HDOC DAY-61

NAME-PRIYADARSHNA

SAPID-590032928

BATCH-15

Question

Write a C program to find two distinct indices in a variable-length integer array whose elements add up to a given target. Pass the array to a function two_sum() using pointers and use nested loops. Print -1 -1 if no valid pair exists.


Aim

To write a C program to find two indices whose corresponding array elements add up to a given target using pointers, functions, and nested loops.

Algorithm

1. Start the program.
2. Read the size n of the array.
3. Declare a variable-length array nums[n].
4. Read the array elements and target value.
5. Pass the array address, size, and target to two_sum().
6. Use two nested loops to check pairs of elements.
7. If the sum equals the target, print their indices and return.
8. If no pair is found, print -1 -1.
9. Stop the program.

>C PROGRAM;

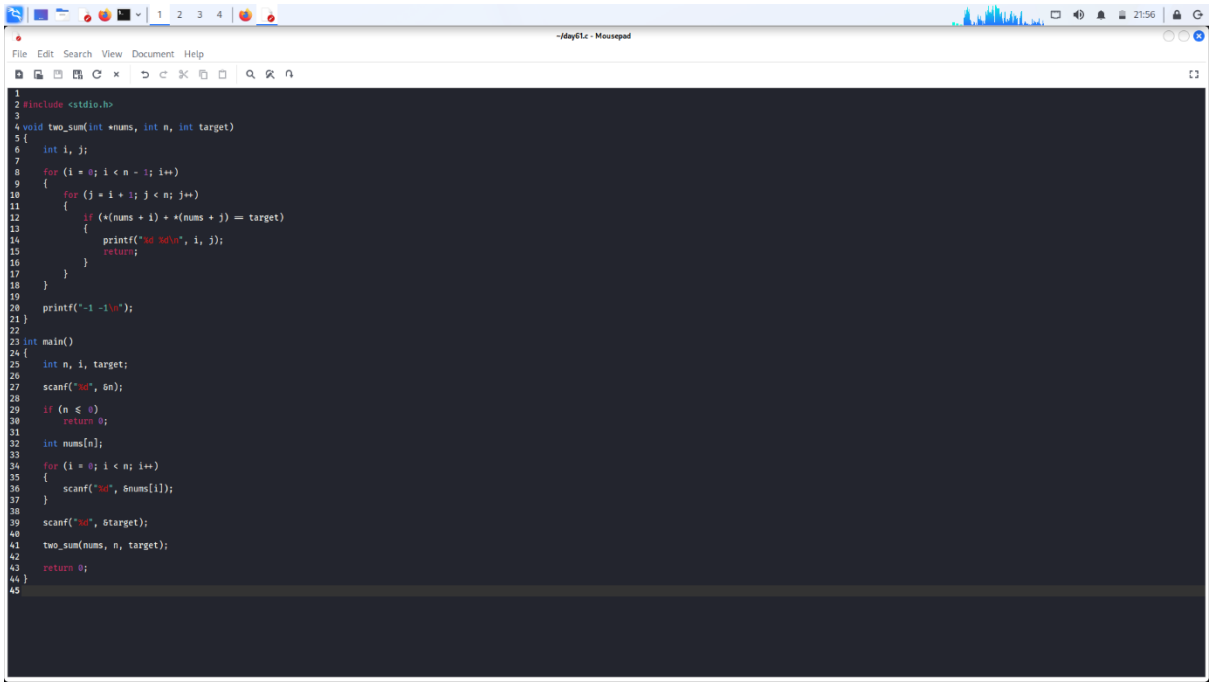

>OUTPUT:

