HDOC Day-60

Question

Write a C program to check whether two lowercase strings are anagrams using pointers and a function named check_anagram(). Use character-frequency counting to compare the strings.

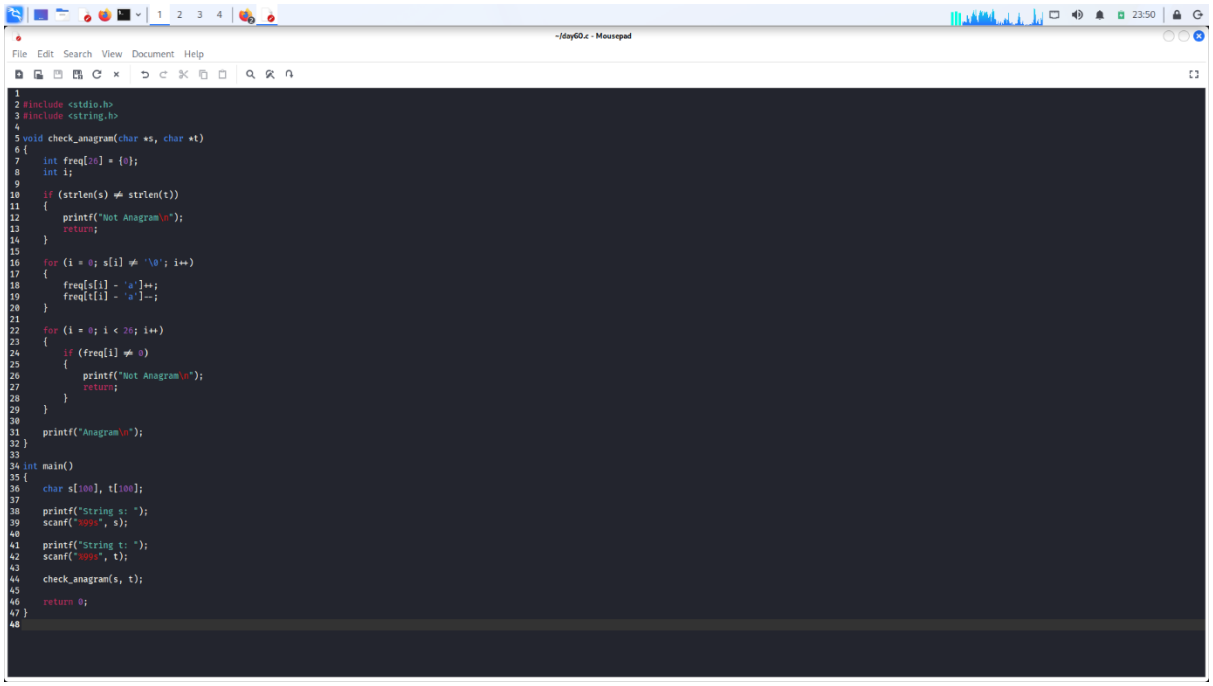
Aim

To write a C program to determine whether two strings are anagrams using pointers, functions, and character-frequency counting.

Algorithm

1. Start the program.
2. Declare two character arrays s and t.
3. Read both strings from the user.
4. Pass the addresses of the strings to check_anagram().
5. Declare a frequency array of size 26 and initialize it to zero.
6. Count the frequency of each character in the first string.
7. Decrease the frequency of each character in the second string.
8. Check whether all frequency values are zero.
9. If all values are zero, print "Anagram".
10. Otherwise, print "Not Anagram".
11. Stop the program.

>C CODE


~/day60.c - Mousepad
File Edit Search View Document Help
#include <stdio.h>
#include <string.h>
void check_anagram(char *s, char *t)
{
int freq[26] = {0};
int i;
if (strlen(s) != strlen(t))
{
printf("Not Anagram\n");
return;
}
for (i = 0; s[i] != '\0'; i++)
{
freq[s[i] - 'a']++;
freq[t[i] - 'a']--;
}
for (i = 0; i < 26; i++)
{
if (freq[i] != 0)
{
printf("Not Anagram\n");
return;
}
}
printf("Anagram\n");
}
int main()
{
char s[100], t[100];
printf("String s: ");
scanf("%99s", s);
printf("String t: ");
scanf("%99s", t);
check_anagram(s, t);
return 0;
}