


**Convolutional Neural Network (CNN):** is an advanced version of artificial neural networks (ANNs), primarily designed to extract features from grid-like matrix datasets. This is particularly useful for visual datasets such as images or videos, where data patterns play a crucial role.


CNNs are widely used in computer vision applications due to their effectiveness in processing visual data. CNNs consist of multiple layers like the input layer, Convolutional layer, pooling layer, and fully connected layers. Let's learn more about CNNs in detail.

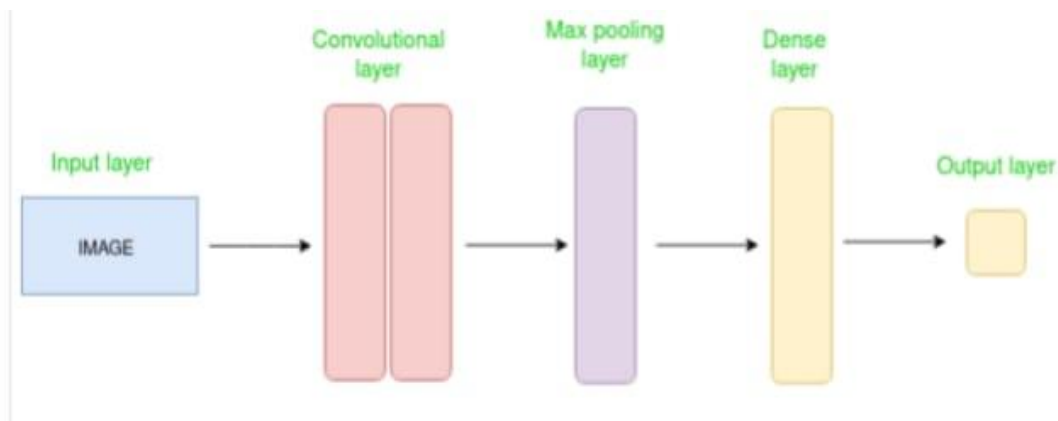

## How Convolutional Layers Works?


Convolution Neural Networks are neural networks that share their parameters.

Imagine you have an image. It can be represented as a cuboid having its length, width (dimension of the image), and height (i.e the channel as images generally have red, green, and blue channels).

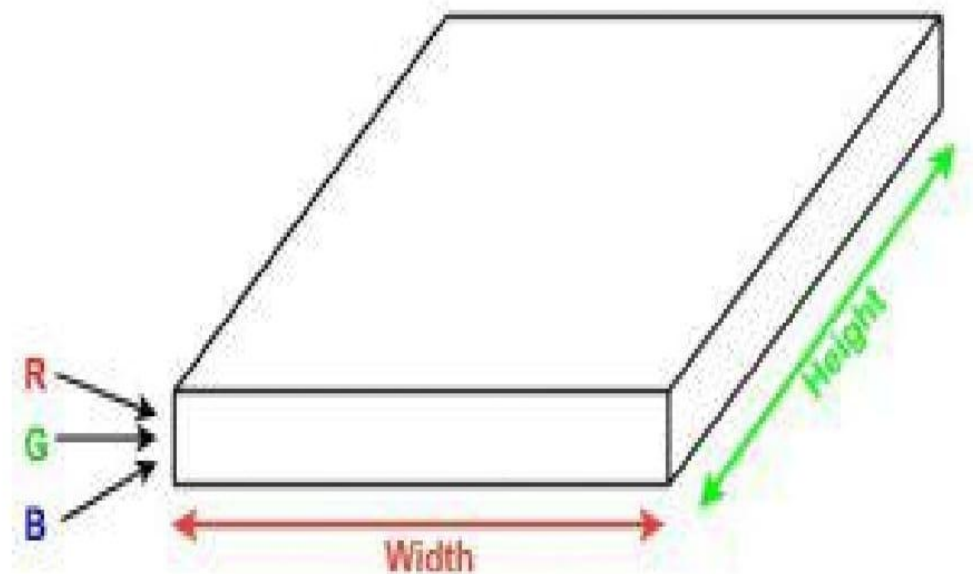

Now imagine taking a small patch of this image and running a small neural network, called a filter or kernel on it, with say, K outputs and representing them vertically.

Now slide that neural network across the whole image, as a result, we will get another image with different widths, heights, and depths. Instead of just R, G, and B channels now we have more channels but lesser width and height. This operation is called Convolution. If the patch size is the same as that of the image it will be a regular neural network. Because of this small patch, we have fewer weights.

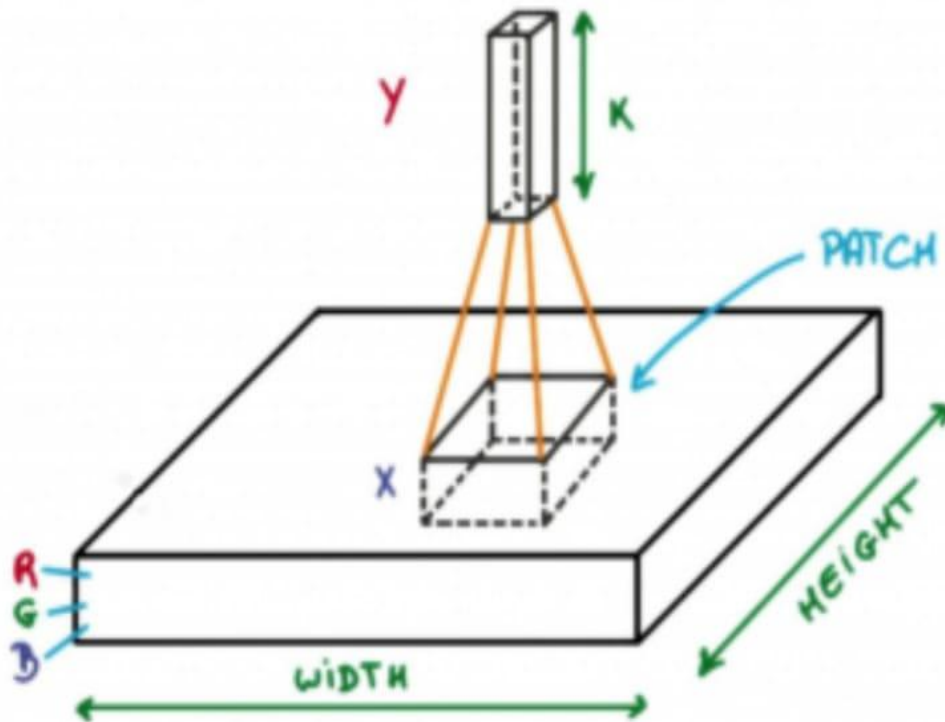

## Mathematical Overview of Convolution

Now let's talk about a bit of mathematics that is involved in the whole convolution process.

- Convolution layers consist of a set of learnable filters (or kernels) having small widths and heights and the same depth as that of input volume (3 if the input layer is image input).
- For example, if we have to run convolution on an image with dimensions  $34 \times 34 \times 3$ . The possible size of filters can be  $a \times a \times 3$ , where 'a' can be anything like 3, 5, or 7 but smaller as compared to the image dimension.
- During the forward pass, we slide each filter across the whole input volume step by step where each step is called stride (which can have a value of 2, 3, or even 4 for highdimensional images) and compute the dot product between the kernel weights and patch from input volume.
- As we slide our filters we'll get a 2-D output for each filter and we'll stack them together as a result, we'll get output volume having a depth equal to the number of filters. The network will learn all the filters.

## Layers Used to Build ConvNets

A complete Convolution Neural Networks architecture is also known as convnets. A convnets is a sequence of layers, and every layer transforms one volume to another through a differentiable function.


Let's take an example by running a convnets on of image of dimension  $32 \times 32 \times 3$ .

**Input Layers:** It's the layer in which we give input to our model. In CNN, Generally, the input will be an image or a sequence of images. This layer holds the raw input of the image with width 32, height 32, and depth 3.


**Convolutional Layers:** This is the layer, which is used to extract the feature from the input dataset. It applies a set of learnable filters known as the kernels to the input images. The filters/kernels are smaller matrices usually  $2 \times 2$ ,  $3 \times 3$ , or  $5 \times 5$  shape. it slides over the input image data and computes the dot product between kernel weight and the corresponding input image patch. The output of this layer is referred as feature maps. Suppose we use a total of 12 filters for this layer we'll get an output volume of dimension  $32 \times 32 \times 12$ .

**Activation Layer:** By adding an activation function to the output of the preceding layer, activation layers add nonlinearity to the network. it will apply an element-wise activation function to the output of the convolution layer. Some common activation functions are RELU:  $\max(0, x)$ , Tanh, Leaky RELU, etc. The volume remains unchanged hence output volume will have dimensions  $32 \times 32 \times 12$ .

**Pooling layer:** This layer is periodically inserted in the convnets and its main function is to reduce the size of volume which makes the computation fast reduces memory and also prevents overfitting. Two common types of pooling layers are max pooling and average pooling. If we use a max pool with  $2 \times 2$  filters and stride 2, the resultant volume will be of dimension  $16 \times 16 \times 12$

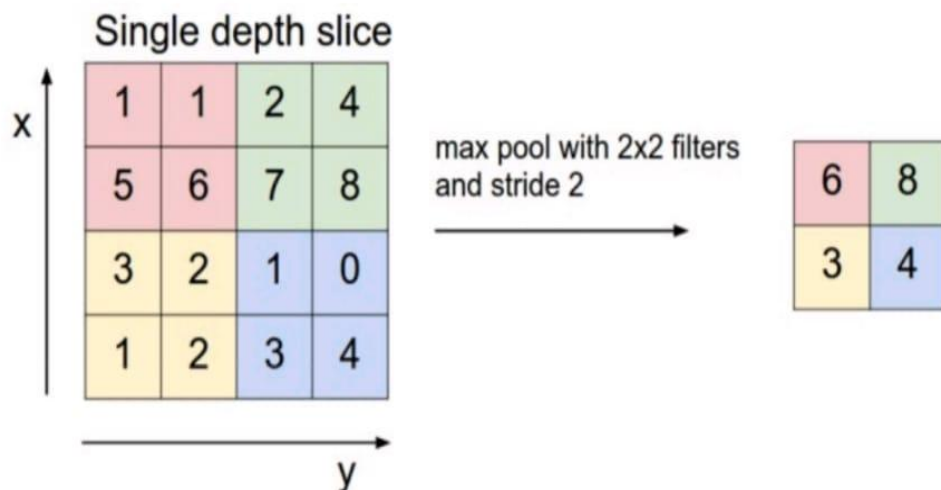

- **Flattening:** The resulting feature maps are flattened into a one-dimensional vector after the convolution and pooling layers so they can be passed into a completely linked layer for categorization or regression.
- **Fully Connected Layers:** It takes the input from the previous layer and computes the final classification or regression task

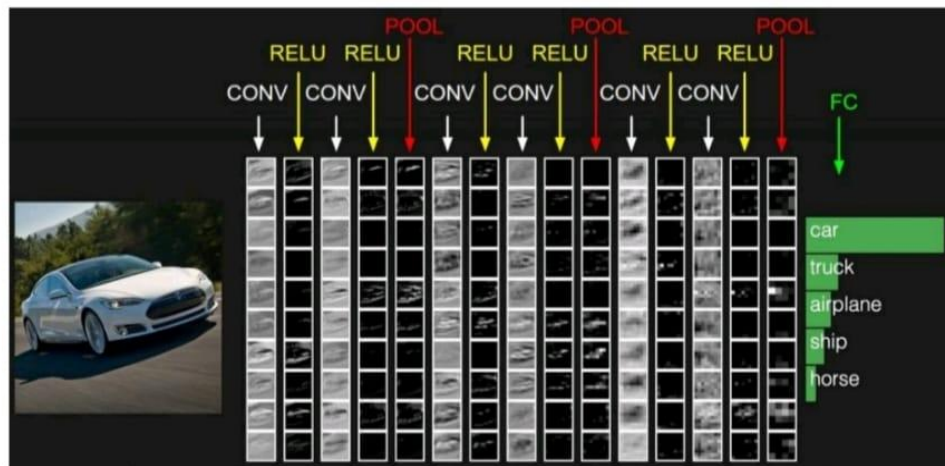

### Example: Applying CNN to an Image

Let's consider an image and apply the convolution layer, activation layer, and pooling layer operation to extract the inside feature.

**Input image:**



**Step:**

- import the necessary libraries
- set the parameter
- define the kernel Load the image and plot it.
- Reformat the image Apply convolution layer operation and plot the output image.
- Apply activation layer operation and plot the output image.
- Apply pooling layer operation and plot the output image.

## **# Implement Image Edge Detection using Convolution Neural Network(CNN) Layers with Tensorflow.**

```
import numpy as np
```

```
import tensorflow as tf
```

```
import matplotlib.pyplot as plt
```

```
from itertools import product
```

### **# Set the param**

```
plt.rc('figure',autolayout=True)
```

```
plt.rc('image',cmap='magma')
```

### **# Define the kernel**

```
kernel=tf.constant([
```

```
    [-1,-1,-1],
```

```
    [-1,8,-1],
```

```
    [-1,-1,-1]
```

```
])
```

### **# Load the iamge**

```
image=tf.io.read_file('Rose.jpg')
```

```
image=tf.io.decode_jpeg(image,channels=1)
```

```
image=tf.image.resize(image,size=[300,300])
```

### **# Plot the image**

```
img=tf.squeeze(image).numpy()
```

```
plt.figure(figsize=(5,5))
```

```
plt.imshow(img,cmap='gray')
```

```
plt.axis('off')
```

```
plt.title('Original Gray Scale image')
```

```
plt.show();
```

### **# Reformat**

```
image=tf.image.convert_image_dtype(image,dtype=tf.float32)
```

```
image=tf.expand_dims(image,axis=0)
```

```
kernel=tf.reshape(kernel,[*kernel.shape,1,1])
```

```
kernel=tf.cast(kernel,dtype=tf.float32)
```

### **# Convolution layer**

```
conv_fn=tf.nn.conv2d
```

```
image_filter=conv_fn(input=image,filters=kernel,strides=1,padding='SAME',)
```

```
plt.figure(figsize=(15,5))
```

### **# Plot the convolved iamge**

```
plt.subplot(1,3,1)
```

```
plt.imshow(tf.squeeze(image_filter))
```

```
plt.axis('off')
```

```
plt.title('Covolution')
```

```
#activation layer
```

```
relu_fn=tf.nn.relu
```

### **#Image detection**

```
image_detect=relu_fn(image_filter)
```

```
plt.subplot(1,3,2)
```

```
plt.imshow(tf.squeeze(image_detect))
```

```
plt.axis('off')
```

```
plt.title('Activation')
```

### **#Pooling Layer(fixed)**

```
image_condense=tf.nn.pool(
```

```
    input=image_detect,
```

```
    window_shape=(2,2),
```

```
    pooling_type='MAX',
```

```
    strides=(2,2),
```

```
    padding='SAME')
```

### **# Disply All Result**

```
plt.figure(figsize=(15,5))
```


```
plt.subplot(1,3,1)
```

```
plt.imshow(tf.squeeze(image_filter),cmap='gray')
```

```
plt.title('Convolution Output')  
plt.axis('off')  
plt.subplot(1,3,2)  
plt.imshow(tf.squeeze(image_detect),cmap='gray')  
plt.title('Relu Activation')  
plt.axis('off')  
plt.subplot(1,3,3)  
plt.imshow(tf.squeeze(image_condense),cmap='gray')  
plt.title('Max Pooling output')  
plt.axis('off')  
plt.show()
```

### Output:



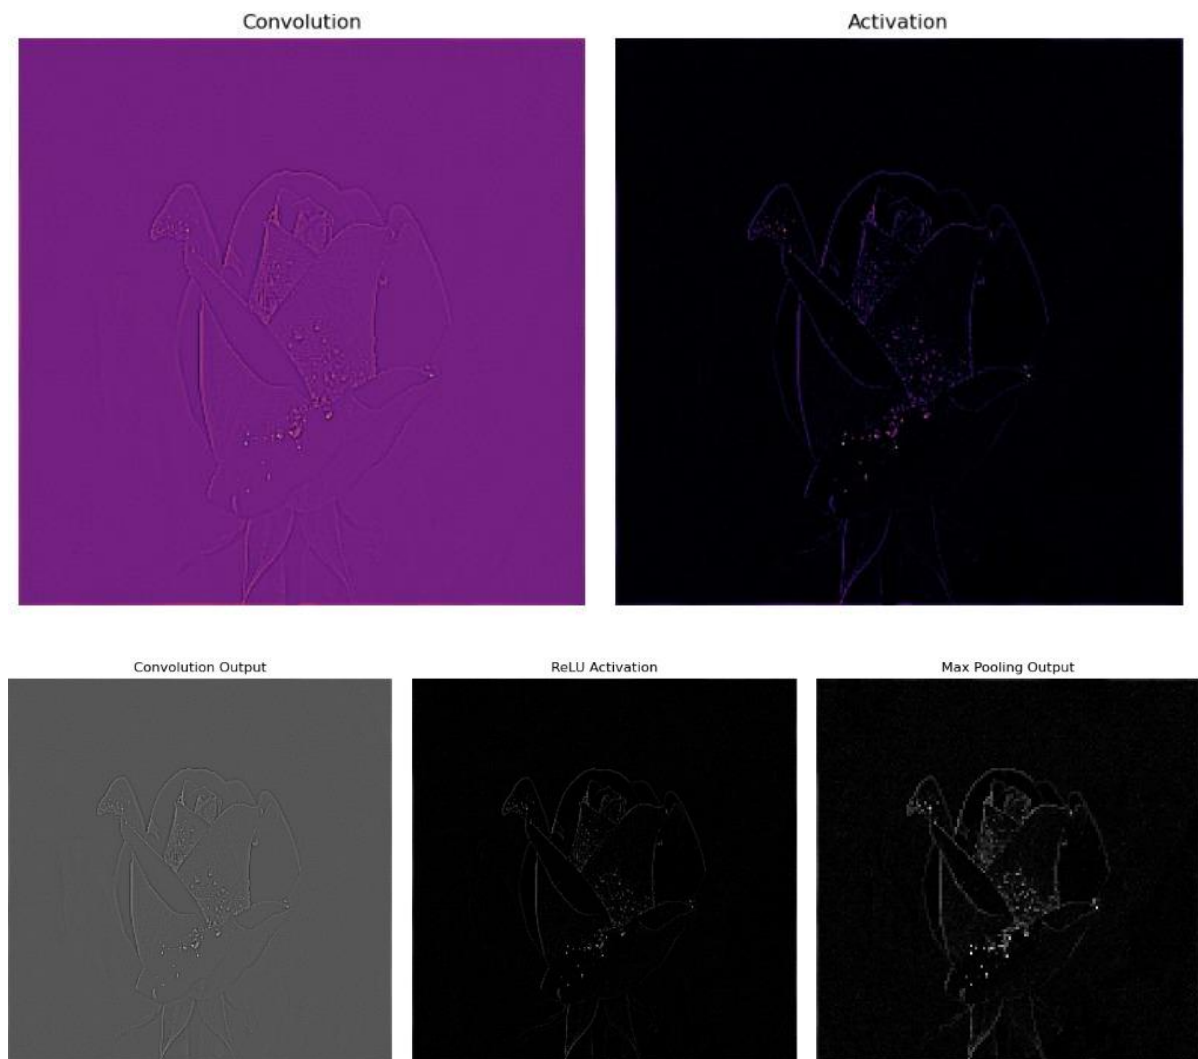

## **Advantages of CNNs**

1. Good at detecting patterns and features in images, videos, and audio signals.
2. Robust to translation, rotation, and scaling invariance.
3. End-to-end training, no need for manual feature extraction.
4. Can handle large amounts of data and achieve high accuracy.

## **Disadvantages of CNNs**

1. Computationally expensive to train and require a lot of memory.
2. Can be prone to overfitting if not enough data or proper regularization is used.
3. Requires large amounts of labeled data.
4. Interpretability is limited, it's hard to understand what the network has learned.