

Name: Priyanka A School: Computing and Data Sciences Email: priyanka.a-26@scds.saiuniversity.edu.in

Dataset

The Car Images Dataset dataset is used for this project.

Original Dataset

1. Total images: 4165
2. Classes: 7 ['Audi', 'Hyundai Creta', 'Mahindra Scorpio', 'Rolls Royce', 'Swift', 'Tata Safari', 'Toyota Innova']
3. Images per class: [1013, 338, 391, 385, 526, 547, 965]
4. Training samples: 3123, Testing samples: 1042

Subset Dataset

To ease training, a selection of 200 samples per category was used to form the subset dataset.

1. **Total images: 1400**
2. **Classes: 7 ['Audi', 'Hyundai Creta', 'Mahindra Scorpio', 'Rolls Royce', 'Swift', 'Tata Safari', 'Toyota Innova']**
3. **Images per class: [200, 200, 200, 200, 200, 200, 200]**
4. **Training samples: 1050, Testing samples: 350**

The subset dataset is split into 75% training and 25% testing.

Pretrained models

Task is to train the following three pretrained CNN models by applying both Transfer-Learning and Fine-Tuning.

1. Model-1: ResNet101V2
2. Model-2: InceptionResNetV2
3. Model-3: DenseNet201

Part 2

Model-2: InceptionResNetV2

Subtask 1: Apply the following modifications to the default classifier layers of the model during Transfer-Learning:

1. Model-2 → **Set the initial 35% of the layers are non-trainable and remaining layers as trainable.**

2. Apply fine-tuning on the best performing TL models for 10 epochs and preserve the best performing FT models

```
# Import necessary libraries
import numpy as np
import tensorflow as tf
from tensorflow import keras
from tensorflow.keras import layers
from sklearn.model_selection import train_test_split
import os
from glob import glob
import matplotlib.pyplot as plt
from PIL import Image
import seaborn as sns

# Set random seeds for reproducibility
np.random.seed(42)
tf.random.set_seed(42)

# Subset the dataset
dataset_path = "../input/car-images-dataset/Car_Dataset"
categories = ["Audi", "Hyundai Creta", "Mahindra Scorpio", "Rolls Royce", "Swift", "Tata Safari", "Toyota Innova"]

# Load images and labels
images, labels = [], []
for i, category in enumerate(categories):
    image_files = glob(os.path.join(dataset_path, category, "*.jpg"))
    selected_files = image_files[:200] # Select subset (200) number
    of samples per category
    for file in selected_files:
        img = Image.open(file).convert("RGB") # Ensure all images are
        RGB
        img = img.resize((224, 224)) # Resizing for model input
        images.append(np.array(img))
        labels.append(i)

# Convert to numpy arrays
images = np.array(images) / 255.0 # Normalize
labels = np.array(labels)

# Split into train and test sets
X_train, X_test, y_train, y_test = train_test_split(images, labels,
test_size=0.25, stratify=labels, random_state=42)

# Check dataset details
print(f"Total images: {len(images)}")
print(f"Classes: {categories}")
print(f"Images per class: {[labels.tolist().count(i) for i in
range(len(categories))]}")
print(f"Training samples: {len(X_train)}, Testing samples:
```

```

{len(X_test)}")

# Fine-Tuning InceptionResNetV2 (Model-2)

# Load the best Transfer Learning model
model =
keras.models.load_model("/kaggle/input/model2-tl/inceptionresnetv2_tl_
best.keras")

# Set the first 35% of layers as non-trainable
num_layers = len(model.layers)
freeze_layers = int(0.35 * num_layers)
for layer in model.layers[:freeze_layers]:
    layer.trainable = False
for layer in model.layers[freeze_layers:]:
    layer.trainable = True

# Compile the model for Fine-Tuning
model.compile(optimizer=keras.optimizers.Adam(learning_rate=1e-4),
              loss='sparse_categorical_crossentropy',
              metrics=['accuracy'])

# Train the model
callbacks = [
    keras.callbacks.ModelCheckpoint("inceptionresnetv2_ft_best.keras",
    save_best_only=True, monitor='val_accuracy'),
    keras.callbacks.EarlyStopping(monitor='val_accuracy', patience=3)
]

history = model.fit(
    X_train, y_train,
    validation_split=0.1,
    epochs=10,
    batch_size=32,
    callbacks=callbacks
)

# Plot accuracy
plt.plot(history.history['accuracy'], label='Training Accuracy')
plt.plot(history.history['val_accuracy'], label='Validation Accuracy')
plt.xlabel('Epochs')
plt.ylabel('Accuracy')
plt.legend()
plt.title('InceptionResNetV2 Fine-Tuning Accuracy')
plt.show()

# Evaluate the model on the test set
model.load_weights("inceptionresnetv2_ft_best.keras")
test_loss, test_accuracy = model.evaluate(X_test, y_test)

```

```

print(f"Test Loss: {test_loss}, Test Accuracy: {test_accuracy}")

# Generate Confusion Matrix and Classification Report
y_pred = np.argmax(model.predict(X_test), axis=1)
conf_matrix = tf.math.confusion_matrix(y_test, y_pred)
print("\n")

# Visualize the Confusion Matrix
plt.figure(figsize=(10, 8))
sns.heatmap(conf_matrix, annot=True, fmt='d', cmap='Reds',
            xticklabels=categories, yticklabels=categories)
plt.xlabel('Predicted Labels')
plt.ylabel('True Labels')
plt.title('Confusion Matrix for InceptionResNetV2')
plt.show()

from sklearn.metrics import precision_score, recall_score, f1_score
precision = precision_score(y_test, y_pred, average='weighted')
recall = recall_score(y_test, y_pred, average='weighted')
f1 = f1_score(y_test, y_pred, average='weighted')

print(f"Precision: {precision}")
print(f"Recall: {recall}")
print(f"F1-Score: {f1}")


```

```


Total images: 1400
Classes: ['Audi', 'Hyundai Creta', 'Mahindra Scorpio', 'Rolls Royce',
'Swift', 'Tata Safari', 'Toyota Innova']
Images per class: [200, 200, 200, 200, 200, 200, 200]
Training samples: 1050, Testing samples: 350
Epoch 1/10
30/30 ————— 169s 2s/step - accuracy: 0.5514 - loss:
1.4538 - val_accuracy: 0.8381 - val_loss: 0.5788
Epoch 2/10
30/30 ————— 12s 388ms/step - accuracy: 0.9611 - loss:
0.1312 - val_accuracy: 0.8476 - val_loss: 0.4589
Epoch 3/10
30/30 ————— 11s 384ms/step - accuracy: 0.9956 - loss:
0.0403 - val_accuracy: 0.9048 - val_loss: 0.3416
Epoch 4/10
30/30 ————— 7s 237ms/step - accuracy: 0.9960 - loss:
0.0211 - val_accuracy: 0.8952 - val_loss: 0.3551
Epoch 5/10
30/30 ————— 11s 385ms/step - accuracy: 0.9986 - loss:
0.0094 - val_accuracy: 0.9143 - val_loss: 0.3544
Epoch 6/10
30/30 ————— 11s 385ms/step - accuracy: 0.9993 - loss:
0.0083 - val_accuracy: 0.9238 - val_loss: 0.3543
Epoch 7/10

```

```
30/30 ————— 7s 238ms/step - accuracy: 1.0000 - loss:
0.0015 - val_accuracy: 0.9048 - val_loss: 0.3634
Epoch 8/10
30/30 ————— 7s 238ms/step - accuracy: 1.0000 - loss:
0.0011 - val_accuracy: 0.8857 - val_loss: 0.3694
Epoch 9/10
30/30 ————— 7s 237ms/step - accuracy: 1.0000 - loss:
0.0012 - val_accuracy: 0.8762 - val_loss: 0.3806
```

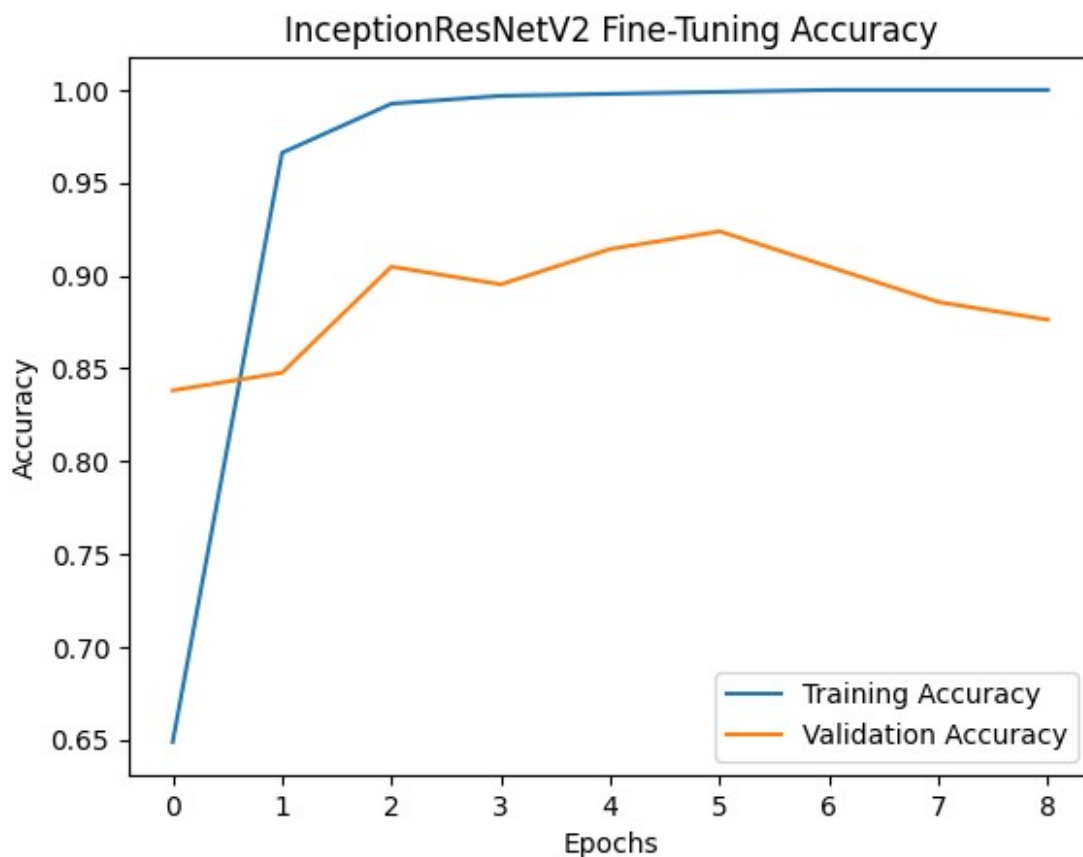

```
11/11 ————— 8s 765ms/step - accuracy: 0.8652 - loss:
0.4430
Test Loss: 0.39236965775489807, Test Accuracy: 0.8714285492897034
11/11 ————— 19s 1s/step
```

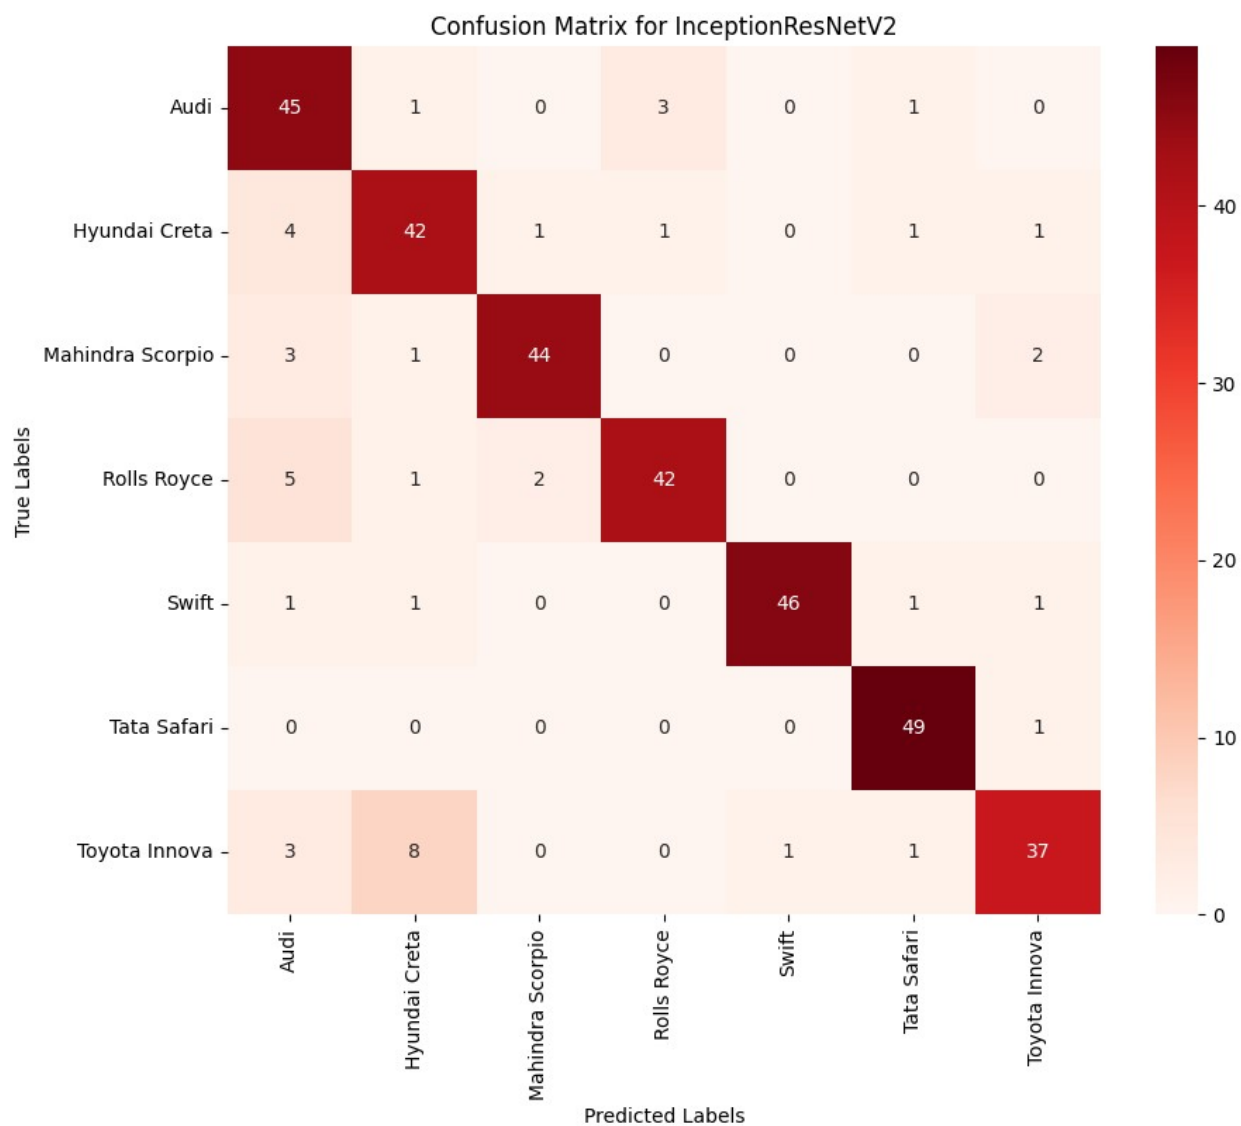

Precision: 0.8784143534188406

Recall: 0.8714285714285714

F1-Score: 0.87213962262321