


Sr. No.	Practical Name	Date
1	For a given a global conceptual schema, divide the schema into horizontal and vertical fragmentation and place them on different nodes. Execute queries on these fragments that will demonstrate distributed databases environment.	25/09
2	Place the replication of global conceptual schema on different nodes and execute queries that will demonstrate distributed databases environment.	9/10
3	CRUD operation using MongoDB.	18/10
4	Create different types that include attributes and methods. Define tables for these types by adding sufficient number of tuples. Demonstrate insert, update and delete operations on these tables. Fire suitable queries on them.	23/10
5	Create a temporal database and issue queries on it.	30/10
6	Create a table that stores the special data and issue queries on it.	13/11
7	Create a table employee having dept_id as number datatype and employee_spec as XML data type (XM_Type). The employee_spec is a schema with attributes emp_id, name, email, acc_no, managerEmail, dataOf Joining. Insert 10 tuples into employee table. Fire the following queries on XML database.	16/11

Practical No: 1

Aim: For a given a global conceptual schema, divide the schema into horizontal and vertical fragmentation and place them on different nodes. Execute queries on these fragments that will demonstrate distributed databases environment.

Software Requirement:


Oracle Database 11g.

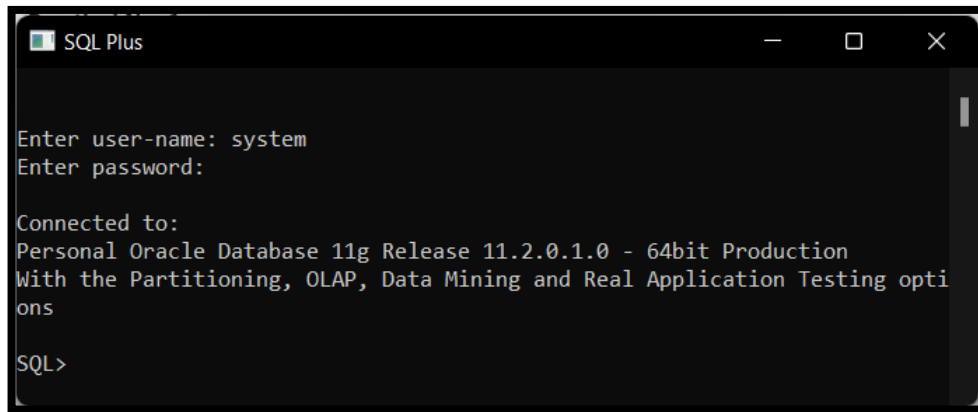


How to Create Two Database

Steps to Create Database db1 and db2


Step 1:- Open Start Menu on Window Explorer Go to Database Configuration Assistant.

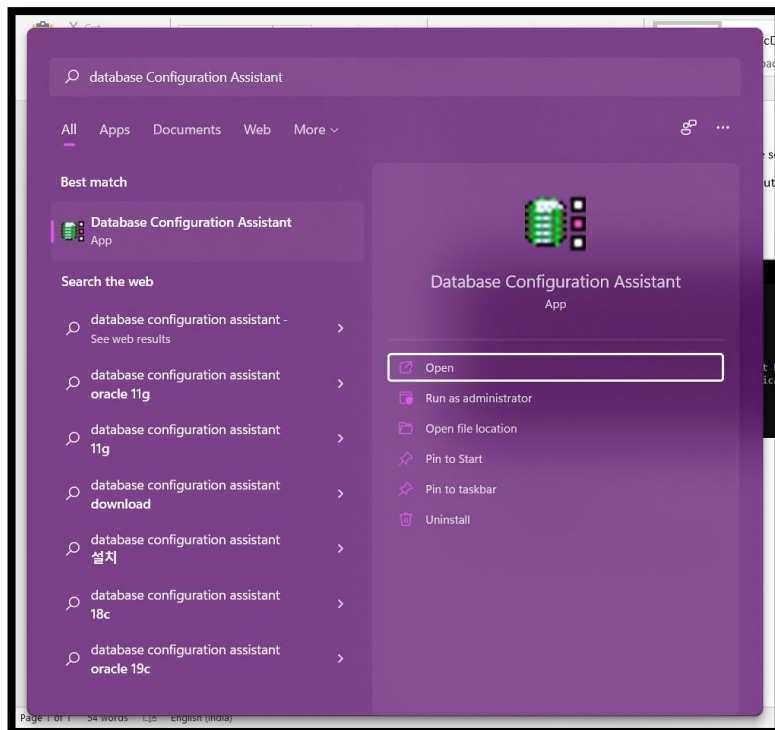


Step 2: Click on Next.

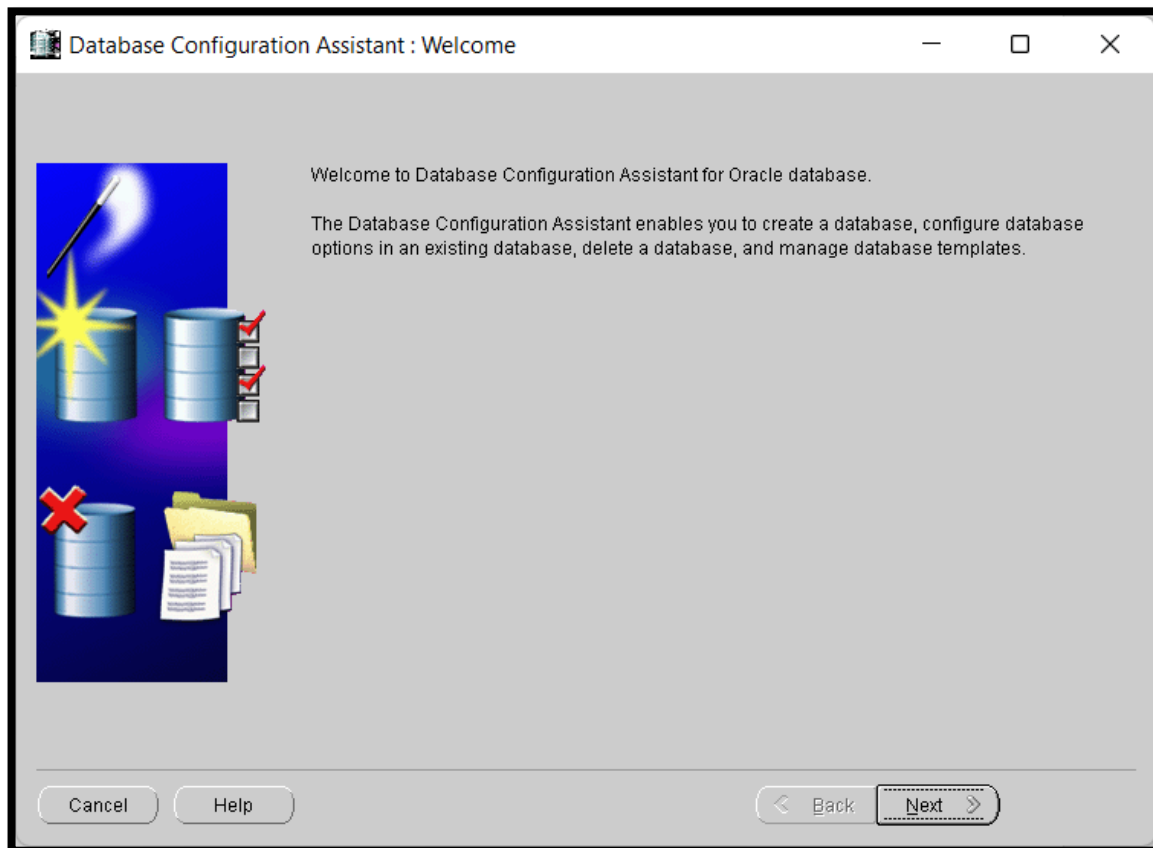


Step 3: Select Option Create a Database.

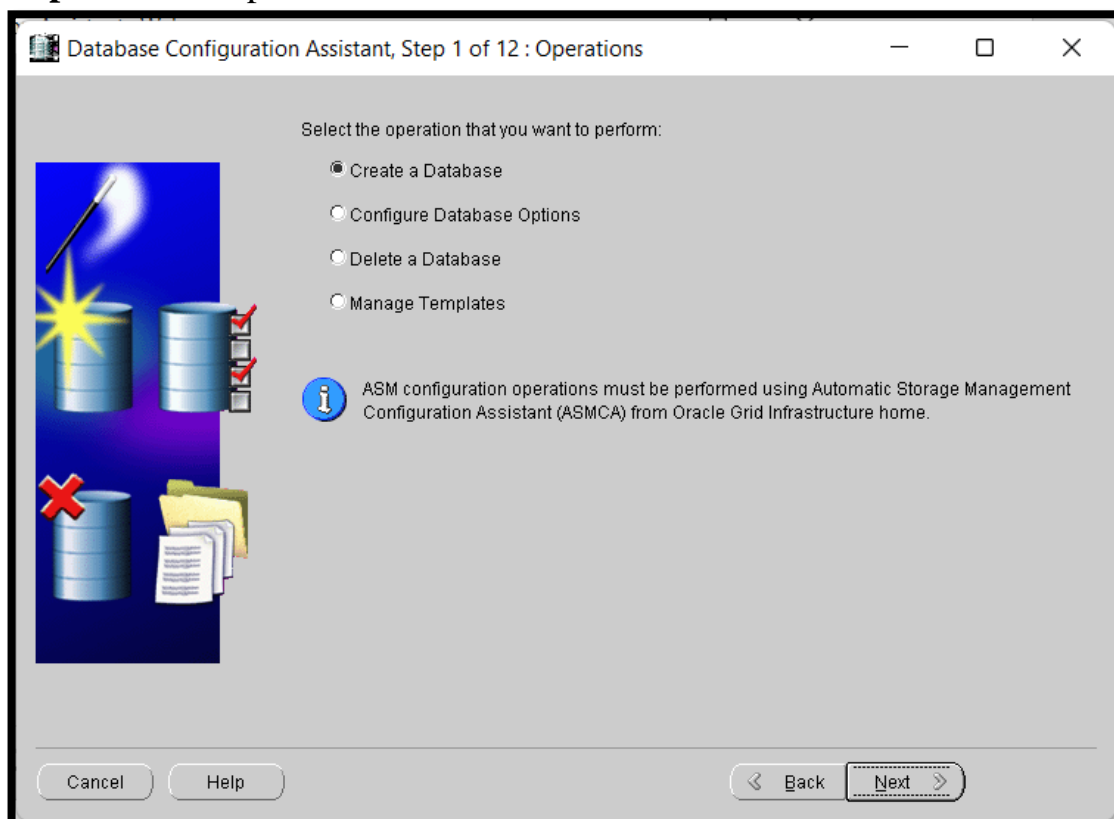


Step 4: Select Option General Purpose or Transaction Processing or You can Create your Own Custom Database.

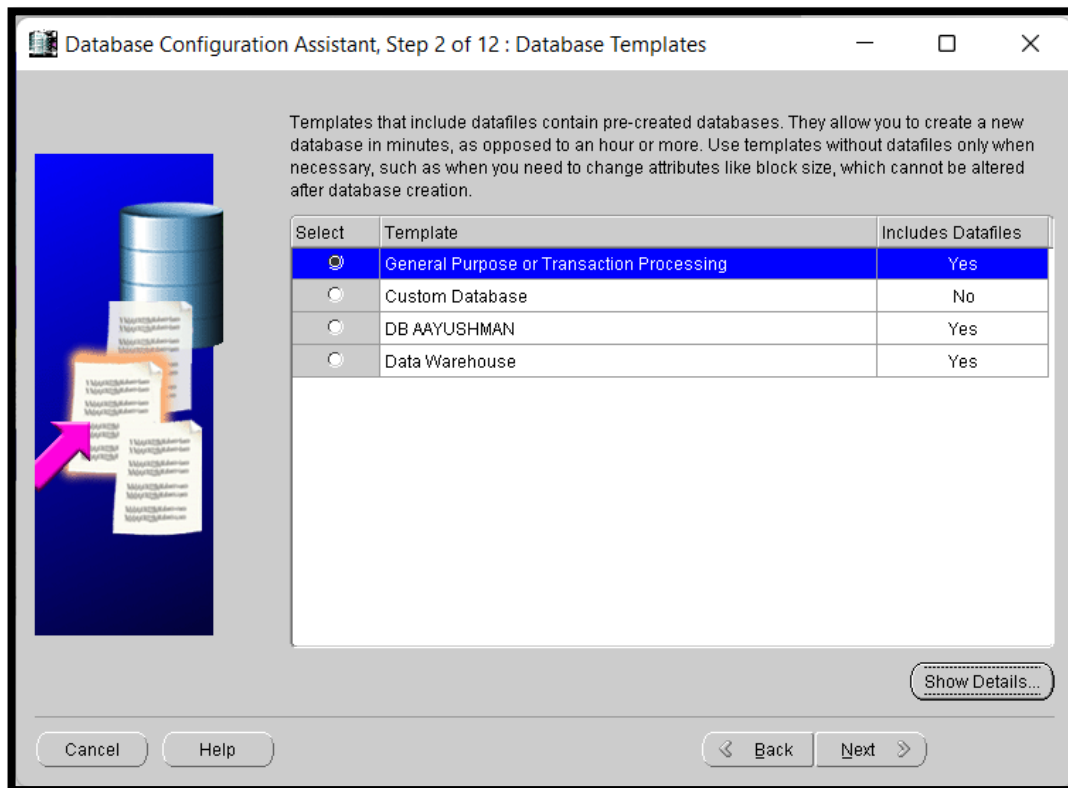

Step 5: Give Database Name as db1 (of your own choice).

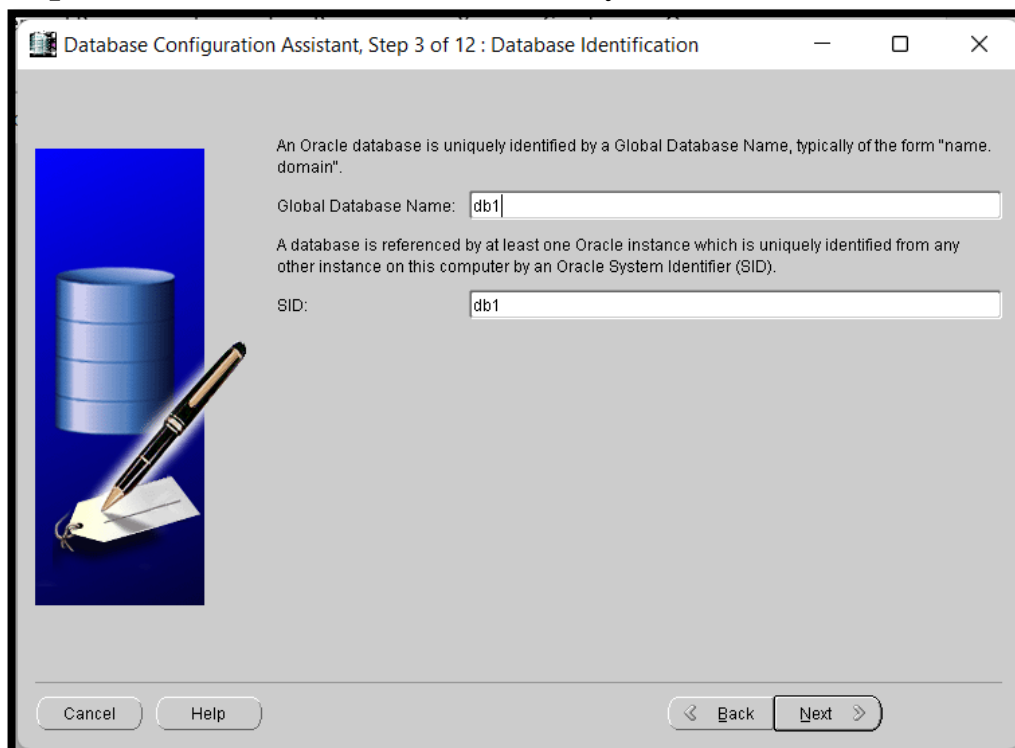

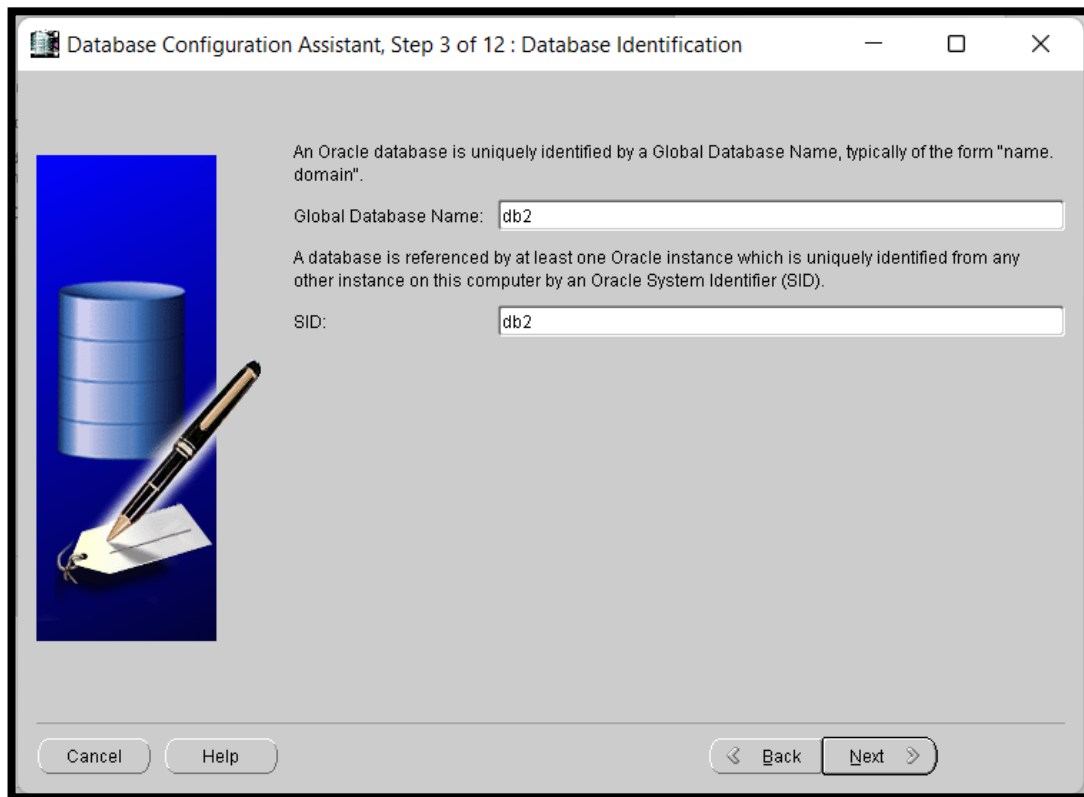

Database Configuration Assistant, Step 3 of 12 : Database Identification

An Oracle database is uniquely identified by a Global Database Name, typically of the form "name.domain".


Global Database Name:

A database is referenced by at least one Oracle instance which is uniquely identified from any other instance on this computer by an Oracle System Identifier (SID).

SID:

Cancel Help < Back Next >

Step 6: No changes Needed, Click on Next.

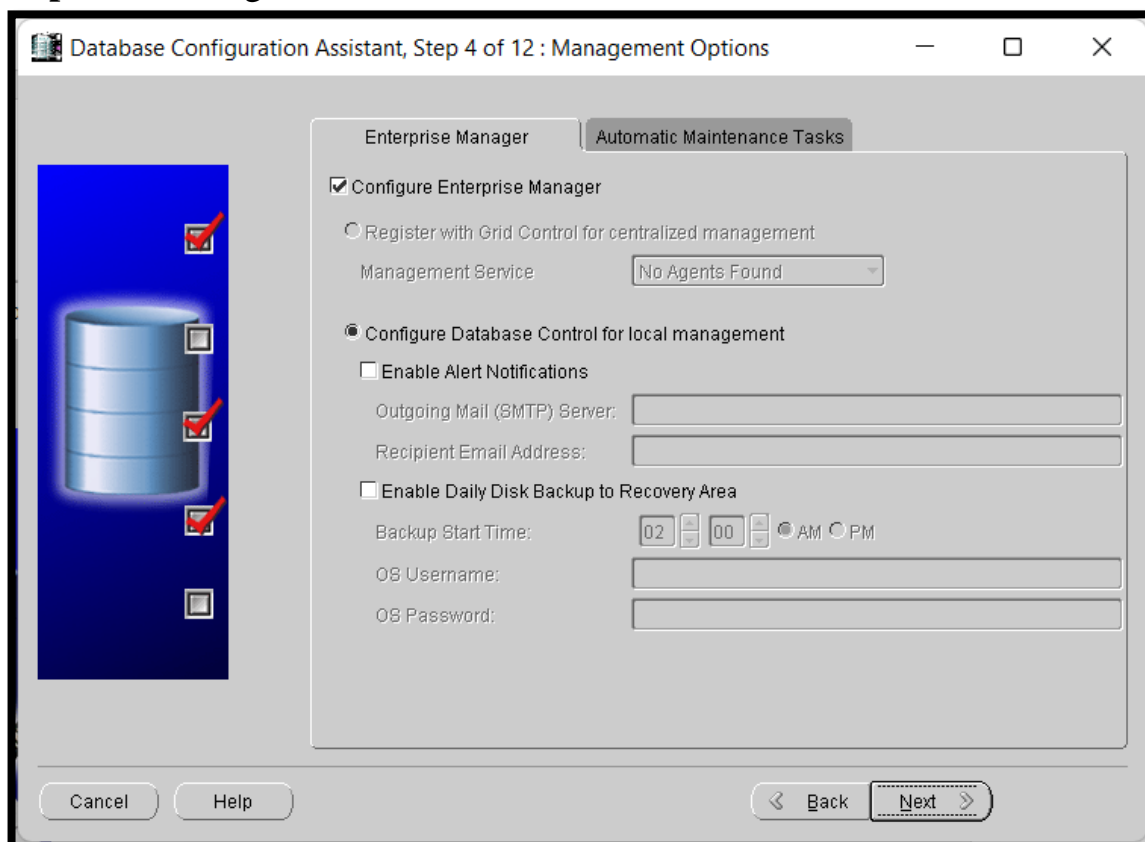

Database Configuration Assistant, Step 4 of 12 : Management Options

Enterprise Manager Automatic Maintenance Tasks

☒ Configure Enterprise Manager

☐ Register with Grid Control for centralized management

Management Service:

☒ Configure Database Control for local management

☐ Enable Alert Notifications

Outgoing Mail (SMTP) Server:

Recipient Email Address:

☐ Enable Daily Disk Backup to Recovery Area

Backup Start Time: AM ☐ PM

OS Username:

OS Password:

Cancel Help < Back Next >

Step 7: Input Password of your choice for Each Fields or Else use your Administrator Credentials for all Profile.

Database Configuration Assistant, Step 5 of 12 : Database Credentials

For security reasons, you must specify passwords for the following user accounts in the new database.

☒ Use Different Administrative Passwords

User Name	Password	Confirm Password
SYS	*****	*****
SYSTEM	*****	*****
DBSNMP	*****	*****
SYSMAN	*****	*****

☐ Use the Same Administrative Password for All Accounts


Password:

Confirm Password:

Cancel Help < Back Next >

Checks for Password Confirmation, Just Click Yes.

Database Configuration Assistant

 Password entered does not satisfy Oracle recommended password complexity policy. A password should have minimum of 8 characters in length. In addition, the password must contain at least one upper case character, one lower case character and one digit.

Do you want to continue?

Yes No

Step 8: No changes Needed, Click on Next.

Database Configuration Assistant, Step 6 of 12 : Database File Locations

Specify storage type and locations for database files.

Storage Type: File System

Storage Locations:

☒ Use Database File Locations from Template


☐ Use Common Location for All Database Files

Database Files Location: Browse...

☐ Use Oracle-Managed Files

Database Area: Browse...

Multiplex Redo Logs and Control Files...

 If you want to specify different locations for any database files, pick any of the above options except Oracle-Managed Files and use the Storage page later to customize each file location. If you use Oracle-Managed Files, Oracle automatically generates the names for database files, which can not be changed on the Storage page.

File Location Variables...

Cancel Help Back Next Finish

Step 9: No changes Needed, Click on Next.

Database Configuration Assistant, Step 7 of 12 : Recovery Configuration

Choose the recovery options for the database:

☒ Specify Flash Recovery Area

This is used as the default for all disk based backup and recovery operations, and is also required for automatic disk based backup using Enterprise Manager. Oracle recommends that the database files and recovery files be located on physically different disks for data protection and performance.

Flash Recovery Area: Browse...


Flash Recovery Area Size: M Bytes

☐ Enable Archiving Edit Archive Mode Parameters...


File Location Variables...

Cancel Help Back Next Finish



Step 10: No changes Needed, Click on Next.

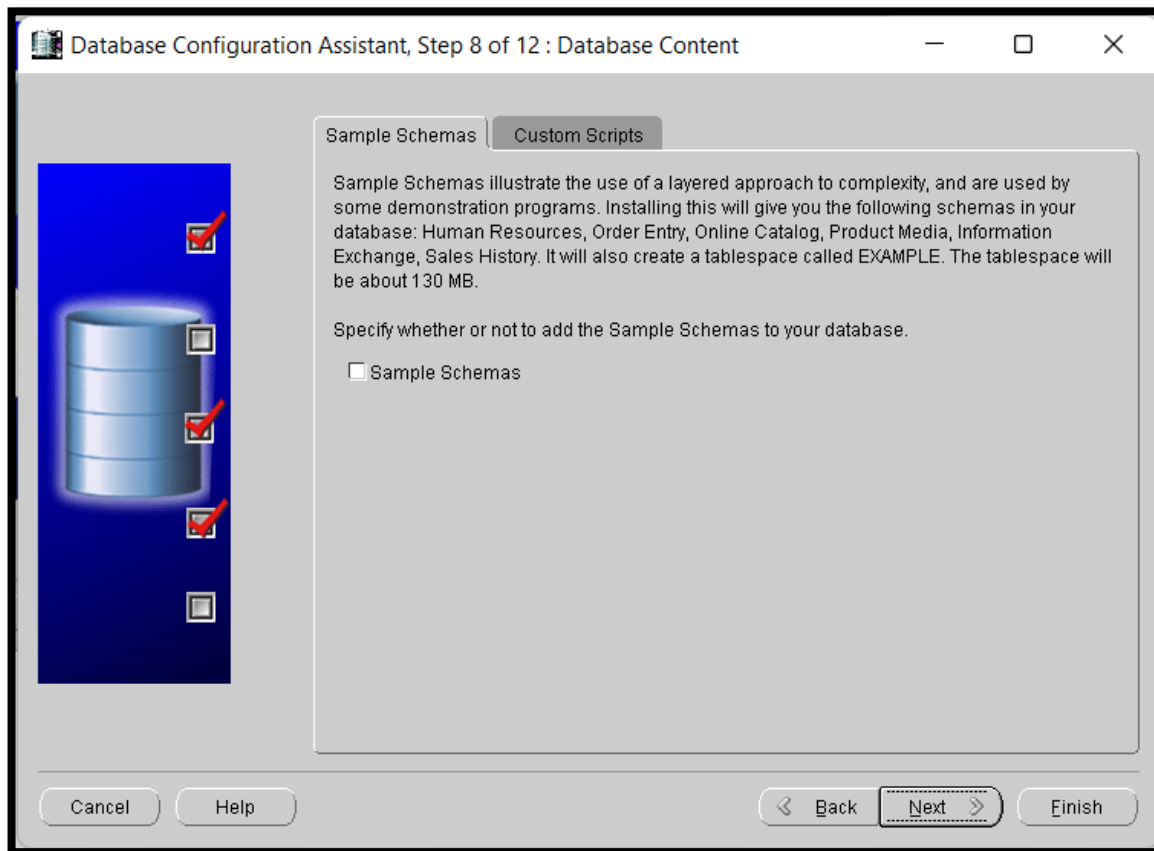



Step 11: No changes Needed, Click on Next.

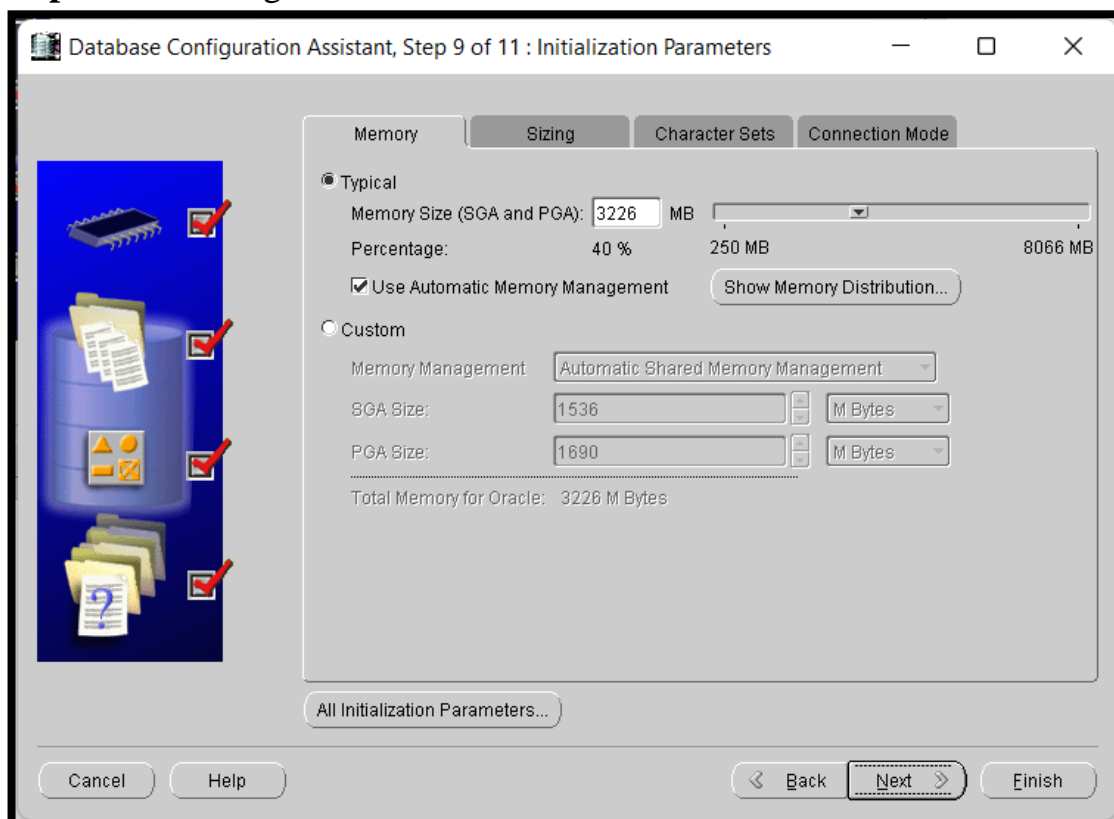


Step 12: No changes Needed, Click on Next..

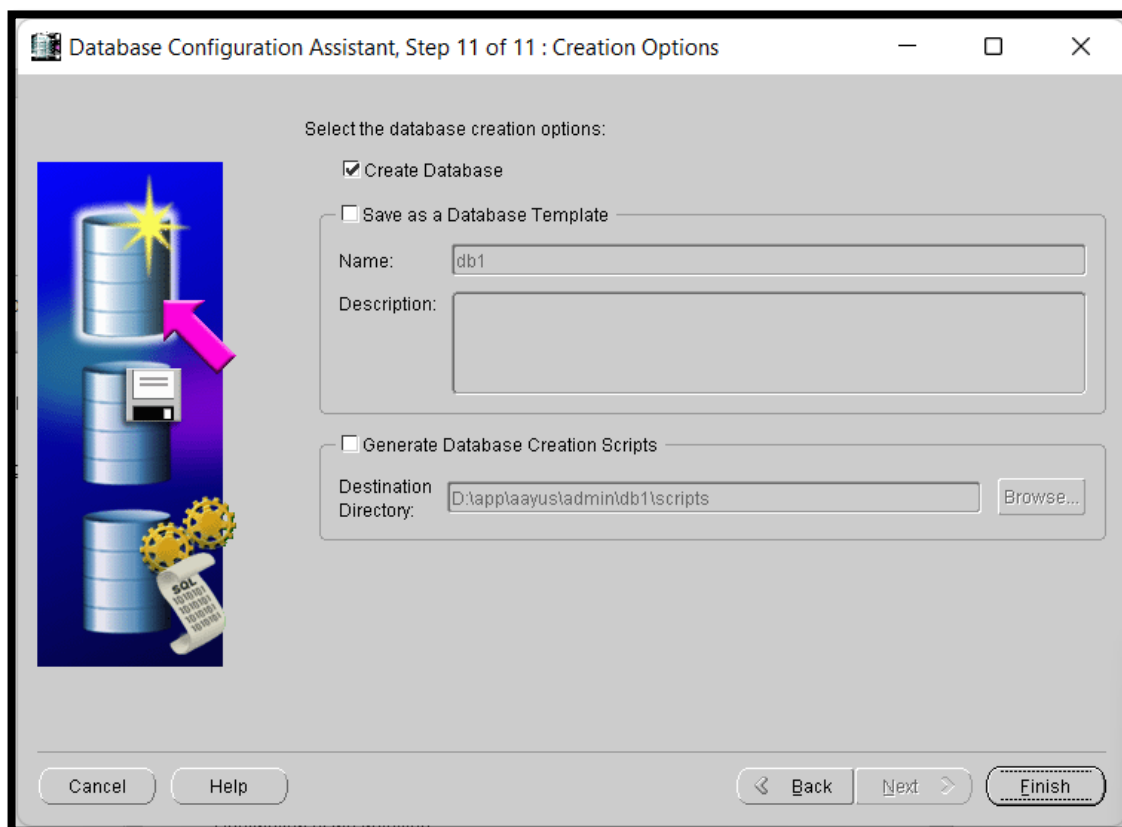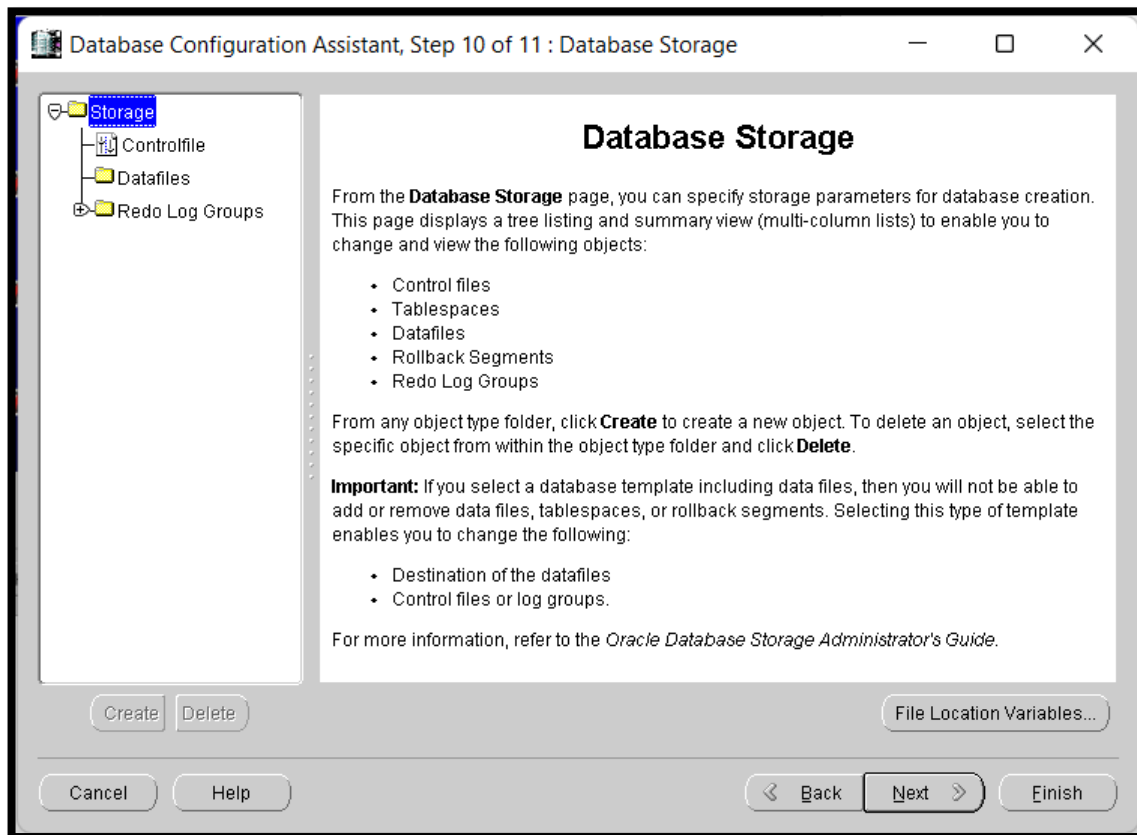

Step 13: No changes Needed, Click on Finish. Confirmation of Creating Database, You can Save it as well for your database details. Incase you forget credentials for your database, you can take help of this file to get access of your database.

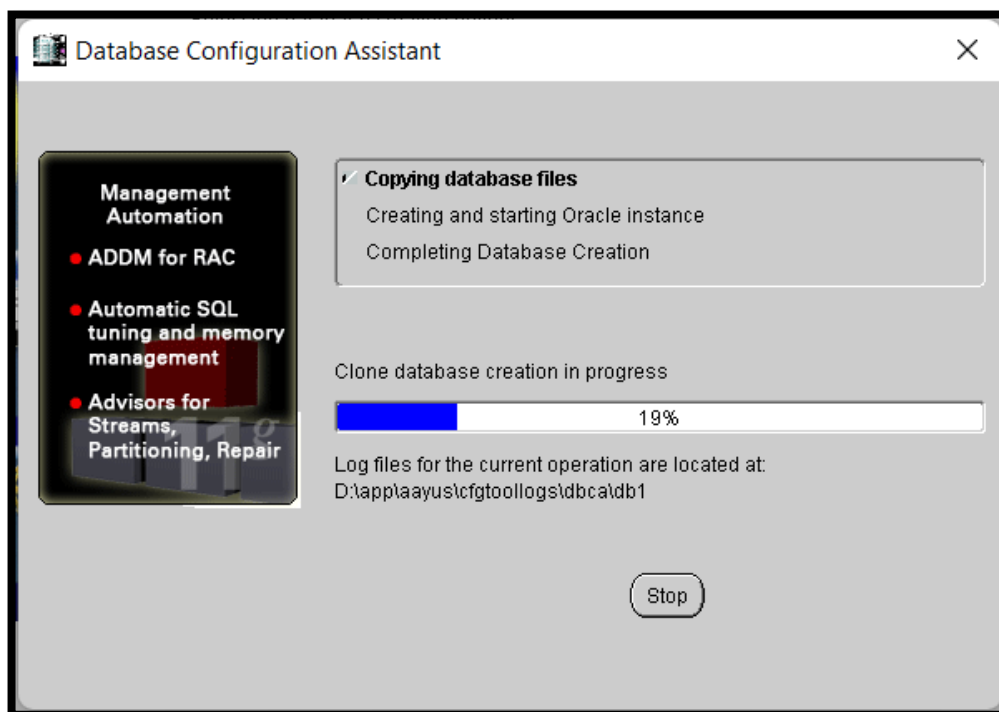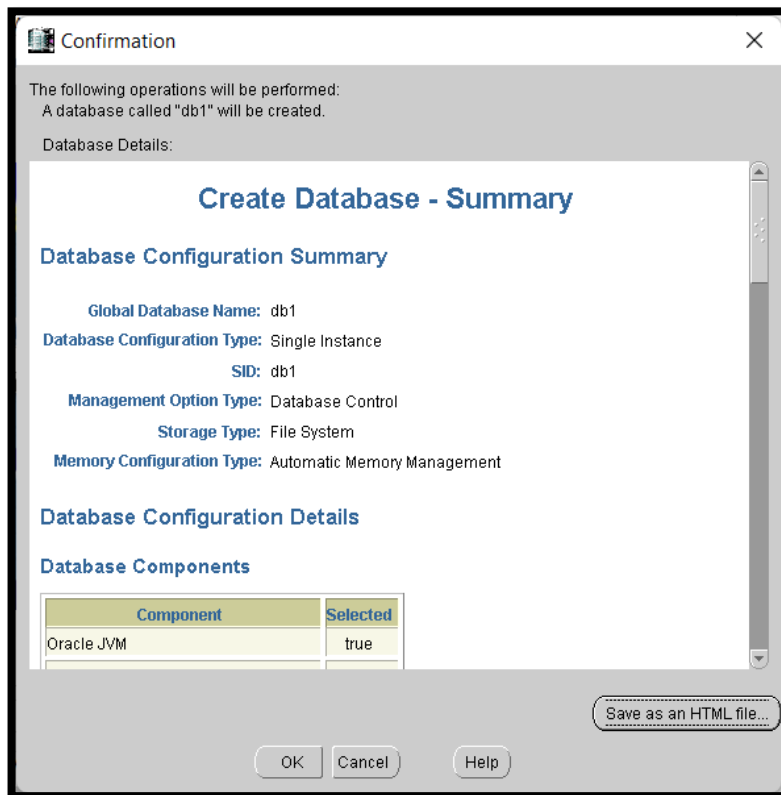

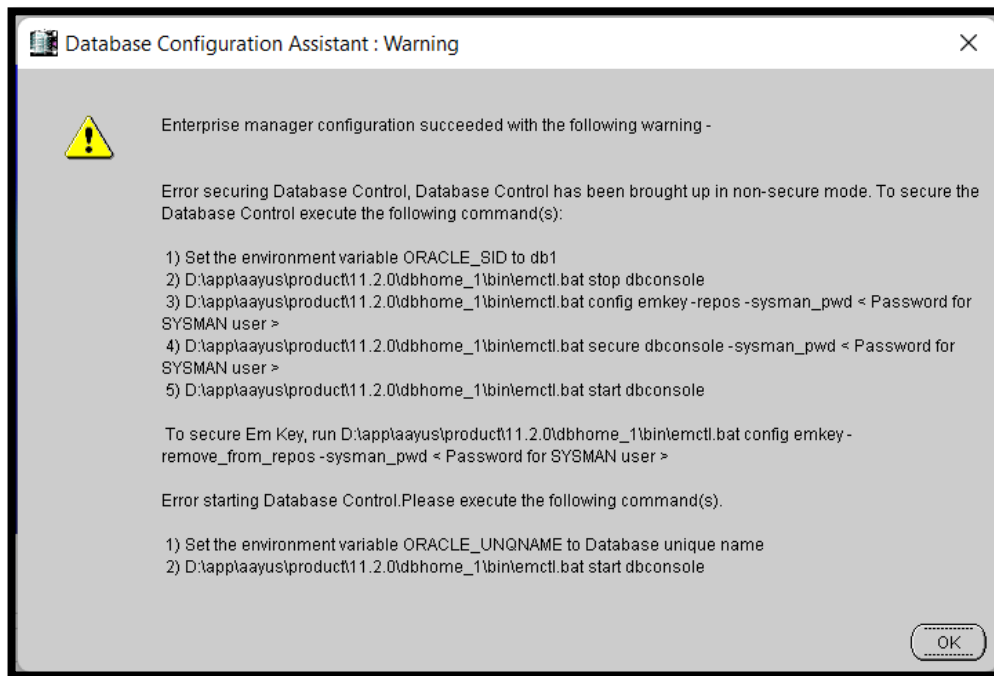


Click on Exit and Done.....


Follow the Same Steps to create db2,
Once done with Creating db1 and db2 .

Practical Implementation Steps:

✓ **Step 1:-** Open SQLPlus.

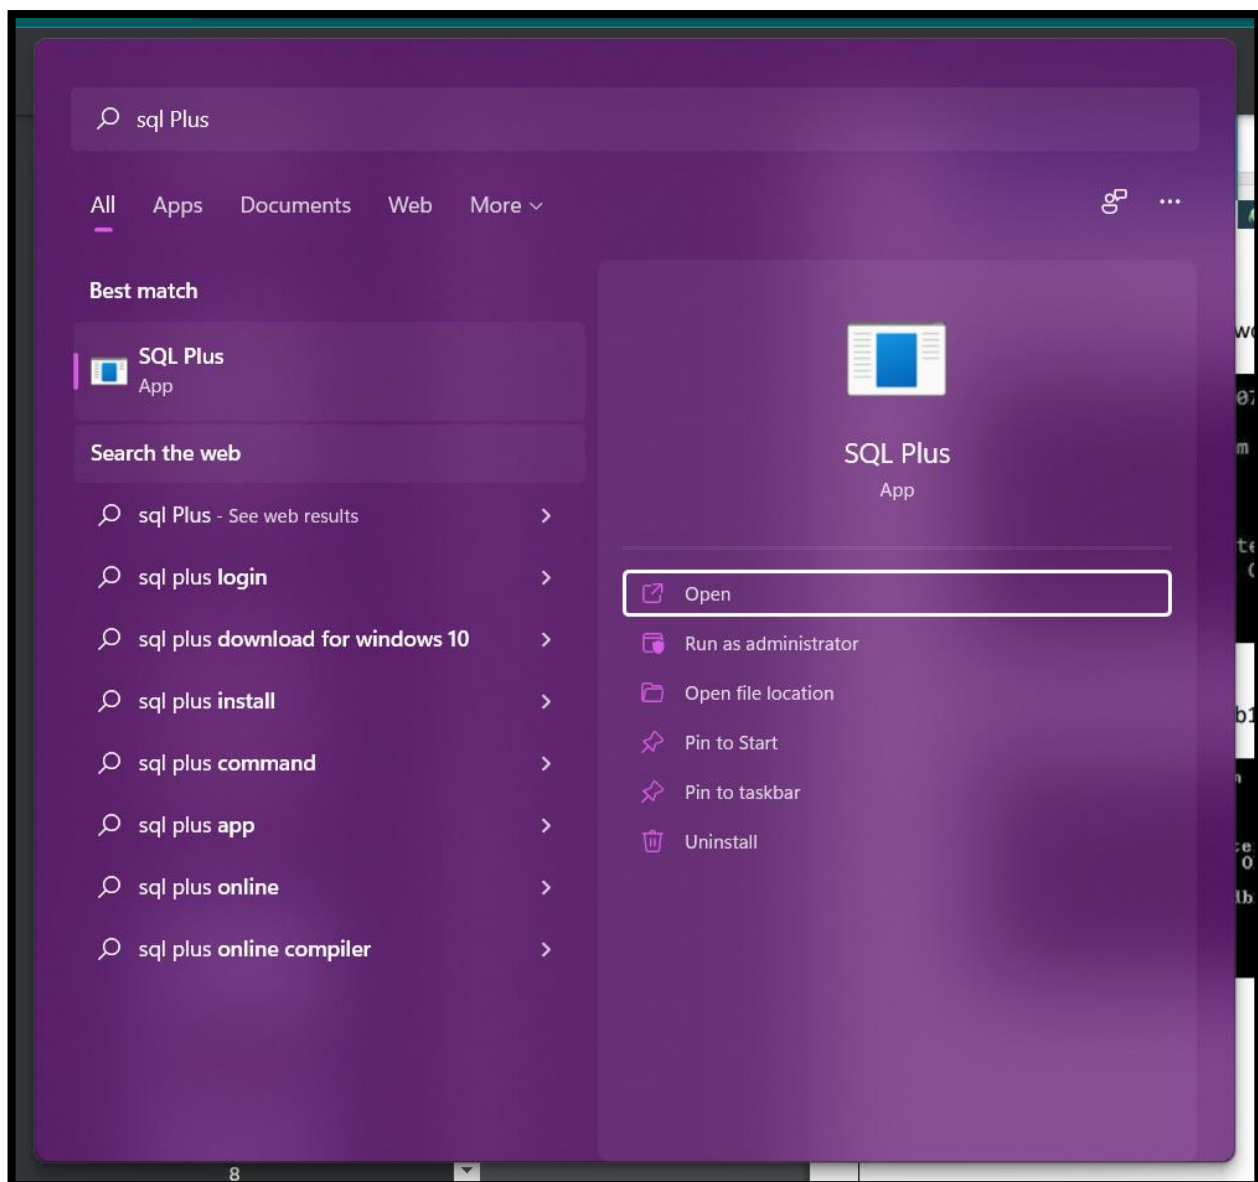

✓ **Step 2:** Connect to Your Database .

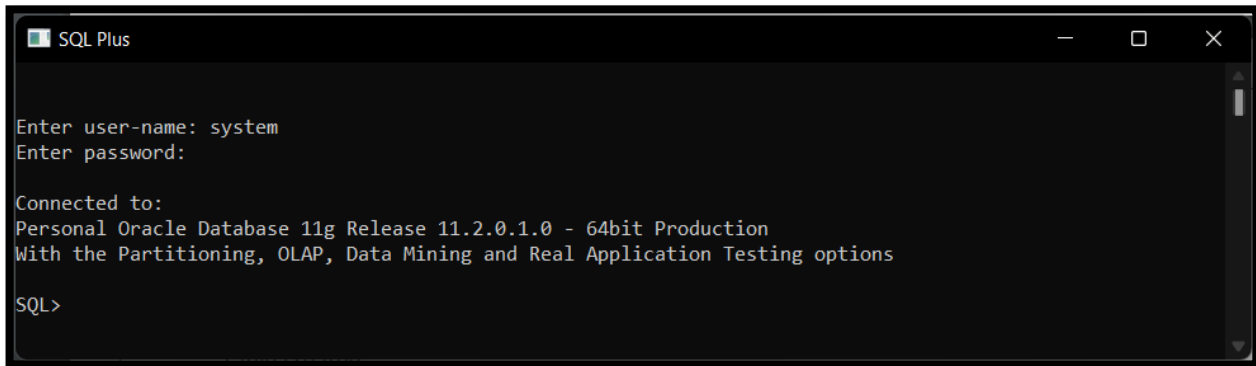


```
SQL Plus

Enter user-name: system
Enter password:

Connected to:
Personal Oracle Database 11g Release 11.2.0.1.0 - 64bit Production
With the Partitioning, OLAP, Data Mining and Real Application Testing options


SQL>
```

✓ **Step 3:** Connect your db1 While executing the Command

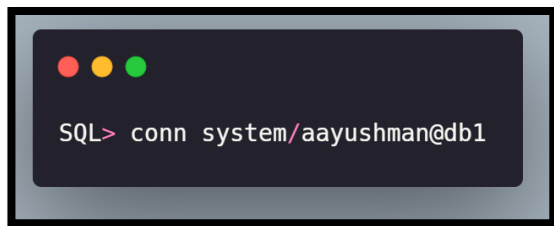

```
SQL> conn system/aayushman@db1
```

[Where “aayushman” is password of your database, and “db1” is database name].

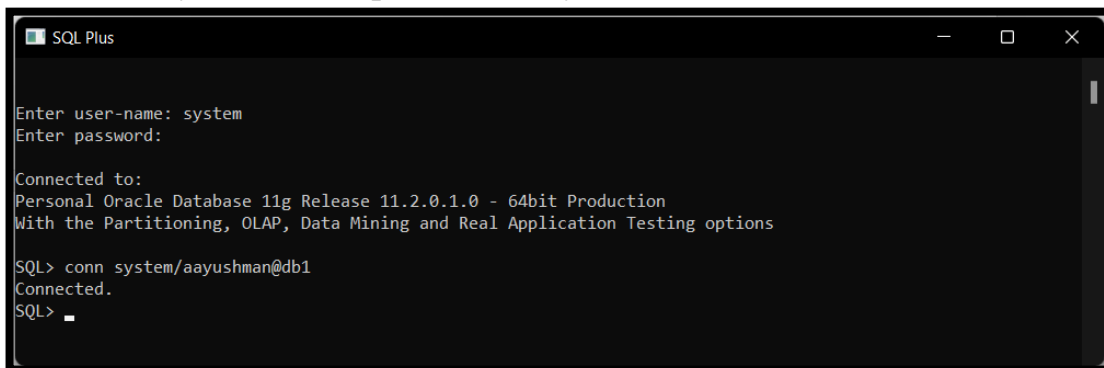

```
SQL Plus

Enter user-name: system
Enter password:

Connected to:
Personal Oracle Database 11g Release 11.2.0.1.0 - 64bit Production
With the Partitioning, OLAP, Data Mining and Real Application Testing options

SQL> conn system/aayushman@db1
Connected.
SQL>
```

✓ **Step 4:** Create one table in database db1.



```
Create one table in database db1.

create table employee027 (
EmpId int primary key,
EmpName varchar(30),
Address varchar(30),
Email varchar(20),
Salary int
);
```

```
SQL Plus

SQL*Plus: Release 11.2.0.1.0 Production on Fri Nov 26 16:29:34 2021

Copyright (c) 1982, 2010, Oracle. All rights reserved.

Enter user-name: system
Enter password:

Connected to:
Personal Oracle Database 11g Release 11.2.0.1.0 - 64bit Production
With the Partitioning, OLAP, Data Mining and Real Application Testing options

SQL> conn system/aayushman@db1
Connected.
SQL> create table employee027 (
  2 EmpId int primary key,
  3 EmpName varchar(30),
  4 Address varchar(30),
  5 Email varchar(30),
  6 Salary int
  7 );

Table created.

SQL> _
```

✓ **Step 5:** Insert Some values in Created Table.

```
Insert some values into table employee027.

SQL> insert into employee027 values (1, 'aayushman', 'Goregaon', 'aayushmanojha@protonmail.com', 20000);
SQL> insert into employee027 values (2, 'abhishek', 'Kandivali', 'abhishekojha@protonmail.com', 18000);
SQL> insert into employee027 values (3, 'aashi ojha', 'Bandra', 'aashiojha@protonmail.com', 25000);
SQL> insert into employee027 values (4, 'Priyesh', 'Colaba', 'Priyesh@protonmail.com', 23500);
SQL> insert into employee027 values (5, 'Pankaj', 'Madh', 'Pankaj@protonmail.com', 15200);
```

```
SQL Plus

SQL*Plus: Release 11.2.0.1.0 Production on Fri Nov 26 16:29:34 2021

Copyright (c) 1982, 2010, Oracle. All rights reserved.

Enter user-name: system
Enter password:

Connected to:
Personal Oracle Database 11g Release 11.2.0.1.0 - 64bit Production
With the Partitioning, OLAP, Data Mining and Real Application Testing options

SQL> conn system/aayushman@db1
Connected.
SQL> create table employee027 (
  2  EmpId int primary key,
  3  EmpName varchar(30),
  4  Address varchar(30),
  5  Email varchar(30),
  6  Salary int
  7 );

Table created.

SQL> insert into employee027 values (1, 'aayushman', 'Goregaon', 'aayushmanojha@protonmail.com', 20000);

1 row created.

SQL> insert into employee027 values (2, 'abhishek', 'Kandivali', 'abhishekojha@protonmail.com', 18000);

1 row created.

SQL> insert into employee027 values (3, 'aashi ojha', 'Bandra', 'aashiojha@protonmail.com', 25000);

1 row created.

SQL> insert into employee027 values (4, 'Priyesh', 'Colaba', 'Priyesh@protonmail.com', 23500);

1 row created.

SQL> insert into employee027 values (5, 'Pankaj', 'Madh', 'Pankaj@protonmail.com', 15200);

1 row created.

SQL> _
```

✓ Step 6:

Show all tables in employee.

```
SQL> Select * from employee027;
```

```
SQL Plus
SQL> select * from employee027;

  EMPID EMPNAME                ADDRESS                EMAIL                SALARY
-----
     6 kyara                   Borivali              kyara@protonmail.com    15000
     1 aayushman               Goregaon              aayushmanojha@protonmail.com 20000
     2 abhishek                Kandivali             abhishekojha@protonmail.com 18000
     3 aashi ojha              Bandra                aashiojha@protonmail.com 25000
     4 Priyesh                 Colaba               Priyesh@protonmail.com 23500
     5 Pankaj                 Madh                 Pankaj@protonmail.com 15200

6 rows selected.

SQL>
```

✓ **Step 7:** Enter following command to create link between two databases.

Enter following command to create link between two databases.

```
SQL> create database link db1todb2 connect system identified by aayushman using 'db2';
```

```
SQL Plus
SQL> create database link db1todb2 connect to system identified by aayushman using 'db2';

Database link created.

SQL>
```

✓ **Step 8:** Connect to Db2.

```
SQL Plus
SQL> conn system/aayushman@db2

Connected.

SQL>
```

✓ **Step 9:** Create link to connect db1.

Create link to connect db1.

```
SQL> create database link db2todb1 connect system identified by aayushman using 'db1';
```

```
SQL Plus
SQL> create database link db2todb1 connect to system identified by aayushman using 'db1';

Database link created.

SQL>
```

✓ **Step 10:** Create emp1 select where salary<18000.

Create emp1 select where salary<18000.

```
SQL> create table emp1 as select * from employee027@db2todb1 where salary<18000;
```



```
SQL Plus

SQL> create table emp1 as select * from employee027@db2todb1 where salary < 18000;

Table created.

SQL> set linesize 1000
SQL> select * from emp1;

  EMPID EMPNAME                ADDRESS                EMAIL                SALARY
-----
     6 kyara                    Borivali                kyara@protonmail.com    15000
     5 Pankaj                    Madh                    Pankaj@protonmail.com    15200

SQL>
```

✓ **Step 11:** Create table emp2 where address='Bandra'.

```
Create table emp2 where address='Bandra'.

SQL> > create table emp2 as select * from employee027@db2todb1 where address='Bandra';
```

```
SQL Plus

SQL> create table emp2 as select * from employee027@db2todb1 where address='Bandra';

Table created.

SQL> select * from emp2;

  EMPID EMPNAME                ADDRESS                EMAIL                SALARY
-----
     3 aashi ojha                Bandra                aashiojha@protonmail.com    25000

SQL>
```

✓ **Step 12:** Select salary from employee.

```
Select salary from employee

SQL> conn system/aayushman@db2
SQL> select salary from employee027@db2todb1;
```

```
SQL Plus

SQL> conn system/aayushman@db2
Connected.
SQL> select salary from employee027@db2todb1;

  SALARY
-----
    15000
    20000
    18000
    25000
    23500
    15200

6 rows selected.

SQL>
```

✓ **Step 13:** Select mail whose salary>16000.

```
Select email whose salary>16000.
```

```
SQL> select email from employee027@db2todb1 where salary > 16000
```

SQL Plus

```
SQL> select Email from employee027@db2todb1 where salary > 16000;
```

EMAIL

```
-----  
aayushmanojha@protonmail.com  
abhishekojha@protonmail.com  
aashiojha@protonmail.com  
Priyesh@protonmail.com
```

```
SQL> _
```

✓ **Step 14:** Select Employee Name and Email from Employee table where eid=2.

```
Select ename, email from employee where eid=2.
```

```
SQL> select EmpName,Email from employee027@db2todb1 where eid=2;
```

SQL Plus

```
SQL> select EmpName, Email from employee027@db2todb1 where EmpId=2;
```

EMPNAME

EMAIL

```
-----  
abhishek                abhishekojha@protonmail.com
```

```
SQL> _
```

✓ **Step 15:** Create table emp3 where address='Madh'.

```
Create table emp3 where address='Madh'.
```

```
SQL> create table emp3 as select * from employee027@db2todb1 where address='Madh';
```

SQL Plus

```
SQL> create table emp3 as select * from emp1@db1todb2 where address='Madh';
```

Table created.

```
SQL> select * from emp3;
```

EMPID	EMPNAME	ADDRESS	EMAIL	SALARY
5	Pankaj	Madh	Pankaj@protonmail.com	15200

```
SQL>
```

Conclusion: Successfully Execution of Schema into horizontal and vertical Fragmentation on different nodes in Distributed Database Environment.

Practical No 2

Aim:

Place the replication of global conceptual schema on different nodes and execute queries that will demonstrate distributed databases environment.


Software Requirement:

Oracle 11g.

Query:

1. Update any record in db1 & show in db2
2. Delete any record in db1 & show in db2.
3. Find the salary of all employees.
4. Find the email of all employees where salary = 15000.
5. Find the employee name and email where employee number is known.
6. Find the employee name and address where employee number is known.

Step 1: Create Table in db1.

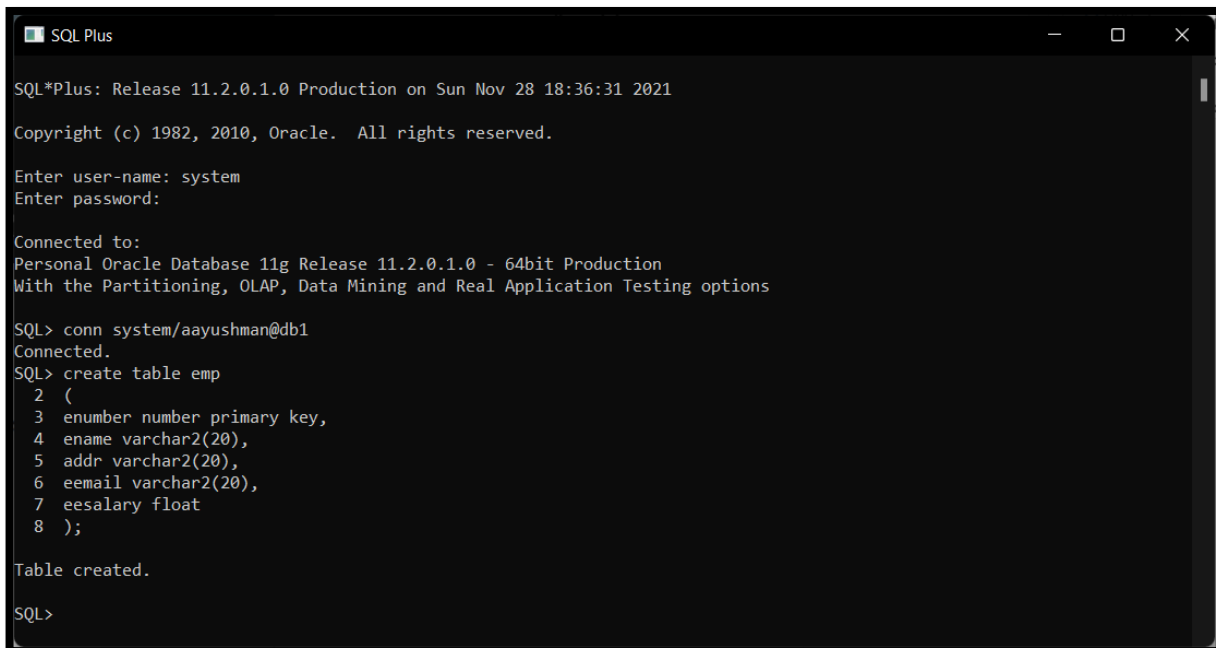

```
SQL Plus
SQL*Plus: Release 11.2.0.1.0 Production on Sun Nov 28 18:36:31 2021
Copyright (c) 1982, 2010, Oracle. All rights reserved.

Enter user-name: system
Enter password:


Connected to:
Personal Oracle Database 11g Release 11.2.0.1.0 - 64bit Production
With the Partitioning, OLAP, Data Mining and Real Application Testing options

SQL> conn system/aayushman@db1
Connected.
SQL> create table emp
 2 (
 3  enumber number primary key,
 4  ename varchar2(20),
 5  addr varchar2(20),
 6  eemail varchar2(20),
 7  eesalary float
 8 );

Table created.

SQL>
```

Step 2: Create Table in db2.

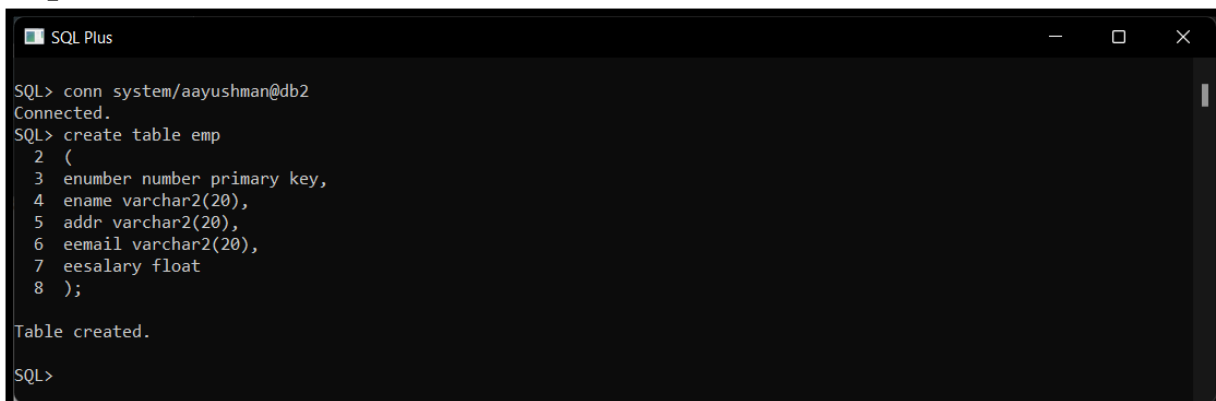

```
SQL Plus
SQL> conn system/aayushman@db2
Connected.
SQL> create table emp
 2 (
 3  enumber number primary key,
 4  ename varchar2(20),
 5  addr varchar2(20),
 6  eemail varchar2(20),
 7  eesalary float
 8 );

Table created.

SQL>
```

Step 3: Create Database link.

```
SQL Plus

SQL> create database link db1todb3 connect to system identified by aayushman using 'db3';

Database link created.

SQL> create database link db3todb1 connect to system identified by aayushman using 'db1';

Database link created.

SQL> _
```

Step 4: Create Trigger to Insert Data.

```
SQL Plus

SQL> conn system/aayushman@db1
Connected.
SQL> create or replace Trigger insert_data
2  after insert on emp
3  for each row
4  begin
5  insert into emp@db1todb2
6  values(:new.enunder,:new.ename,:new.addr,:new.eemail,:new.eesalary);
7  end;
8  /

Trigger created.

SQL> _
```

Step 5: Create Trigger to Update Data in Table.

```
SQL Plus

SQL> create or replace Trigger del_data
2  before delete on emp
3  for each row
4  begin
5  delete from emp@db1todb2
6  where enumber=:old.enunder;
7  end;
8  /

Trigger created.

SQL> _
```

```
SQL Plus

SQL> create or replace Trigger update_data
2  after update on emp
3  for each row
4  begin
5  update emp@db1todb2
6  set enumber= :new.enunder,
7  ename= :new.ename,
8  addr= :new.addr,
9  eemail= :new.eemail,
10 eesalary= :new.eesalary
11 where enumber= :old.enunder;
12 end;
13 /

Trigger created.
```

Step 6: Insert Values in Created Table.

```
SQL> insert into employee values(1,'yash','mumbai','yash@email.com',5000);
1 row created.

SQL> insert into employee values(2,'him','chennai','him@email.com',4000);
1 row created.

SQL> insert into employee values(3,'hiakyu','chennai','hiakyu@email.com',3000);
1 row created.

SQL> insert into employee values(4,'kage','mumbai','kage@email.com',2000);
1 row created.
```

Show Create Tables.

```
SQL> set linesize 500
SQL> select * from emp;
```

ENUMBER	ENAME	ADDR	EEMAIL	EESALARY
111	Aayushman	Bhayandar	aayush@yahoo.com	100000
112	Sagar	Goregaon	sagar@yahoo.com	10400
113	Aashi	Borivali	Aashi@yahoo.com	100000
114	Ashish	Bhayandar	ash@yahoo.com	15000
115	Tejas	Bhayandar	tej@yahoo.com	5000
116	Shubham	Malad	shub@yahoo.com	100000
117	Priyanka	Vasai	priya@yahoo.com	15000
118	Swapna	Nalasopara	swap@yahoo.com	300000
119	Samodaya	Goregaon	sam@yahoo.com	15000

```
9 rows selected.

SQL> _
```

Query

1. Update any record in db1 & show in db2.

```
SQL> update emp
2 set eesalary=800000
3 where enumber=114;
```

```
1 row updated.

SQL> select * from emp;
```

ENUMBER	ENAME	ADDR	EEMAIL	EESALARY
111	Aayushman	Bhayandar	aayush@yahoo.com	100000
112	Sagar	Goregaon	sagar@yahoo.com	10400
113	Aashi	Borivali	Aashi@yahoo.com	100000
114	Ashish	Bhayandar	ash@yahoo.com	800000
115	Tejas	Bhayandar	tej@yahoo.com	5000
116	Shubham	Malad	shub@yahoo.com	100000
117	Priyanka	Vasai	priya@yahoo.com	15000
118	Swapna	Nalasopara	swap@yahoo.com	300000
119	Samodaya	Goregaon	sam@yahoo.com	15000

```
9 rows selected.

SQL> _
```

Show Updated Table in db2.

```
Select SQL Plus
SQL> conn system/aayushman@db2
Connected.
SQL> select * from emp;
```

ENUMBER	ENAME	ADDR	EEMAIL	EESALARY
111	Aayushman	Bhayandar	aayush@yahoo.com	100000
112	Sagar	Goregaon	sagar@yahoo.com	10400
113	Aashi	Borivali	Aashi@yahoo.com	100000
114	Ashish	Bhayandar	ash@yahoo.com	800000
115	Tejas	Bhayandar	tej@yahoo.com	5000
116	Shubham	Malad	shub@yahoo.com	100000
117	Priyanka	Vasai	priya@yahoo.com	15000
118	Swapna	Nalasopara	swap@yahoo.com	300000
119	Samodaya	Goregaon	sam@yahoo.com	15000

```
9 rows selected.
SQL>
```

2. Delete any record in db1 & show in db2.

```
SQL Plus
SQL> conn system/aayushman@db1
Connected.
SQL> delete from emp where enumber=111;

1 row deleted.

SQL> conn system/aayushman@db2
Connected.
SQL> select * from emp;
```

ENUMBER	ENAME	ADDR	EEMAIL	EESALARY
112	Sagar	Goregaon	sagar@yahoo.com	10400
113	Aashi	Borivali	Aashi@yahoo.com	100000
114	Ashish	Bhayandar	ash@yahoo.com	800000
115	Tejas	Bhayandar	tej@yahoo.com	5000
116	Shubham	Malad	shub@yahoo.com	100000
117	Priyanka	Vasai	priya@yahoo.com	15000
118	Swapna	Nalasopara	swap@yahoo.com	300000
119	Samodaya	Goregaon	sam@yahoo.com	15000

```
8 rows selected.
SQL>
```

3. Find the salary of all employees.

```
SQL Plus
SQL> select ename, eesalary from emp;

ENAME          EESALARY
-----
Sagar          10400
Aashi          100000
Ashish         800000
Tejas          5000
Shubham        100000
Priyanka       15000
Swapna         300000
Samodaya       15000

8 rows selected.

SQL>
```

4. Find the email of all employees where salary = 15000.

```
SQL Plus
SQL> select eemail from emp where eesalary= 15000;

EEMAIL
-----
priya@yahoo.com
sam@yahoo.com

SQL>
```

5. Find the employee name and email where employee number is known.

```
SQL Plus
SQL> select ename,eemail from emp where enumber=113;

ENAME          EEMAIL
-----
Aashi          Aashi@yahoo.com

SQL>
```

6. Find the employee name and address where employee number is known.

```
SQL Plus
SQL> select ename,addr,eemail from emp where enumber=113;

ENAME          ADDR          EEMAIL
-----
Aashi          Borivali      Aashi@yahoo.com

SQL>
```

Conclusion: Successfully Created Triggers and Perform Different Queries on them.

PRACTICAL NO :3

AIM:CRUD operation using MongoDB

To run mongoDb from your command prompt:

```
C:\Users\shweta>cd C:\Program Files\MongoDB\Server\4.2\bin

C:\Program Files\MongoDB\Server\4.2\bin>mongod
2021-03-11T21:26:22.045+0530 I  CONTROL  [main] Automatically disabling TLS 1.0, to force-enable TLS 1.0 specify --sslDi
sabledProtocols 'none'
2021-03-11T21:26:22.053+0530 W  ASIO      [main] No TransportLayer configured during NetworkInterface startup
2021-03-11T21:26:22.054+0530 I  CONTROL  [initandlisten] MongoDB starting : pid=8552 port=27017 dbpath=C:\data\db\ 64-bi
t host=DESKTOP-DL3T888
```

By performing the above command you are going to on your mongo DB serverNow to on your mongoDb shell :open new cmd

mongo

```
C:\Program Files\MongoDB\Server\4.2\bin>mongo
MongoDB shell version v4.2.17
connecting to: mongodb://127.0.0.1:27017/?compressors=disabled&gssapiServiceName=mongodb
Implicit session: session { "id" : UUID("c58bfe33-58d6-42e5-a852-1f217de5dc89") }
MongoDB server version: 4.2.17
Welcome to the MongoDB shell.
For interactive help, type "help".
For more comprehensive documentation, see
```

Creating and selecting database;

use msccs

```
> use msccs
switched to db msccs
> db
msccs
> show dbs
admin    0.000GB
config  0.000GB
local   0.000GB
>
```

To check the current connected database : **db**To see the list of all database : **show dbs**

C : CREATING COLLECTION AND INSERTING VALUES :

Creating a collection and inserting values can be done together. Here we have or collection name as 'student '

```
> db.student.insert({name:"sds"})
```

```
> db.student.insert({no:2,name:"yash",course:{coursename:"bsc",duration:"3yrs"},address:{city:"mumbai",state:"maharashtra",country:"india"}})
```

```
> db.student.insert({name:"sds"})
WriteResult({ "nInserted" : 1 })
```

```
> db.student.insert({no:2,name:"yash",course:{coursename:"bsc",duration:"3 yrs"},address:{city:"mumbai",state:"maharashtra",country:"india"}})
WriteResult({ "nInserted" : 1 })
>
```

R : READ DATA FROM THE COLLECTION :

To retrieve the inserted document,

```
> db.student.find()
```

```
> db.student.find()
{ "_id" : ObjectId("619f4f3fc5c3f41a15053a00"), "name" : "sds" }
{ "_id" : ObjectId("619f4f7dc5c3f41a15053a01"), "no" : 2, "name" : "yash", "course" : { "coursename" : "bsc", "duration" : "3 yrs" }
>
```

U : UPDATING A DOCUMENT IN A COLLECTION :

> **db.student.update({no:2},{ \$set:{'name':'notyash'}})**

```
> db.student.update({no:2},{ $set:{'name':'notyash'}})
WriteResult({ "nMatched" : 1, "nUpserted" : 0, "nModified" : 1 })
> db.student.find()
{ "_id" : ObjectId("619f4f3fc5c3f41a15053a00"), "name" : "sds" }
{ "_id" : ObjectId("619f4f7dc5c3f41a15053a01"), "no" : 2, "name" : "notyash", "co
>
```

D : REMOVING AN ENTRY FROM THE COLLECTION (DELETE)

> **db.student.remove({no:2})**

```
> db.student.remove({no:2})
WriteResult({ "nRemoved" : 1 })
> db.student.find()
{ "_id" : ObjectId("619f4f3fc5c3f41a15053a00"), "name" : "sds" }
>
```

Conclusion: Successfully performed CRUD operations.

Practical No : 4

Aim: Create different types that include attributes and methods. Define tables for these types by adding sufficient number of tuples. Demonstrate insert, update and delete operations on these tables. Execute queries on them.

Using Object Oriented databases create the following types:

- a) AddrType1 (PinQuery: number, Street :char, City : char, state :char)
- b) (ii)BranchType (address: AddrType1, phone1: integer,phone2: integer)
- c) AuthorType (name:char,,addr AddrType1)
- d) PublisherType (name: char, addr: AddrType1, branches: BranchTableTypeee) AuthorListType as varray, which is a reference to AuthorType

Next create the following tables:

- f) BranchTableType of BranchType
- g) authors of AuthorType
- h) books(title: varchar, year : date, published_by ref PublisherType,authorsAuthorListType)
- i) Publishers of PublisherType

Insert 10 records into the above tables and fire the following queries:

- a) List all of the authors that have the same pin Query as their publisher:
- b) List all books that have 2 or more authors:
- c) List the name of the publisher that has the most branches
- d) Name of authors who have not published a book
- e) List all authors who have published more than one book:
- f) Name of authors who have published books with at least two different publishers
- g) List all books (title) where the same author appears more than once on the list of authors (assuming that an integrity constraint requiring that the name of an author is unique in a list of authors has not been specified).

SQL> Create or replace type AddrType1 as object (PinQuery number (5), Street char(20), City varchar2(50), state varchar2(40), no number(4));

SQL> create or replace type BranchType as object (address AddrType1, phone1integer,phone2 integer);

SQL> create or replace type BranchTableType as table of BranchType;

```
SQL> Create or replace type AddrType1 as object (PinQuery number (5), Street char(20), City varchar2(50), state varchar2(40), no number(4));
2 /
Type created.
SQL> create or replace type BranchType as object (address AddrType1, phone1 integer,phone2 integer );
2 /
Type created.
SQL> create or replace type BranchTableType as table of BranchType;
2 /
Type created.
```

SQL> create or replace type AuthorType as object (name varchar2 (50), addr AddrType1);

SQL> create or replace table Authors of AuthorType;

```
SQL> create or replace type AuthorType as object (name varchar2 (50), addr AddrType1);
2 /
```

Type created.

SQL> create table Authors of AuthorType;

Table created.

SQL> create or replace type AuthorListType as varray(10) of ref AuthorType ;

```
SQL> create or replace type AuthorListType as varray(10) of ref AuthorType ;
2 /
```

Type created.

SQL> create or replace type PublisherType as object(name varchar2(50), addr AddrType1,branches BranchTableType);

SQL> create table Publishers of PublisherType NESTED TABLE branches STORE asbranchtable;

```
SQL> create or replace type PublisherType as object(name varchar2(50), addr AddrType1, branches BranchTableType);
2 /
```

Type created.

SQL> create table Publishers of PublisherType NESTED TABLE branches STORE as branchtable;

Table created.

SQL> create table books(title varchar2(50), year date, published_by ref PublisherType,authorsAuthorListType);

```
SQL> create table books(title varchar2(50), year date, published_by ref PublisherType,authors AuthorListType);
```

Table created.

- > insert into Authors values('Aakash', AddrType1(7000,'AT street','mumbai','maharashtra',1007));
- > insert into Authors values('abc', AddrType1(7000,'AT street','mumbai','maharashtra',1007));
- > insert into Authors values('Salman',AddrType1(7003,'PL street','mumbai','maharashtra',1003));
- > insert into Authors values('Vikas',AddrType1(7008,'AT street', 'mumbai','maharashtra',1007));
- > insert into Authors values ('Rajan', AddrType1(7006,'Nehrut','mumbai','maharashtra',1005));
- > insert into Authors values ('Tejas', AddrType1(8002,'THstreet', 'pune', 'maharashtra' , 13));
- > insert into Authors values('Ashish',AddrType1(7008,'TT street', 'Nasik','maharashtra',1008));
- > insert into Authors values('Richard',AddrType1(7002,'FL street','pune','maharashtra',03));

```
SQL> insert into Authors values('Salman',AddrType1(7003,'PL street', 'mumbai','maharashtra',1003));
1 row created.

SQL> insert into Authors values('Vikas',AddrType1(7008,'AT street', 'mumbai', 'maharashtra',1007));
1 row created.

SQL> insert into Authors values ('Rajan', AddrType1 (7006,'Nehrut','mumbai','maharashtra',1005));
1 row created.

SQL> insert into Authors values ('Tejas', AddrType1(8002,'TH street', 'pune', 'maharashtra' , 13));
1 row created.

SQL> insert into Authors values('Ashish',AddrType1(7008,'TT street', 'Nasik', 'maharashtra',1008));
1 row created.

SQL> insert into Authors values('Richard',AddrType1(7002,'FL street','pune', 'maharashtra',03));
1 row created.
```

insert into Publishers values ('Aakash', AddrType1 (4002,'PK street', 'mumbai','maharashtra',03),
BranchTableType(BranchType (AddrType1(5002,'PL street','mumbai', 'maharashtra', 03), 23406,69896)));

insert into Publishers
values('McGraw',AddrType1(7007,'LJstreet','mumbai', 'maharashtra',07), BranchTableType(BranchType (
AddrType1 (7007,'K street','mumbai', 'maharashtra',1007), 4543545,8676775)));

insert into Publishers values ('Tata',AddrType1(7008,'JW street','mumbai', 'maharashtra',27),
BranchTableType (BranchType (AddrType1(1002,'DM street','nasik','maharashtra',1007), 456767,7675757)));

insert into Publishers values ('Nurali', AddrType1(7002,'ST street','pune','maharashtra',1007),
BranchTableType (BranchType (AddrType1(1002,'SGstreet','pune', 'maharashtra',1007), 4543545,8676775)));

insert into Publishers values('Tata', AddrType1(6002,'Gold street','nasik',
'maharashtra',1007),BranchTableType (BranchType(AddrType1(6002,'South street','nasik','mha',1007),
4543545,8676775)));

insert into books select 'IP','28-may-1983', ref (pub), AuthorListType(ref(aut)) from Publishers pub,Authors aut where pub.name='Tata' and aut.name='Richard';

insert into books select 'ADBMS','09-jan-1890',ref(pub), AuthorListType(ref(aut))from Publishers pub,Authors aut where pub.name='McGraw' and aut.name='Abhijith';

insert into books select 'c prog','25-may-1983', ref (pub),AuthorListType(ref(aut)) from Publishers pub,Authors aut where pub.name='Vipul' and aut.name='Tejas';

```
SQL> insert into books select 'c prog','25-may-1983', ref (pub),AuthorListType(ref(aut)) from Publishers pub,Authors aut where pub.name='Vipul' and aut.name='Tejas';
0 rows created.

SQL> insert into books select 'IP','28-may-1983', ref (pub), AuthorListType(ref(aut)) from Publishers pub,Authors aut where pub.name='Tata' and aut.name='Richard';
2 rows created.

SQL>
SQL> insert into books select 'ADBMS','09-jan-1890',ref(pub), AuthorListType(ref(aut)) from Publishers pub,Authors aut where pub.name='McGraw' and aut.name='Abhijith';
0 rows created.

SQL>
SQL> insert into books select 'c prog','25-may-1983', ref (pub),AuthorListType(ref(aut)) from Publishers pub,Authors aut where pub.name='Vipul' and aut.name='Tejas';
0 rows created.
```

Firing Queries on the tables.

- 1) List all of the authors that have the same pin Query as their publisher:

Query:

select a.name from Authors a, Publishers p where a.addr.pinQuery = p.addr.pinQuery;

```
NAME
-----
Vikas
Ashish
Richard
```

- 2) List all books that have 2 or more authors

Query:

Select title from books b where 1 <= (select count(*) from table(b.authors));

```
TITLE
-----
IP
IP
```

- 3) List the name of the publisher that has the most branches

Query:

Select p.name from publishers p, table (p.branches) group by p.name having count(*) >= all (select count(*) from publishers p, table(p.branches) group by name);

```
NAME
-----
Tata
```

4) **List all authors who have published more than one book**Query:

```
select a.name from authors a, books b, table (b.authors) v
where v.column_value = ref(a) group by a.name having count(*) > 1;
```

```
SQL> select a.name from authors a, books b, table (b.authors) v
  2  where v.column_value = ref(a) group by a.name having count(*) > 1
  3  ;

NAME
-----
Richard
```

5) **List all books (title) where the same author appears more than once on the list of authors(assuming that an integrity constraint requiring that the name of an author is unique in a list of authors has not been specified).**

Query:

```
select title from authors a, books b, table (b.authors) v where v.column_value = ref(a) group by title having count(*)
> 1;
```

Conclusion: Successfully different attributes and special data types.

Practical No : 5

Aim: Create a temporal database and issue queries on it.

Query:

Create table:

```
SQL> create table Emp_Appnt( Acc_No number(10), Name varchar2(10), RECDate date, RETDate date);
SQL> create table Emp_Appnt ( Acc_No number(10), Name varchar2(10), RECDate date, RETDate date);
Table created.
```

Inserting rows :

```
insert into Emp_Appnt values(1235,'Aakash Pal','08-mar-1987','12-oct-2015') ;
insert into Emp_Appnt values(1235,'Alpa','08-oct-1978','19-nov-2020') ;
insert into Emp_Appnt values(1237,'ac','25-jan-1988','20-feb-2021') ;
insert into Emp_Appnt values(1278,'xyz','05-dec-1978','02-mar-2017') ;
insert into emp_appnt values(1789,'mon','06-nov-1999','22-mar-2021');
```

```
SQL>
SQL> insert into Emp_Appnt values(1235,'Aakash Pal','08-mar-1987','12-oct- 2015') ;
1 row created.
SQL> insert into Emp_Appnt values(1235,'Alpa','08-oct-1978','19-nov-2020') ;
1 row created.
SQL> insert into Emp_Appnt values(1237,'ac','25-jan-1988','20-feb-2021') ;
1 row created.
SQL> insert into Emp_Appnt values(1278,'xyz','05-dec-1978','02-mar-2017') ;
1 row created.
SQL> insert into emp_appnt values(1789,'mon','06-nov-1999','22-mar-2021');
1 row created.
```


SQL> select * from emp_appnt ;

SQL> select * from emp_appnt ;

ACC_NO	NAME	RECDATE	RETDATE
1235	Aakash Pal	08-MAR-87	12-OCT-15
1235	Aakash Pal	08-MAR-87	12-OCT-15
1237	ac	25-JAN-88	20-FEB-21
1278	xyz	05-DEC-78	02-MAR-17
1789	mon	06-NOV-99	22-MAR-21
1235	Aakash Pal	08-MAR-87	12-OCT-15
1235	Alpa	08-OCT-78	19-NOV-20
1237	ac	25-JAN-88	20-FEB-21
1278	xyz	05-DEC-78	02-MAR-17
1789	mon	06-NOV-99	22-MAR-21

Queries:

- i. Show the employee whose record date is 25th Jan-1988.
select * from emp_appnt where RECDate='25-jan-1988';

SQL> select * from emp_appnt where RECDate='25-jan-1988';

ACC_NO	NAME	RECDATE	RETDATE
1237	ac	25-JAN-88	20-FEB-21
1237	ac	25-JAN-88	20-FEB-21

- ii. Show the employee whose record date is 22th mar-2021.

select * from emp_appnt where RETDate='22-mar-2021';

SQL> select * from emp_appnt where RETDate='22-mar-2021';

ACC_NO	NAME	RECDATE	RETDATE
1789	mon	06-NOV-99	22-MAR-21
1789	mon	06-NOV-99	22-MAR-21

iii. Create a new table named as tbl_shares.

```
create table tbl_shares1(  
    C_Name varchar2(10), No_Share Number(10), Price number(10), TransTime  
    varchar2(10) Default To_char(sysdate,'HH:MI'));
```

```
SQL> create table tbl_shares1 (  
2  C_Name varchar2(10), No_Share Number(10), Price number(10), TransTime varchar2(10) Default To_char(sysdate,'HH:MI'));
```

Inserting rows :

```
insert into tbl_shares1 values('Aakash', 123,500,Default);  
insert into tbl_shares1 values('Alpa', 121,550,Default);  
insert into tbl_shares1 values('VIK', 124,600,Default);  
insert into tbl_shares1 values('RAJ', 125,750,Default);  
insert into tbl_shares1 values('SAK', 133,1000,Default);
```

```
SQL> insert into tbl_shares1 values('Aakash', 123,500,Default);  
1 row created.  
  
SQL> insert into tbl_shares1 values('Alpa', 121,550,Default);  
1 row created.  
  
SQL> insert into tbl_shares1 values('VIK', 124,600,Default);  
1 row created.  
  
SQL> insert into tbl_shares1 values('RAJ', 125,750,Default);  
1 row created.  
  
SQL> insert into tbl_shares1 values('SAK', 133,1000,Default);  
1 row created.
```

- iv. Display all the records you have entered in table.

```
select * from tbl_shares;
```

```
SQL> select * from tbl_shares1;
```

C_NAME	NO_SHARE	PRICE	TRANSTIME
Aakash	123	500	03:09
Alpa	121	550	03:09
VIK	124	600	03:09
RAJ	125	750	03:09
SAK	133	1000	03:09

- v. Display records where price>100 and TransTime='01:24'.

```
select * from tbl_shares where price>100 and TransTime='01:24';
```

```
SQL> select * from tbl_shares1 where price>100 and TransTime='03:09';
```

C_NAME	NO_SHARE	PRICE	TRANSTIME
Aakash	123	500	03:09
Alpa	121	550	03:09
VIK	124	600	03:09
RAJ	125	750	03:09
SAK	133	1000	03:09

- vi. Display the records where price=(select max(price) from tbl_shares where TransTime='02:04');

```
select * from tbl_shares1 where price=(select max(price) from tbl_shares where TransTime='01:25');
```


```
SQL> select * from tbl_shares1 where price=(select max(price) from tbl_shares1 where TransTime='03:09');
```

C_NAME	NO_SHARE	PRICE	TRANSTIME
SAK	133	1000	03:09

Conclusion: Successfully Created a temporal database

Practical No: 6

Aim: Create a table that stores spatial data and issue queries on it.

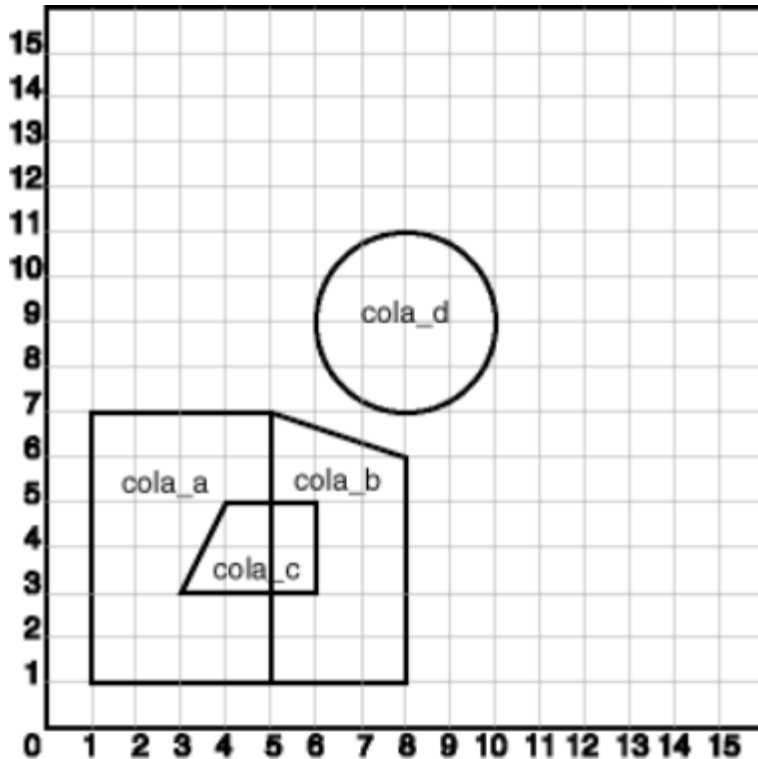

Query:

Create a spatial database table that stores the number, name and location, which consists of four different areas say abc, pqr, mno and xyz.

Fire the following queries:

- Find the topological intersection of two geometries.
- Find whether two geometric figures are equivalent to each other.
- Find the areas of all different locations.
- Find the area of only one location.
- Find the distance between two geometries.

Steps:-

```
Enter user-name: system
Enter password:

Connected to:
Oracle Database 11g Enterprise Edition Release 11.1.0.6.0 - Production
With the Partitioning, OLAP, Data Mining and Real Application Testing options
```

Query for Creating Table

```
SQL>create table cola_mrp(  
    mkt_id number primary key, name varchar(20), shapeMDSYS.SDO_Geometry  
    );
```

Queries for inserting rows :

1)

```
SQL> insert into cola_mrp values (1,'cola_a',MDSYS.SDO_GEOMETRY(  
    2003,NULL,NULL, MDSYS.SDO_ELEM_INFO_ARRAY (1,1003,3),  
    MDSYS.SDO_ORDINATE_ARRAY (1,1,5,7)))  
/
```

```
SQL> insert into cola_mrp values  
2  (1,'cola_a',MDSYS.SDO_GEOMETRY(  
3  2003,NULL,NULL,  
4  MDSYS.SDO_ELEM_INFO_ARRAY  
5  (1,1003,3),  
6  MDSYS.SDO_ORDINATE_ARRAY  
7  (1,1,5,7)))  
8  /  
  
1 row created.
```

2)

```
SQL>insert into cola_mrp values (2,'cola_b',MDSYS.SDO_GEOMETRY(  
    2003,NULL,NULL, MDSYS.SDO_ELEM_INFO_ARRAY (1,1003,1),  
    MDSYS.SDO_ORDINATE_ARRAY (5,1,8,1,8,6,5,7,5,1)))  
/
```

```

SQL> insert into cola_mrp values
  2  (2,'cola_b',MDSYS.SDO_GEOMETRY(
  3    2003,NULL,NULL,
  4    MDSYS.SDO_ELEM_INFO_ARRAY
  5    (1,1003,1),
  6    MDSYS.SDO_ORDINATE_ARRAY
  7    (5,1,8,1,8,6,5,7,5,1)))
  8  /

1 row created.

```

3)

```

SQL>insert into cola_mrp values (3,'cola_c',MDSYS.SDO_GEOMETRY(
    2003,NULL,NULL, MDSYS.SDO_ELEM_INFO_ARRAY (1,1003,1),
    MDSYS.SDO_ORDINATE_ARRAY (3,3,6,3,6,5,4,5,3,3)))
/

```

```

SQL> insert into cola_mrp values
  2  (3,'cola_c',MDSYS.SDO_GEOMETRY(
  3    2003,NULL,NULL,
  4    MDSYS.SDO_ELEM_INFO_ARRAY
  5    (1,1003,1),
  6    MDSYS.SDO_ORDINATE_ARRAY
  7    (3,3,6,3,6,5,4,5,3,3)))
  8  /

1 row created.

```

4)

```

SQL>insert into cola_mrp values (4,'cola_d', MDSYS.SDO_GEOMETRY(
    2003,NULL,NULL,
    MDSYS.SDO_ELEM_INFO_ARRAY(1,1003,4),
    MDSYS.SDO_ORDINATE_ARRAY (7,9,10,9,8,11)))
/

```

```

SQL> insert into cola_mrp values
  2  (4,'cola_d',
  3  MDSYS.SDO_GEOMETRY(
  4  2003,NULL,NULL,
  5  MDSYS.SDO_ELEM_INFO_ARRAY
  6  (1,1003,4),
  7  MDSYS.SDO_ORDINATE_ARRAY
  8  (7,9,10,9,8,11)))
  9  /

1 row created.

```

Creating Metadata information:

```

SQL>insert into user_SDO_GEOM_METADATA values('cola_mrp','shape',
      MDSYS.SDO_DIM_ARRAY( MDSYS.SDO_DIM_ELEMENT('X',0,20,0.005),
      MDSYS.SDO_DIM_ELEMENT('Y',0,20,0.005)
      ),NULL);

```

```

SQL> insert into user_SDO_GEOM_METADATA values
  2  ('cola_mrp','shape',
  3  MDSYS.SDO_DIM_ARRAY(
  4  MDSYS.SDO_DIM_ELEMENT('X',0,20,0.005),
  5  MDSYS.SDO_DIM_ELEMENT('Y',0,20,0.005)
  6  ),NULL);

1 row created.

```

Query for creating index :

```

SQL>create index cola_spatial_idx on cola_market(location) Indextype Is
      mdsys.spatial_index;

```

```

SQL> create index cola_spatial_idx
  2  on cola_market(location)
  3  Indextype Is mdsys.spatial_index;
on cola_market(location)
  ×
ERROR at line 2:
ORA-00942: table or view does not exist

```

Queries :

1) Find the topological intersection of two geometries.

```
SQL>select SDO_GEOM.SDO_INTERSECTION (c_a.shape,c_c.shape,0.005)
      from cola_mrpc_a,cola_mrpc_c
      where c_a.name='cola_a' AND c_c.name='cola_c';
```

```
SQL> select SDO_GEOM.SDO_INTERSECTION (c_a.shape,c_c.shape,0.005)
  2   from cola_mrp c_a,cola_mrp c_c
  3   where c_a.name='cola_a' AND c_c.name='cola_c';

SDO_GEOM.SDO_INTERSECTION(C_A.SHAPE,C_C.SHAPE,0.005)(SDO_GTYPE, SDO_SRID, SDO_PO
-----
SDO_GEOMETRY(2003, NULL, NULL, SDO_ELEM_INFO_ARRAY(1, 1003, 1), SDO_ORDINATE_ARR
AY(4, 5, 3, 3, 5, 3, 5, 5, 4, 5))
```

2) Find whether two geometric figures are equivalent to each other.

```
SQL>SELECT SDO_GEOM.RELATE(c_c.shape, 'EQUAL', c_a.shape,0.005)
      FROM cola_mrpc_c, cola_mrpc_a
      WHERE c_c.name='cola_c' AND c_a.name = 'cola_a';
```

```
SQL> SELECT SDO_GEOM.RELATE(c_c.shape, 'EQUAL', c_a.shape,0.005)
  2   FROM cola_mrp c_c, cola_mrp c_a
  3   WHERE c_c.name='cola_c' AND c_a.name = 'cola_a';

SDO_GEOM.RELATE(C_C.SHAPE, 'EQUAL', C_A.SHAPE,0.005)
-----
FALSE
```

3) Find the areas of all different locations

```
SQL>select name,SDO_GEOM.SDO_AREA(shape,0.005) from cola_mrp;
```

```
SQL> select name,SDO_GEOM.SDO_AREA(shape,0.005) from cola_mrp;

NAME                                SDO_GEOM.SDO_AREA(SHAPE,0.005)
-----
cola_a                                24
cola_b                               16.5
cola_c                                5
cola_d                               7.85398163
```


4) Find the area of only one location.

```
SQL>select c.name,SDO_GEOM.SDO_AREA(c.shape,0.005) from cola_mrp c where  
c.name='cola_a';
```

```
SQL> select c.name,SDO_GEOM.SDO_AREA(c.shape,0.005) from cola_mrp c  
2  where c.name='cola_a';  
  
NAME                                SDO_GEOM.SDO_AREA(C.SHAPE,0.005)  
-----  
cola_a                                24
```

5) Find the distance between two geometries.

```
SQL>select SDO_GEOM.SDO_DISTANCE(c_b.shape,c_d.shape,0.005)  
from cola_mrpb,cola_mrpd  
where c_b.name= 'cola_b' AND c_d.name = 'cola_d';
```

```
SQL> select SDO_GEOM.SDO_DISTANCE(c_b.shape,c_d.shape,0.005)  
2  from cola_mrp c_b,cola_mrp c_d  
3  where c_b.name= 'cola_b' AND c_d.name = 'cola_d';  
  
SDO_GEOM.SDO_DISTANCE(C_B.SHAPE,C_D.SHAPE,0.005)  
-----  
1.8973666
```

Conclusion: Successfully Created a Spatial database.


Practical 7: (XML Database)

Question:

Create a table employee having dept_id as number datatype and employee_spec as XML data type (XM_Type). The employee_spec is a schema with attributes emp_id, name, email, acc_no, managerEmail, dataOf Joining. Insert 10 tuples into employee table. Fire the following queries on XML database.

1. Retrieve the names of employee.
2. Retrieve the acc_no of employees.
3. Retrieve the names, acc_no, and email of employees.
4. Update the 3rd record from the table and display the name of an employee.
5. Delete 4th record from the table

Setup:



Create a table:

```
create table emp (emp_id int, emp_spec xmltype);
```

Insert records:

```
Insert into emp values (1,xmlltype('<?xml version="1.0"?>
<employee id="be130">
  <firstname>William</firstname>
  <lastname>Defoe</lastname>
  <title>Accountant</title>
  <division>Accts Payable</division>
  <building>326</building>
  <room>14a</room>
</employee>' ));
```

```
Insert into emp values (2,xmlltype('<?xml version="1.0"?>
<employee id="be129">
  <firstname>Jane</firstname>
  <lastname>Doe</lastname>
  <title>Engineer</title>
  <division>Materials</division>
  <building>327</building>
  <room>19</room>
  <supervisor>be131</supervisor>
</employee>' ));
```

```
Insert into emp values (3,xmlltype('<?xml version="1.0"?>
<employee id="be129">
  <firstname>Jane</firstname>
  <lastname>Doe</lastname>
  <title>Engineer</title>
  <division>Materials</division>
  <building>327</building>
  <room>19</room>
  <supervisor>be131</supervisor>
</employee>' ));
```

```
Insert into emp values (4,xmlltype('<?xml version="1.0"?>
  <employee id="be132">
    <firstname>Sandra</firstname>
    <lastname>Rogers</lastname>
    <title>Engineering</title>
    <division>Materials</division>
    <building>327</building>
    <room>22</room>
  </employee>' ));
```

```
Insert into emp values (5,xmlltype('<?xml version="1.0"?>
  <employee id="be133">
    <firstname>Steve</firstname>
    <lastname>Casey</lastname>
    <title>Engineering</title>
    <division>Materials</division>
    <building>327</building>
    <room>24</room>
  </employee>' ));
```

```
Insert into emp values (6,xmlltype('<?xml version="1.0"?>
  <employee id="be135">
    <firstname>Michelle</firstname>
    <lastname>Michaels</lastname>
    <title>COO</title>
    <division>Management</division>
    <building>216</building>
    <room>264</room>
  </employee>' ));
```

```
SQL> Insert into emp values (1,xmlltype('<?xml version="1.0"?>
2      <employee id="be130">
3          <firstname>William</firstname>
4          <lastname>Defoe</lastname>
5          <title>Accountant</title>
6          <division>Accts Payable</division>
7          <building>326</building>
8          <room>14a</room>
9      </employee>'));
```

1 row created.

```
SQL>
SQL> Insert into emp values (2,xmlltype('<?xml version="1.0"?>
2      <employee id="be129">
3          <firstname>Jane</firstname>
4          <lastname>Doe</lastname>
5          <title>Engineer</title>
6          <division>Materials</division>
7          <building>327</building>
8          <room>19</room>
9          <supervisor>be131</supervisor>
10     </employee>'));
```

1 row created.

```
SQL>
SQL>
SQL> Insert into emp values (3,xmlltype('<?xml version="1.0"?>
2      <employee id="be129">
3          <firstname>Jane</firstname>
4          <lastname>Doe</lastname>
5          <title>Engineer</title>
6          <division>Materials</division>
7          <building>327</building>
8          <room>19</room>
9          <supervisor>be131</supervisor>
10     </employee>'));
```

1 row created.

```
SQL>
SQL> Insert into emp values (4,xmlltype('<?xml version="1.0"?>
2      <employee id="be132">
3          <firstname>Sandra</firstname>
4          <lastname>Rogers</lastname>
5          <title>Engineering</title>
6          <division>Materials</division>
7          <building>327</building>
8          <room>22</room>
9      </employee>'));
```

1 row created.

```
SQL> set wrap off
SQL> select * from emp;
```

EMP_ID	EMP_SPEC
1	<?xml version="1.0"?>
2	<?xml version="1.0"?>
3	<?xml version="1.0"?>
4	<?xml version="1.0"?>
5	<?xml version="1.0"?>
6	<?xml version="1.0"?>

Get the first name:

```
select x.emp_spec.extract('//firstname/text() ').getStringVal() from emp x;
```

```
SQL> select x.emp_spec.extract('//firstname/text() ').getStringVal() emp_name from emp x;
```

EMP_NAME
William
Jane
Jane
Sandra
Steve
Michelle

6 rows selected.

Get the first name and room number:

```
select x.emp_spec.extract('//firstname/text() ').getStringVal() emp_name,
x.emp_spec.extract('//room/text()').getStringVal() room_No from emp x;
```

EMP_NAME	ROOM_NO
Sandra	22
Steve	24
Michelle	264

Get the first name and room number and title:

```
select x.emp_spec.extract('///firstname/text() ').getStringVal() emp_name,  
x.emp_spec.extract('///room/text()').getStringVal() room_No from emp x;
```

```
EMP_NAME  
-----  
ROOM_NO  
-----  
TITLE  
-----  
William  
14a  
Accountant  
  
Jane  
19  
Engineer  
  
EMP_NAME
```

Update 3rd record from the table:

```
Update emp set emp_spec=xmltype('<?xml version="1.0"?>  
<employee id="be135">  
  <firstname>NotMichelle</firstname>  
  <lastname>NotMichaels</lastname>  
  <title>COO</title>  
  <division>Management</division>  
  <building>216</building>  
  <room>264</room>  
</employee>') where emp_id=3;
```

```
SQL> Update emp set emp_spec=xmltype('<?xml version="1.0"?>  
2   <employee id="be135">  
3     <firstname>NotMichelle</firstname>  
4     <lastname>NotMichaels</lastname>  
5     <title>COO</title>  
6     <division>Management</division>  
7     <building>216</building>  
8     <room>264</room>  
9     </employee>') where emp_id=3;  
  
1 row updated.
```

```
EMP_SPEC  
-----  
<?xml version="1.0"?>  
  <employee id="be135">  
    <firstname>NotMichelle</
```

Delete a record from the table:

Delete from emp where x.emp_spec.extract('//firstname/text() ').getStringVal() ="NotMichelle";

```
SQL> Delete from emp x where x.emp_spec.extract('//firstname/text() ').getStringVal() ='NotMichelle';  
1 row deleted.
```

Conclusion: Successfully Created a XML database.