
📖 Structural Pseudo-Class – CSS-Only Notes (with HTML Connection)

✓ :first-child

★ Meaning:

Jo element apne parent ka **sabse pehla child** ho.


∞ Connected HTML:

```
<div>
  <p>1st paragraph</p>   ← 🎯 Targeted
  <p>2nd paragraph</p>
</div>
```

🔗 CSS:

```
p:first-child {
  color: red;
}
```

Code ➡

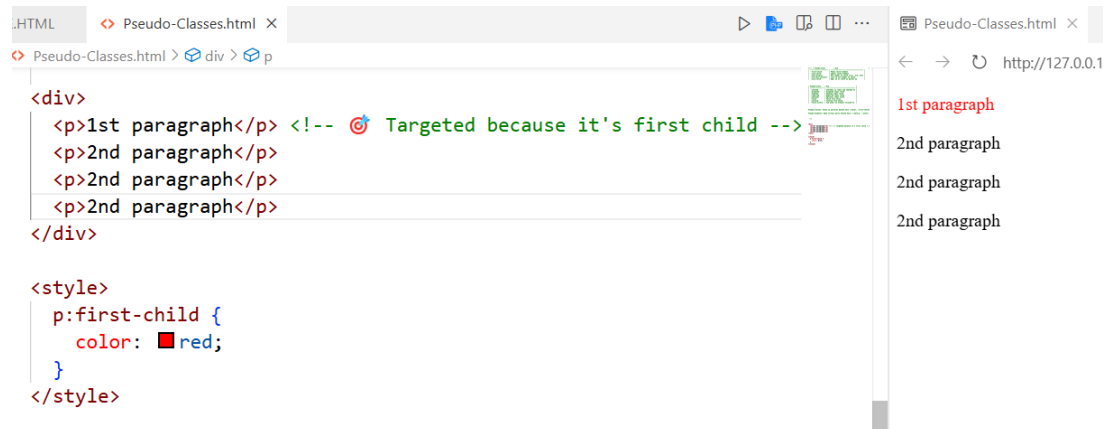

✓ :last-child

★ Meaning:

Jo element parent ka **aakhri child** ho.

∞ Connected HTML:

```
<ul>
  <li>Item 1</li>
  <li>Item 2</li>
```

```
<li>Item 3</li>    ← 🎯 Targeted
</ul>
```

🔗 CSS:

```
li:last-child {
  color: blue;
}
```



✓ :nth-child(n)

🔗 Meaning:


Parent ka **nth number** ka child target karta hai (1-based index).

🔗 Connected HTML:


```
<ul>
  <li>Item 1</li>
  <li>Item 2</li>    ← 🎯 2nd child
  <li>Item 3</li>
</ul>
```

🔗 CSS:

```
li:nth-child(2) {
  background: yellow;
}
```

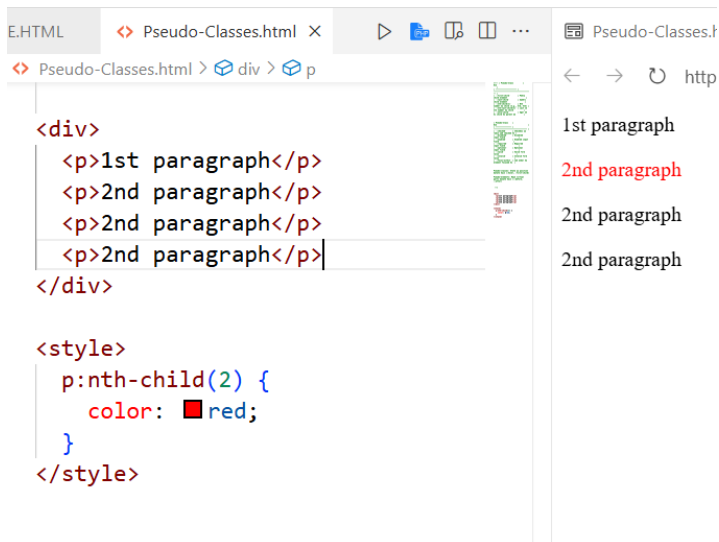

EXAMPLE 2 :

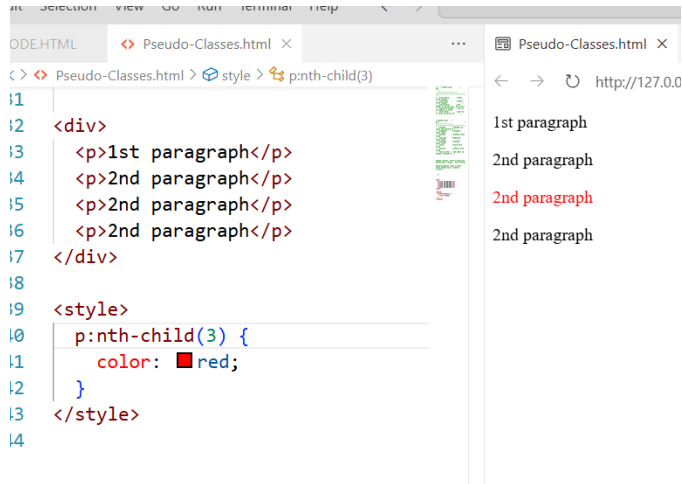

✓ :nth-last-child(n)

★ Meaning:


Counting **last** se hoti hai, nth child ko target karta hai.

∞ Connected HTML:

```
<ul>
  <li>First</li>
  <li>Middle</li>
  <li>Last</li> ← last-child (1st from end)
</ul>
```

🌀 CSS:

```
li:nth-last-child(1) {
  font-style: italic;
}
```

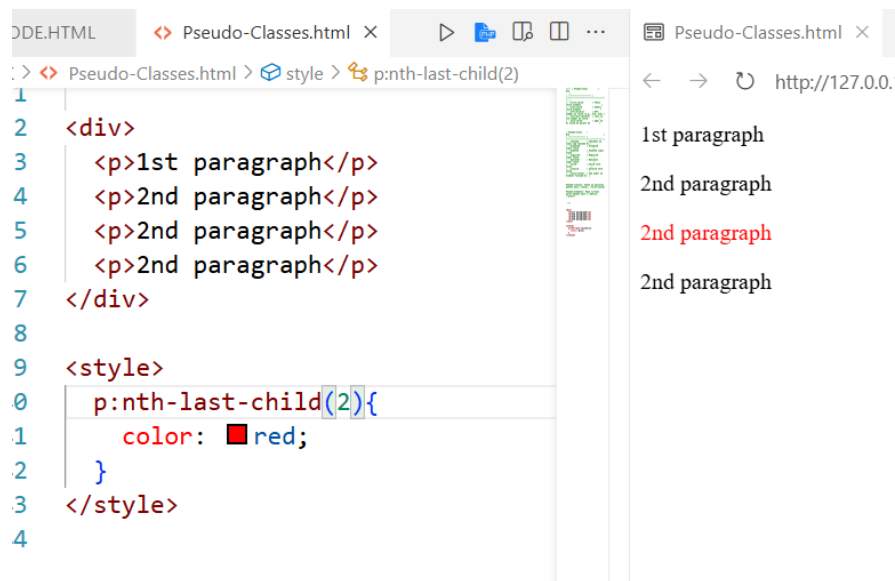

✓ :only-child

★ Meaning:

Agar parent ke paas **sirf ek hi child** ho, toh use target karega.

∞ Connected HTML:

```
<div>
  <p>Single child</p>   ← 🎯 Targeted
</div>
```

```
<div>
  <p>1</p>
  <p>2</p>   ← ❌ Not targeted
</div>
```

🌀 CSS:

```
p:only-child {
  border: 2px solid green;
}
```



Part 2 ➡

✓ **::before**

★ **Meaning:**

Element ke actual content **ke pehle** virtual content insert karta hai.

🔗 **Connected HTML:**

```
<p class="tagline">Welcome to my website</p>
```


🎨 **CSS:**

```
.tagline::before {  
  content: "★ ";  
  color: orange;  
}
```


□ **Output:**

★ Welcome to my website

🎯 **Targeted:** Pehle star emoji insert hua.

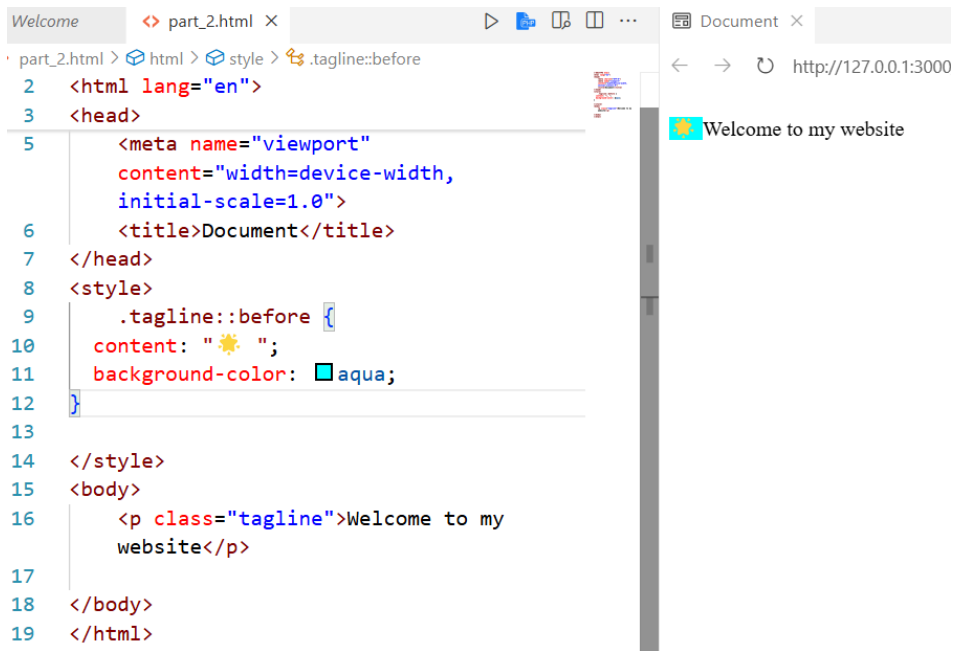

Example ➡ 2

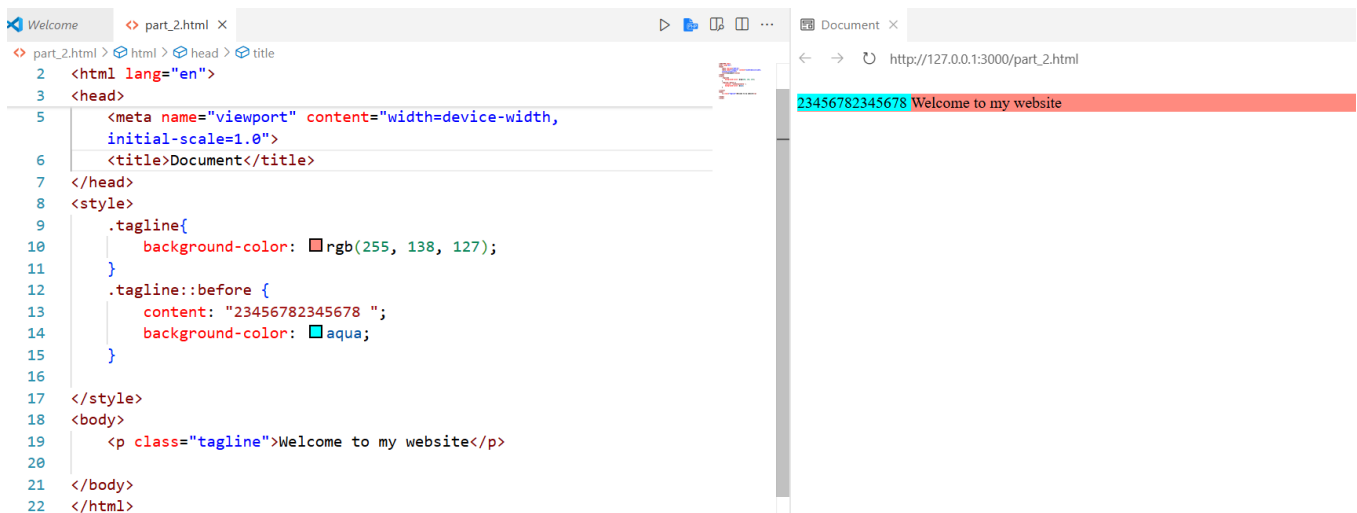

✓ ::after

★ Meaning:

Element ke actual content **ke baad** virtual content insert karta hai.

🔗 Connected HTML:

<p class="cta">Click Here</p>


🌀 CSS:

```
.cta::after {
  content: " →";
  color: green;
}
```

❑ Output:

Click Here →

🎯 **Targeted:** Arrow emoji end mein insert hua.

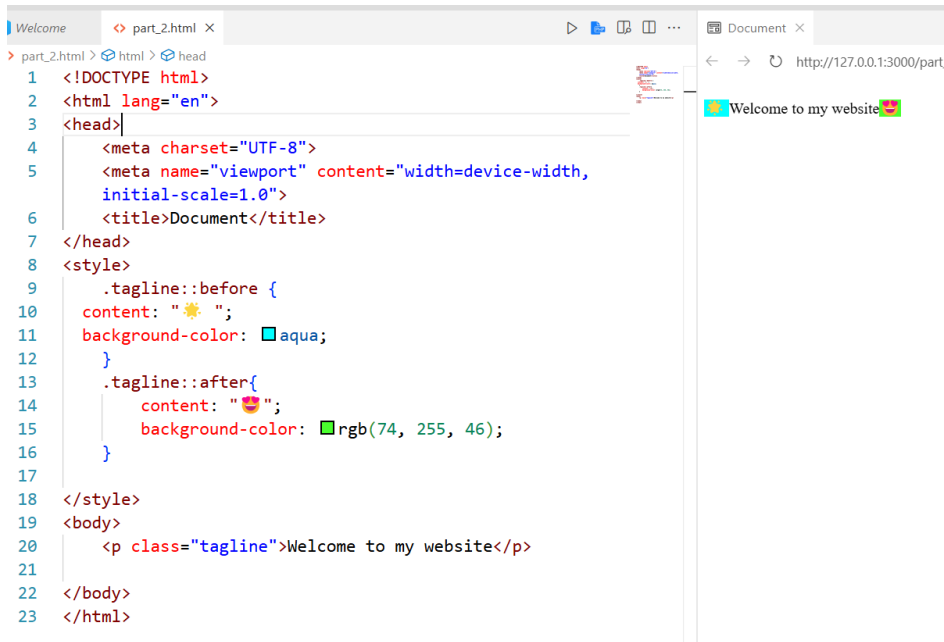

✔ Notes & Properties

Feature	Explanation
content:	Mandatory hai pseudo-elements ke liye
::before	Content ke pehle add karta hai
::after	Content ke baad add karta hai
Styling Allowed	✔ Yes (color, font, padding, etc.)
Common Use Cases	Emojis, icons, labels, badges, timelines
Works Best With	div, p, button, span, etc.

✔ Use Case Example: Notification Badge

🔗 HTML:


```
<button class="notify">Notifications</button>
```

🔗 CSS:

```
.notify::after {
  content: " (3)";
  color: red;
  font-weight: bold;
}
```

□ **Output:**
Notifications (3)


🎯 **Targeted:** Button ke text ke baad badge insert hua.

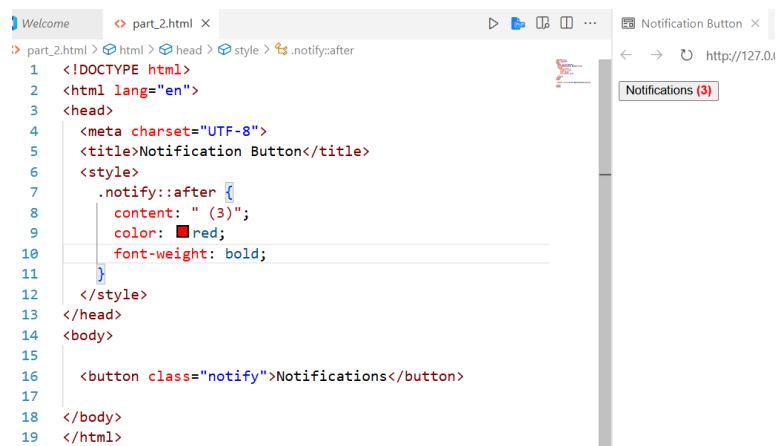

The screenshot shows a web browser window with a single tab titled 'part_2.html'. The address bar shows 'http://127.0.0.1'. The page content is a button with the text 'Notifications' and a red badge with the number '3' in the top right corner. The browser's developer tools are open, showing the 'style' tab for the button element. The CSS rules for the button are as follows:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <title>Notification Button</title>
6   <style>
7     .notify::after {
8       content: " (3)";
9       color: red;
10      font-weight: bold;
11    }
12  </style>
13 </head>
14 <body>
15
16   <button class="notify">Notifications</button>
17
18 </body>
19 </html>
```

➔ Example (2)

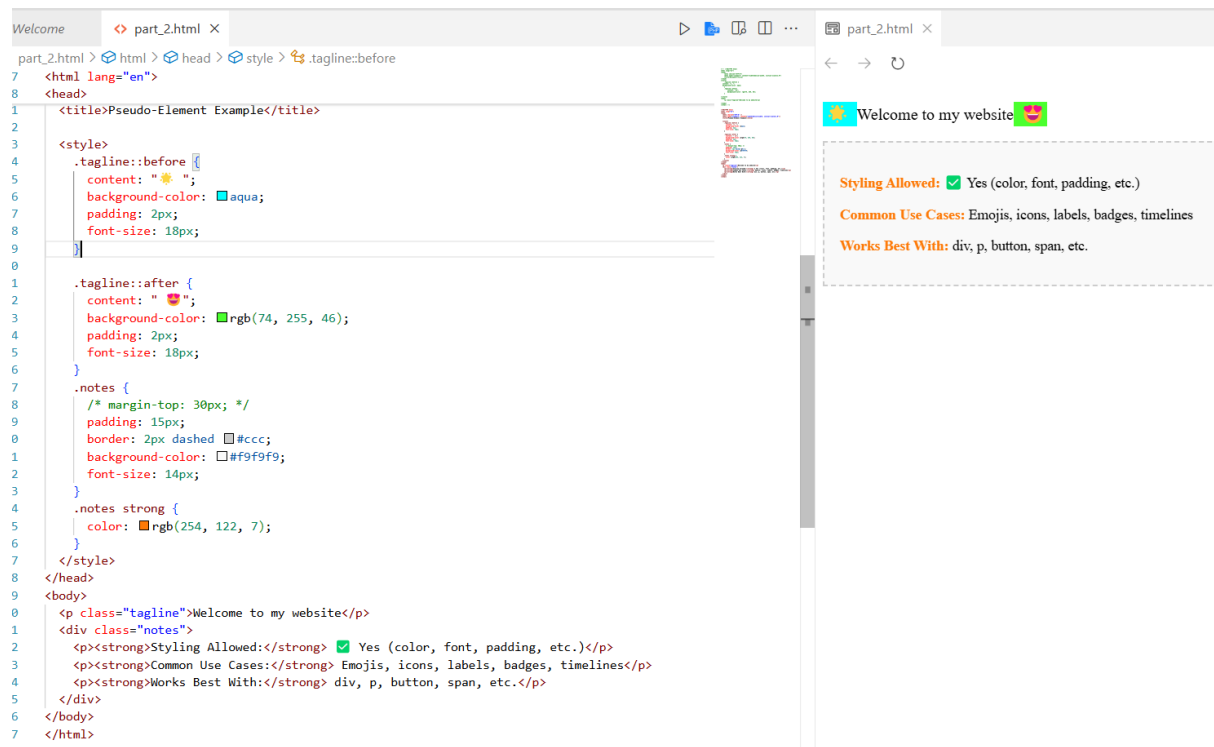

The screenshot shows a web browser window with a single tab titled 'part_2.html'. The address bar shows 'http://127.0.0.1'. The page content is a website with a tagline 'Welcome to my website' and a box containing notes. The browser's developer tools are open, showing the 'style' tab for the tagline element. The CSS rules for the tagline are as follows:

```
7 <html lang="en">
8 <head>
9   <title>Pseudo-Element Example</title>
10
11   <style>
12     .tagline::before {
13       content: "🌟";
14       background-color: aqua;
15       padding: 2px;
16       font-size: 18px;
17     }
18
19     .tagline::after {
20       content: "📝";
21       background-color: rgb(74, 255, 46);
22       padding: 2px;
23       font-size: 18px;
24     }
25
26     .notes {
27       /* margin-top: 30px; */
28       padding: 15px;
29       border: 2px dashed #ccc;
30       background-color: #f9f9f9;
31       font-size: 14px;
32     }
33
34     .notes strong {
35       color: rgb(254, 122, 7);
36     }
37   </style>
38 </head>
39 <body>
40   <p class="tagline">Welcome to my website</p>
41   <div class="notes">
42     <p><strong>Styling Allowed:</strong> Yes (color, font, padding, etc.)</p>
43     <p><strong>Common Use Cases:</strong> Emojis, icons, labels, badges, timelines</p>
44     <p><strong>Works Best With:</strong> div, p, button, span, etc.</p>
45   </div>
46 </body>
47 </html>
```

✔ Bonus: Emoji Wrapper

⇄ HTML:


```
<div class="box">Hello</div>
```

🎨 CSS:

```
.box::before {  
  content: "👋 ";  
}  
.box::after {  
  content: " 🌟";  
}
```

□ Output:

👋 Hello 🌟

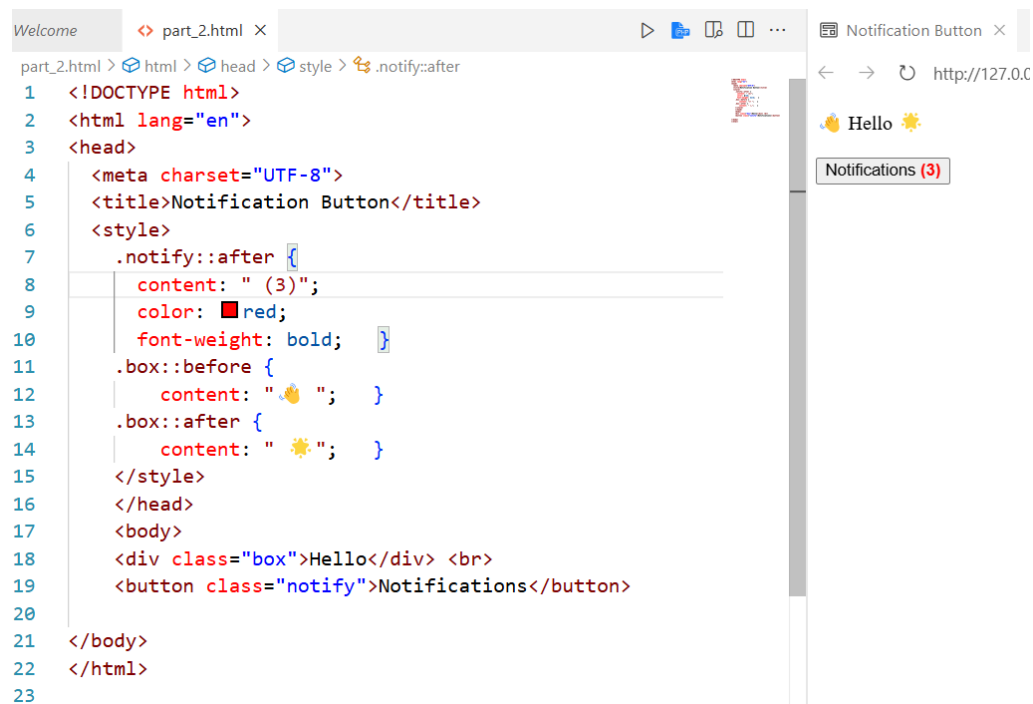

🚀 Real-World Use Cases of `::before` & `::after`


Use Case	Description
✓ Custom bullet list	Emoji ya icons add karne ke liye
✓ Quotes styling	Quotation marks automatically insert karna
✓ Timeline UI	Dots, lines add karna beside items
✓ Buttons with icons	"Submit ➡", "Back ⬅" etc.
✓ Ribbon/Labels	Virtual ribbons using CSS only

⚠ Important Notes:



- `::before` and `::after` **DOM mein visible nahi hote** – sirf visually display hote hain.
 - `content:` property is **required**, warna kuch bhi display nahi hoga.
 - Dono elements **inline content** banate hain by default (block banane ke liye `display: block;` use karein).
-
-

- `::first-letter`
- `::first-line`
- `::selection`
- `::placeholder`

➡ TASK

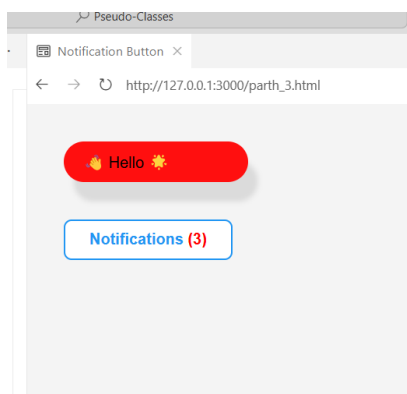


After Hover :

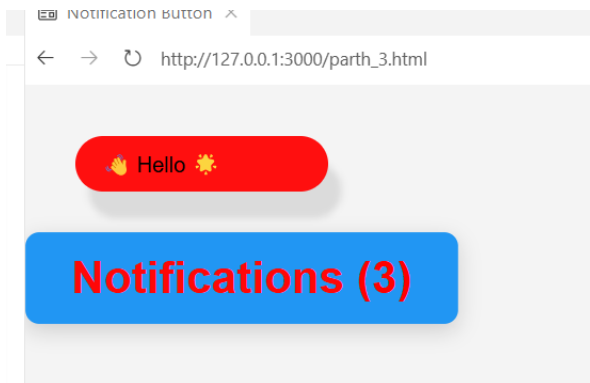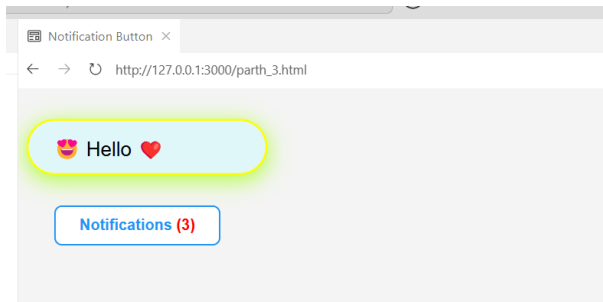

Solution ::➡

CLICK ME

Task 2 ➡

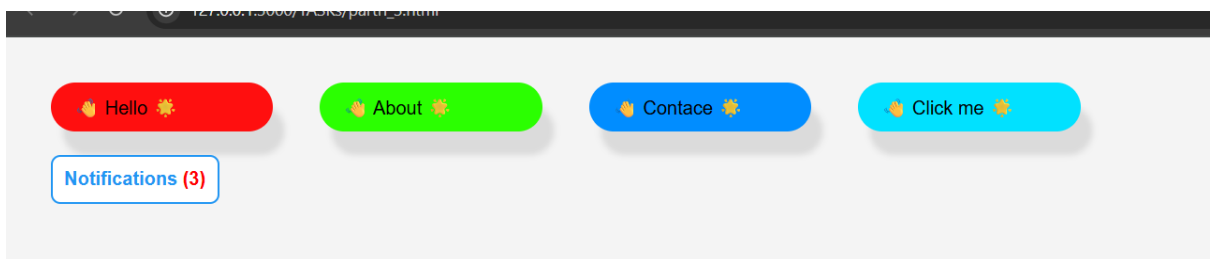


Solution ➡

[CLICK ME](#)

TASK ➡ 3



After Hover :

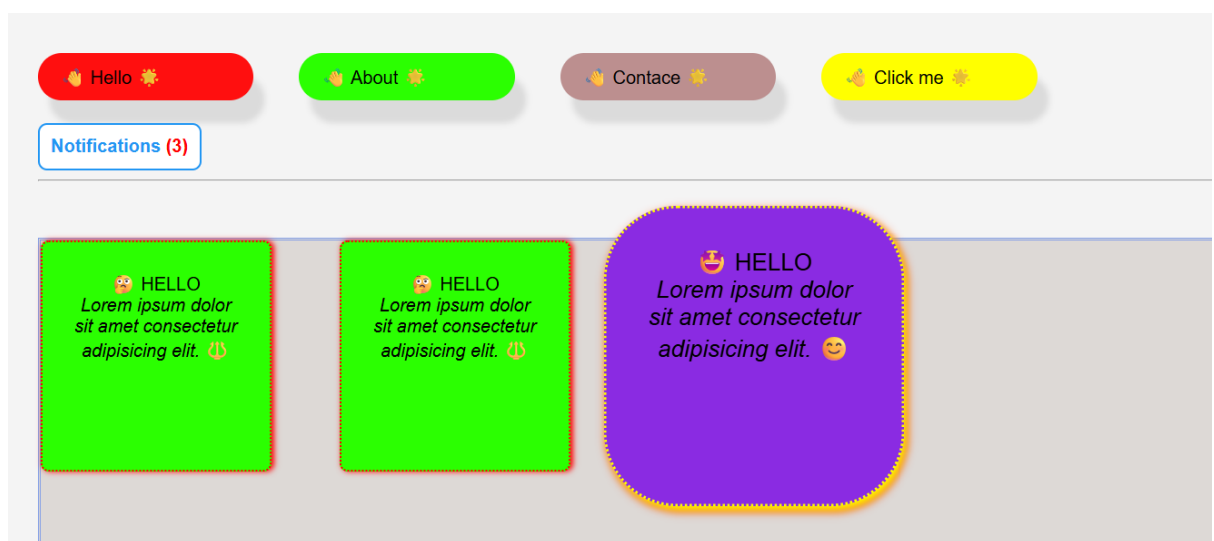

Soluction ➡

[Click me](#)