
📖 Structural Pseudo-Class – CSS-Only Notes (with HTML Connection)

✓ :first-child

★ Meaning:

Jo element apne parent ka **sabse pehla child** ho.


∞ Connected HTML:

```
<div>
  <p>1st paragraph</p>   ← 🎯 Targeted
  <p>2nd paragraph</p>
</div>
```

🔗 CSS:

```
p:first-child {
  color: red;
}
```

Code ➡

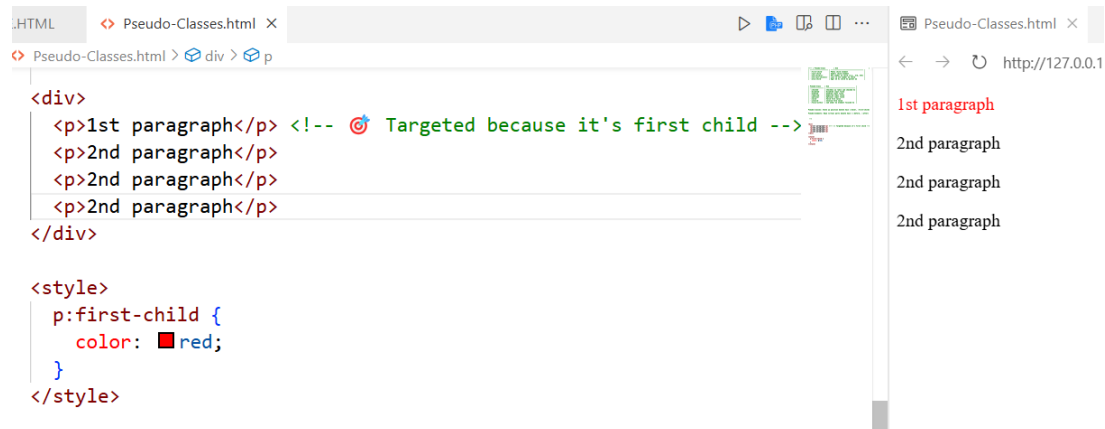

✓ :last-child

★ Meaning:

Jo element parent ka **aakhri child** ho.

∞ Connected HTML:

```
<ul>
  <li>Item 1</li>
  <li>Item 2</li>
```

```
<li>Item 3</li>    ← 🎯 Targeted
</ul>
```

🔗 CSS:

```
li:last-child {
  color: blue;
}
```



✓ :nth-child(n)

🔗 Meaning:


Parent ka **nth number** ka child target karta hai (1-based index).

🔗 Connected HTML:


```
<ul>
  <li>Item 1</li>
  <li>Item 2</li>    ← 🎯 2nd child
  <li>Item 3</li>
</ul>
```

🔗 CSS:

```
li:nth-child(2) {
  background: yellow;
}
```

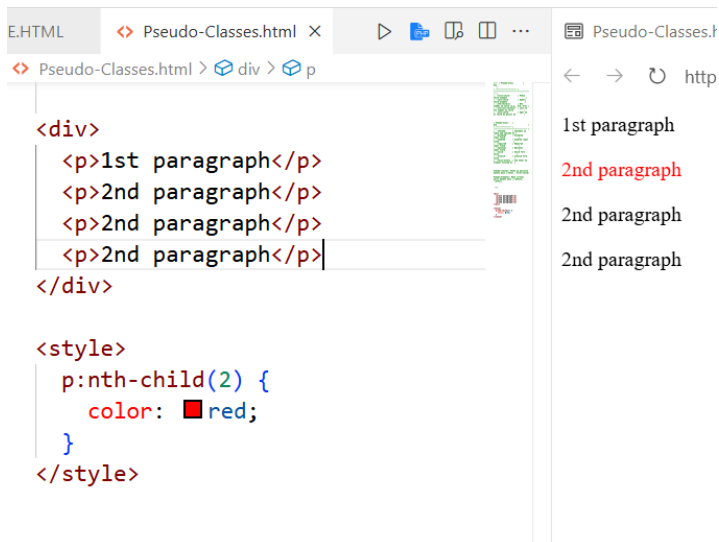

EXAMPLE 2 :

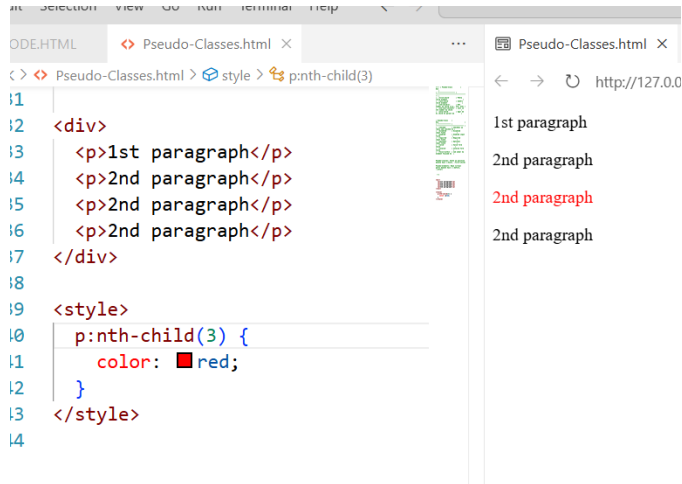

✓ :nth-last-child(n)

★ Meaning:


Counting **last** se hoti hai, nth child ko target karta hai.

∞ Connected HTML:

```
<ul>
  <li>First</li>
  <li>Middle</li>
  <li>Last</li> ← last-child (1st from end)
</ul>
```

🌀 CSS:

```
li:nth-last-child(1) {
  font-style: italic;
}
```

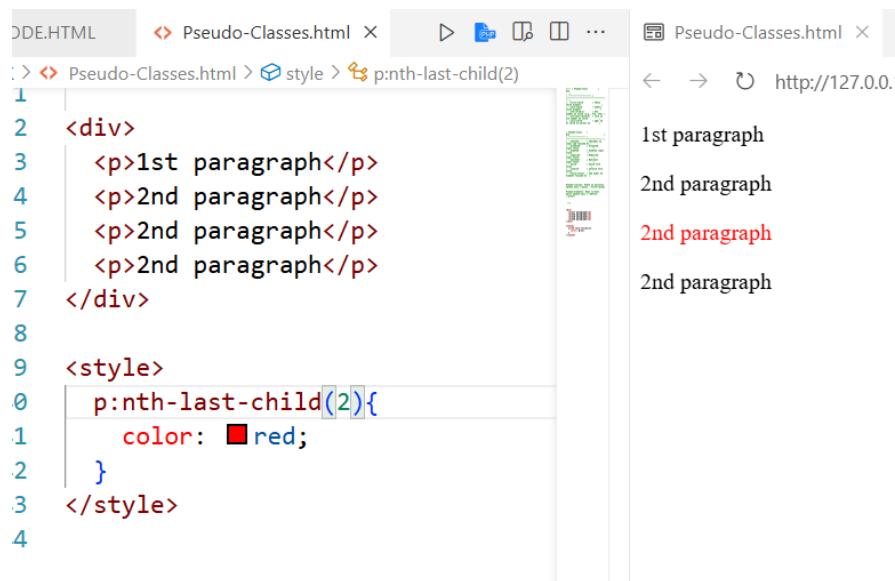

✓ :only-child

★ Meaning:

Agar parent ke paas **sirf ek hi child** ho, toh use target karega.

∞ Connected HTML:

```
<div>
  <p>Single child</p>   ← 🎯 Targeted
</div>
```

```
<div>
  <p>1</p>
  <p>2</p>   ← ✗ Not targeted
</div>
```

🔗 CSS:

```
p:only-child {
  border: 2px solid green;
}
```



Part 2 ➡

✓ **::before**

★ **Meaning:**

Element ke actual content **ke pehle** virtual content insert karta hai.

🔗 **Connected HTML:**

```
<p class="tagline">Welcome to my website</p>
```


🎨 **CSS:**

```
.tagline::before {  
  content: "★ ";  
  color: orange;  
}
```


□ **Output:**

★ Welcome to my website

🎯 **Targeted:** Pehle star emoji insert hua.

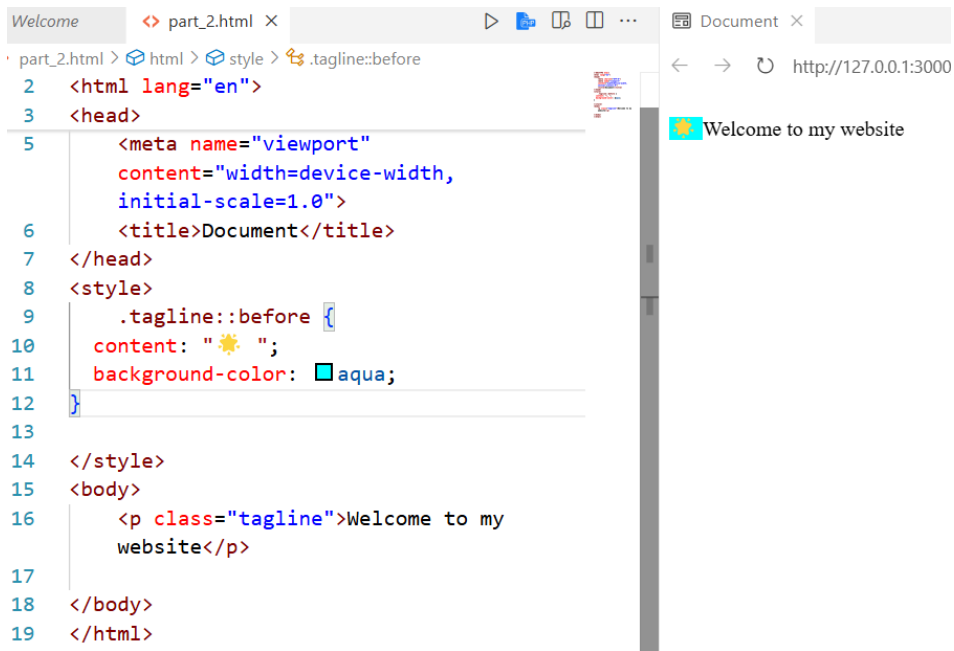

Example ➔ 2

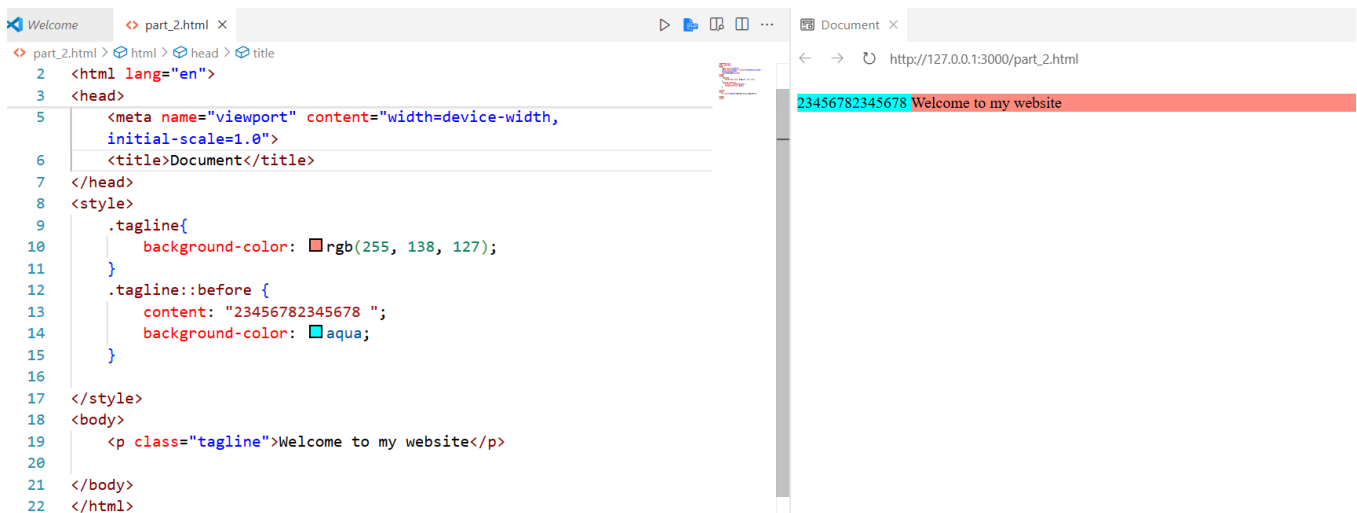

✓ ::after

★ Meaning:

Element ke actual content **ke baad** virtual content insert karta hai.

🔗 Connected HTML:

<p class="cta">Click Here</p>


🎨 CSS:

```
.cta::after {
  content: " →";
  color: green;
}
```

□ Output:

Click Here →

🎯 **Targeted:** Arrow emoji end mein insert hua.

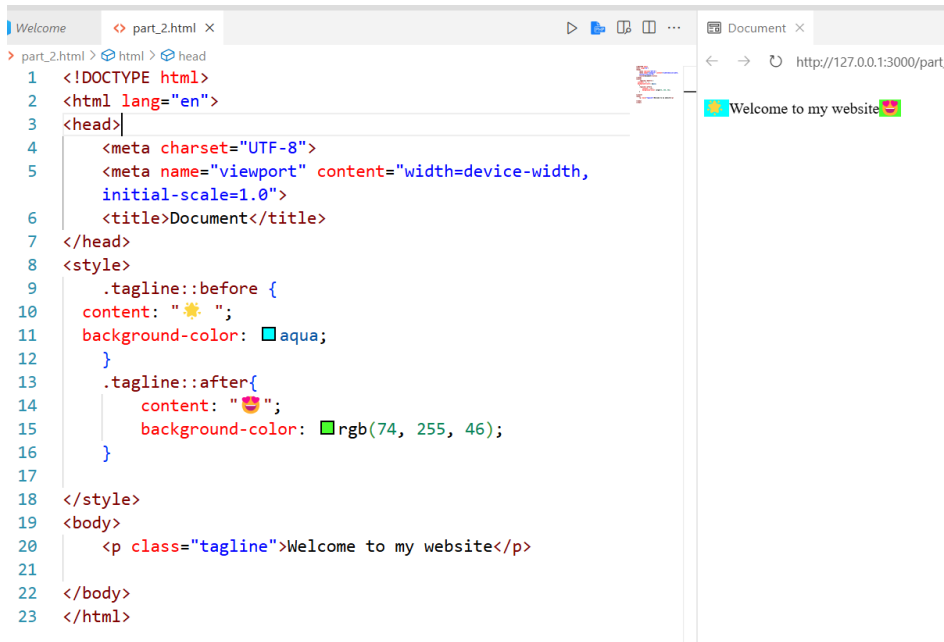

✓ Notes & Properties

Feature	Explanation
content:	Mandatory hai pseudo-elements ke liye
::before	Content ke pehle add karta hai
::after	Content ke baad add karta hai
Styling Allowed	✓ Yes (color, font, padding, etc.)
Common Use Cases	Emojis, icons, labels, badges, timelines
Works Best With	div, p, button, span, etc.

✓ Use Case Example: Notification Badge

🔗 HTML:


```
<button class="notify">Notifications</button>
```

🔗 CSS:

```
.notify::after {
  content: " (3)";
  color: red;
  font-weight: bold;
}
```


□ **Output:**
Notifications (3)

🎯 **Targeted:** Button ke text ke baad badge insert hua.

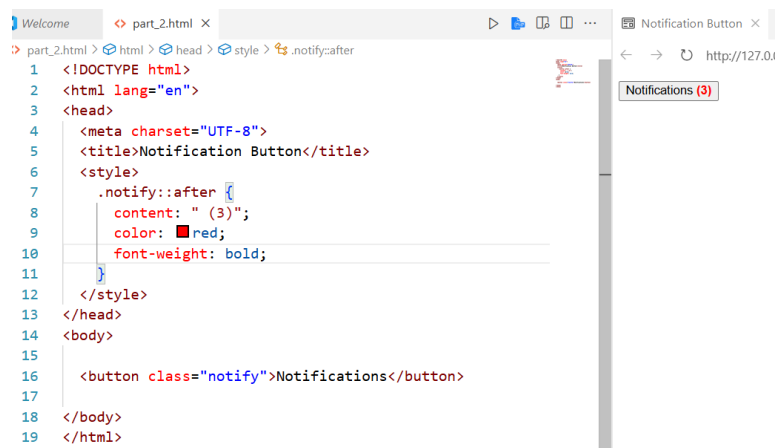

```
part_2.html > html > head > style > .notify:after
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <title>Notification Button</title>
6   <style>
7     .notify::after {
8       content: " (3)";
9       color: red;
10      font-weight: bold;
11    }
12  </style>
13 </head>
14 <body>
15
16   <button class="notify">Notifications</button>
17
18 </body>
19 </html>
```

➔ Example (2)

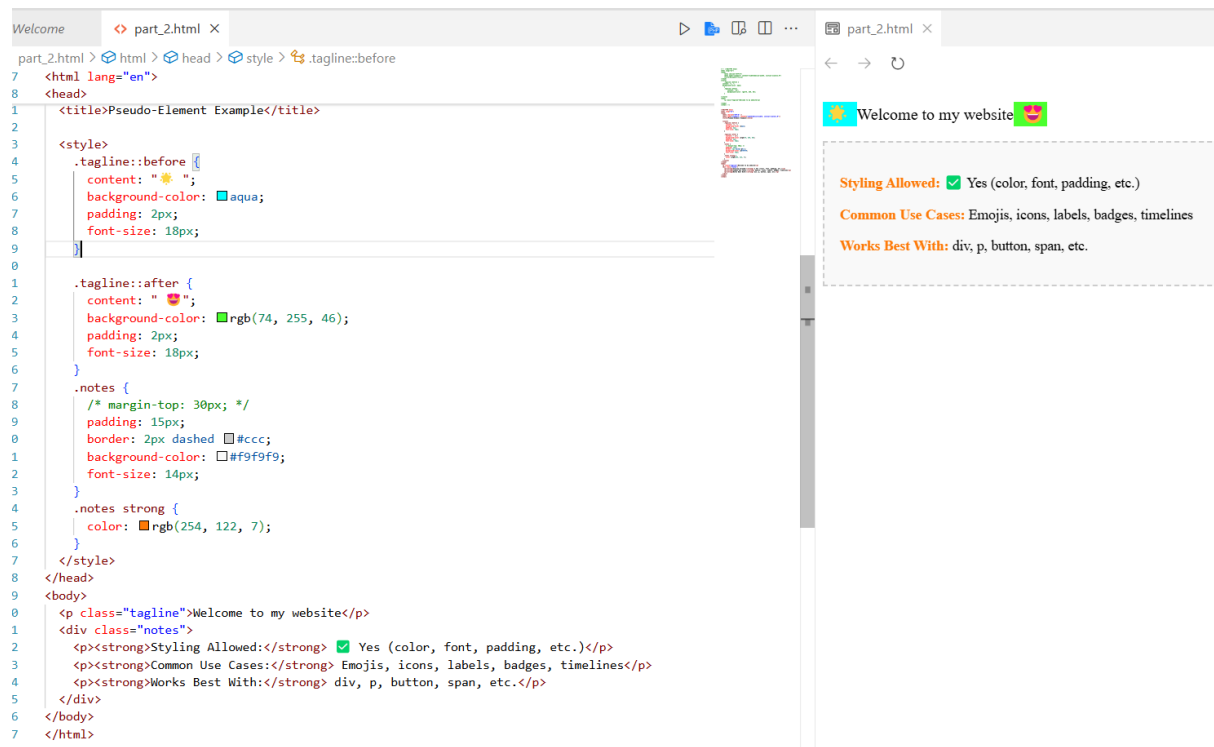

```
part_2.html > html > head > style > .tagline:before
7 <html lang="en">
8 <head>
9   <title>Pseudo-Element Example</title>
10
11   <style>
12     .tagline::before {
13       content: "🌟 ";
14       background-color: aqua;
15       padding: 2px;
16       font-size: 18px;
17     }
18
19     .tagline::after {
20       content: "📌";
21       background-color: rgb(74, 255, 46);
22       padding: 2px;
23       font-size: 18px;
24     }
25
26     .notes {
27       /* margin-top: 30px; */
28       padding: 15px;
29       border: 2px dashed #ccc;
30       background-color: #f9f9f9;
31       font-size: 14px;
32     }
33
34     .notes strong {
35       color: rgb(254, 122, 7);
36     }
37   </style>
38 </head>
39 <body>
40   <p class="tagline">Welcome to my website</p>
41   <div class="notes">
42     <p><strong>Styling Allowed:</strong> ✓ Yes (color, font, padding, etc.)</p>
43     <p><strong>Common Use Cases:</strong> Emojis, icons, labels, badges, timelines</p>
44     <p><strong>Works Best With:</strong> div, p, button, span, etc.</p>
45   </div>
46 </body>
47 </html>
```

✔ Bonus: Emoji Wrapper

⇌ HTML:


```
<div class="box">Hello</div>
```

🎨 CSS:

```
.box::before {  
  content: "👋 ";  
}  
.box::after {  
  content: " 🌟";  
}
```

□ Output:

👋 Hello 🌟

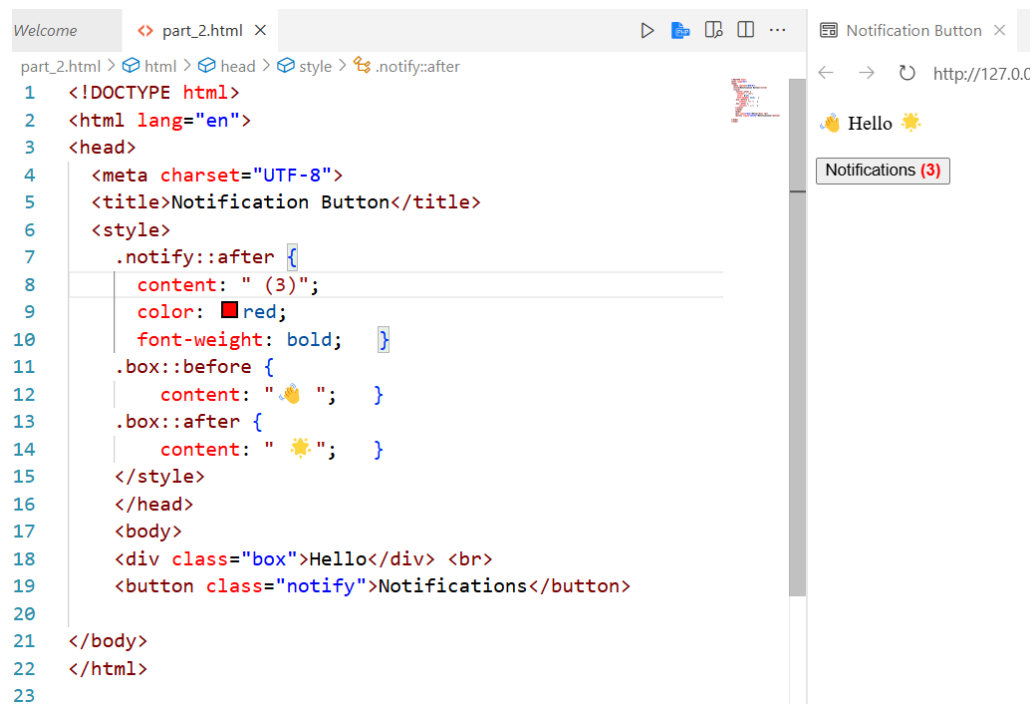

🚀 Real-World Use Cases of `::before` & `::after`


Use Case	Description
✓ Custom bullet list	Emoji ya icons add karne ke liye
✓ Quotes styling	Quotation marks automatically insert karna
✓ Timeline UI	Dots, lines add karna beside items
✓ Buttons with icons	"Submit ➡", "Back ⬅" etc.
✓ Ribbon/Labels	Virtual ribbons using CSS only

⚠ Important Notes:



- `::before` and `::after` **DOM mein visible nahi hote** – sirf visually display hote hain.
 - `content:` property is **required**, warna kuch bhi display nahi hoga.
 - Dono elements **inline content** banate hain by default (block banane ke liye `display: block;` use karein).
-
-

- `::first-letter`
- `::first-line`
- `::selection`
- `::placeholder`

➡ TASK

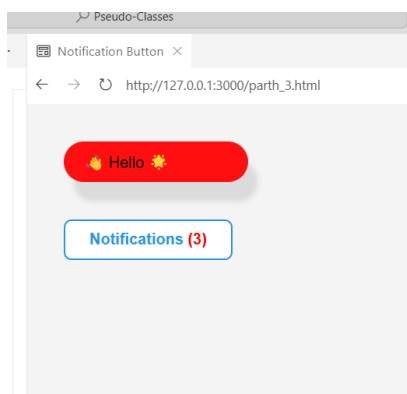


After Hover :

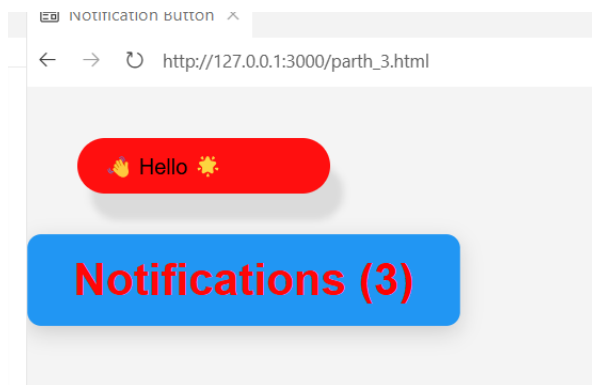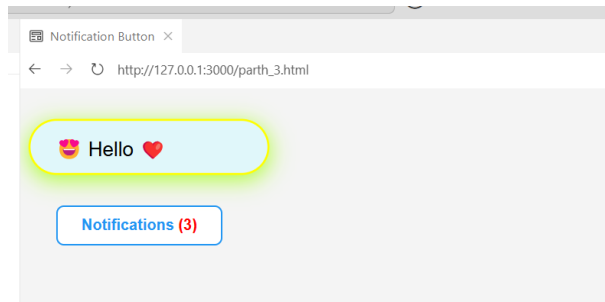

Solution ::➡

CLICK ME

Task 2 ➡

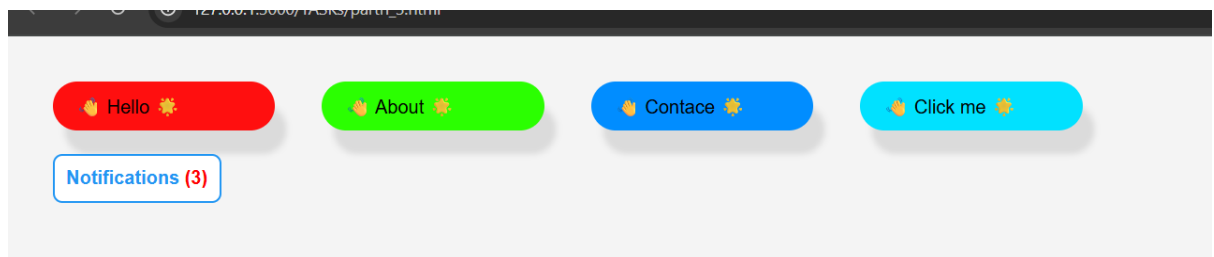

Solution ➡

[CLICK ME](#)