
📖 Structural Pseudo-Class – CSS-Only Notes (with HTML Connection)

✓ :first-child

★ Meaning:

Jo element apne parent ka **sabse pehla child** ho.


∞ Connected HTML:

```
<div>
  <p>1st paragraph</p>   ← 🎯 Targeted
  <p>2nd paragraph</p>
</div>
```

🔗 CSS:

```
p:first-child {
  color: red;
}
```

Code ➡

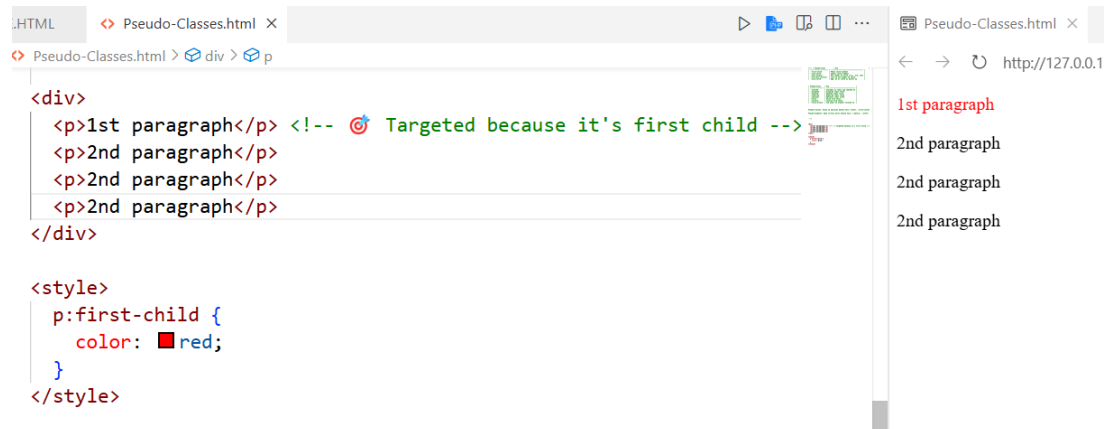

✓ :last-child

★ Meaning:

Jo element parent ka **aakhri child** ho.

∞ Connected HTML:

```
<ul>
  <li>Item 1</li>
  <li>Item 2</li>
```

```
<li>Item 3</li>    ← 🎯 Targeted
</ul>
```

🔗 CSS:

```
li:last-child {
  color: blue;
}
```



✓ :nth-child(n)

🔗 Meaning:


Parent ka **nth number** ka child target karta hai (1-based index).

🔗 Connected HTML:


```
<ul>
  <li>Item 1</li>
  <li>Item 2</li>    ← 🎯 2nd child
  <li>Item 3</li>
</ul>
```

🔗 CSS:

```
li:nth-child(2) {
  background: yellow;
}
```

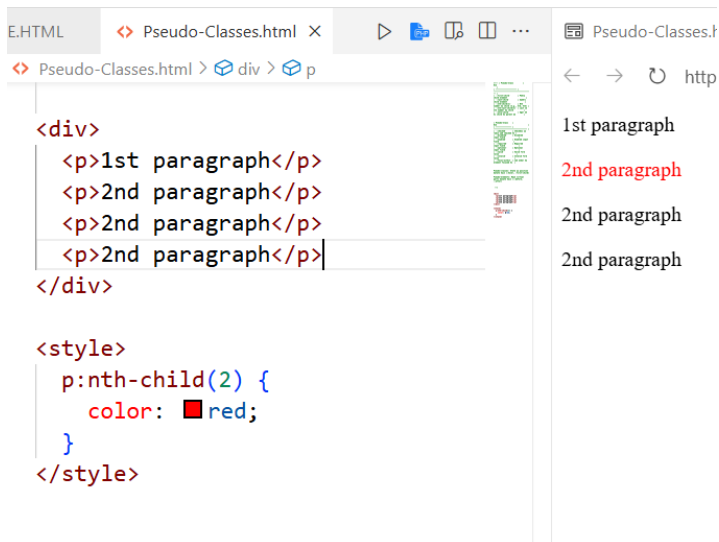

EXAMPLE 2 :

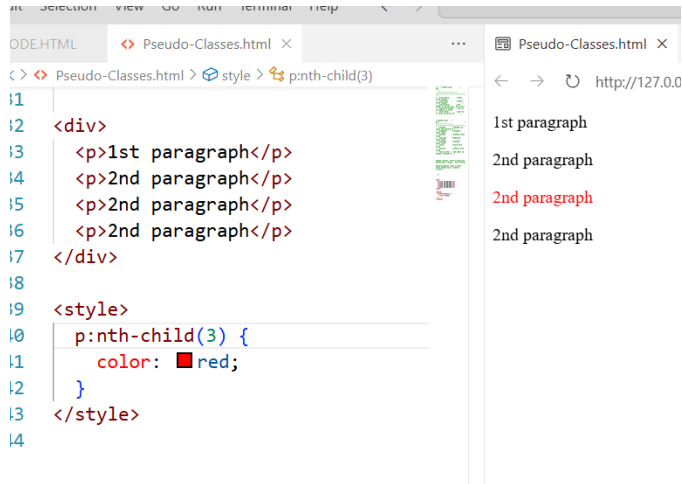

✓ :nth-last-child(n)

★ Meaning:


Counting **last** se hoti hai, nth child ko target karta hai.

∞ Connected HTML:

```
<ul>
  <li>First</li>
  <li>Middle</li>
  <li>Last</li> ← last-child (1st from end)
</ul>
```

🌀 CSS:

```
li:nth-last-child(1) {
  font-style: italic;
}
```

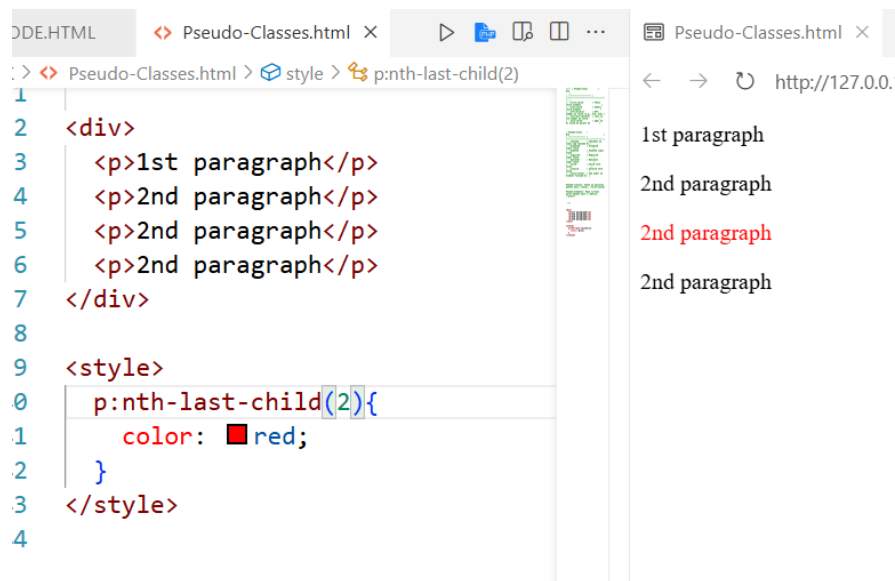

✓ :only-child

★ Meaning:

Agar parent ke paas **sirf ek hi child** ho, toh use target karega.

∞ Connected HTML:

```
<div>
  <p>Single child</p>   ← 🎯 Targeted
</div>
```

```
<div>
  <p>1</p>
  <p>2</p>   ← ❌ Not targeted
</div>
```

🌀 CSS:

```
p:only-child {
  border: 2px solid green;
}
```

HTML

Pseudo-Classes.html X

Pseudo-Classes.html > ...

<-->

<STYLE>

p:only-child {

border: 2px solid green;

padding: 5px;

}

</STYLE>

<div>

<p>Single child</p> <!-- Sirf ek hi child hai, isliye ye select hoga -->

</div>

<div>

<p>Child 1</p> <!-- Parent ke paas 2 child hain, ye select nahi hoga -->

<p>Child 2</p> <!-- Ye bhi select nahi hoga -->

</div>

Pseudo-Classes.html X

http://127.0.0.1:3000

Single child

Child 1

Child 2