

JS IN CONNECT HTML AND CSS →

✓ What is `innerText`?

◆ Definition (Simple English):

`innerText` is a property in JavaScript that lets you **get or set the visible text** inside an HTML element.

It **ignores HTML tags** and only shows **plain text**.


Code → [click me](#)

Example →



```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Document</title>
5 </head>
6 <script>
7   function changeText() {
8     document.getElementById("myPara").innerText = "Welcome to JavaScript!";
9   }
10 </script>
11 <body>
12   <p id="myPara">Hello World!</p>
13   <button onclick="changeText()">Click Me</button>
14 </body>
15 </html>
```

After Click →

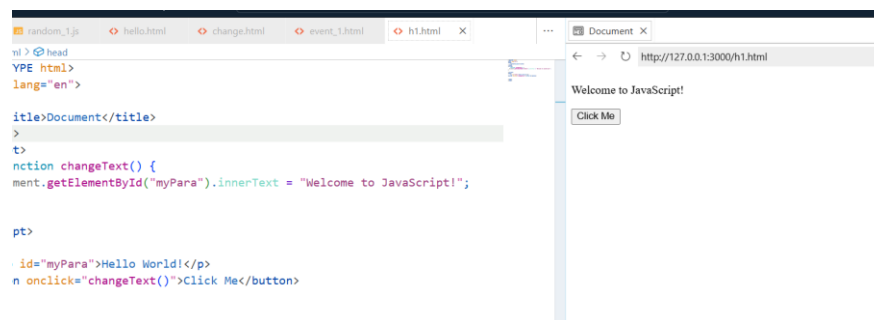

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Document</title>
5 </head>
6 <script>
7   function changeText() {
8     document.getElementById("myPara").innerText = "Welcome to JavaScript!";
9   }
10 </script>
11 <body>
12   <p id="myPara">Hello World!</p>
13   <button onclick="changeText()">Click Me</button>
14 </body>
15 </html>
```

1->

```
event_1.html > html > head
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>Simple Addition</title>
5 </head>
6 <body>
7   <h2>2 Number Addition</h2>
8
9   <input type="number" id="num1" placeholder="Enter first number"><br><br>
10  <input type="number" id="num2" placeholder="Enter second number"><br><br>
11  <button onclick="addNumbers()">Add</button>
12
13  <script>
14    function addNumbers() {
15      const n1 = parseInt(document.getElementById("num1").value);
16      const n2 = parseInt(document.getElementById("num2").value);
17      const sum = n1 + n2;
18      alert("Sum is: " + sum);
19    }
20  </script>
21
22 </body>
23 </html>
24
```

2 Number Addition

Enter first number

Enter second number

Add

2→

```
<!DOCTYPE html>
<html>
<head> <title>Simple Addition</title>
</head>
<body>
  <h2>2 Number Addition</h2>
  <input type="number" id="num1" placeholder="Enter first number"><br><br>
  <input type="number" id="num2" placeholder="Enter second number"><br><br>
  <button onclick="addNumbers()">Add</button>
  <p id="re"></p>
  <script>
    function addNumbers() {
      const n1 = parseInt(document.getElementById("num1").value);
      const n2 = parseInt(document.getElementById("num2").value);
      const sum = n1 + n2;
      document.getElementById("re").innerText=sum;
    }
  </script>
</body>
</html>
```

2 Number Addition

12

12

Add

24

3→

```
1 <!DOCTYPE html>
2 <html>
3 <head> <title>Simple Addition</title>
4 </head>
5 <body>
6   <h2>2 Number Addition</h2>
7
8   <input type="number" id="num1" placeholder="Enter first number"><br><br>
9   <input type="number" id="num2" placeholder="Enter second number"><br><br>
10  <button onclick="addNumbers()">Add</button>
11  <p id="re"></p>
12
13  <script>
14    function addNumbers() {
15      const n1 = parseInt(document.getElementById("num1").value);
16      const n2 = parseInt(document.getElementById("num2").value);
17      const sum = n1 + n2;
18      // document.getElementById("re").innerText=sum;
19      document.getElementById("re").innerText='${n1}+${n2}=${sum}';
20    }
21  </script>
22
23 </body>
24 </html>
25
```

2 Number Addition

12

13

Add

12+13=25

4→

```
1 <!DOCTYPE html>
2 <html>
3 <head> <title>Simple Addition</title>
4 </head>
5 <body>
6   <h2>2 Number Addition</h2>
7
8   <input type="number" id="num1" placeholder="Enter first number"><br><br>
9   <input type="number" id="num2" placeholder="Enter second number"><br><br>
10  <button onclick="addNumbers()">Add</button>
11  <p id="re"></p>
12  <p id="re1"></p>
13
14  <script>
15    function addNumbers() {
16      const n1 = parseInt(document.getElementById("num1").value);
17      const n2 = parseInt(document.getElementById("num2").value);
18      const sum = n1 + n2;
19      const sum2 = n1 * n1;
20      // document.getElementById("re").innerText=sum;
21      document.getElementById("re").innerText=` ${n1}+${n2}=${sum}`;
22      document.getElementById("re1").innerText=` ${n1}*${n1}=${sum2}`;
23    }
24  </script>
25
26 </body>
27 </html>
```

2 Number Addition

Add

12+12=24

12*12=144

5->

```
1 <!DOCTYPE html>
2 <html>
3 <head> <title>Simple Addition</title>
4 </head>
5 <body>
6   <h2>2 Number Addition</h2>
7
8   <input type="number" id="num1" placeholder="Enter first number"><br><br>
9   <input type="number" id="num2" placeholder="Enter second number"><br><br>
10  <br>
11
12  <input type="text" id="name" placeholder="Enter first name"><br><br>
13  <input type="text" id="name2" placeholder="Enter second Name 2"><br><br>
14  <button onclick="addNumbers()">Add</button>
15  <p id="re"></p>
16  <p id="re1"></p>
17  <br>
18  <p id="namevalue"></p>
19  <script>
20    function addNumbers() {
21      const name = (document.getElementById("name").value);
22      const name2 = (document.getElementById("name2").value);
23
24      const n1 = parseInt(document.getElementById("num1").value);
25      const n2 = parseInt(document.getElementById("num2").value);
26      const sum = n1 + n2;
27      const sum2 = n1 * n1;
28      document.getElementById("namevalue").innerText=` ${name} and ${name2} both are Good Boy `;
29
30      // document.getElementById("re").innerText=sum;
31      document.getElementById("re").innerText=` ${n1}+${n2}=${sum}`;
32      document.getElementById("re1").innerText=` ${n1}*${n1}=${sum2}`;
33    }
34  </script>
35
36 </body>
37 </html>
```

2 Number Addition

Add

CODE ➔ [CLICK ME](#)