

Assignement-02

Q1. In an HTML page display a text “You have clicked the button 0 times.” and a button with a text “Click”. As many times the button is clicked the count value on the text should update.

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Document</title>

</head>

<body>

  <p>U HAVe clicked <span>0</span> Times</p>

  <button id = "firstBtn">+</button>

  <button id = "secondBtn" onclick="decCount()">-</button>

  <script>

    let count = 0;

    span = document.querySelector("span")

    span.textContent=count;

    document.querySelector("#firstBtn").addEventListener("click",()=>{

      count++;

      span.textContent = count;

    })

    function decCount(){

      count--;

      span.textContent = count;

    }

  </script>

</body>

</html>
```

U HAVe clicked 2 Times



Q3. Create a JS array of color names. In HTML create a div with fixed height and width. Also, create buttons based on array elements. If any button is clicked, the background color of the div should change to the corresponding color.

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Document</title>
  </head>
  <style>
    .page {
      width: 100px;
      height: 100px;
      border: 2px solid black;
    }
  </style>
  <link rel="stylesheet" href="/bootstrap.min.css">
  <body>
    <div class="container">

      <div class="box">
        <div class="page">
          <!-- <div class="page" name="page"></div> -->
        </div>
        <div class="buttons">
          <!-- <button></button> -->
        </div>
        <div class="add" onclick="addMore()">
          <button>ADD</button>
        </div>
      </div>
    </div>
  </body>
</html>
```

</div>

<script>

```
let colors = ["red", "green", "blue", "yellow", "pink", "orange"];
```

```
let buttons = document.querySelector(".buttons");
```

```
for (let c of colors) {
```

```
  let btn = document.createElement("button");
```

```
  btn.textContent = c;
```

```
  buttons.appendChild(btn);
```

```
  btn.style.backgroundColor = c;
```

```
}
```

```
function addMore(){
```

```
  let color = prompt("Enter Color");
```

```
  colors.push(color);
```

```
  let col = document.createElement("input");
```

```
  col.type="color";
```

```
  col.addEventListener("change", (e) => {
```

```
    colors.push(e.target.value);
```

```
  })
```

```
  buttons.appendChild(inp);
```

```
}
```

```
buttons.addEventListener("click", (e) => {
```

```
  console.log(e);
```

```
  console.log(e.target);
```

```
  if (e.target.tagName === "BUTTON") {
```

```
    let page = document.querySelector(".page");
```

```
    page.style.backgroundColor = e.target.textContent;
```


```
  }
```

```
});
```

</script> <script src="./bootstrap.bundle.min.js"></script>

</body>

</html>

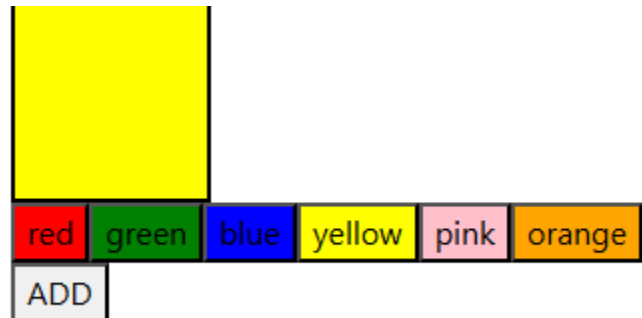

Q4. Create a form to add TODOs with 3 fields – task, date, and time. Each time a task is added it should be displayed on the same HTML page along with the existing tasks. Style the TODOs with Bootstrap. Every TODO will have a “Done” button and once click on Done the respective task should be deleted.

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Document</title>

  <link rel="stylesheet" href="./bootstrap.min.css">

</head>

<body>

  <div class="container">

    <h2>TODO LIST</h2>

    <div class="div">

      <input type="text" id="task" class="form-control task" placeholder="Enter ur Task">

      <input type="date" id="date" class="form-control task">

      <button id="addBtn">ADD</button>

      <button id="addList" onclick="addList()">Add To List</button>

    </div>

    <div>

      <ul>

        <!-- <li></li> -->

      </ul>

    </div>

    <div class="card" style="width: 18rem;">

      <div class="card-header">

        Lists

      </div>

      <ul class="list-group list-group-flush" id="list">

      </ul>

    </div>

  </div>
```

```

</div>

<script src="/bootstrap.bundle.min.js"></script>

<script>

    let addBtn = document.getElementById("addBtn");

    let inp = document.querySelector(".task");

    addBtn.addEventListener("click", ()=>{

        let task = inp.value;

        let date = document.querySelector("input[type=date]").value;

        let li = document.createElement("li");

        li.textContent = task + " " + date;

        let ul = document.querySelector("ul");

        let btn = document.createElement("button");

        btn.textContent="Done";

        btn.addEventListener("click",()=>{

            li.style.textDecoration="line-through";

        })

        let btn2 = document.createElement("button");

        btn2.textContent="Delete";

        btn2.addEventListener("click",()=>{

            li.remove();

            btn.style.display="none";

            btn2.style.display="none";

        })

        ul.appendChild(li);

        ul.appendChild(btn);

        ul.appendChild(btn2);

        inp.value="";

        inp.focus();

    })

</script>

</body>

</html>

```

TODO LIST



ADD

Add To List