Supplementary Material for "Ensemble-Based Quantum Machine Learning Techniques for Predicting Bladder Cancer Using RNA-Seq Gene Expression Data"

Priyasi Mallick[1], Suvhodip Saha[2], and Indrajit Saha[1,*]

[1] Department of Computer Science and Engineering, National Institute of Technical Teachers' Training and Research, Kolkata, India,
[2] Department of Computer Science and Engineering, Academy of Technology, Adisaptagram, India,
Corresponding Author: indrajit@nitttrkol.ac.in

Table S1: Average PPI node degree of upregulated genes in BLCA

Rank	Gene	Avg. Node Degree
1	CDCA5	9.82
2	SPAG5	9.82
3	NEK2	9.09
4	RYR3	8.55
5	CDCA8	8.36
6	KIAA0101	8.00
7	PUSL1	7.82
8	GTSE1	7.09
9	FBXL6	4.73
10	CDK10	3.09
11	NKAPL	3.09

Table S2: Average PPI node degree of downregulated genes in BLCA

Rank	Gene	Avg. Node Degree
1	UTRN	8.73
2	NCALD	8.36
3	F8	7.64
4	NFIX	6.36
5	IL11RA	6.18
6	SDPR	5.27
7	CLEC3B	4.55
8	RERG	2.00

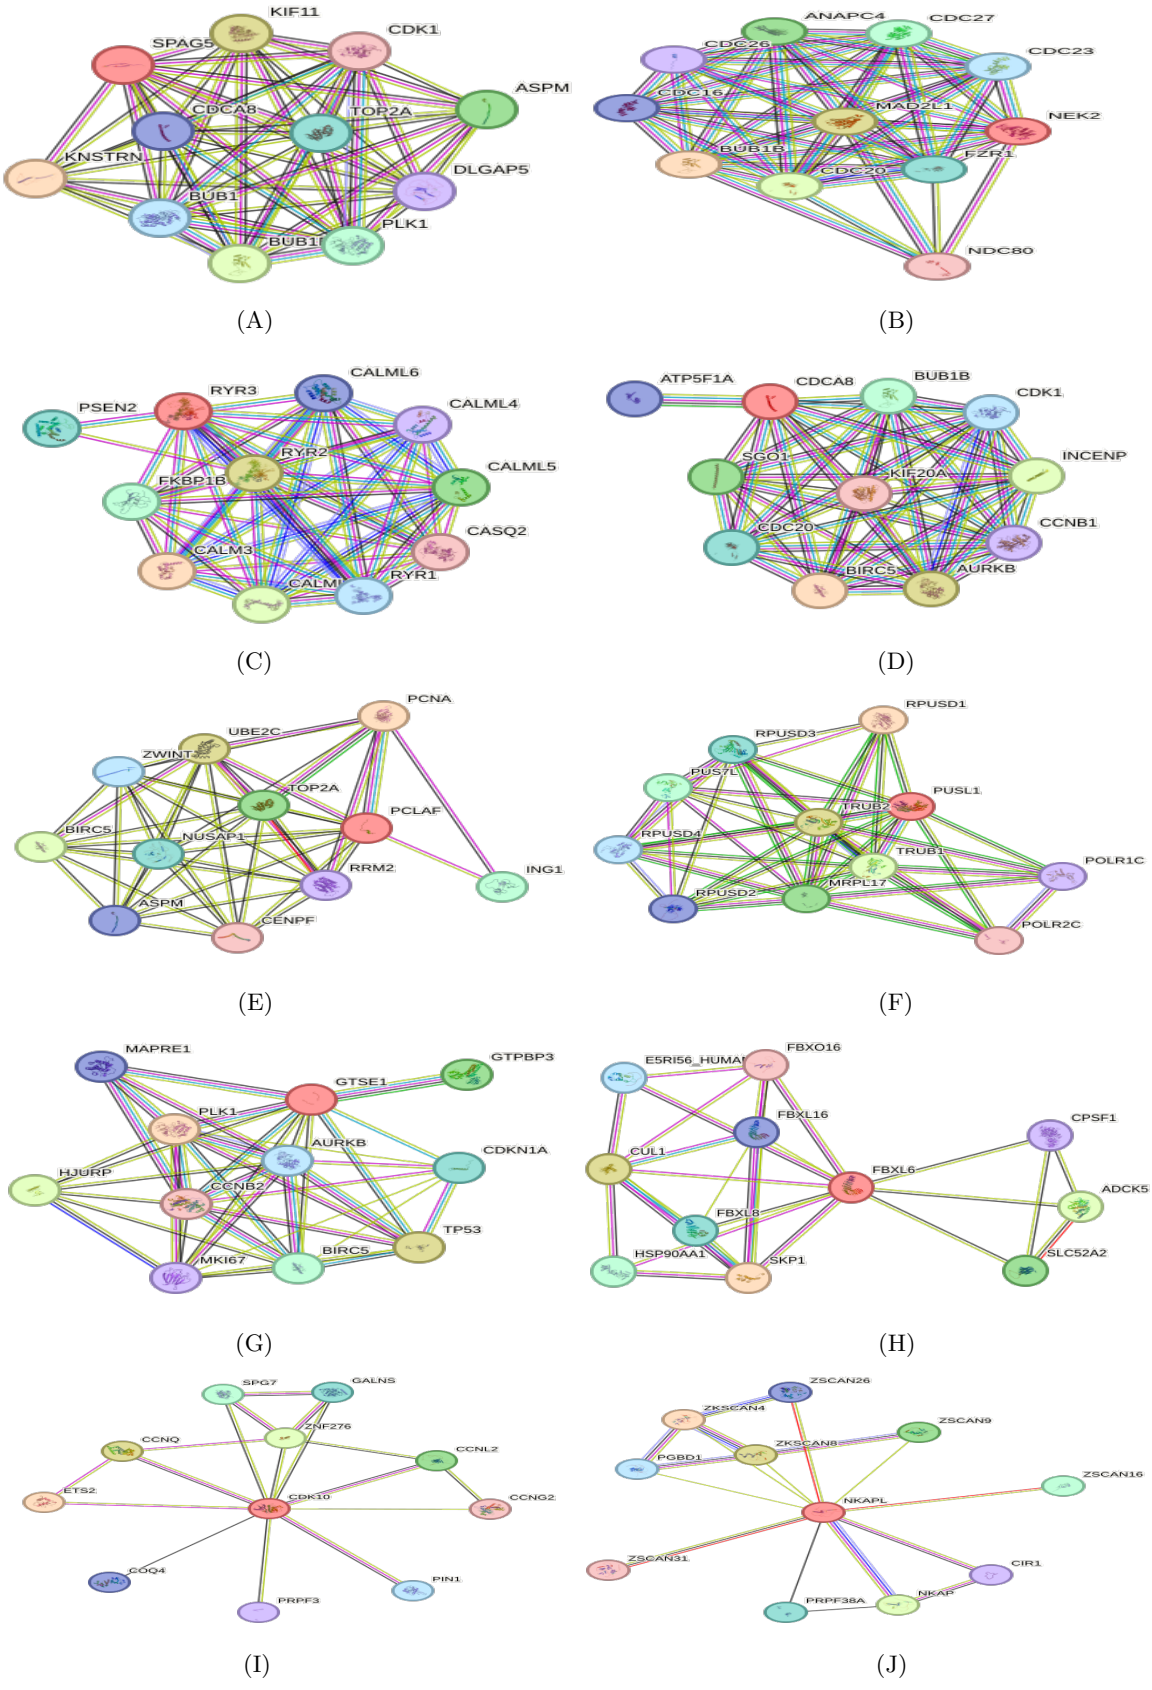


Fig. S1: Protein-protein interaction networks of the selected upregulated genes identified in BLCA: (A) SPAG5, (B) NEK2, (C) RYR3, (D) CDCA8, (E) KIAA0101, (F) PUSL1, (G) GTSE1, (H) FBXL6, (I) CDK10, and (J) NKAPL.

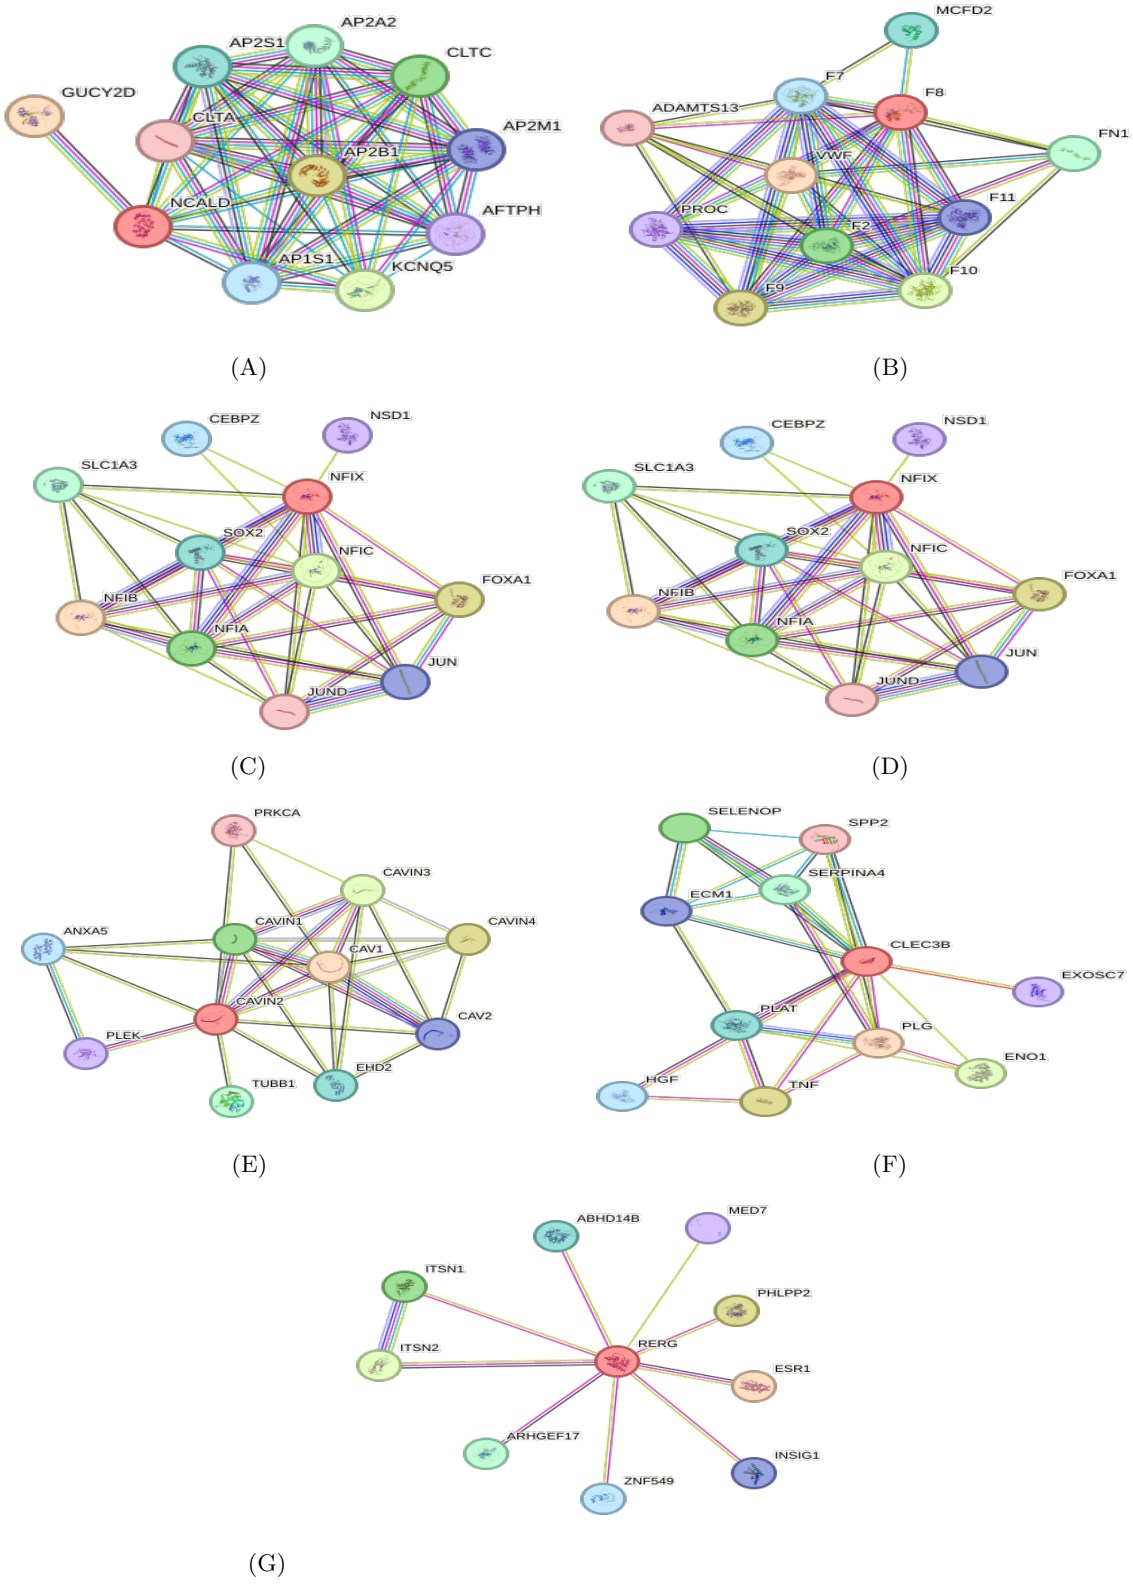


Fig. S2: Protein-protein interaction networks of the selected downregulated genes identified in BLCA: (A) NCALD, (B) F8, (C) NFIX, (D) IL11RA, (E) SDPR, (F) CLEC3B, and (G) RERG