AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

1.Create an EC2 Windows Instance in AWS

Windows Server

Priyavarshini V

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Windows instance is a virtual machine running the Microsoft Windows operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, IIS, etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Windows Instances:

- Web and Application Hosting: Run IIS web servers or other Windows-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Windows instances, using RDS or EC2 for more control.
- Remote Desktop Applications: Set up RDS (Remote Desktop Services) for remote access to Windows desktops in the cloud.
- Development and Testing: Create development environments with Windows OS to test .NET or other Windows-based applications.

Used Services in AWS:



Amazon EC2

Topology

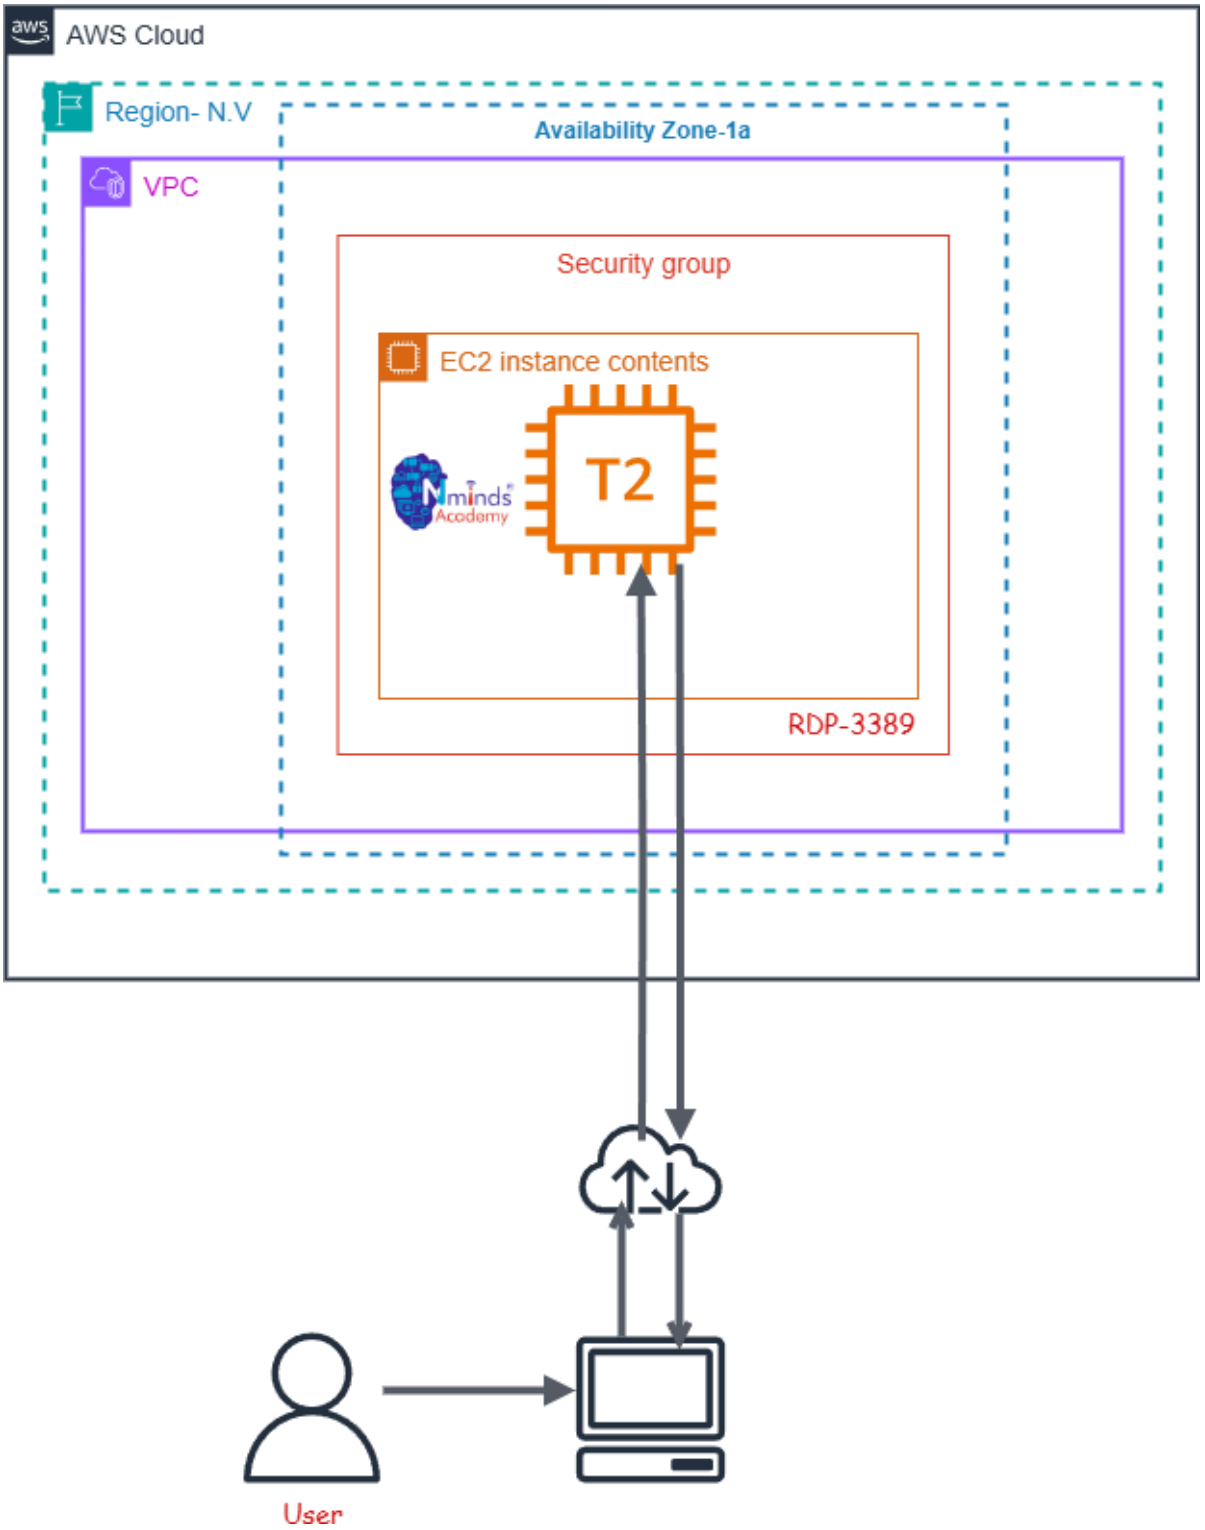
AWS Cloud
Region- N.V
Availability Zone-1a
VPC
Security group
EC2 instance contents
T2
RDP-3389
User

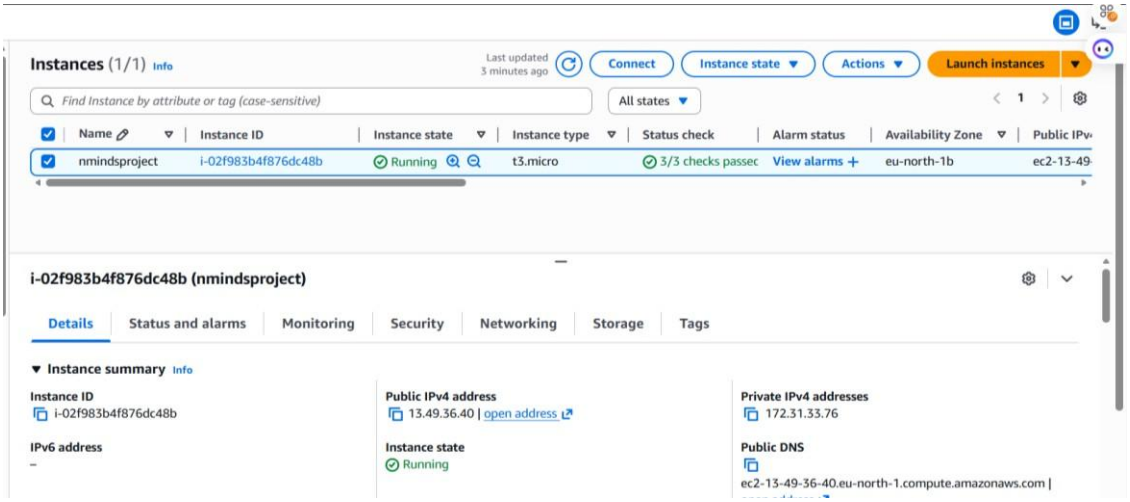
Instances (1/1) Info
Last updated 3 minutes ago
Connect
Instance state
Actions
Launch instances
Find Instance by attribute or tag (case-sensitive)
All states
Name
Instance ID
Instance state
Instance type
Status check
Alarm status
Availability Zone
Public IPv4
nmindsproject
i-02f983b4f876dc48b
Running
t3.micro
3/3 checks passed
View alarms
eu-north-1b
ec2-13-49-
i-02f983b4f876dc48b (nmindsproject)
Details
Status and alarms
Monitoring
Security
Networking
Storage
Tags
Instance summary Info
Instance ID
i-02f983b4f876dc48b
Public IPv4 address
13.49.36.40 | open address
Private IPv4 addresses
172.31.33.76
IPv6 address
–
Instance state
Running
Public DNS
ec2-13-49-36-40.eu-north-1.compute.amazonaws.com |

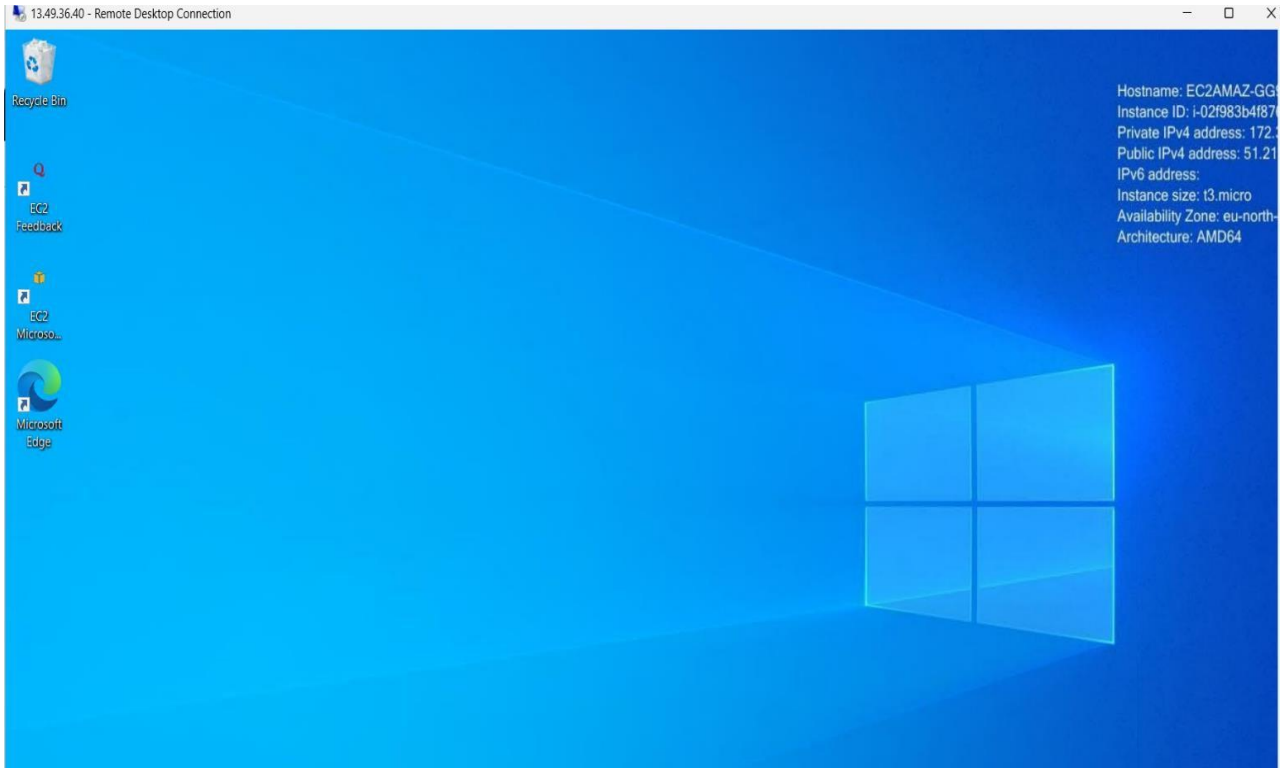
13.49.36.40 - Remote Desktop Connection
Recycle Bin
EC2 Feedback
EC2 Microso...
Microsoft Edge
Hostname: EC2AMAZ-GG
Instance ID: i-02f983b4f87
Private IPv4 address: 172.
Public IPv4 address: 51.21
IPv6 address:
Instance size: t3.micro
Availability Zone: eu-north-
Architecture: AMD64

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification Training

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

2. Configure IIS Webserver on Windows Server in AWS

,

Priyavarshini V
CSE-Artificial Intelligence & Machine Learning,
Sri Eshwar College Of Engineering,
Coimbatore.

Objective

An EC2 Windows instance is a virtual machine running the Microsoft Windows operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, IIS, etc.) in the cloud without having to manage physical hardware.

IIS (Internet Information Services) is a web server software created by Microsoft for hosting websites and web applications on Windows Server operating systems. It provides a platform for building, deploying, and managing web-based applications. IIS supports multiple protocols, including HTTP, HTTPS, FTP, and more, and is tightly integrated with the Windows OS.

Common Use Cases of IIS:

1. Hosting Websites: IIS is often used by businesses and developers to host websites and web applications, particularly those built with ASP.NET.
2. Web Applications: For applications that require robust back-end support, IIS provides features like application pooling and security for web services (e.g., SOAP or RESTful APIs).
3. Secure File Sharing: IIS can be configured as an FTP server to securely share files between different locations.
4. Application Hosting in Enterprises: Many enterprise applications built on Microsoft technologies rely on IIS for deployment, such as SharePoint, Exchange Server, or Dynamics CRM.
5. API Hosting: IIS is commonly used to host APIs (e.g., RESTful services) built with .NET or other technologies.

Used Services in AWS

Used Services in Windows Server

Amazon EC2

IIS- Internet Information Services

Topology

How to Configure the IIS web server in Windows Server with AWS EC2

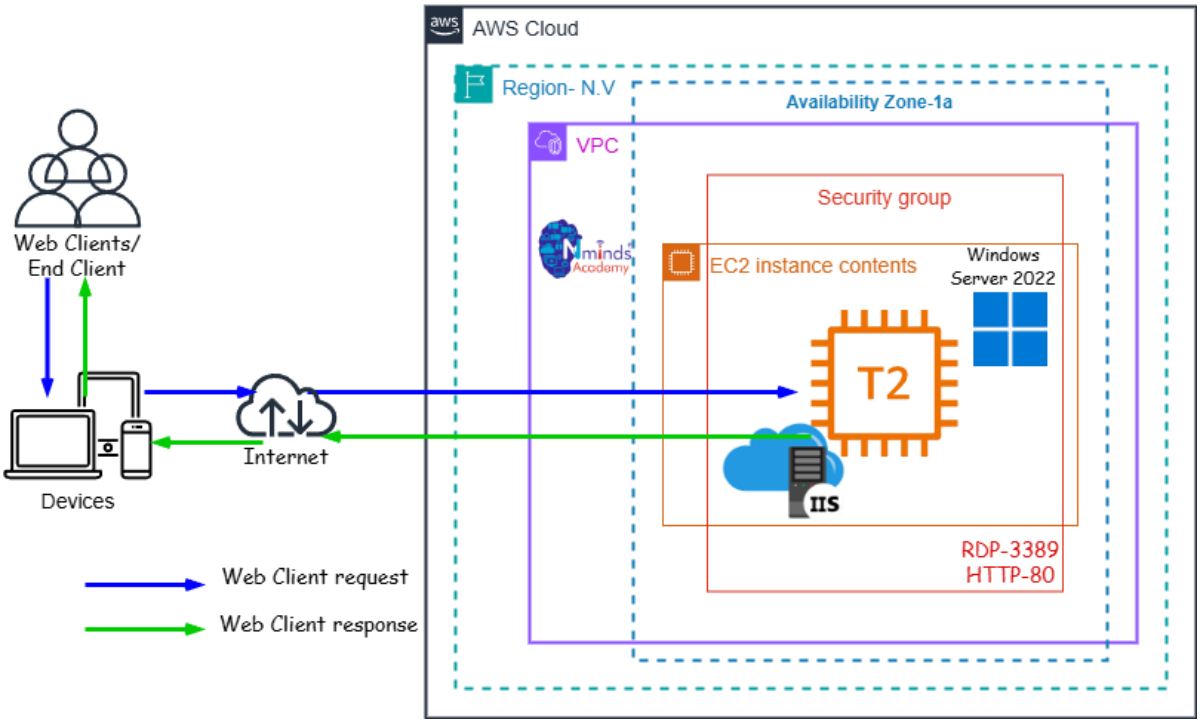

Execution Tasks:

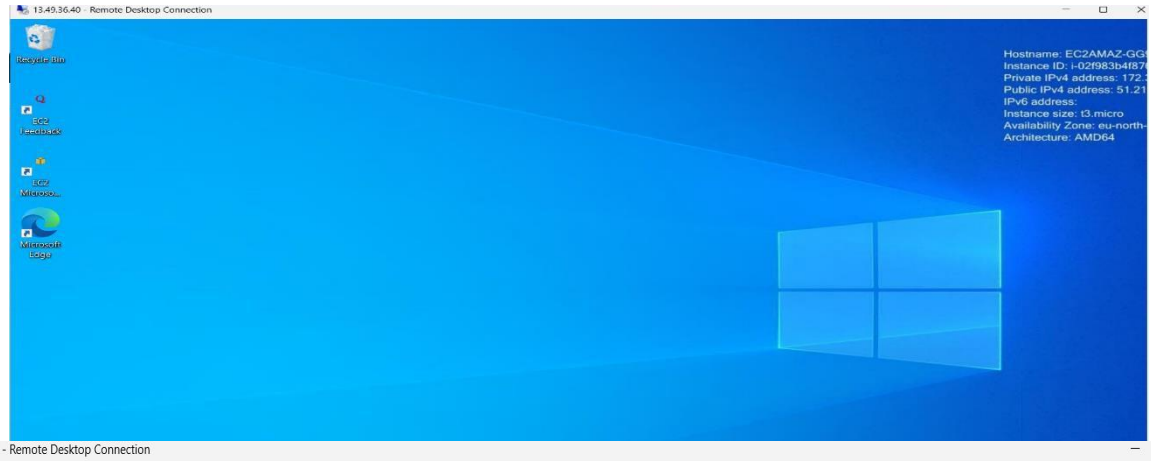

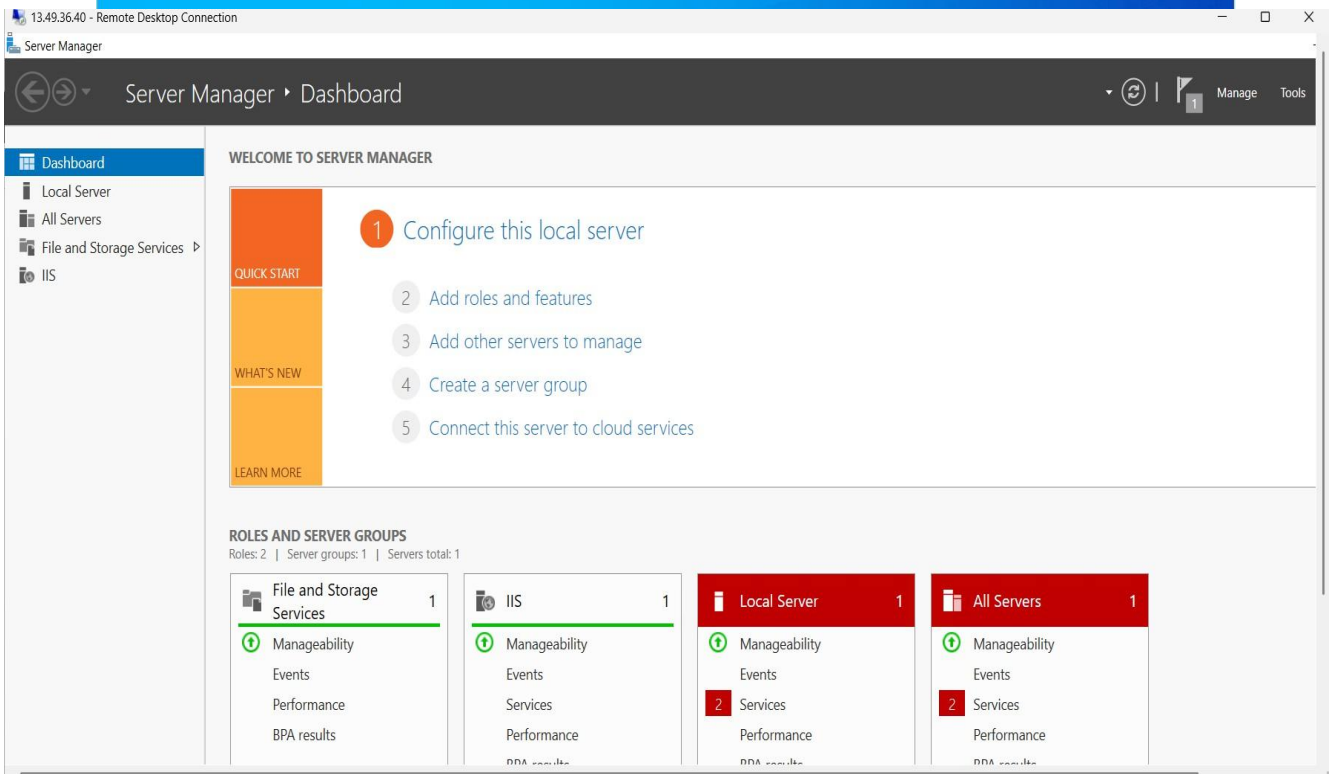

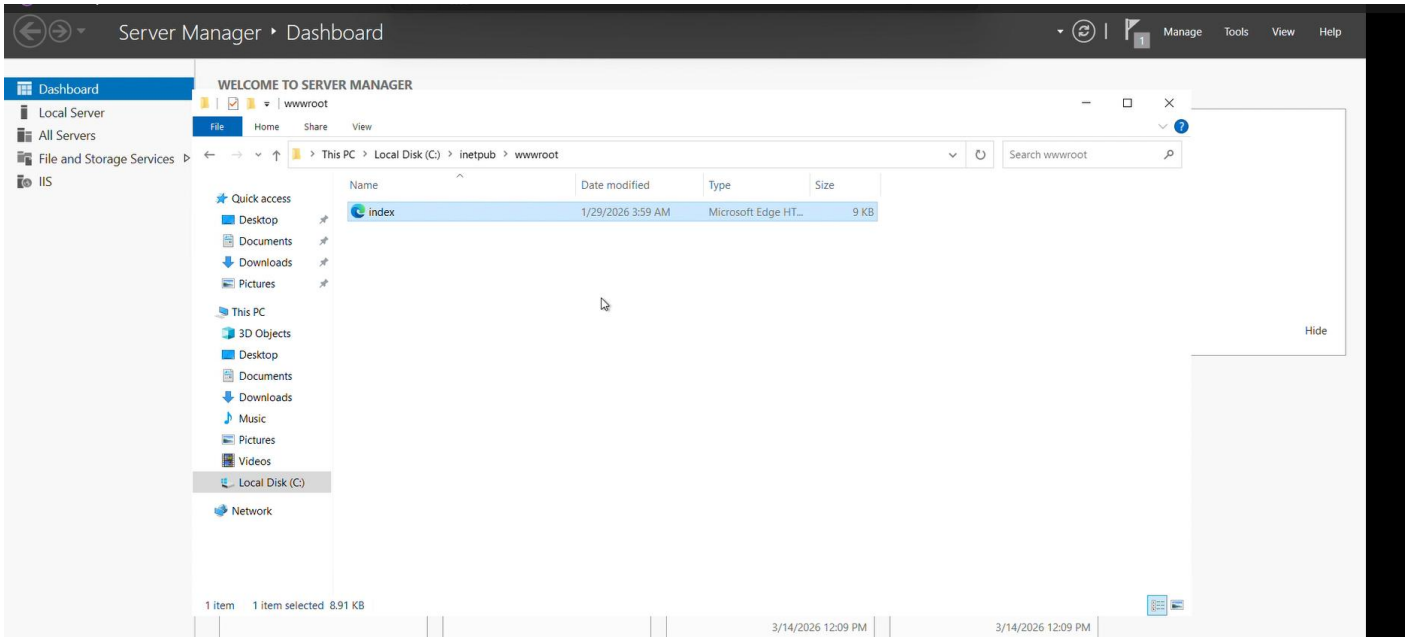
Server Manager ‣ Dashboard
Manage
Tools
View
Help
Dashboard
Local Server
All Servers
File and Storage Services
IIS
WELCOME TO SERVER MANAGER
wwwroot
File
Home
Share
View
This PC › Local Disk (C:) › inetpub › wwwroot
Search wwwroot
Quick access
Desktop
Documents
Downloads
Pictures
This PC
3D Objects
Desktop
Documents
Downloads
Music
Pictures
Videos
Local Disk (C:)
Network
Name
Date modified
Type
Size
index
1/29/2026 3:59 AM
Microsoft Edge HT...
9 KB
Hide
1 item
1 item selected 8.91 KB
3/14/2026 12:09 PM
3/14/2026 12:09 PM

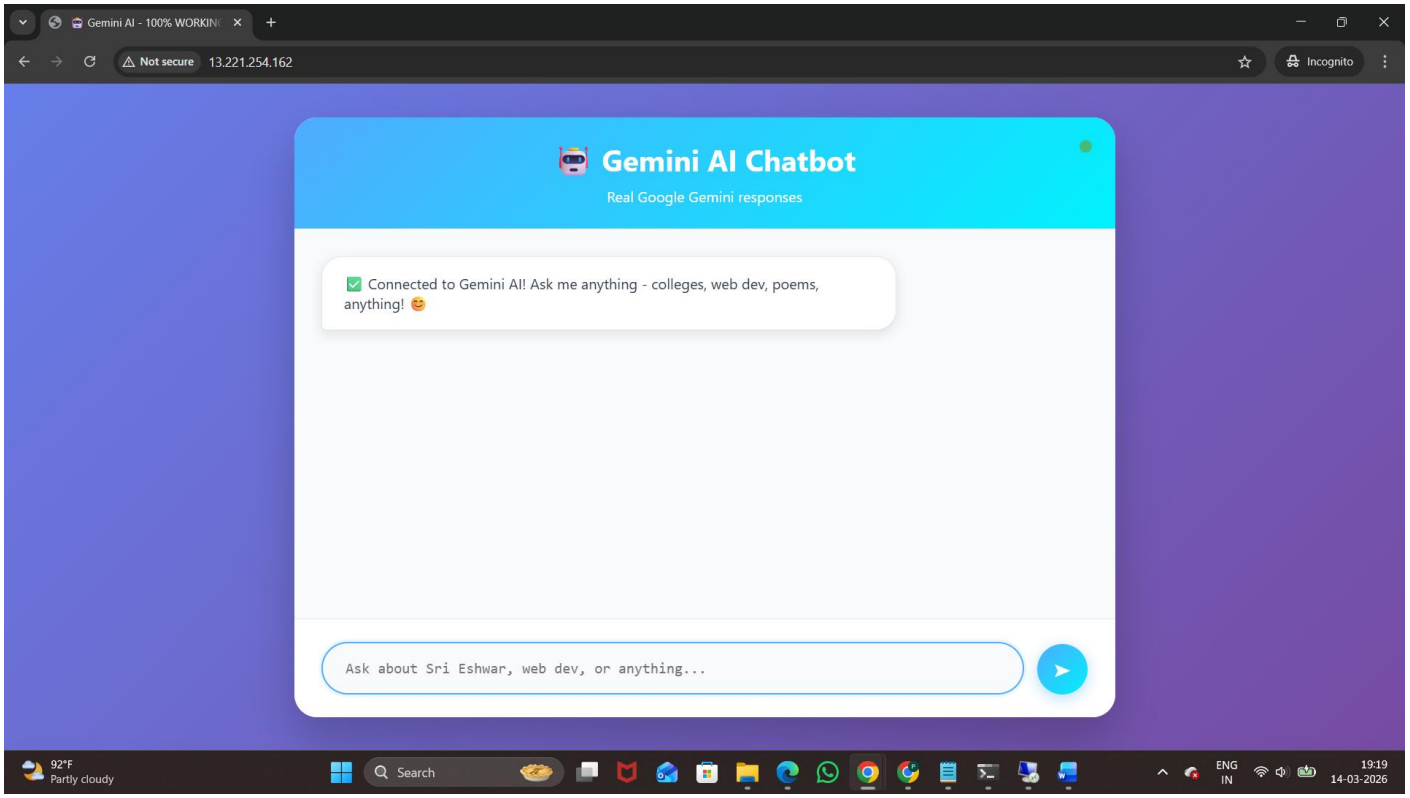
Gemini AI - 100% WORKIN
Not secure
13.221.254.162
Incognito
Gemini AI Chatbot
Real Google Gemini responses
✅ Connected to Gemini AI! Ask me anything - colleges, web dev, poems, anything! 😊
Ask about Sri Eshwar, web dev, or anything...
92°F
Partly cloudy
Search
ENG
IN
19:19
14-03-2026

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

3. Configure Elastic IP Address to Windows Web Server in AWS

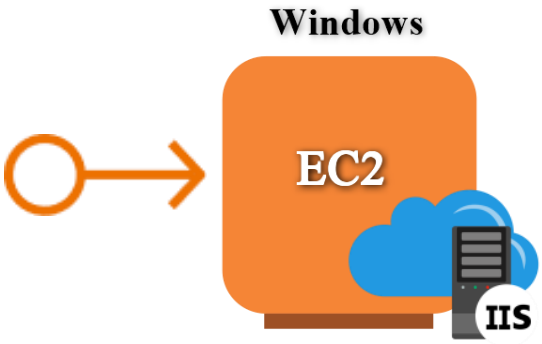

Priyavarshini V

CSE-Artificial Intelligence & Machine Learning,

Sri Eshwar College of Engineering,

Coimbatore.

Objective

An Elastic IP (EIP) in AWS is a static, public IP address designed for dynamic cloud computing. It is associated with your AWS account and can be quickly associated or disassociated with any EC2 instance in your account. This feature is particularly useful when you need to maintain a consistent IP address for your resources, even when you stop and start EC2 instances.

Common Use Cases for Elastic IP:

1. Highly Available Applications:
   - If you're running a service that requires high availability, you can use Elastic IPs to quickly reassign a static IP to a new instance if your primary instance fails, ensuring minimal downtime.
2. Web Servers:
   - If you host a website and need to ensure the IP address remains the same even if the underlying EC2 instance is restarted, an Elastic IP helps maintain this consistency.
3. Disaster Recovery:
   - Elastic IPs are useful for disaster recovery scenarios. If one instance goes down, you can quickly associate the EIP with a backup instance to ensure services are still accessible.

Best Practices:

- Use Elastic IPs only when necessary: Since they come with associated costs when unused, it's a good practice to release EIPs that are no longer required.
- Move IPs during instance failure: Instead of keeping an EIP permanently attached, use it as a failover method, reassociating it to a new instance when needed.
- Monitor EIP Usage: Periodically review your usage to ensure you're not paying for unnecessary Elastic IP addresses.

Topology

How to Configure the Elastic IP Address to Windows Web Server with AWS EC2

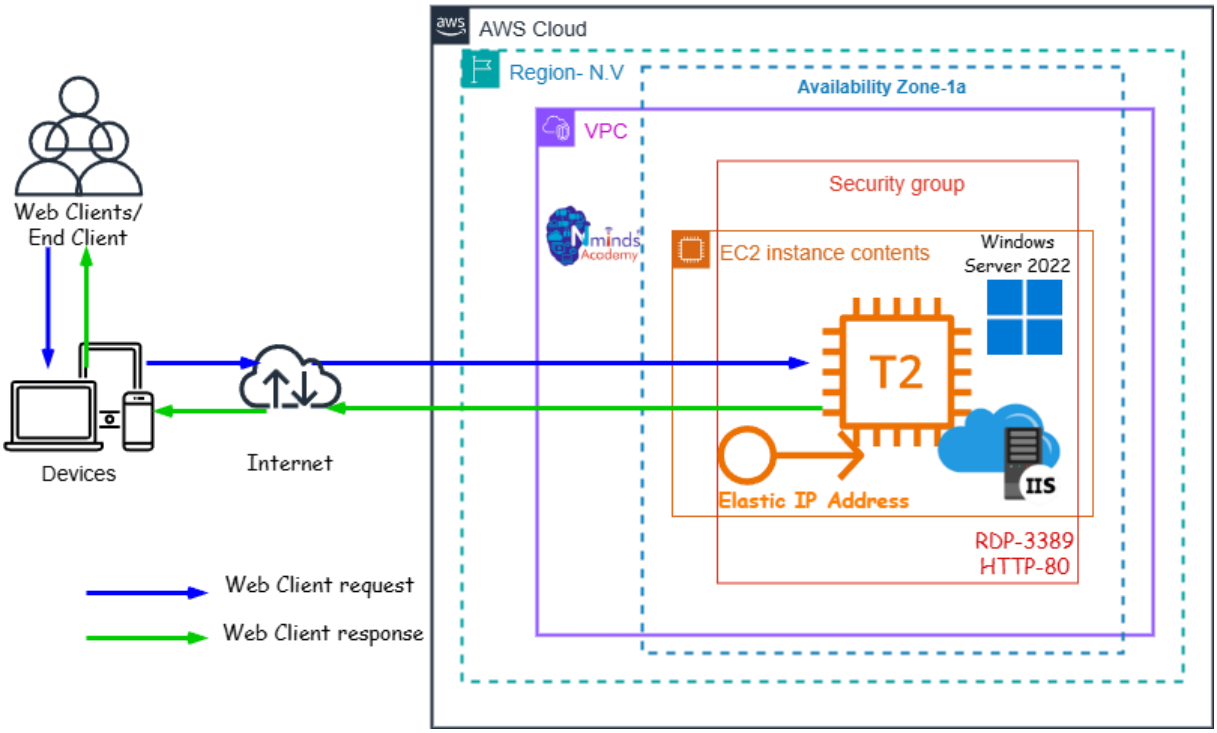

Used Services in AWS

Used Services in Windows Server



Amazon EC2

IIS- Internet Information Services

Amazon Elastic IP Address

Execution Tasks:

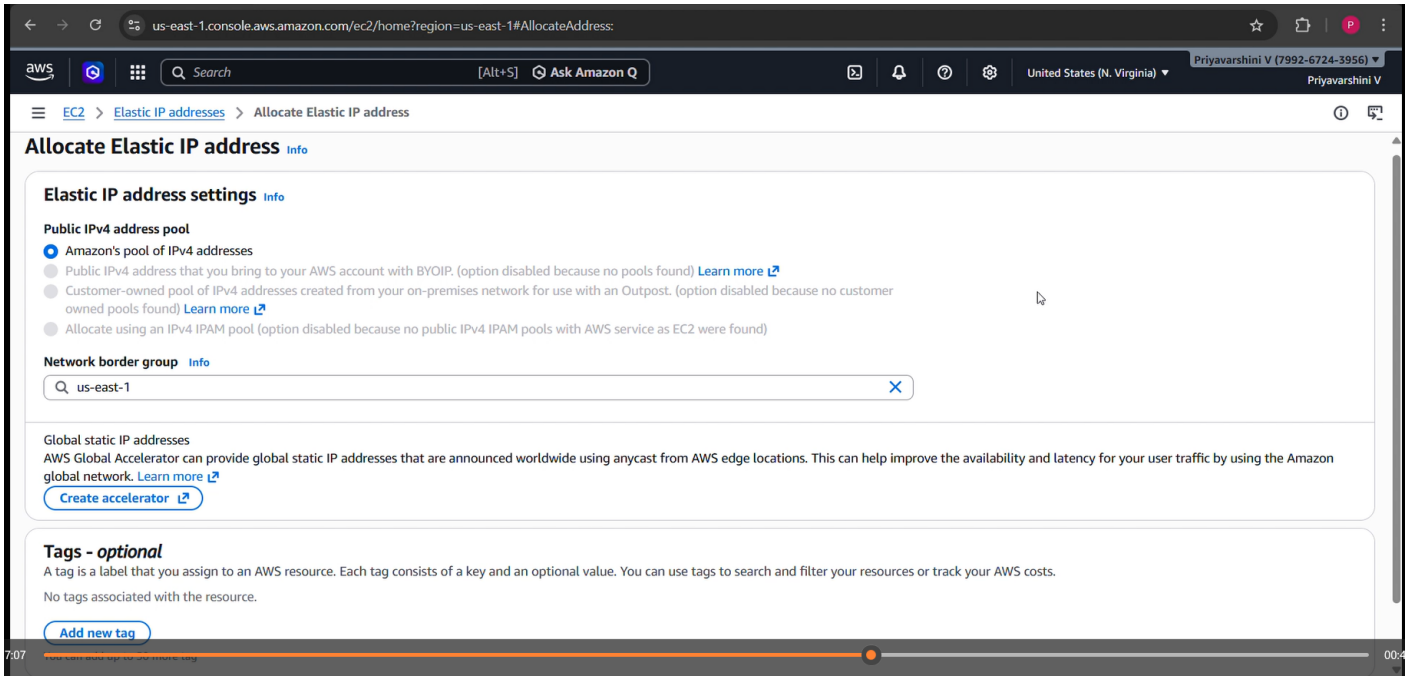

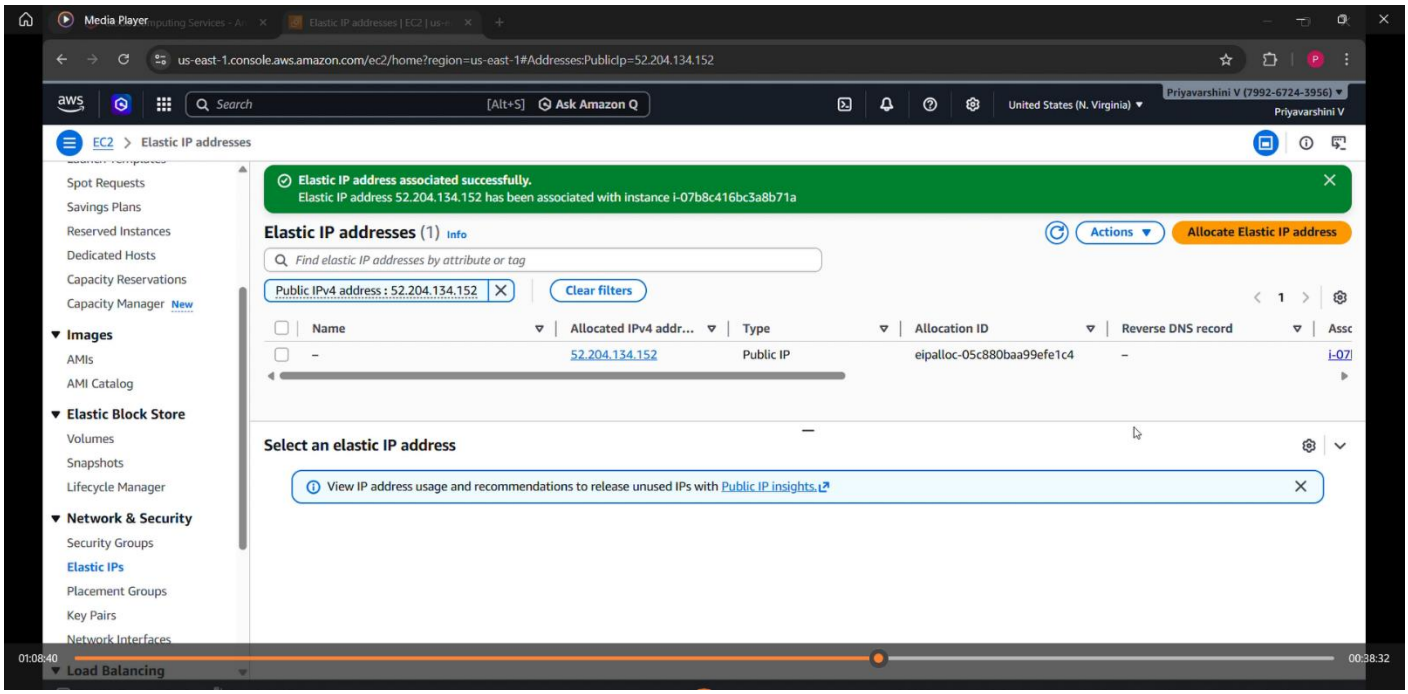

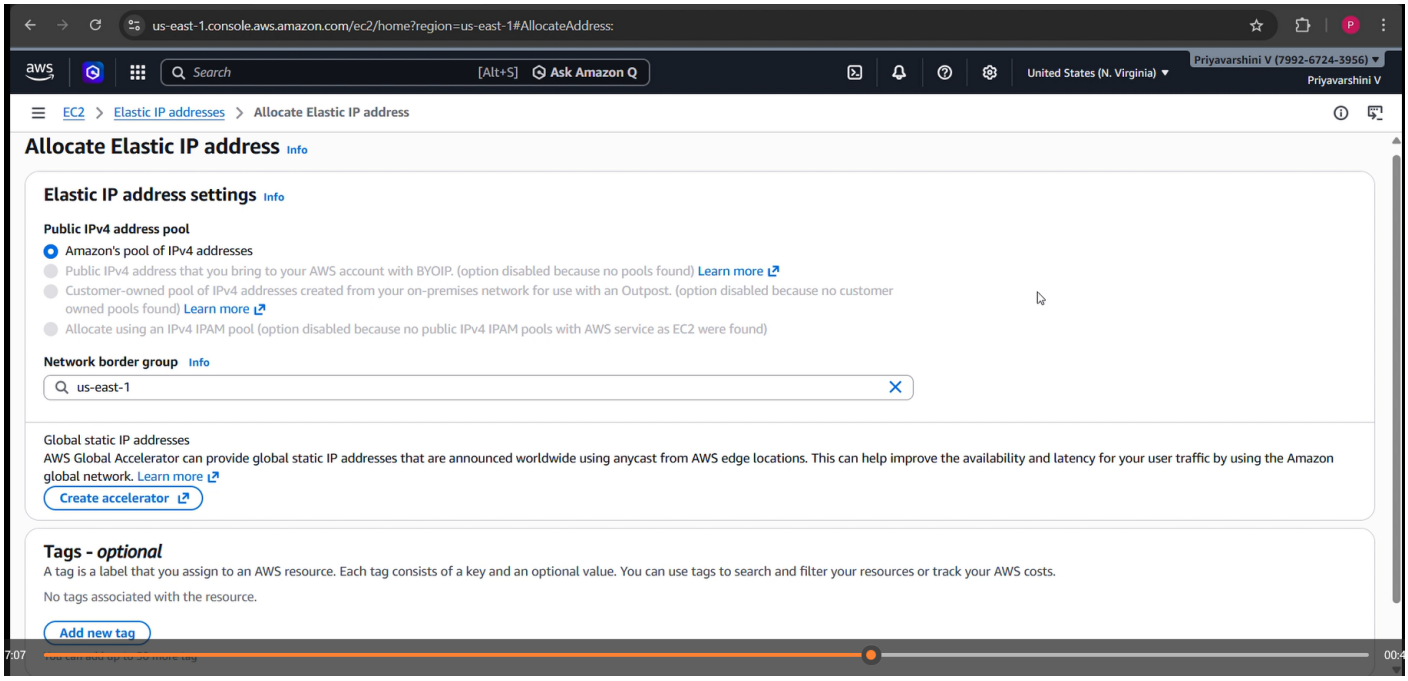
us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#AllocateAddress:
Search
[Alt+S]
Ask Amazon Q
United States (N. Virginia)
Priyavarshini V (7992-6724-3956)
Priyavarshini V
EC2 > Elastic IP addresses > Allocate Elastic IP address
Allocate Elastic IP address Info
Elastic IP address settings Info
Public IPv4 address pool
Amazon's pool of IPv4 addresses
Public IPv4 address that you bring to your AWS account with BYOIP. (option disabled because no pools found) Learn more
Customer-owned pool of IPv4 addresses created from your on-premises network for use with an Outpost. (option disabled because no customer owned pools found) Learn more
Allocate using an IPv4 IPAM pool (option disabled because no public IPv4 IPAM pools with AWS service as EC2 were found)
Network border group Info
us-east-1
Global static IP addresses
AWS Global Accelerator can provide global static IP addresses that are announced worldwide using anycast from AWS edge locations. This can help improve the availability and latency for your user traffic by using the Amazon global network. Learn more
Create accelerator
Tags - optional
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
No tags associated with the resource.
Add new tag

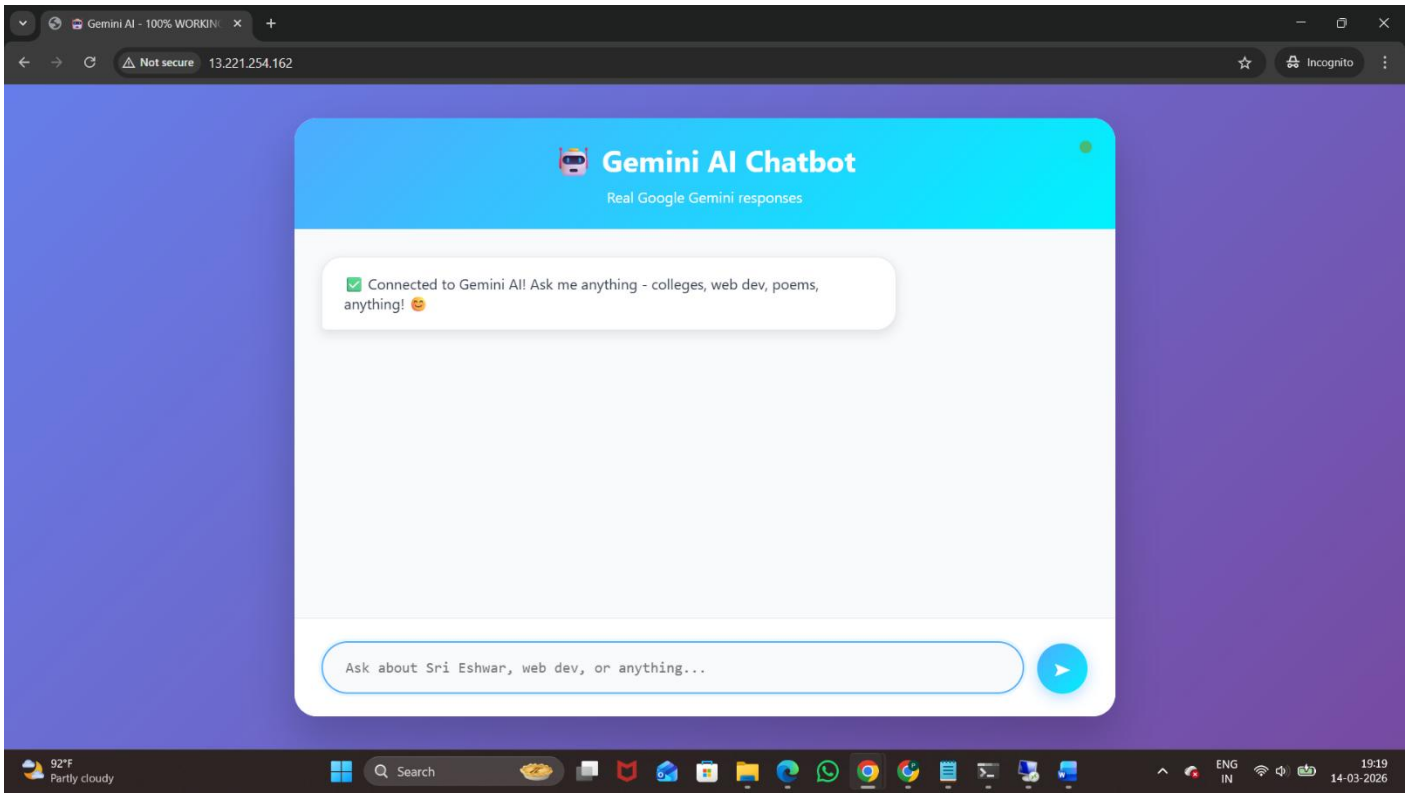
Gemini AI - 100% WORKIN
Not secure
13.221.254.162
Incognito
Gemini AI Chatbot
Real Google Gemini responses
Connected to Gemini AI! Ask me anything - colleges, web dev, poems, anything!
Ask about Sri Eshwar, web dev, or anything...
92°F
Partly cloudy
Search
ENG
IN
19:19
14-03-2026

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

4. Create an EC2 Linux Instance in AWS

Priyavarshini V
CSE-Artificial Intelligence & Machine Learning,
Sri Eshwar College Of Engineering,
Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Linux instance is a virtual machine running the Linux operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, Apache,FileServer etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

Used Services in AWS



Amazon EC2

Topology

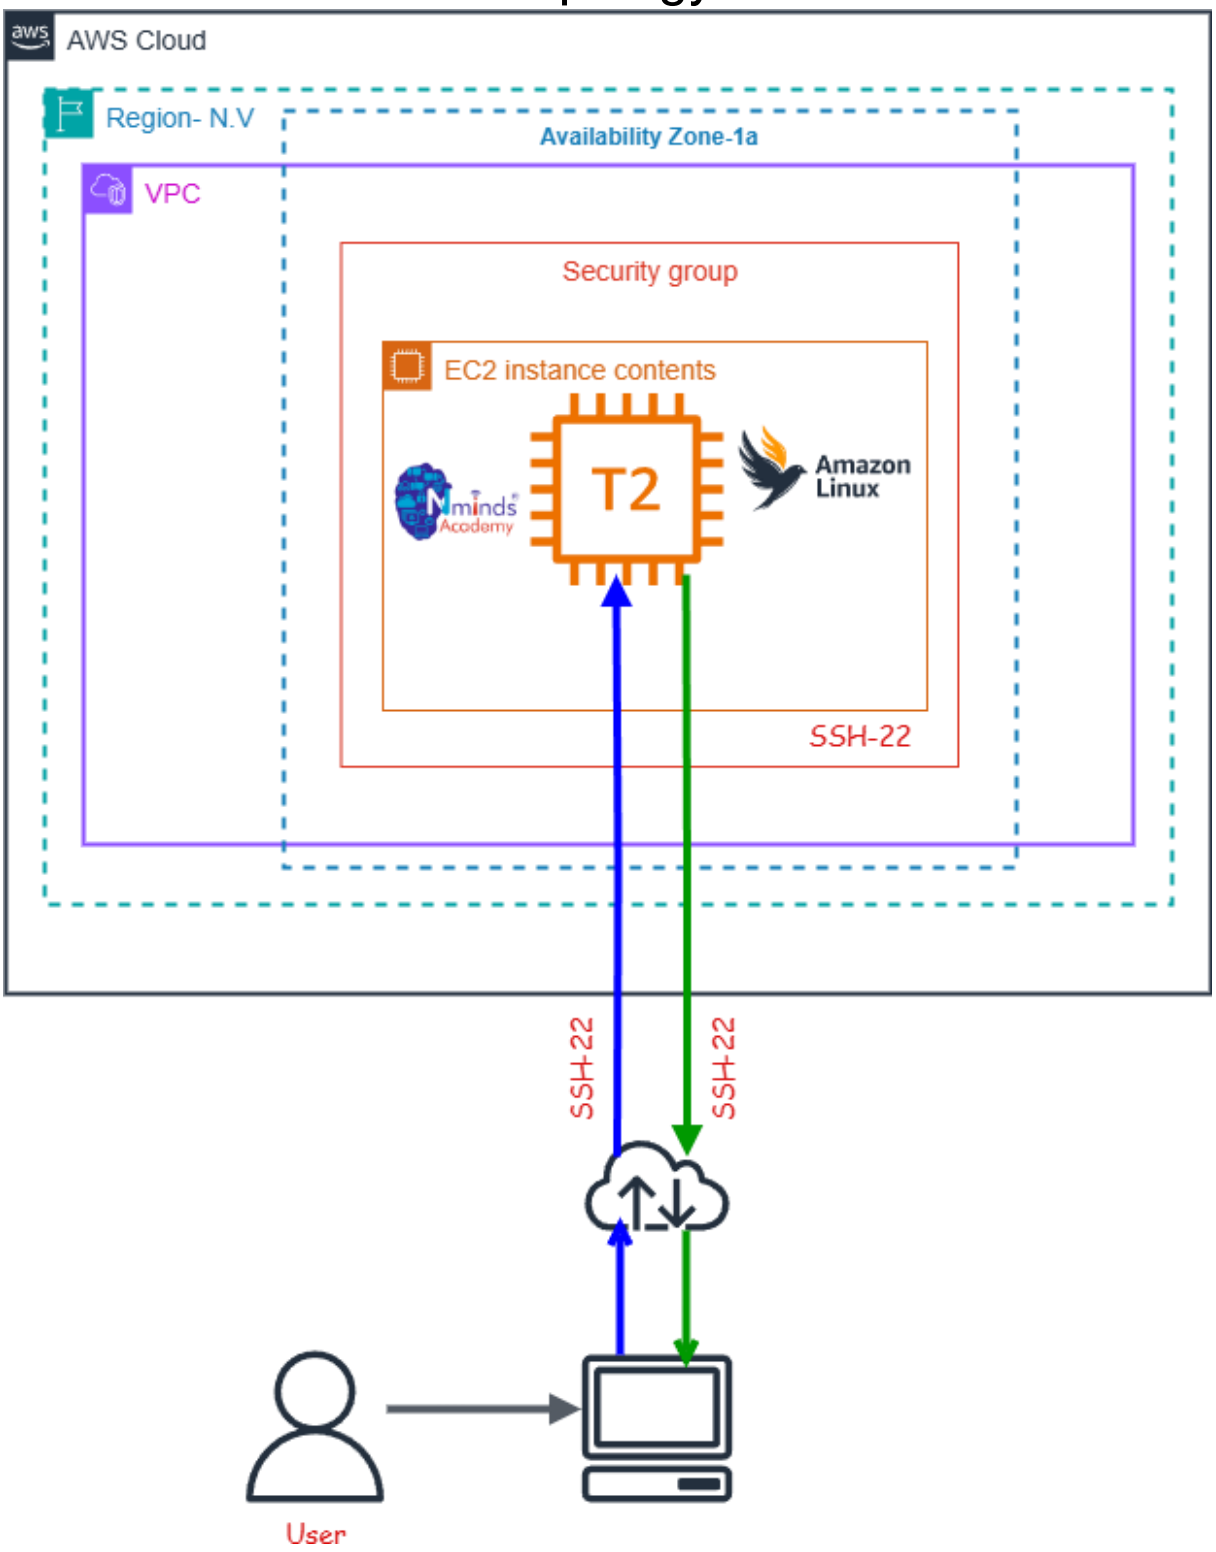

Execution Tasks:

```
root@ip-172-31-28-164:~

[root@ip-172-31-28-164 ~]# systemctl enable httpd
Created symlink /etc/systemd/system/multi-user.target.wants/httpd.service → /usr/lib/systemd/system/httpd.service.
[root@ip-172-31-28-164 ~]# client_loop: send disconnect: Connection reset

C:\Users\priya\Downloads>cd /var/www/html
The system cannot find the path specified.

C:\Users\priya\Downloads>sudo -i
error: unexpected argument '-i' found

  tip: to pass '-i' as a value, use '-- -i'

Usage: sudo [OPTIONS] [COMMANDLINE]... [COMMAND]

For more information, try 'help'.

C:\Users\priya\Downloads>ssh -i aws1.pem ec2-user@13.221.254.162
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
Last login: Sat Mar 14 12:34:09 2026 from 121.200.55.210
[ec2-user@ip-172-31-28-164 ~]$ sudo -i
[root@ip-172-31-28-164 ~]# cd /var/www/html
```

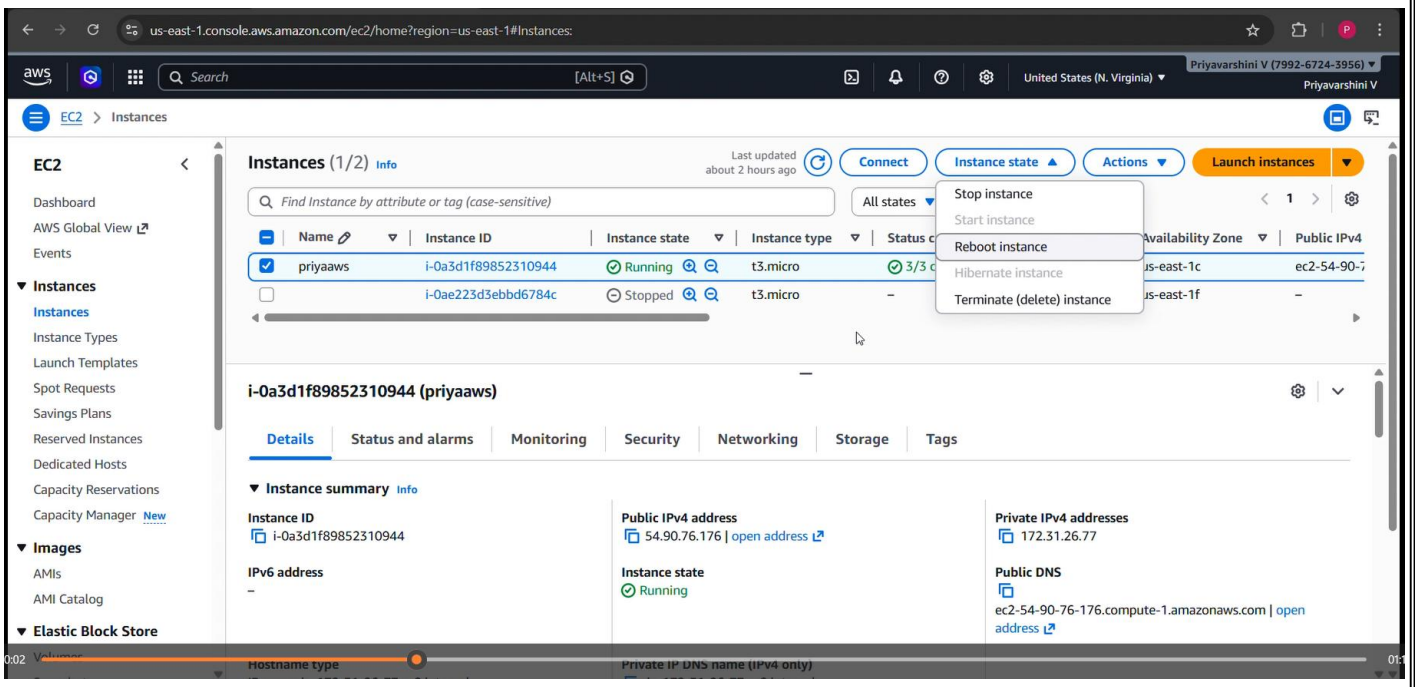

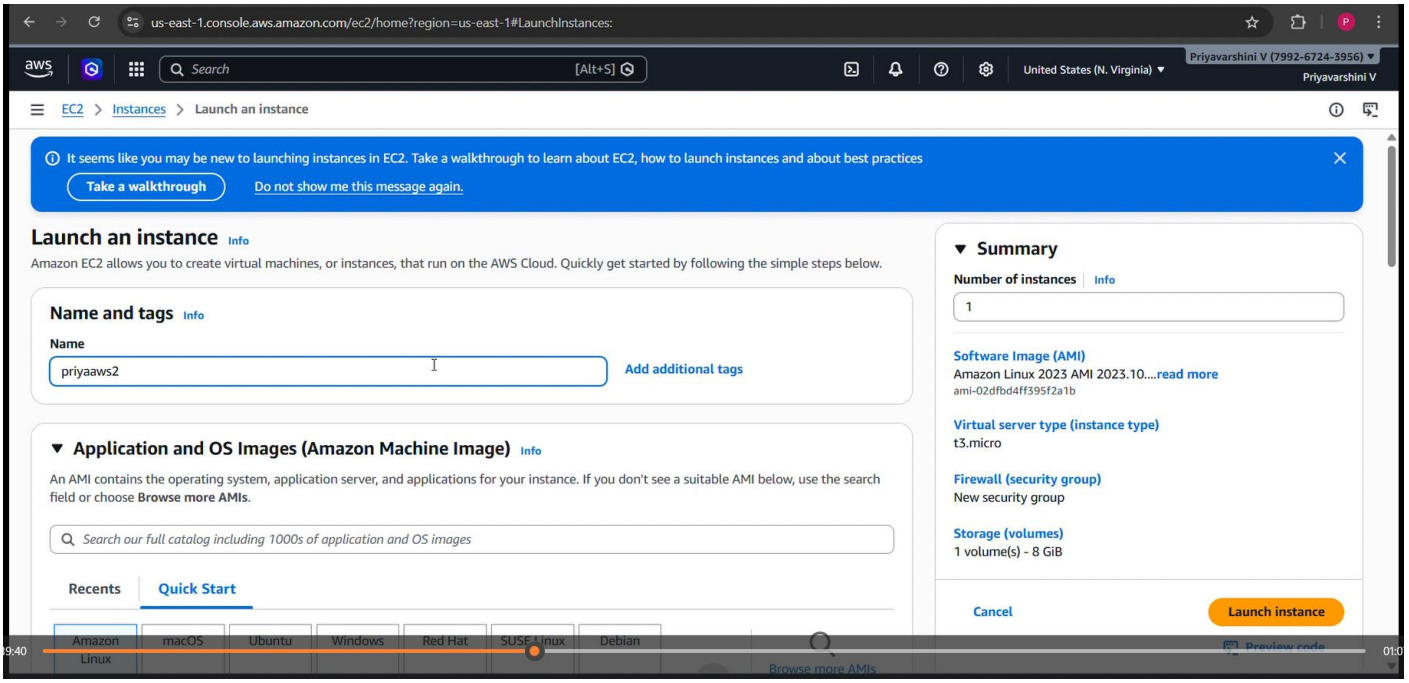
us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#LaunchInstances:
Search
[Alt+S]
United States (N. Virginia)
Priyavarshini V (7992-6724-3956)
Priyavarshini V
EC2 > Instances > Launch an instance
It seems like you may be new to launching instances in EC2. Take a walkthrough to learn about EC2, how to launch instances and about best practices
Take a walkthrough
Do not show me this message again.
Launch an instance Info
Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.
Name and tags Info
Name
priyaaws2
Add additional tags
Application and OS Images (Amazon Machine Image) Info
An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose Browse more AMIs.
Search our full catalog including 1000s of application and OS images
Recents
Quick Start
Amazon Linux
macOS
Ubuntu
Windows
Red Hat
SUSE Linux
Debian
Browse more AMIs
Summary
Number of instances Info
1
Software Image (AMI)
Amazon Linux 2023 AMI 2023.10....read more
ami-02dfbd4ff395f2a1b
Virtual server type (instance type)
t3.micro
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Launch instance
Preview code

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

5. Configure Apache Web Server on Linux Instance in AWS

Priyavarshini V

CSE-Artificial Intelligence and Machine Learning

Sri Eshwar College of Engineering,

Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

An EC2 Linux instance is a virtual machine running the Linux operating system on Amazon Web Services (AWS) EC2 (Elastic Compute Cloud). This allows you to run Windows-based applications, manage Windows Server configurations, and use various Microsoft software (like SQL Server, Apache,FileServer etc.) in the cloud without having to manage physical hardware.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

Used Services in AWS

Amazon EC2

Used Services in Linux Server

Apache Webserver

Topology

How to Configure the Apache web server in Linux Server with AWS EC2

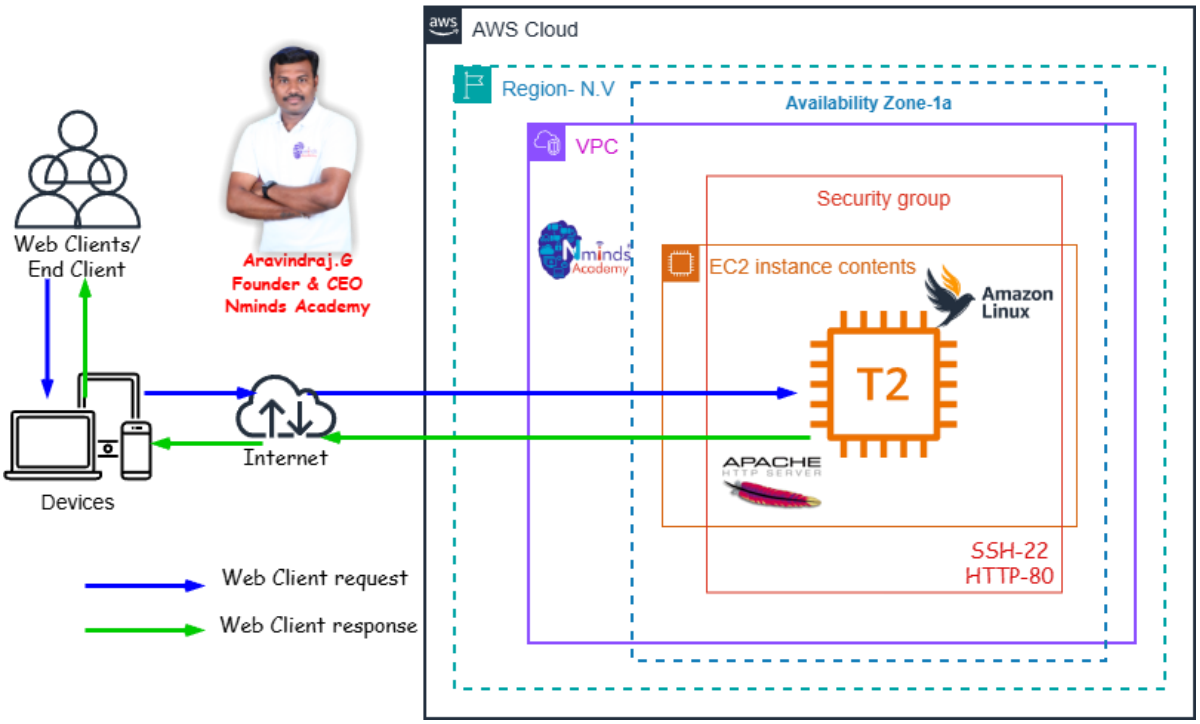

Execution Tasks:

```
root@ip-172-31-28-164:~
  Installing       : mod_http2-2.0.27-1.amzn2023.0.3.x86_64                                  10/13
  Installing       : mod_lua-2.4.66-1.amzn2023.0.1.x86_64                                    11/13
  Installing       : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch                       12/13
  Installing       : httpd-2.4.66-1.amzn2023.0.1.x86_64                                      13/13
  Running scriptlet: httpd-2.4.66-1.amzn2023.0.1.x86_64                                      13/13
  Verifying        : apr-1.7.5-1.amzn2023.0.4.x86_64                                          1/13
  Verifying        : apr-util-1.6.3-1.amzn2023.0.2.x86_64                                     2/13
  Verifying        : apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64                                3/13
  Verifying        : apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64                             4/13
  Verifying        : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch                        5/13
  Verifying        : httpd-2.4.66-1.amzn2023.0.1.x86_64                                       6/13
  Verifying        : httpd-core-2.4.66-1.amzn2023.0.1.x86_64                                  7/13
  Verifying        : httpd-filesystem-2.4.66-1.amzn2023.0.1.noarch                            8/13
  Verifying        : httpd-tools-2.4.66-1.amzn2023.0.1.x86_64                                 9/13
  Verifying        : libbrotli-1.0.9-4.amzn2023.0.2.x86_64                                   10/13
  Verifying        : mailcap-2.1.49-3.amzn2023.0.3.noarch                                    11/13
  Verifying        : mod_http2-2.0.27-1.amzn2023.0.3.x86_64                                  12/13
  Verifying        : mod_lua-2.4.66-1.amzn2023.0.1.x86_64                                    13/13

Installed:
  apr-1.7.5-1.amzn2023.0.4.x86_64                          apr-util-1.6.3-1.amzn2023.0.2.x86_64
  apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64                apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64
  generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch        httpd-2.4.66-1.amzn2023.0.1.x86_64
  httpd-core-2.4.66-1.amzn2023.0.1.x86_64                  httpd-filesystem-2.4.66-1.amzn2023.0.1.noarch
  httpd-tools-2.4.66-1.amzn2023.0.1.x86_64                 libbrotli-1.0.9-4.amzn2023.0.2.x86_64
  mailcap-2.1.49-3.amzn2023.0.3.noarch                     mod_http2-2.0.27-1.amzn2023.0.3.x86_64
  mod_lua-2.4.66-1.amzn2023.0.1.x86_64

Complete!
[root@ip-172-31-28-164 ~]#
```

```
root@ip-172-31-28-164:~
[root@ip-172-31-28-164 ~]# systemctl enable httpd
Created symlink /etc/systemd/system/multi-user.target.wants/httpd.service → /usr/lib/systemd/system/httpd.service.
[root@ip-172-31-28-164 ~]# client_loop: send disconnect: Connection reset

C:\Users\priya\Downloads>cd /var/www/html
The system cannot find the path specified.

C:\Users\priya\Downloads>sudo -i
error: unexpected argument '-i' found

  tip: to pass '-i' as a value, use '-- -i'

Usage: sudo [OPTIONS] [COMMANDLINE]... [COMMAND]

For more information, try 'help'.

C:\Users\priya\Downloads>ssh -i aws1.pem ec2-user@13.221.254.162
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
Last login: Sat Mar 14 12:34:09 2026 from 121.200.55.210
[ec2-user@ip-172-31-28-164 ~]$ sudo -i
[root@ip-172-31-28-164 ~]# cd /var/www/html
```

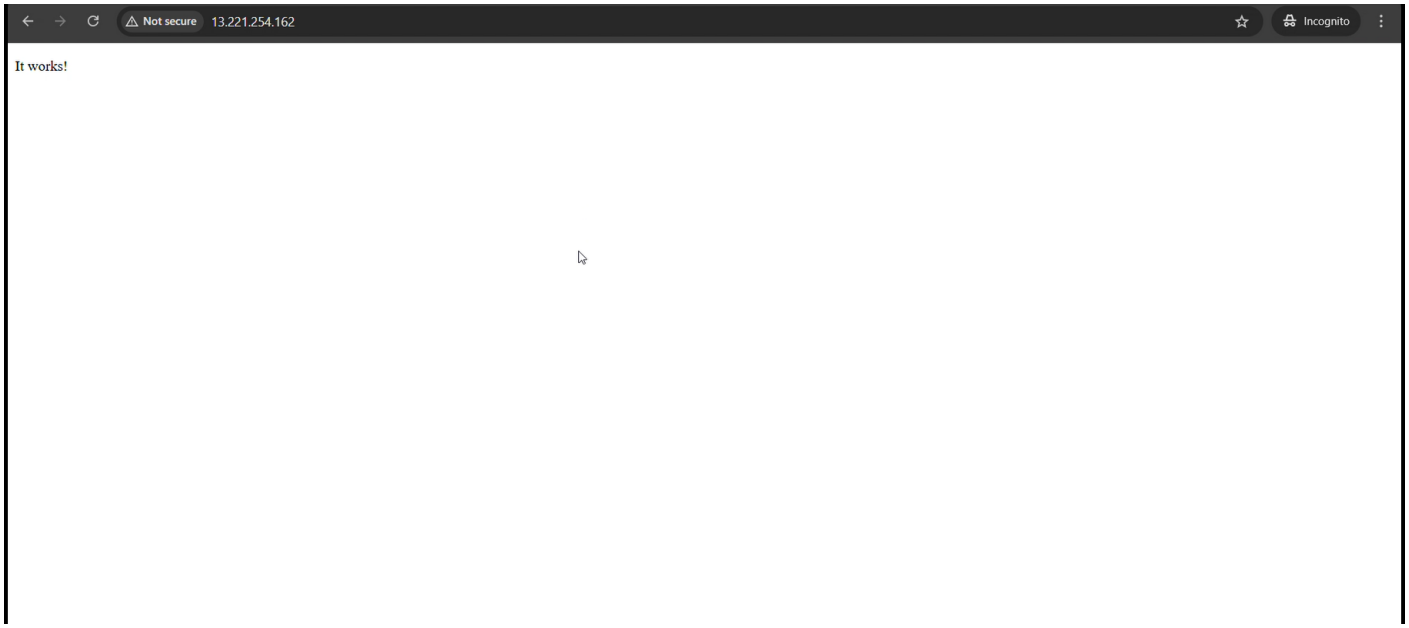
Not secure
13.221.254.162
Incognito
It works!

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

6. Configure Elastic IP Address to Windows Web Server in AWS

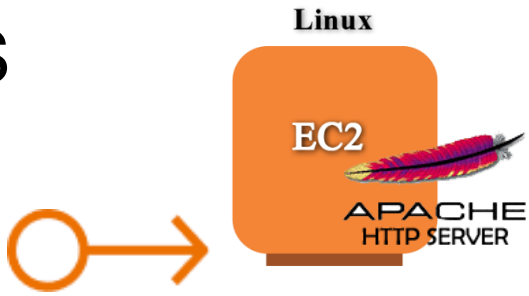

Priyavarshini V
CSE-Artificial Intelligence & Machine Learning,
Sri Eshwar College Of Engineering,
Coimbatore.

Objective

An Elastic IP (EIP) in AWS is a static, public IP address designed for dynamic cloud computing. It is associated with your AWS account and can be quickly associated or disassociated with any EC2 instance in your account. This feature is particularly useful when you need to maintain a consistent IP address for your resources, even when you stop and start EC2 instances.

Common Use Cases for Elastic IP:

1. Highly Available Applications:
    - If you're running a service that requires high availability, you can use Elastic IPs to quickly reassign a static IP to a new instance if your primary instance fails, ensuring minimal downtime.
2. Web Servers:
    - If you host a website and need to ensure the IP address remains the same even if the underlying EC2 instance is restarted, an Elastic IP helps maintain this consistency.
3. Disaster Recovery:
    - Elastic IPs are useful for disaster recovery scenarios. If one instance goes down, you can quickly associate the EIP with a backup instance to ensure services are still accessible.

Best Practices:

- Use Elastic IPs only when necessary: Since they come with associated costs when unused, it's a good practice to release EIPs that are no longer required.
- Move IPs during instance failure: Instead of keeping an EIP permanently attached, use it as a failover method, reassociating it to a new instance when needed.
- Monitor EIP Usage: Periodically review your usage to ensure you're not paying for unnecessary Elastic IP addresses.

Topology

How to Configure the Elastic IP Address to Linux Web Server with AWS EC2

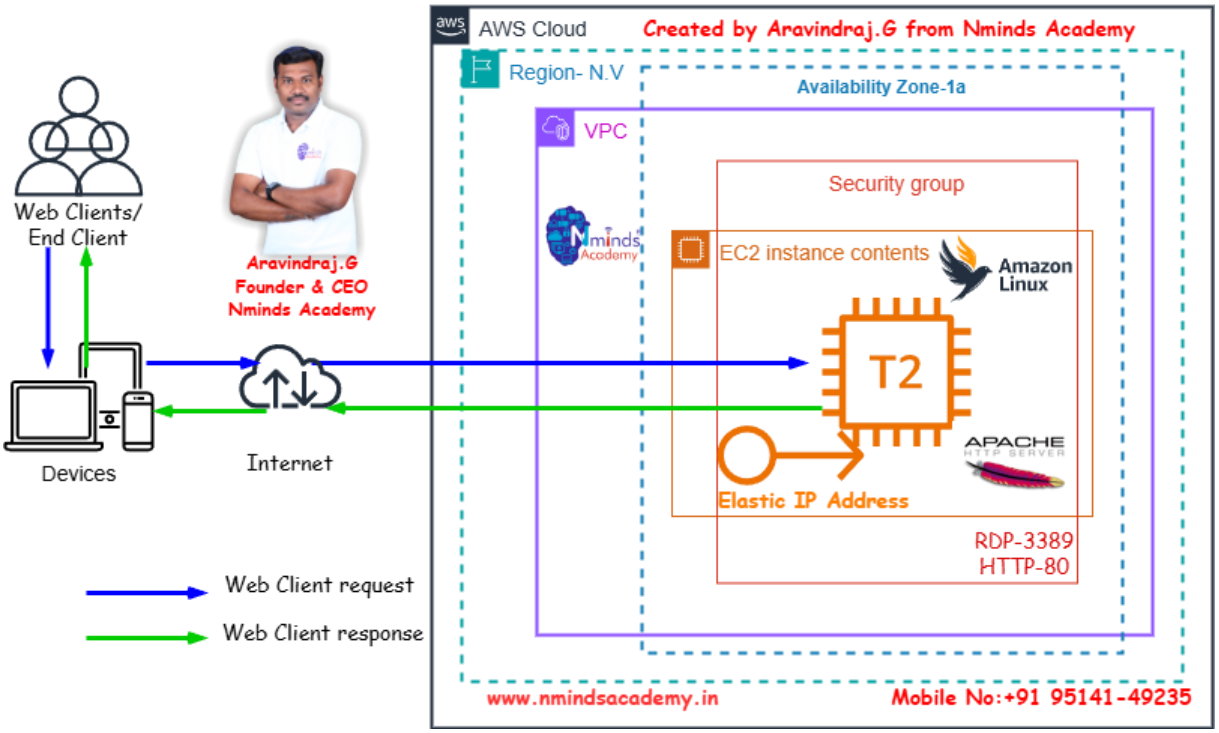

Used Services in AWS

Used Services in Windows Server

Amazon EC2

APACHE HTTP SERVER

Apache Webserver

Amazon Elastic IP Address

Execution Tasks:

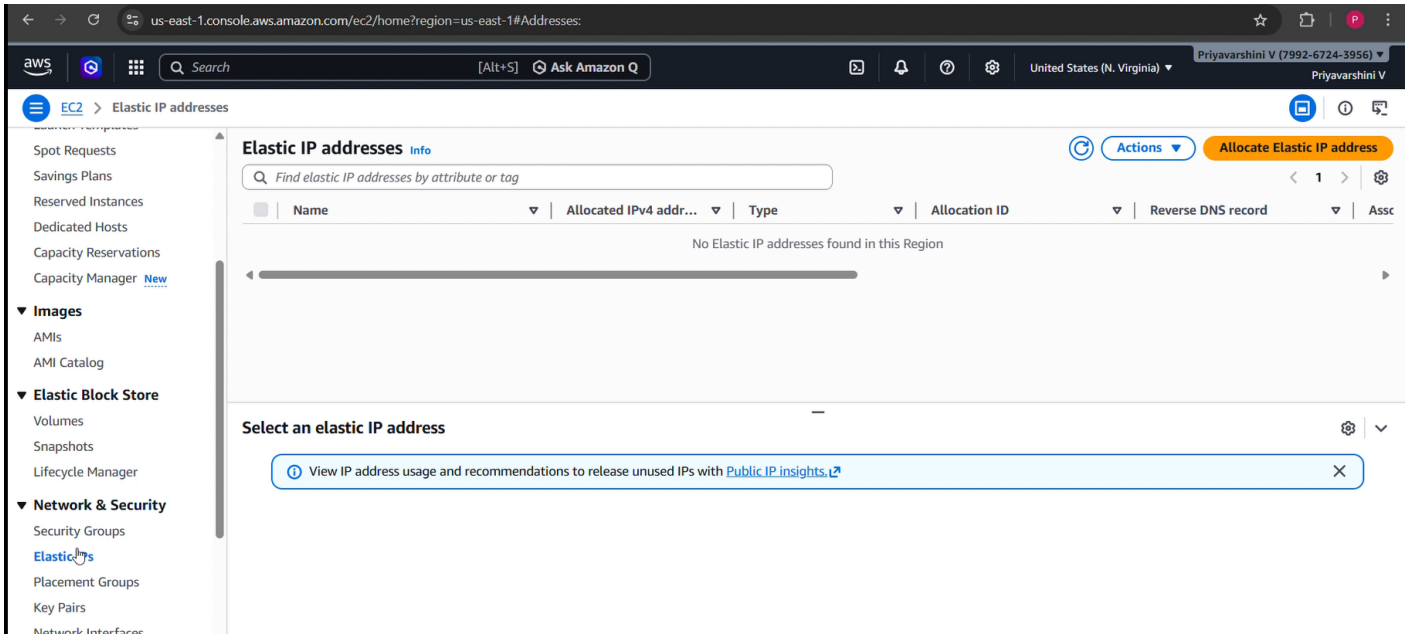

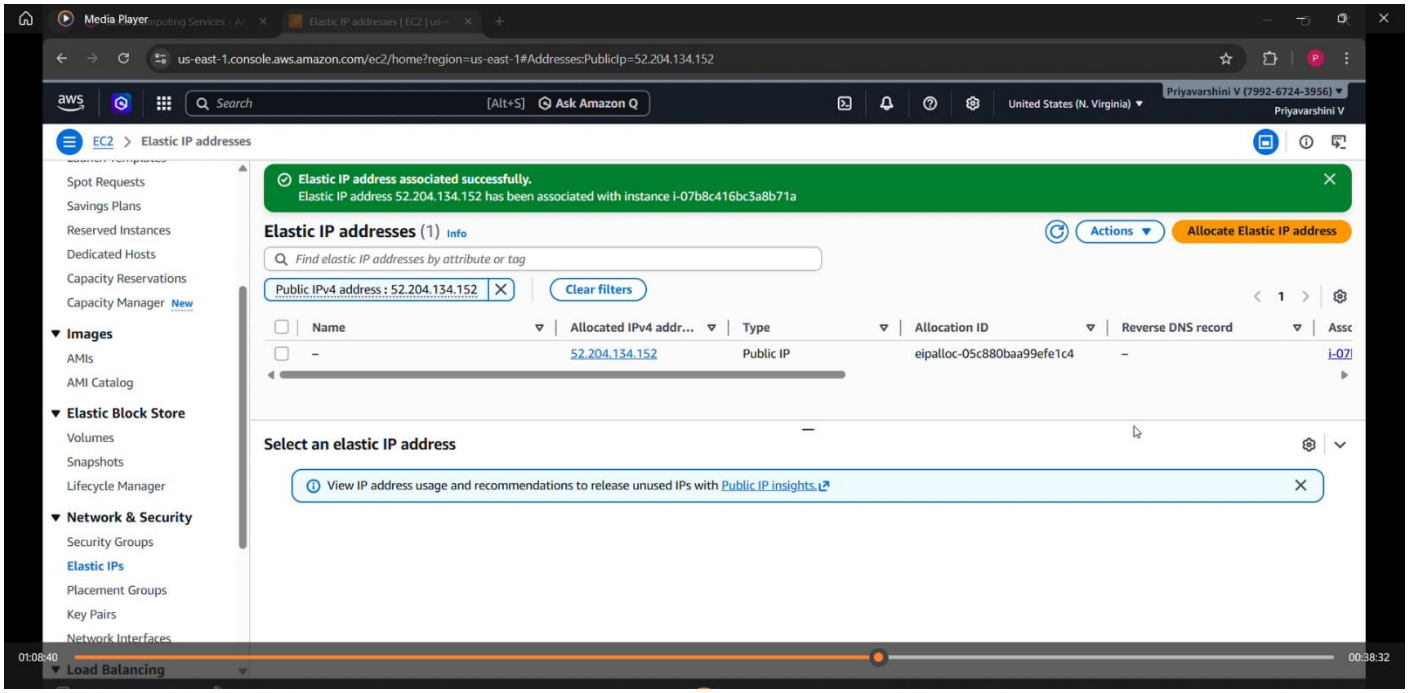
Media Player
us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#Addresses:PublicIp=52.204.134.152
Search
[Alt+S]
Ask Amazon Q
United States (N. Virginia)
Priyavarshini V (7992-6724-3956)
Priyavarshini V
EC2 > Elastic IP addresses
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Snapshots
Lifecycle Manager
Network & Security
Security Groups
Elastic IPs
Placement Groups
Key Pairs
Network Interfaces
Load Balancing
Elastic IP address associated successfully.
Elastic IP address 52.204.134.152 has been associated with instance i-07b8c416bc3a8b71a
Elastic IP addresses (1) Info
Actions
Allocate Elastic IP address
Find elastic IP addresses by attribute or tag
Public IPv4 address : 52.204.134.152
Clear filters
Name
Allocated IPv4 addr...
Type
Allocation ID
Reverse DNS record
52.204.134.152
Public IP
eipalloc-05c880baa99efe1c4
Select an elastic IP address
View IP address usage and recommendations to release unused IPs with Public IP insights.
01:08:40
00:38:32

AWS Solution Architect Training with
AWS Cloud Practitioner Global Certification

Capstone Projects

Trainer: Aravindraj.G- Nminds Academy

AWS Academy Certified Educator

7.Configure SFTP to Linux Web Server in AWS

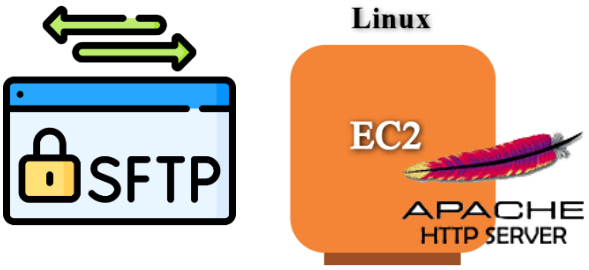

Priyavarshini V
CSE-Artificial Intelligence & Machine Learning,
Sri Eshwar College Of Engineering,
Coimbatore.

Objective

EC2 (Elastic Compute Cloud) is a core service provided by Amazon Web Services (AWS) that enables users to rent virtual servers in the cloud to run applications, store data, or handle computational workloads.

Use Cases for EC2 Linux Instances:

- Web and Application Hosting: Run Apache web servers or other Linux-based web applications in the cloud.
- Database Servers: Host SQL Server databases with EC2 Linux instances, using SSH or EC2 for more control.
- Remote Desktop Applications: Set up SSH (Remote Desktop Services) for remote access to Linux desktops in the cloud.
- Development and Testing: Create development environments with linux OS to test php,MySql or other Linux-based applications.

SFTP- Secure File Transfer Protocol

SFTP (Secure File Transfer Protocol) is a secure network protocol that allows users to transfer files over a secure, encrypted connection. It is a more secure alternative to FTP (File Transfer Protocol) and is commonly used to upload, download, and manage files on remote servers.

Here are the key uses and advantages of SFTP:

1. File Transfer: SFTP allows secure transfer of files between a local and a remote computer over a network. It ensures that the data is encrypted during transmission, protecting it from eavesdropping or tampering.
2. File Management: Besides transferring files, SFTP also allows users to perform file management tasks such as renaming, deleting, and moving files on the remote server.
3. Secure Authentication: SFTP uses SSH (Secure Shell) for authentication, which provides a stronger level of security compared to FTP's traditional username/password system. It often supports public key authentication, adding an extra layer of security.
4. Encryption: The main advantage of SFTP over FTP is encryption. All data sent over SFTP is encrypted, ensuring that sensitive information (like passwords and files) is protected during transmission

5. Firewall-Friendly: SFTP operates over a single port (usually port 22) making it easier to use behind firewalls and NAT (Network Address Translation) devices compared to FTP, which uses multiple ports.

Topology

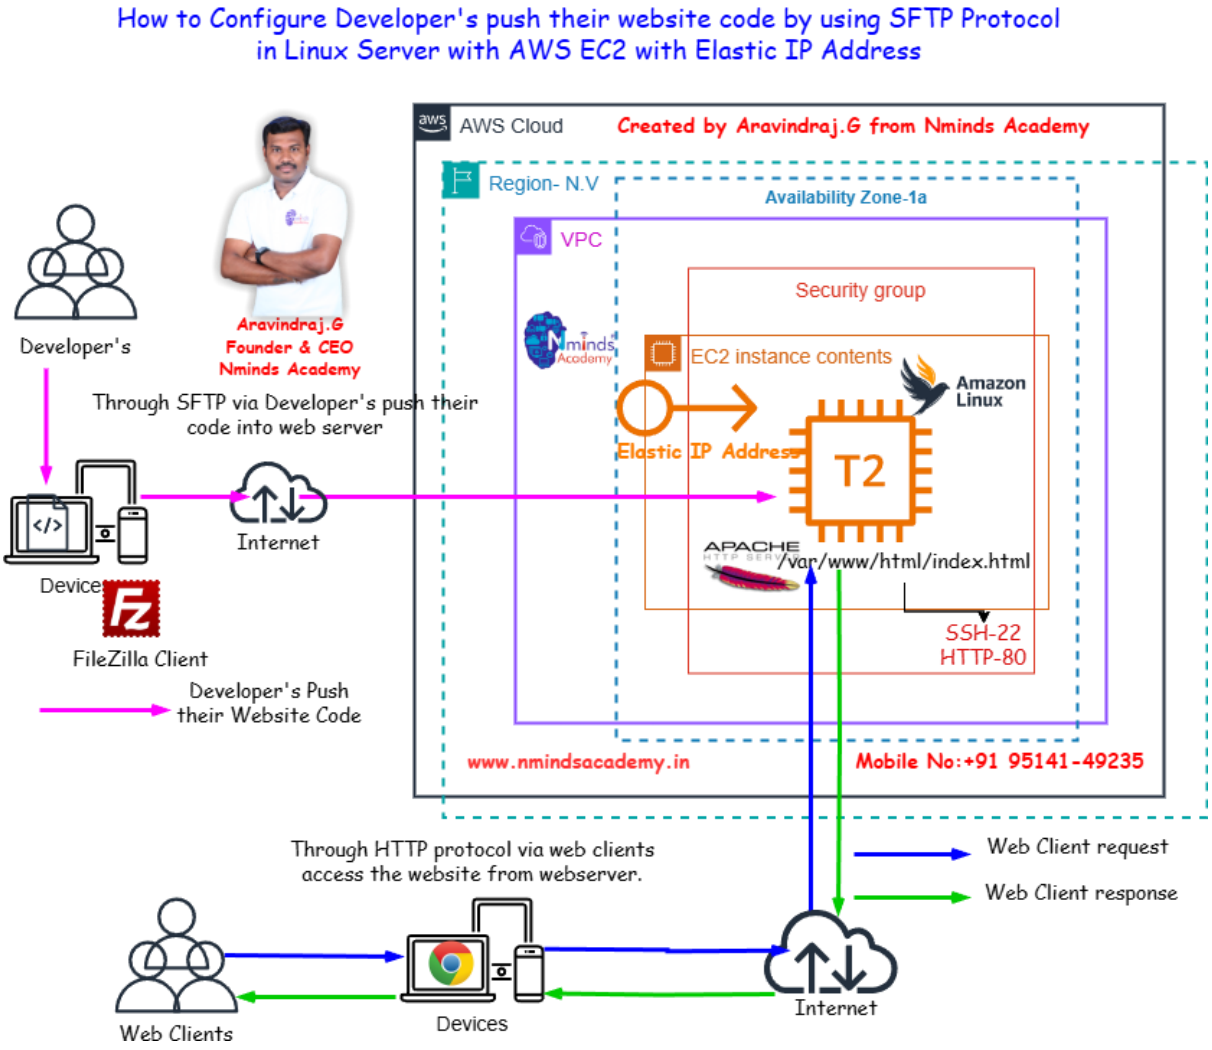

Used Services in AWS

Used Services in Windows Server

Amazon EC2

APACHE HTTP SERVER

Apache Webserver

Amazon Elastic IP Address

SFTP

Execution Tasks:

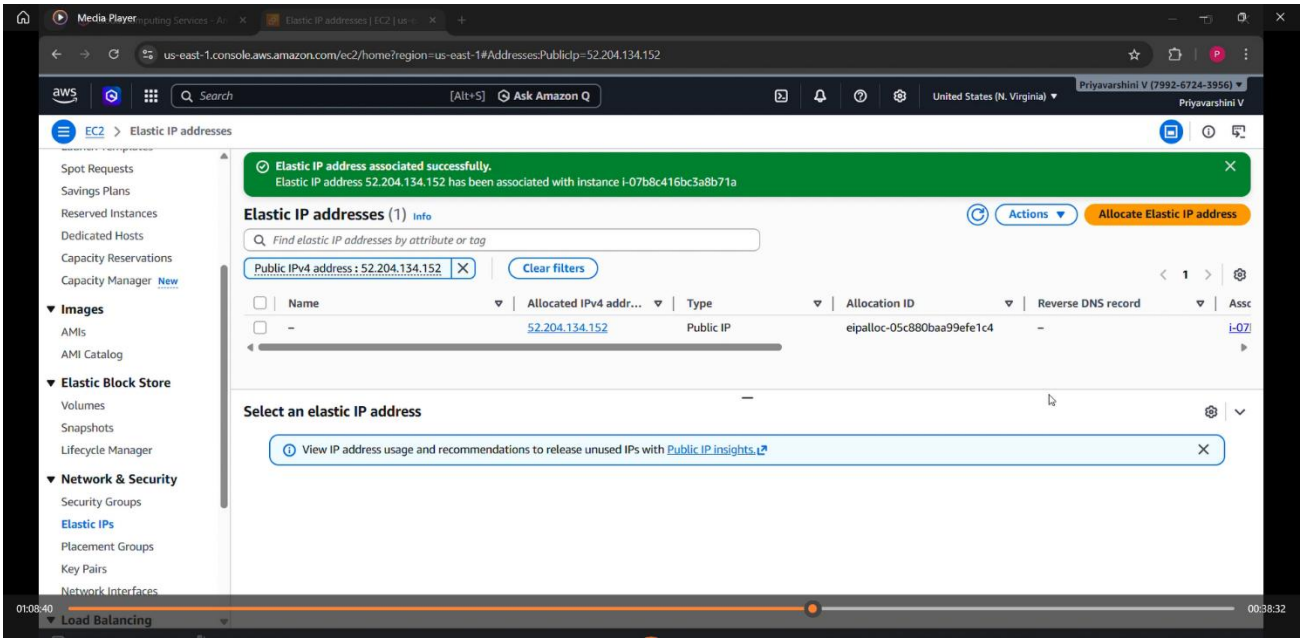

```
root@ip-172-31-28-164:~

  Installing       : mod_http2-2.0.27-1.amzn2023.0.3.x86_64                                  10/13
  Installing       : mod_lua-2.4.66-1.amzn2023.0.1.x86_64                                    11/13
  Installing       : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch                       12/13
  Installing       : httpd-2.4.66-1.amzn2023.0.1.x86_64                                      13/13
  Running scriptlet: httpd-2.4.66-1.amzn2023.0.1.x86_64                                      13/13
  Verifying        : apr-1.7.5-1.amzn2023.0.4.x86_64                                          1/13
  Verifying        : apr-util-1.6.3-1.amzn2023.0.2.x86_64                                     2/13
  Verifying        : apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64                                3/13
  Verifying        : apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64                             4/13
  Verifying        : generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch                        5/13
  Verifying        : httpd-2.4.66-1.amzn2023.0.1.x86_64                                       6/13
  Verifying        : httpd-core-2.4.66-1.amzn2023.0.1.x86_64                                  7/13
  Verifying        : httpd-filesystem-2.4.66-1.amzn2023.0.1.noarch                            8/13
  Verifying        : httpd-tools-2.4.66-1.amzn2023.0.1.x86_64                                 9/13
  Verifying        : libbrotli-1.0.9-4.amzn2023.0.2.x86_64                                   10/13
  Verifying        : mailcap-2.1.49-3.amzn2023.0.3.noarch                                    11/13
  Verifying        : mod_http2-2.0.27-1.amzn2023.0.3.x86_64                                  12/13
  Verifying        : mod_lua-2.4.66-1.amzn2023.0.1.x86_64                                    13/13

Installed:
  apr-1.7.5-1.amzn2023.0.4.x86_64                          apr-util-1.6.3-1.amzn2023.0.2.x86_64
  apr-util-lmdb-1.6.3-1.amzn2023.0.2.x86_64                apr-util-openssl-1.6.3-1.amzn2023.0.2.x86_64
  generic-logos-httpd-18.0.0-12.amzn2023.0.3.noarch        httpd-2.4.66-1.amzn2023.0.1.x86_64
  httpd-core-2.4.66-1.amzn2023.0.1.x86_64                  httpd-filesystem-2.4.66-1.amzn2023.0.1.noarch
  httpd-tools-2.4.66-1.amzn2023.0.1.x86_64                 libbrotli-1.0.9-4.amzn2023.0.2.x86_64
  mailcap-2.1.49-3.amzn2023.0.3.noarch                     mod_http2-2.0.27-1.amzn2023.0.3.x86_64
  mod_lua-2.4.66-1.amzn2023.0.1.x86_64

Complete!
[root@ip-172-31-28-164 ~]#
```

```
root@ip-172-31-28-164:~

input:x:104:
kvm:x:36:
render:x:105:
sgx:x:106:
systemd-journal:x:190:ec2-user
systemd-network:x:192:
systemd-oom:x:998:
systemd-resolve:x:193:
rpc:x:32:
libstoragemgmt:x:997:
systemd-coredump:x:996:
systemd-timesync:x:995:
sshd:x:74:
chrony:x:994:
ec2-instance-connect:x:993:
stapusr:x:156:
stapsys:x:157:
stapdev:x:158:
stapunpriv:x:159:stapunpriv
rpcuser:x:29:
tcpdump:x:72:
screen:x:84:
ec2-user:x:1000:
apache:x:48:
dev1:x:1001:
dev2:x:1002:
bench:x:1003:
[root@ip-172-31-28-164 ~]# usermod -G bench dev1
[root@ip-172-31-28-164 ~]# usermod -G bench dev2
[root@ip-172-31-28-164 ~]#
```
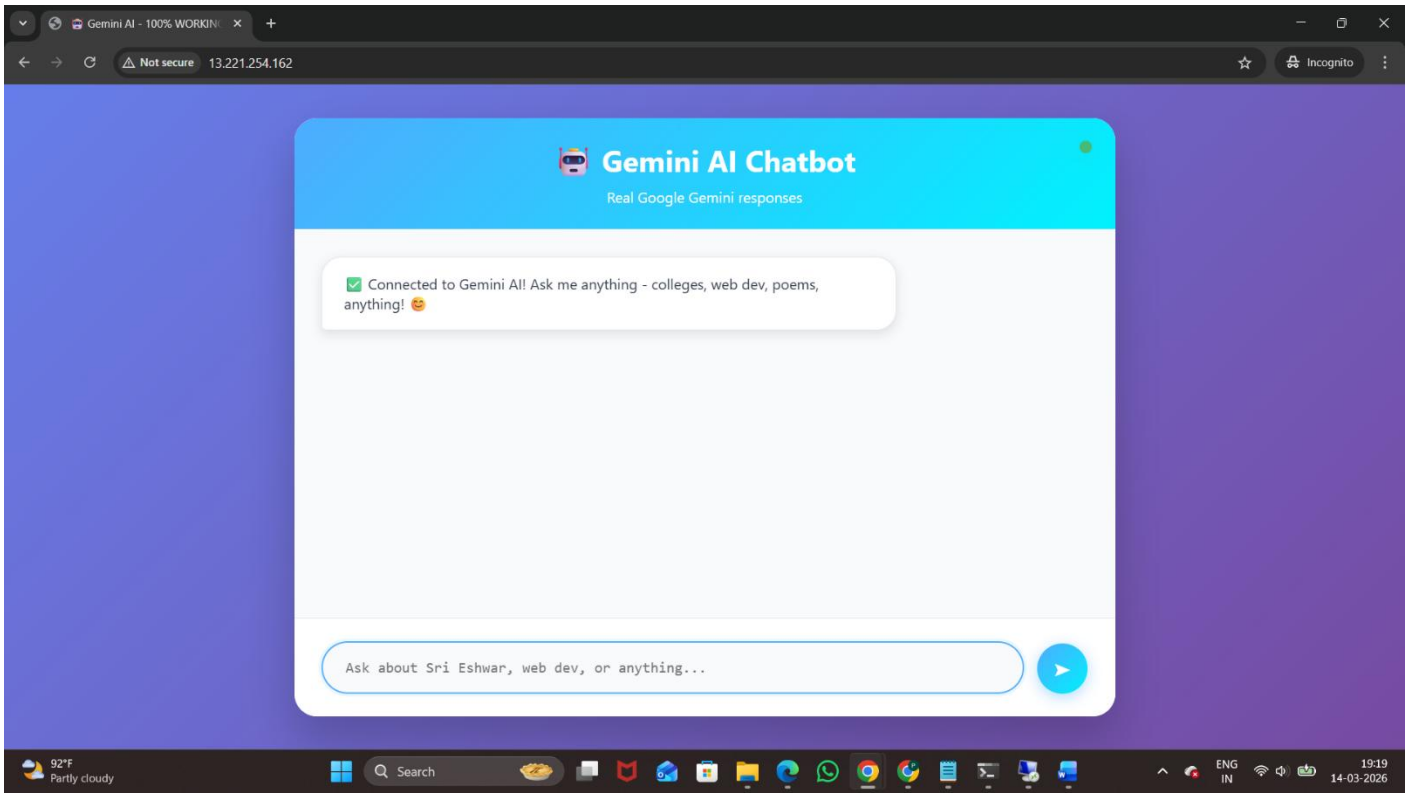
```
root@ip-172-31-28-164:~

#PermitRootLogin prohibit-password
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10

PubkeyAuthentication yes

# The default is to check both .ssh/authorized_keys and .ssh/authorized_keys2
# but this is overridden so installations will only check .ssh/authorized_keys
AuthorizedKeysFile      .ssh/authorized_keys

#AuthorizedPrincipalsFile none


# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no
# Change to yes if you don't trust ~/.ssh/known_hosts for
# HostbasedAuthentication
#IgnoreUserKnownHosts no
# Don't read the user's ~/.rhosts and ~/.shosts files
#IgnoreRhosts yes

# Explicitly disable PasswordAuthentication. By presetting it, we
# avoid the cloud-init set_passwords module modifying sshd_config and
# restarting sshd in the default instance launch configuration.
PasswordAuthentication no
PermitEmptyPasswords no

# Change to no to disable s/key passwords
                                                                    45,1          37%
```