


Pro Coffee Gear – Agent System Guide

Four separate views of the system: how knowledge moves, how people are onboarded, how skills/scripts/tools are shared, and how the fleet is routed and monitored.

Diagram 1 – Data flow after onboarding

This diagram intentionally excludes onboarding. It shows the steady-state movement of knowledge and built work.

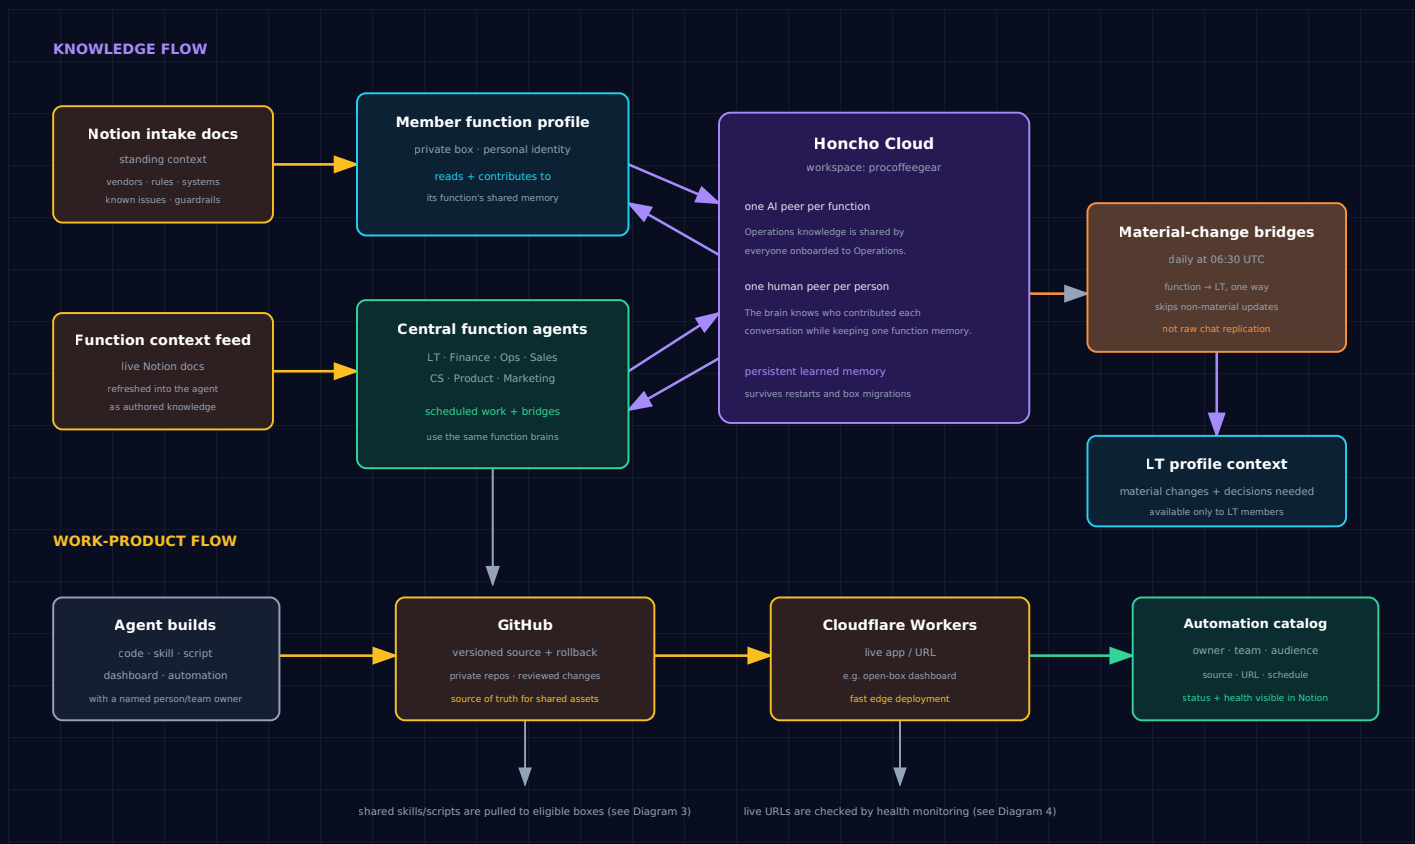


Knowledge is not one giant pool. Each function has its own shared brain. Bridges move only the relevant material signal between functions and into LT.

People remain identifiable. Everyone in a function uses the same AI peer, but Honcho remembers each contributor as their own human peer.

Built work has a separate lifecycle. Memory goes to Honcho; source goes to GitHub; live apps go to Cloudflare; significant systems are indexed in Notion.

Diagram 2 – Onboarding: functional member vs. LT member

Both people get their own private instance. The LT checkbox changes which profiles and leadership context are installed.

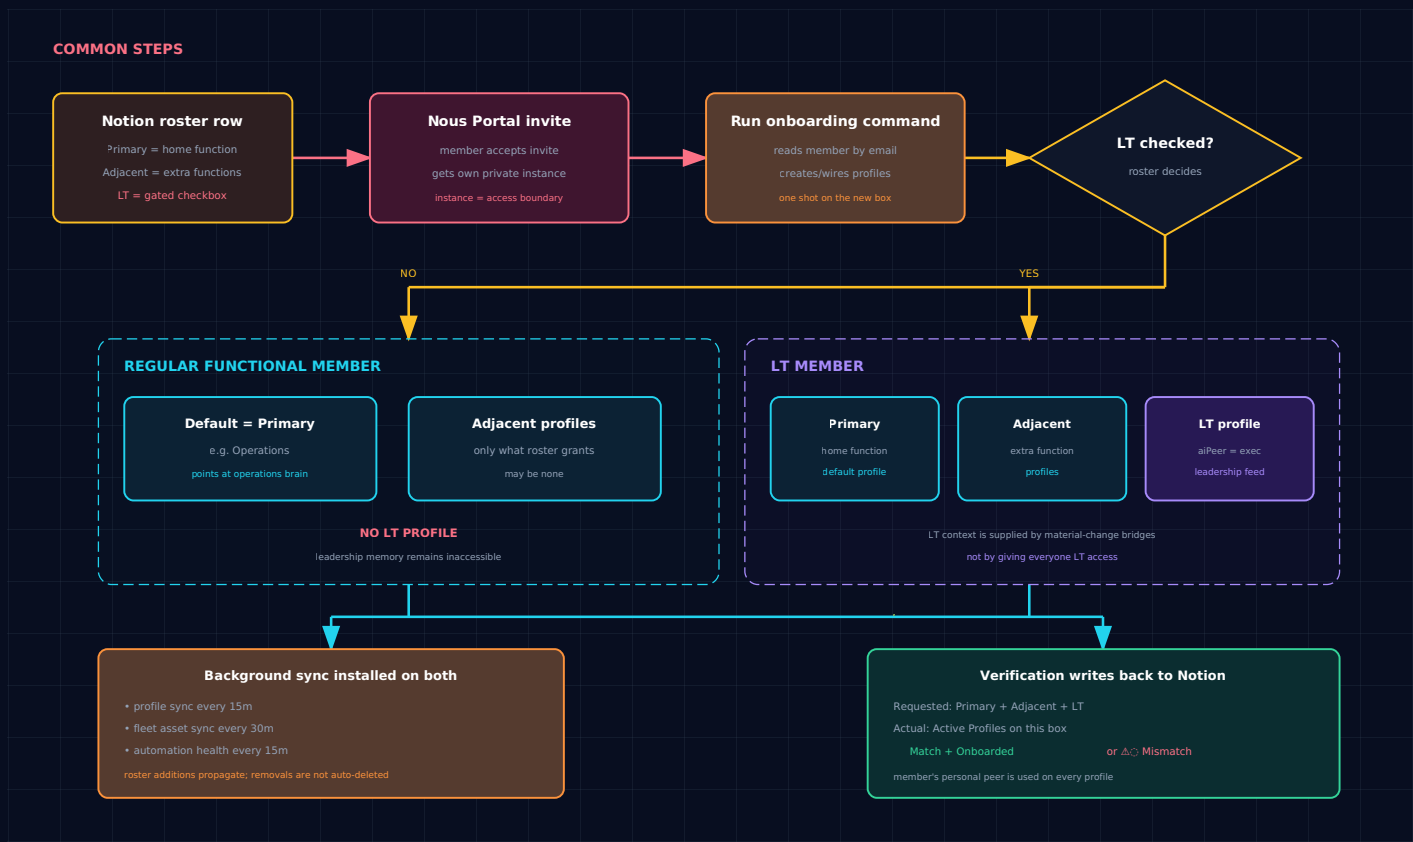


Primary is the home function. It becomes the box's default profile; it is no longer hardcoded to LT.

Adjacent means extra functional access. Newly added Adjacent profiles appear through the 15-minute profile sync.

LT is an explicit gate. Only checked roster rows receive the LT profile and leadership memory.

● Diagram 3 – Skill, script, job, and tool sharing

Box-local work is not shared automatically. The private pcg-agents repo is the distribution channel; Notion is the catalog and curation layer.

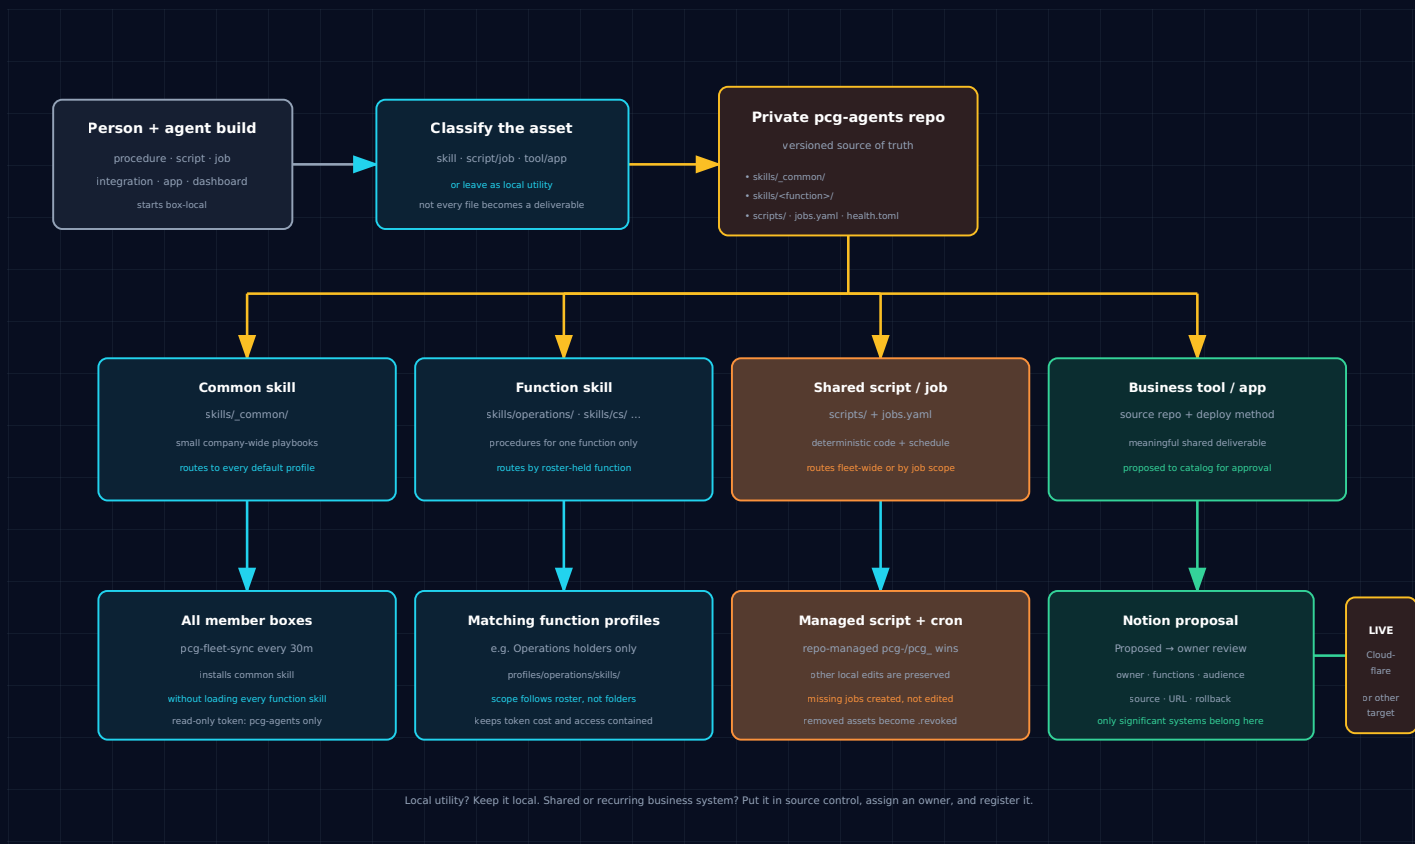


Skills teach the agent how to work. They are loaded only into the profiles that need them, so Operations procedures do not clutter CS.

Scripts do deterministic work. Shared scripts self-update from GitHub; managed jobs can be declared in jobs.yaml and run without model cost.

Tools are business deliverables. Dashboards, apps, integrations, and recurring automations get an owner, team relationship, source, status, health, and rollback method.

● Diagram 4 – Observe, evaluate, record, respond, and verify

Each managed box checks its own deployments. The result is evaluated first, then recorded at the right scope. Only warnings or failures enter a governed response path; a later green check closes the incident.

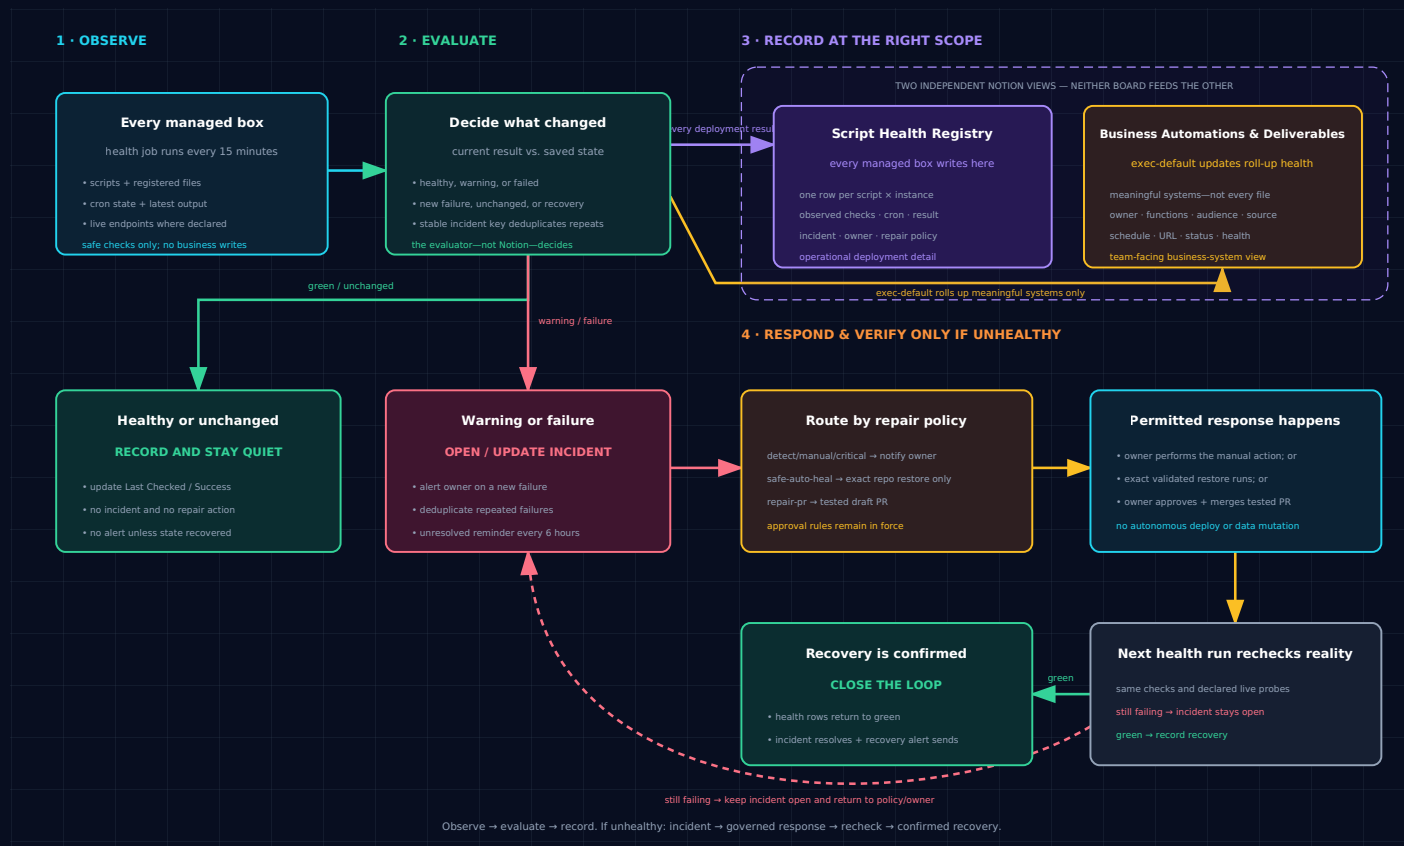

One monitor, two board scopes. Every box writes instance-specific script health. Only exec-default updates the global health of significant business deliverables.

The boards do not feed each other. Together they answer what exists, who owns it, which people/functions use it, where it runs, and whether each deployment is working.

Repair remains governed. Detection is automatic. Safe restoration is deliberately narrow; PRs require owner approval; critical and manual systems never change themselves.

● How the four views fit together

- **Onboarding establishes access and routing.** The roster decides the member's home function, adjacent functions, and whether LT is permitted. The member's box is then wired to the corresponding shared brains.
- **Data flow begins after onboarding.** Function work teaches the function brain. Bridges summarize material changes into the LT feed. Built source and deployed tools follow their own GitHub/Cloudflare lifecycle.
- **Asset sharing turns one person's build into team capability.** Skills route to the profiles that need them, scripts route to managed boxes, and meaningful tools are cataloged and assigned to an owner.
- **Monitoring closes the loop.** The two Notion boards show what exists and whether it is healthy; recurring checks detect drift, notify owners, and verify recovery.

● What counts as a meaningful deliverable

A local helper file does not need to become company infrastructure. A build belongs on the Business Automations & Deliverables board when it is recurring, operational, shared with a function/company/LT audience, or materially affects customers, revenue, payments, inventory, compliance, finance, or vendors. New meaningful builds enter as **Proposed**; a function owner approves, rejects, or requests changes.

● Current operating truth

- **Shared by nature:** Honcho memory, Notion pages/boards, GitHub repositories, and Cloudflare URLs.
- **Box-local until distributed:** skills, scripts, cron jobs, profiles, tokens, and standing-context files.
- **Additions are automated; destructive removal is guarded.** New Adjacent profiles are created automatically. Removed repo assets are quarantined as `.revoked`. Removing a roster permission does not silently delete a local profile.
- **"Healthy" is evidence-based.** The monitor checks syntax, declared dependencies, cron state/output, live endpoints, and missing previously registered scripts. It does not execute dangerous external writes merely to prove health.

● Appendix A – Definitions

- **Hermes** – the agent platform team members work in.
- **Instance / box** – one member’s isolated Hermes server and access boundary.
- **Profile** – a function-specific agent identity on a box, with its own context, tools, and skill index.
- **Primary** – the roster-selected home function; it becomes the member box’s default profile.
- **Adjacent** – extra functional profiles a member is allowed to switch into.
- **LT checkbox** – the explicit roster gate for receiving the LT profile and leadership context.
- **Honcho** – the persistent shared-memory layer.
- **AI peer** – one function’s shared brain in Honcho.
- **Human peer** – one person’s identity in Honcho, used across their permitted profiles.
- **Standing context** – authored function knowledge loaded from Notion.
- **Learned memory** – durable knowledge learned from real conversations.
- **Bridge** – a one-way summarization route between function brains or into LT.
- **Skill** – a procedural playbook that teaches a profile how to perform a recurring type of work.
- **Script** – deterministic code used by an agent or scheduled job.
- **Tool / app** – a business-facing deliverable such as a dashboard, integration, or deployed workflow.
- **pcg-fleet-sync** – the zero-token 30-minute puller that distributes scoped skills, scripts, and managed job definitions from GitHub.
- **Repo-managed asset** – a `pcg-/pcg_-`prefixed item where the repository wins conflicts.
- **Quarantine / .revoked** – a safe rename used when a previously distributed asset disappears from the repo; it is not hard-deleted.
- **Business Automations & Deliverables** – the team-facing Notion catalog of significant systems and builds.
- **Script Health Registry** – the operational Notion board with one row per script deployment/instance.
- **Repair policy** – the declared rule for a failure: detect-only, safe-auto-heal, repair PR, critical approval, or manual.
- **Incident key** – a stable fingerprint that deduplicates repeated reports of the same failure.
- **Cloudflare Workers** – the live deployment layer for web tools such as the open-box returns dashboard.
- **Vendor lock-in** – dependency on one supplier that makes leaving expensive; this architecture keeps code, memory, control data, and deploys separable.

● Appendix B — FAQ

Does every employee get an LT profile?

No. LT is explicitly gated by the roster checkbox. Regular functional members receive Primary plus any Adjacent profiles only.

Does everyone in Operations share Sina's personal memory?

No. Everyone assigned to Operations shares the Operations AI peer—the function brain—but each person is represented by their own human peer.

Are all chats copied into LT?

No. Daily bridges ask each function brain for material changes and decisions leadership should know. Non-material updates and raw chats are not copied wholesale.

How does a skill reach the team?

It is committed to either `skills/_common/` or a function folder in the private repo. The 30-minute fleet sync places it only into eligible profiles.

How does a script reach the team?

Shared scripts live under `scripts/` in the private repo and are pulled to managed boxes. A missing `pcg_` job declared in `jobs.yaml` is created automatically.

Does the repository overwrite a person's local work?

Only repo-managed `pcg_`/`pcg_` assets are authoritative. Other local changes are preserved and reported as conflicts.

Where can I see everything the team has built?

The Business Automations & Deliverables board shows meaningful shared systems, their owners, functions, audience, source, schedule, URL, status, and health. One-off utilities are intentionally excluded.

Where can I see whether the underlying code is working?

The Script Health Registry shows each script deployment/instance, checks performed, cron relationships, latest success or failure, incident state, and repair policy.

What happens when something breaks?

The 15-minute health job updates the boards and alerts on failure or recovery. Unresolved failures remind every six hours. The repair policy determines whether the owner handles it manually or a tested repair PR may be opened for approval.

Can the repair system change critical infrastructure by itself?

No. Critical-approval and manual policies prevent autonomous changes. Even repair-PR items require the owner to approve and merge the fix.

How do we undo a bad change?

The source and rollback method are recorded. Most shared assets roll back by reverting the Git commit; fleet sync or redeployment restores the previous version.

What if onboarding shows Mismatch?

Compare Requested versus Active Profiles in the roster. Do not repeatedly rerun onboarding; send the mismatch detail to the system owner so the failed step can be diagnosed.