디자인

권기웅

1. CSS

1.1 쌩 CSS

1.1.1 일단 정리 좀

index.js 에서

```
import React from 'react';
import ReactDOM from 'react-dom/client';
// import './index.css';
import App from './App';
import reportWebVitals from './reportWebVitals';

const root = ReactDOM.createRoot(document.getElementById('root'));
root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);

// If you want to start measuring performance in your app, pass a function
// to log results (for example: reportWebVitals(console.log))
// or send to an analytics endpoint. Learn more: https://bit.ly/CRA-vitals
reportWebVitals();
```

App.js 에서

```
import logo from './logo.svg';
// import './App.css';

function App() {
  return (
    <div className="App">
      <header className="App-header">
        <img src={logo} className="App-logo" alt="logo" />
        <p>
          Edit <code>src/App.js</code> and save to reload.
        </p>
        <a
          className="App-link"
          href="https://reactjs.org"
          target="_blank"
          rel="noopener noreferrer"
        >
          Learn React
        </a>
      </header>
    </div>
  );
}

export default App;
```

index.css, App.css 삭제

1.2 쌩 css

(폰트파일 넣고) diva.css

```
@font-face {
  font-family: "sam3";
  src: url("Sam3KRFont.ttf");
}
.d {
  font-family: "sam3";
}
```

diva.js

```
import React from "react";
import "./diva.css";

const DivA = () => {
  return <div className="d">그 아이디로 그 URL을</div>;
};

export default DivA;
```

App.js

```
import DivA from "./diva";

function App() {
  return <DivA />;
}

export default App;
```

1.3 CSS Module

1.3.1 XXX.module.css

divb.module.css

```
.d {
  color: crimson;
}
:global .d {
  font-size: 15pt;
}
```

divb.js

```
import React from "react";
import bb from "./divb.module.css";

const DivB = () => {
  return (
    <>
      <div className={bb.d}>프라이버시는 존중할게 형</div>
      <div className="d">어 설렌다</div>
    </>
  );
};

export default DivB;
```

App.js

```
import DivA from "./diva";
import DivB from "./divb";

function App() {
  return (
    <>
      <DivA />
      <DivB />
    </>
  );
}

export default App;
```

1.3.2 여러 개 적용

divb.module.css 수정

```
.d {
  color: crimson;
}
.d2 {
  font-size: 18pt;
}
:global .d {
  font-size: 15pt;
}
```

divb.js 수정(‘말고 `)

```
import React from "react";
import bb from "./divb.module.css";

const DivB = () => {
  return (
    <>
      <div className={bb.d}>프라이버시는 존중할게 형</div>
      <div className="d">어 설렌다</div>
      <div className={`${bb.d} ${bb.d2}`}>바지 좀 털고올게</div>
    </>
  );
};

export default DivB;
```

2. 라이브러리

2.1 classnames

2.1.1 라이브러리 추가

```
yarn add classnames
```

```
Windows PowerShell
D:₩Kwon₩wsReact₩r08_design>yarn add classnames
yarn add v1.22.19
[1/4] Resolving packages...
[2/4] Fetching packages...
[3/4] Linking dependencies...
warning " > @testing-library/user-event@13.5.0" has unmet peer dependency "@testing-library/dom@>=7.21.4".
warning "react-scripts > eslint-config-react-app > eslint-plugin-flowtype@8.0.3" has unmet peer dependency "@ba
bel/plugin-syntax-flow@^7.14.5".
warning "react-scripts > eslint-config-react-app > eslint-plugin-flowtype@8.0.3" has unmet peer dependency "@ba
bel/plugin-transform-react-jsx@^7.14.9".
warning "react-scripts > react-dev-utils > fork-ts-checker-webpack-plugin@6.5.2" has unmet peer dependency "typ
escript@>= 2.7".
warning "react-scripts > eslint-config-react-app > @typescript-eslint/eslint-plugin > tsutils@3.21.0" has unmet
 peer dependency "typescript@>=2.8.0 || >= 3.2.0-dev || >= 3.3.0-dev || >= 3.4.0-dev || >= 3.5.0-dev || >= 3.6.
0-dev || >= 3.6.0-beta || >= 3.7.0-dev || >= 3.7.0-beta".
[4/4] Building fresh packages...

success Saved lockfile.
success Saved 1 new dependency.
info Direct dependencies
 └─classnames@2.3.2
info All dependencies
 └─classnames@2.3.2
Done in 5.53s.

D:₩Kwon₩wsReact₩r08_design>yarn start
```

2.1.2 기본 활용

divc.css

```
.a {
  text-shadow: 1px 1px 1px greenyellow;
}
.b {
  font-weight: 900;
}
.c {
  font-size: 30pt;
}
```

divc.js

```
import classNames from "classnames";
import React from "react";
import "./divc.css";

const DivC = () => {
  return (
    <>
      <div className={classNames("c")}>화장실</div>
      <div className={classNames("a", "b")}>가서</div>
      <div className={classNames("a", { b: false })}>쉬고</div>
      <div className={classNames([{ a: true }, "b", "c"])}>올게</div>
    </>
  );
};

export default DivC;
```

App.js

```
import DivA from "./diva";
import DivB from "./divb";
import DivC from "./divc";

function App() {
  return (
    <>
      <DivA />
      <DivB />
      <DivC />
    </>
  );
}

export default App;
```

2.1.3 CSS Module 줄여쓰기

divd.module.css

```
.aa {
  color: steelblue;
}
.bb {
  background-color: powderblue;
}
```

divd.js

```
import classNames from "classnames/bind"; // 손으로 bind추가
import React from "react";
import dddd from "./divd.module.css";

const DivD = () => {
  const dd = classNames.bind(dddd);

  return (
    <>
      <div className={dd("aa")}>하이</div>
      <div className={dd("aa", "bb")}>와카리마시타</div>
    </>
  );
};

export default DivD;
```

App.js

```
import DivA from "./diva";
import DivB from "./divb";
import DivC from "./divc";
import DivD from "./divd";

function App() {
  return (
    <>
      <DivA />
      <DivB />
      <DivC />
      <DivD />
    </>
  );
}

export default App;
```

2.2 styled-components

2.2.1 라이브러리 추가

yarn add styled-components

```
Windows PowerShell
D:₩K₩on₩ws₩ReactWr08_design>yarn add styled-components
yarn add v1.22.19
[1/4] Resolving packages...
[2/4] Fetching packages...
[3/4] Linking dependencies...
warning " > @testing-library/user-event@13.5.0" has unmet peer dependency "@testing-library/dom@>=7.21.4".
warning "react-scripts > eslint-config-react-app > eslint-plugin-flowtype@8.0.3" has unmet peer dependency "@babel/plugin-syntax-flo
w@^7.14.5".
warning "react-scripts > eslint-config-react-app > eslint-plugin-flowtype@8.0.3" has unmet peer dependency "@babel/plugin-transform-
react-jsx@^7.14.9".
warning "react-scripts > react-dev-utils > fork-ts-checker-webpack-plugin@6.5.2" has unmet peer dependency "typescript@>= 2.7".
warning "react-scripts > eslint-config-react-app > @typescript-eslint/eslint-plugin > tsutils@3.21.0" has unmet peer dependency "typ
escript@>=2.8.0 || >= 3.2.0-dev || >= 3.3.0-dev || >= 3.4.0-dev || >= 3.5.0-dev || >= 3.6.0-dev || >= 3.6.0-beta || >= 3.7.0-dev ||
>= 3.7.0-beta".
warning " > styled-components@5.3.6" has unmet peer dependency "react-is@>= 16.8.0".
[4/4] Building fresh packages...
success Saved lockfile.
success Saved 12 new dependencies.
info Direct dependencies
└─styled-components@5.3.6
info All dependencies
├─@emotion/is-prop-valid@1.2.0
├─@emotion/memoize@0.8.0
├─@emotion/stylis@0.8.5
├─@emotion/unitless@0.7.5
├─babel-plugin-styled-components@2.0.7
├─babel-plugin-syntax-jsx@6.18.0
├─camelize@1.0.1
├─css-color-keywords@1.0.0
├─css-to-react-native@3.0.0
├─hoist-non-react-statics@3.3.2
├─shallowequal@1.1.0
└─styled-components@5.3.6
Done in 8.19s.

D:₩K₩on₩ws₩ReactWr08_design>yarn start
```

2.2.2 VS Code Add-On

vscode-styled-components

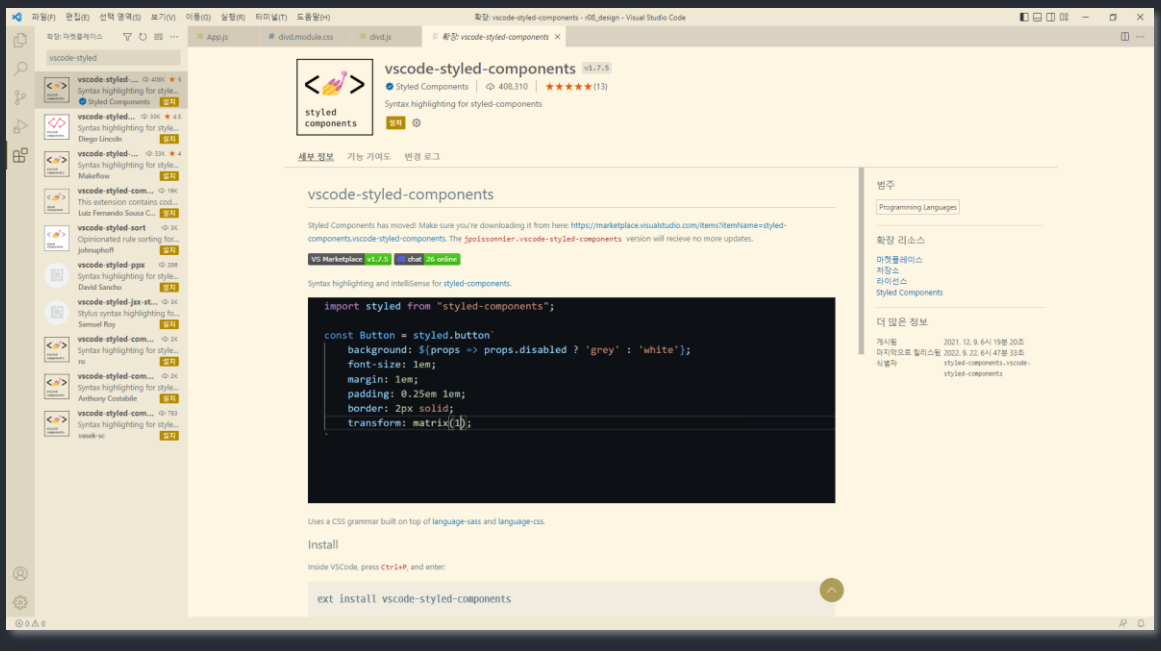

2.2.3 기본 활용

dive.js

```
import React from "react";
import styled from "styled-components";

// styled.태그명
const DivEE1 = styled.div`
  background-color: #ef6c00;
  color: white;
  font-size: 30pt;
`;

const DivE = () => {
  return <DivEE1>부럽다, 야근해라 오늘</DivEE1>;
};

export default DivE;
```

App.js

```
import DivA from "./diva";
import DivB from "./divb";
import DivC from "./divc";
import DivD from "./divd";
import DivE from "./dive";

function App() {
  return (
    <>
      <DivA />
      <DivB />
      <DivC />
      <DivD />
      <DivE />
    </>
  );
}

export default App;
```

2.2.4 상태 선택자

dive.js

```
import React from "react";
import styled from "styled-components";

const DivEE1 = styled.div`
  background-color: #ef6c00;
  color: white;
  font-size: 30pt;
`;

const DivEE2 = styled.div`
  background-color: #ff9800;
  color: white;
  font-size: 20pt;
  cursor: pointer;

  // &로 자기 자신에 접근 가능
  &:hover {
    background-color: white;
    color: #ff9800;
  }
`;

const DivE = () => {
  return (
    <>
      <DivEE1>부럽다, 야근해라 오늘</DivEE1>
      <DivEE2>지금 콜백함수 쪽은 마스터했다</DivEE2>
    </>
  );
};

export default DivE;
```

2.2.5 props

dive.js

```
import React from "react";
import styled from "styled-components";

const DivEE1 = styled.div`…
`;

const DivEE2 = styled.div`…
`;

const DivEE3 = styled.div`
  background-color: ${(p) => p.bg};
  font-size: 15pt;
`;

const DivE = () => {
  return (
    <>
      <DivEE1>부럽다, 야근해라 오늘</DivEE1>
      <DivEE2>지금 콜백함수 쪽은 마스터했다</DivEE2>
      <DivEE3 bg="#ffcc80">어때 내 행동이</DivEE3>
    </>
  );
};

export default DivE;
```

2.2.6 특정 속성에 props 조건

dive.js

```
import React from "react";
import styled from "styled-components";

const DivEE1 = styled.div`…
`;

const DivEE2 = styled.div`…
`;

const DivEE3 = styled.div`…
`;

const DivEE4 = styled.div`
  background-color: #fff3e0;
  font-size: ${(p) => {
    if (p.fs === "big") {
      return "30pt";
    } else if (p.fs === "small") {
      return "10pt";
    }
    return "20pt";
  }};
`;

const DivE = () => {
  return (
    <>
      <DivEE1>부럽다, 야근해라 오늘</DivEE1>
      <DivEE2>지금 콜백함수 쪽은 마스터했다</DivEE2>
      <DivEE3 bg="#ffcc80">어때 내 행동이</DivEE3>
      <DivEE4 fs="big">하나의 버그를 잡으면 두 개의 버그가 나와</DivEE4>
    </>
  );
};

export default DivE;
```

2.2.7 아예 다 props 조건

```
import React from "react";
import styled, { css } from "styled-components";

const DivEE1 = styled.div` …
`;
const DivEE2 = styled.div` …
`;
const DivEE3 = styled.div` …
`;
const DivEE4 = styled.div` …
`;

const DivEE5 = styled.div`
  ${(p) => {
    if (p.theme === "wr") {
      return css`
        background-color: ghostwhite;   color: red;
      `;
    } else {
      return css`
        background-color: red;  color: ghostwhite;
      `;
    }
  }}
`;

const DivE = () => {
  return (
    <>
      <DivEE1>부럽다, 야근해라 오늘</DivEE1>
      <DivEE2>지금 콜백함수 쪽은 마스터했다</DivEE2>
      <DivEE3 bg="#ffcc80">어때 내 행동이</DivEE3>
      <DivEE4 fs="big">하나의 버그를 잡으면 두 개의 버그가 나와</DivEE4>
      <DivEE5 theme="wr">진정해 친구야</DivEE5>
    </>
  );
};
export default DivE;
```

3. Sass

3.1 환경설정

3.1.1 VS Code Add-On

Beautify css/sass/scss/less

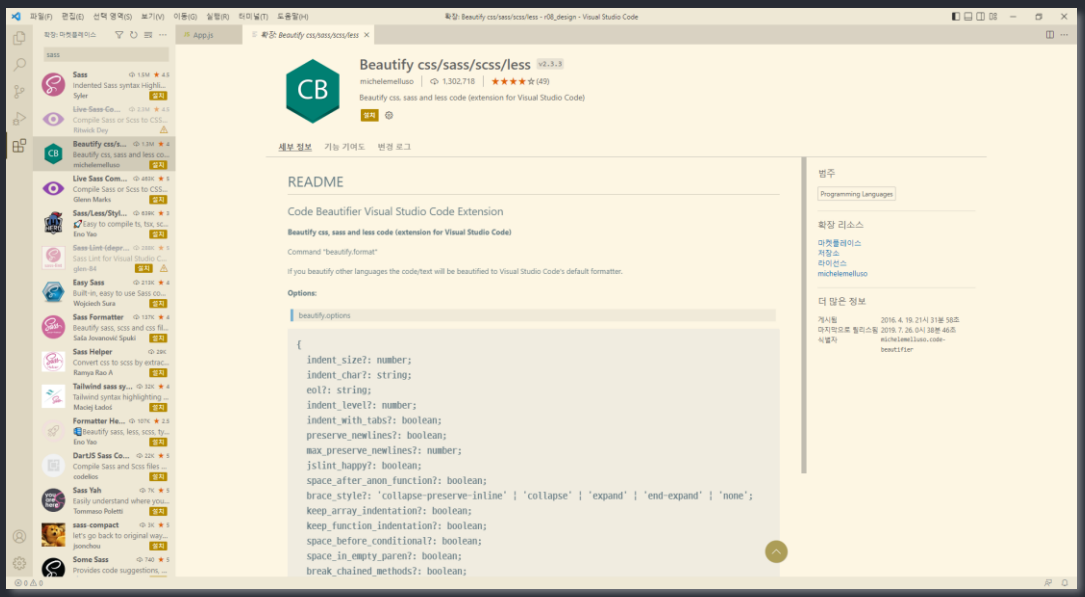

3.1.2 Sass(Syntactically Awesome Style Sheet) 라이브러리 추가

yarn add sass

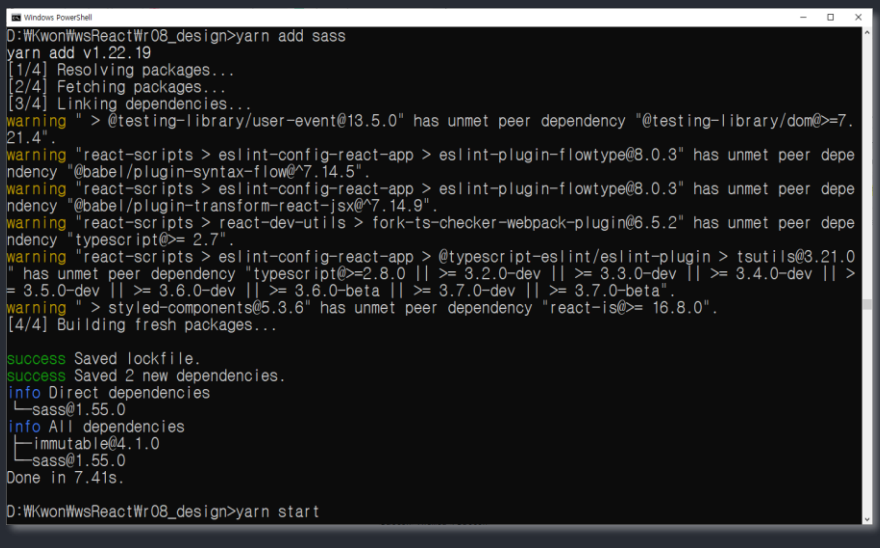

```
D:WKwonWwsReactWr08_design>yarn add sass
yarn add v1.22.19
[1/4] Resolving packages...
[2/4] Fetching packages...
[3/4] Linking dependencies...
warning " > @testing-library/user-event@13.5.0" has unmet peer dependency "@testing-library/dom@>=7.
21.4".
warning "react-scripts > eslint-config-react-app > eslint-plugin-flowtype@8.0.3" has unmet peer depe
ndency "@babel/plugin-syntax-flow@^7.14.5".
warning "react-scripts > eslint-config-react-app > eslint-plugin-flowtype@8.0.3" has unmet peer depe
ndency "@babel/plugin-transform-react-jsx@^7.14.9".
warning "react-scripts > react-dev-utils > fork-ts-checker-webpack-plugin@6.5.2" has unmet peer depe
ndency "typescript@>= 2.7".
warning "react-scripts > eslint-config-react-app > @typescript-eslint/eslint-plugin > tsutils@3.21.0
" has unmet peer dependency "typescript@>=2.8.0 || >= 3.2.0-dev || >= 3.3.0-dev || >= 3.4.0-dev || >
= 3.5.0-dev || >= 3.6.0-dev || >= 3.6.0-beta || >= 3.7.0-dev || >= 3.7.0-beta".
warning " > styled-components@5.3.6" has unmet peer dependency "react-is@>= 16.8.0".
[4/4] Building fresh packages...

success Saved lockfile.
success Saved 2 new dependencies.
info Direct dependencies
└─sass@1.55.0
info All dependencies
├─immutable@4.1.0
└─sass@1.55.0
Done in 7.41s.

D:WKwonWwsReactWr08_design>yarn start
```

3.2 기본 활용

3.2.1 변수

sdiva.scss

```scss
$shadow: 2px 2px 2px #1a237e;
$size:100px;

.a {
    text-shadow: $shadow;
    box-shadow: $shadow;
    width: $size;
    height: $size;
    font-size: 20pt;
}
```

sdiva.js

```js
import React from "react";
import "./sdiva.scss";

const SDivA = () => {
  return <div className="a">몽둥이</div>;
};

export default SDivA;
```

App.js

```js
import SDivA from "./sdiva";

function App() {
  return <SDivA />;
}

export default App;
```

3.2.2 mixin

sdivb.scss

```scss
@mixin sdivbb($i) {
    $s: 100px * $i;
    $c: #33691e;
    width: $s;
    height: $s;
    box-shadow: 2px 2px 2px $c;
    color: $c;
}

.b {
    font-size: 20pt;
    @include sdivbb(1);
}

.c {
    font-size: 40pt;
    @include sdivbb(2);
}
```

sdivb.js

```js
import React from "react";
import "./sdivb.scss";

const SdivB = () => {
  return (
    <>
      <div className="b">방망이</div>
      <div className="c">회초리</div>
    </>
  );
};

export default SdivB;
```

App.js

```js
import SDivA from "./sdiva";
import SdivB from "./sdivb";

function App() {
  return (
    <>
      <SDivA />
      <SdivB />
    </>
  );
}

export default App;
```

3.2.3 마트료시카

sdivc.scss

```scss
$s:100px;

.sdivc {
    div {
        background-color: #ff6f00;
        width: $s;
        height: $s;
        color: white;
        margin: 10px;
    }
}
```

sdivc.js

```js
import React from "react";
import "./sdivc.scss";

const SDivC = () => {
  return (
    <div className="sdivc">
      <div>막대기</div>
      <div>매</div>
    </div>
  );
};

export default SDivC;
```

App.js

```js
import SDivA from "./sdiva";
import SdivB from "./sdivb";
import SDivC from "./sdivc";

function App() {
  return (
    <>
      <SDivA />
      <SdivB />
      <SDivC />
    </>
  );
}

export default App;
```

3.2.4 분리

sdivFont.scss

```scss
@font-face {
    font-family: "sam";
    src: url("Sam3KRFont.ttf");
}

@mixin samFont {
    font-family: "sam";
}
```

sdivc.scss 수정

```scss
@import "./sdivFont.scss";

$s:100px;

.sdivc {
    div {
        background-color: #ff6f00;
        width: $s;
        height: $s;
        color: white;
        margin: 10px;
    }
}

div {
    @include samFont();
}
```

3.3 CSS Module

sdivd.module.scss

```scss
.a {
    $c: pointer;
    cursor: $c;
}
```

sdivd.js

```js
import React from "react";
import cc from "./sdivd.module.scss";

const SDivD = () => {
  return <div className={cc.a}>무기</div>;
};

export default SDivD;
```

App.js

```js
import SDivA from "./sdiva";
import SdivB from "./sdivb";
import SDivC from "./sdivc";
import SDivD from "./sdivd";

function App() {
  return (
    <>
      <SDivA />
      <SdivB />
      <SDivC />
      <SDivD />
    </>
  );
}

export default App;
```