다른 페이지로

react-navigation

권기웅

1. 라이브러리 추가

1.1 라이브러리 추가

1.1.1 라이브러리 추가

```
npm install @react-navigation/native @react-navigation/native-stack

npm install react-native-screens react-native-safe-area-context
```

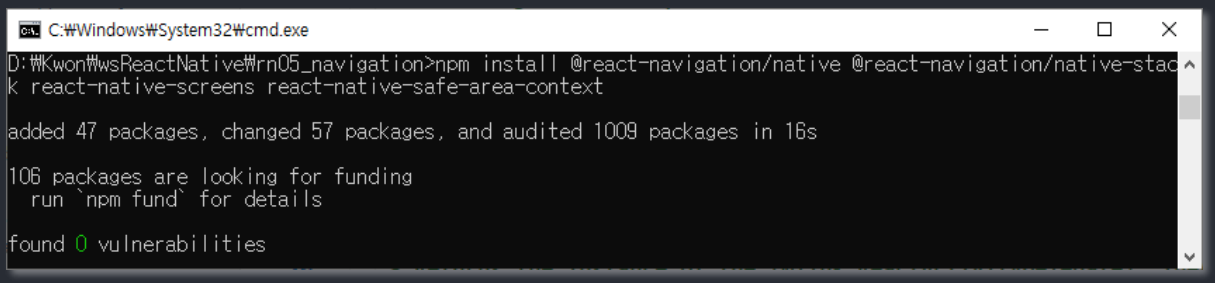

1.1.2 import 추가

android/app/src/main/패키지/MainActivity.java 에

import android.os.Bundle; 추가

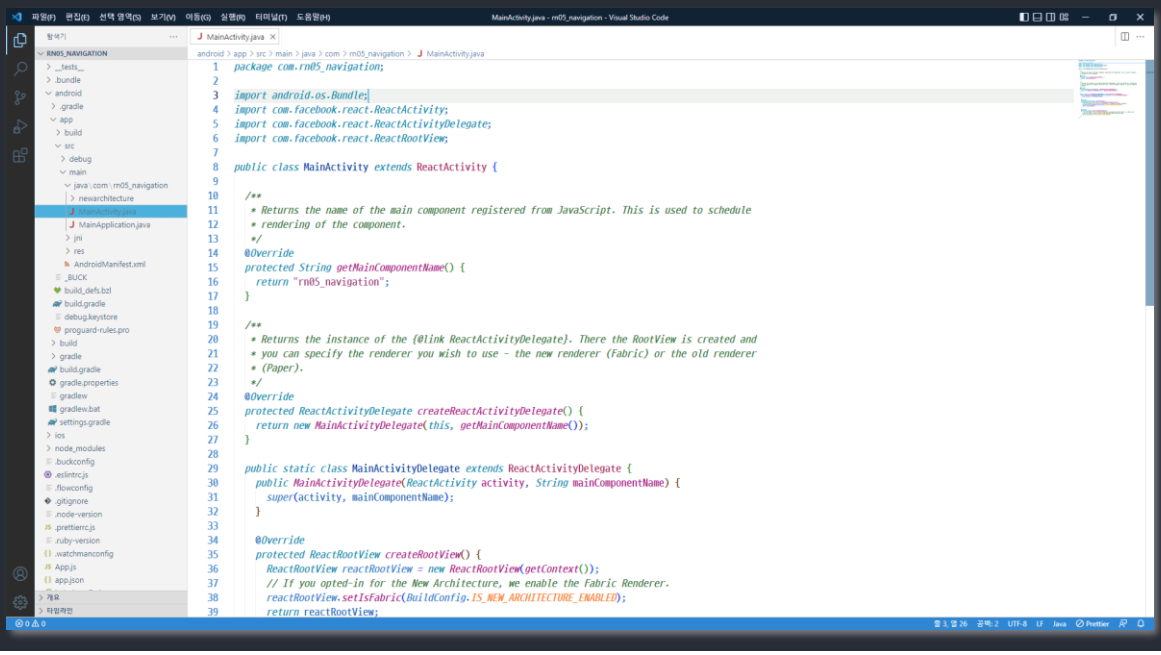

2. 기본 페이지 전환(stack)

2.1 구성

2.1.1 페이지들

first.js

```
import React from 'react';
import {Image, Text, View} from 'react-native';

const First = () => {
  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <Image
        style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
        source={require('./img/first.jpg')}
      />
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        The Soldesk께서 확인 QR찍으라 하셨는데
      </Text>
    </View>
  );
};

export default First;
```

second.js

```
import React from 'react';
import {Image, Text, View} from 'react-native';

const Second = () => {
  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <Image
        style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
        source={require('./img/second.jpg')}
      />
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        감히 이러고 있으니
      </Text>
    </View>
  );
};

export default Second;
```

third.js

```
import React from 'react';
import {Image, View} from 'react-native';

const Third = () => {
  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <Image
        style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
        source={require('./img/third.jpg')}
      />
    </View>
  );
};

export default Third;
```

2.1.2 App.js

App.js

```
import {NavigationContainer} from '@react-navigation/native';
import {createNativeStackNavigator} from '@react-navigation/native-stack';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Stack = createNativeStackNavigator();

  return (
    <NavigationContainer>
      <Stack.Navigator>
        <Stack.Screen name="f" component={First} />
        <Stack.Screen name="s" component={Second} />
        <Stack.Screen name="t" component={Third} />
      </Stack.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

2.2 이동

2.2.1 props 활용

first.js

```
import React from 'react';
import {Image, Text, TouchableOpacity, View} from 'react-native';

const First = ({navigation}) => {
  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <TouchableOpacity
        onPress={() => {
          navigation.navigate('s');
        }}>
        <Image
          style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
          source={require('./img/first.jpg')}
        />
      </TouchableOpacity>
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        The Soldesk께서 확인 QR찍으라 하셨는데
      </Text>
    </View>
  );
};

export default First;
```

2.2.2 Hook 활용

second.js

```
import {useNavigation} from '@react-navigation/native';
import React from 'react';
import {Image, Text, TouchableOpacity, View} from 'react-native';

const Second = () => {
  const n = useNavigation();

  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <TouchableOpacity
        onPress={() => {
          n.navigate('t');
        }}>
        <Image
          style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
          source={require('./img/second.jpg')}
        />
      </TouchableOpacity>
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        감히 이러고 있으니
      </Text>
    </View>
  );
};

export default Second;
```

third.js

```
import {useNavigation} from '@react-navigation/native';
import React from 'react';
import {Image, TouchableOpacity, View} from 'react-native';

const Third = () => {
  const n = useNavigation();

  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <TouchableOpacity
        onPress={() => {
          n.goBack();
        }}>
        <Image
          style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
          source={require('./img/third.jpg')}
        />
      </TouchableOpacity>
    </View>
  );
};

export default Third;
```

2.3 값 전달

2.3.1 보내기

first.js

```
import React from 'react';
import {Image, Text, TouchableOpacity, View} from 'react-native';

const First = ({navigation}) => {
  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <TouchableOpacity
        onPress={() => {
          navigation.navigate('s', {who: '장', cmt: '내가 일등'});
        }}>
        <Image
          style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
          source={require('./img/first.jpg')}
        />
      </TouchableOpacity>
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        조The Soldesk께서 확인QR찍으라 하셨는데
      </Text>
    </View>
  );
};

export default First;
```

2.3.2 보내고 받기(props 활용)

second.js

```
import {useNavigation} from '@react-navigation/native';
import React from 'react';
import {Image, Text, TouchableOpacity, View} from 'react-native';

const Second = ({route}) => {
  const n = useNavigation();

  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <TouchableOpacity
        onPress={() => {
          n.navigate('t', {who: '조', cmt: '몽둥이가 어디있더라'});
        }}>
        <Image
          style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
          source={require('./img/second.jpg')}
        />
      </TouchableOpacity>
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        감히 이러고 있으니
      </Text>
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        {route.params.who} : {route.params.cmt}
      </Text>
    </View>
  );
};

export default Second;
```

2.3.3 받기(Hooks 활용)

third.js

```
import {useNavigation, useRoute} from '@react-navigation/native';
import React from 'react';
import {Image, Text, TouchableOpacity, View} from 'react-native';

const Third = () => {
  const n = useNavigation();
  const r = useRoute();

  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <TouchableOpacity
        onPress={() => {
          n.goBack();
        }}>
        <Image
          style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
          source={require('./img/third.jpg')}
        />
      </TouchableOpacity>
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        {r.params.who} : {r.params.cmt}
      </Text>
    </View>
  );
};

export default Third;
```

2.4 header bar

2.4.1 제목

App.js

```
import {NavigationContainer} from '@react-navigation/native';
import {createNativeStackNavigator} from '@react-navigation/native-stack';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Stack = createNativeStackNavigator();

  return (
    <NavigationContainer>
      <Stack.Navigator>
        <Stack.Screen name="f" component={First} options={{title: '2시'}} />
        <Stack.Screen name="s" component={Second} />
        <Stack.Screen name="t" component={Third} />
      </Stack.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

2.4.2 제목 보내고 받기

first.js

```
import React from 'react';
import {Image, Text, TouchableOpacity, View} from 'react-native';

const First = ({navigation}) => {
  return (
    <View style={{flex: 1, justifyContent: 'center', alignItems: 'center'}}>
      <TouchableOpacity
        onPress={() => {
          navigation.navigate('s', {
            who: '장',
            cmt: '내가 일등',
            jo: '조 : 확인 QR 부탁드립니다!',
          });
        }}>
        <Image
          style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
          source={require('./img/first.jpg')}
        />
      </TouchableOpacity>
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        조The Soldesk께서 확인QR찍으라 하셨는데
      </Text>
    </View>
  );
};

export default First;
```

App.js

```
import {NavigationContainer} from '@react-navigation/native';
import {createNativeStackNavigator} from '@react-navigation/native-stack';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Stack = createNativeStackNavigator();

  return (
    <NavigationContainer>
      <Stack.Navigator>
        <Stack.Screen name="f" component={First} options={{title: '2시'}} />
        <Stack.Screen
          name="s"
          component={Second}
          options={({route}) => ({
            title: route.params.jo,
          })}
        />
        <Stack.Screen name="t" component={Third} />
      </Stack.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

2.4.3 디자인

App.js

```
import {NavigationContainer} from '@react-navigation/native';
import {createNativeStackNavigator} from '@react-navigation/native-stack';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Stack = createNativeStackNavigator();

  return (
    <NavigationContainer>
      <Stack.Navigator>
        <Stack.Screen name="f" component={First} options={{title: '2시'}} />
        <Stack.Screen name="s" component={Second} options={({route}) => ({title: route.params.jo})} />
        <Stack.Screen
          name="t"
          component={Third}
          options={{
            title: '엎드려',
            headerStyle: {
              backgroundColor: '#D32F2F',
            },
            headerTintColor: '#FFFFFF77',
            headerTitleStyle: {
              fontWeight: '900',
              fontSize: 30,
            },
          }}
        />
      </Stack.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

2.4.4 디자인 통일

App.js

```
import {NavigationContainer} from '@react-navigation/native';
import {createNativeStackNavigator} from '@react-navigation/native-stack';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Stack = createNativeStackNavigator();

  return (
    <NavigationContainer>
      <Stack.Navigator
        screenOptions={{
          title: '엎드려',
          headerStyle: {
            backgroundColor: '#D32F2F',
          },
          headerTintColor: '#FFFFFF',
          headerTitleStyle: {
            fontWeight: '900',
          },
        }}>
        <Stack.Screen name="f" component={First} options={{title: '2시'}} />
        <Stack.Screen
          name="s"
          component={Second}
          options={({route}) => ({title: route.params.jo})}
        />
        <Stack.Screen name="t" component={Third} />
      </Stack.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

2.4.5 커스터마이징

App.js

```
import {NavigationContainer} from '@react-navigation/native';
import {createNativeStackNavigator} from '@react-navigation/native-stack';
import * as React from 'react';
import {Image} from 'react-native';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Stack = createNativeStackNavigator();

  return (
    <NavigationContainer>
      <Stack.Navigator
        screenOptions={{…
        }}>
        <Stack.Screen name="f" component={First} options={{title: '2시'}} />
        <Stack.Screen name="s" component={Second} options={({route}) => ({title: route.params.jo})} />
        <Stack.Screen
          name="t"
          component={Third}
          options={{
            headerTitle: () => (
              <Image
                style={{width: 50, height: 50}}
                source={require('./img/jjh.png')}
              />
            ),
          }}
        />
      </Stack.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

2.4.6 없애려면

App.js

```
import {NavigationContainer} from '@react-navigation/native';
import {createNativeStackNavigator} from '@react-navigation/native-stack';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Stack = createNativeStackNavigator();

  return (
    <NavigationContainer>
      <Stack.Navigator
        screenOptions={{
          headerShown: false,
        }}>
        <Stack.Screen name="f" component={First} />
        <Stack.Screen name="s" component={Second} />
        <Stack.Screen name="t" component={Third} />
      </Stack.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

2.5 제스쳐, 애니메이션

2.5.1 라이브러리 설치

```
npm install @react-navigation/stack

npm install react-native-gesture-handler
```

```
C:₩Windows₩System32₩cmd.exe
D:₩Kwon₩wsReactNative₩rn05_navigation>npm install @react-navigation/stack

added 10 packages, and audited 1019 packages in 5s

106 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

D:₩Kwon₩wsReactNative₩rn05_navigation>npm install react-native-gesture-handler

up to date, audited 1019 packages in 2s

106 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
```

2.5.2 활용준비

index.js 제일 위에

import ‘react-native-gesture-handler’; 추가

```
/**
 * @format
 */
import 'react-native-gesture-handler';
import {AppRegistry} from 'react-native';
import App from './App';
import {name as appName} from './app.json';

AppRegistry.registerComponent(appName, () => App);
```

App.js

```
import 'react-native-gesture-handler';
import {NavigationContainer} from '@react-navigation/native';
import {createStackNavigator} from '@react-navigation/stack';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Stack = createStackNavigator();

  return (
    <NavigationContainer>
      <Stack.Navigator>
        <Stack.Screen name="f" component={First} />
        <Stack.Screen name="s" component={Second} />
        <Stack.Screen name="t" component={Third} />
      </Stack.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

2.5.3 제스처, 애니메이션

App.js

```
import {NavigationContainer} from '@react-navigation/native';
import {
  CardStyleInterpolators,
  createStackNavigator,
} from '@react-navigation/stack';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Stack = createStackNavigator();

  return (
    <NavigationContainer>
      <Stack.Navigator
        screenOptions={{
          gestureDirection: 'horizontal',
          gestureEnabled: true,
          cardStyleInterpolator:
            CardStyleInterpolators.forFadeFromBottomAndroid,
        }}>
        <Stack.Screen name="f" component={First} />
        <Stack.Screen name="s" component={Second} />
        <Stack.Screen name="t" component={Third} />
      </Stack.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

3. tab

3.1 라이브러리 추가

npm install @react-navigation/bottom-tabs

```
C:₩Windows₩System32₩cmd.exe
D:₩Kwon₩wsReactNative₩rn05_navigation>npm install @react-navigation/bottom-tabs

added 1 package, and audited 1020 packages in 3s

106 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
```

3.2 구성

3.2.1 페이지들

first.js

```
import React from 'react';
import {Image, Text, View} from 'react-native';

const First = () => {
  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <Image
        style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
        source={require('./img/first.jpg')}
      />
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        조The Soldesk께서 확인QR찍으라 하셨는데
      </Text>
    </View>
  );
};

export default First;
```

second.js

```
import React from 'react';
import {Image, Text, View} from 'react-native';

const Second = () => {
  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <Image
        style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
        source={require('./img/second.jpg')}
      />
      <Text style={{width: '90%', fontSize: 20, textAlign: 'center'}}>
        감히 이러고 있으니
      </Text>
    </View>
  );
};

export default Second;
```

third.js

```
import React from 'react';
import {Image, View} from 'react-native';

const Third = () => {
  return (
    <View
      style={{
        flex: 1,
        justifyContent: 'center',
        alignItems: 'center',
      }}>
      <Image
        style={{width: '90%', height: 'auto', aspectRatio: 16 / 9}}
        source={require('./img/third.jpg')}
      />
    </View>
  );
};

export default Third;
```

3.2.2 App.js

App.js

```
import {createBottomTabNavigator} from '@react-navigation/bottom-tabs';
import {NavigationContainer} from '@react-navigation/native';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Tab = createBottomTabNavigator();

  return (
    <NavigationContainer>
      <Tab.Navigator>
        <Tab.Screen name="f" component={First} />
        <Tab.Screen name="s" component={Second} />
        <Tab.Screen name="t" component={Third} />
      </Tab.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

3.3 디자인

3.3.1 개별

App.js

```
import {createBottomTabNavigator} from '@react-navigation/bottom-tabs';
import {NavigationContainer} from '@react-navigation/native';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Tab = createBottomTabNavigator();

  return (
    <NavigationContainer>
      <Tab.Navigator>
        <Tab.Screen
          name="f"
          component={First}
          options={{title: '2시', tabBarBadge: 'ㅋ'}}
        />
        <Tab.Screen name="s" component={Second} />
        <Tab.Screen name="t" component={Third} />
      </Tab.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

3.3.2 다

App.js

```
import {createBottomTabNavigator} from '@react-navigation/bottom-tabs';
import {NavigationContainer} from '@react-navigation/native';
import * as React from 'react';
import {Image, Text} from 'react-native';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Tab = createBottomTabNavigator();

  return (
    <NavigationContainer>
      <Tab.Navigator screenOptions={({route}) => ({
          tabBarIcon: ({focused, color}) => {
            if (route.name === 'f') {
              return focused ? <Text>2시</Text> : <Text>2</Text>;
            } else if (route.name === 's') {
              return focused ? (<Image style={{width: 30, height: 30}} source={require('./img/jjh.png')} />) : (<Text>ㅋ</Text>);
            } else {
              return focused ? (<Text style={{color: color}}>얼드려</Text>) : (<Text>ㅋ</Text>);
            }
          },
          tabBarActiveTintColor: '#0000FF', tabBarInactiveTintColor: '#000000',
        })}>

        <Tab.Screen name="f" component={First} options={{title: '2시', tabBarBadge: 'ㅋ'}} />
        <Tab.Screen name="s" component={Second} />
        <Tab.Screen name="t" component={Third} />

      </Tab.Navigator>
    </NavigationContainer>
  );
}

export default App;
```

4. drawer

4.1 라이브러리 추가

npm install @react-navigation/drawer

npm install react-native-gesture-handler react-native-reanimated

```
C:₩Windows₩System32₩cmd.exe
D:₩Kwon₩wsReactNative₩rn05_navigation>npm install @react-navigation/drawer

added 7 packages, and audited 1027 packages in 7s

106 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

D:₩Kwon₩wsReactNative₩rn05_navigation>npm install react-native-gesture-handler react-native-reanimated

up to date, audited 1027 packages in 2s

106 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
```

4.2 활용 준비

babel.config.js 에

plugins 추가

```
module.exports = {
  presets: ['module:metro-react-native-babel-preset'],
  plugins: [
    'react-native-reanimated/plugin',
  ],
};
```

index.js

```
/**
 * @format
 */
import 'react-native-gesture-handler';
import {AppRegistry} from 'react-native';
import App from './App';
import {name as appName} from './app.json';

AppRegistry.registerComponent(appName, () => App);
```

잘 안되면 기존 실행명령어 뒤에 -- --reset-cache 옵션 붙여서 실행

4.3 구성

App.js

```
import {createDrawerNavigator} from '@react-navigation/drawer';
import {NavigationContainer} from '@react-navigation/native';
import * as React from 'react';
import First from './first';
import Second from './second';
import Third from './third';

function App() {
  const Drawer = createDrawerNavigator();

  return (
    <NavigationContainer>
      <Drawer.Navigator>
        <Drawer.Screen
          name="f"
          component={First}
          options={{title: '나 화요일에 총 쏘러 가는데'}}
        />
        <Drawer.Screen name="s" component={Second} options={{title: 'M16'}} />
        <Drawer.Screen
          name="t"
          component={Third}
          options={{title: '얼마야?'}}
        />
      </Drawer.Navigator>
    </NavigationContainer>
  );
}

export default App;
```