

- 1. Start no Apache e MySQL, no painel de controle do XAMPP.
- 2. Importar base de dados seaker.sql (está na pasta BD no GitHub) no phpmyadmin:



## Tabela animal\_type está assim:



3. Copiar pasta seaker (está na pasta BD no GitHub) para dentro da pasta htdocs do xampp:



4. Executar comando ipconfig na linha de comandos para saber ip do pc:

```
Wireless LAN adapter WiFi:

Connection-specific DNS Suffix : localdomain link-local IPv6 Address : 1981:1882.176d:788b:74c6x4

IPv4 Address : 1981:188.1.1

Ethernet adapter Ethernet:

Media State : Media disconnected Connection-specific DNS Suffix : localdomain

Ethernet adapter VMware Network Adapter VMnet1:

Connection-specific DNS Suffix : fe80::1852:b533:74b1:bf3cx10

IPv4 Address : 1921:68.32.1

Subnet Mask : 255.255.255.0


Ethernet adapter VMware Network Adapter VMnet8:

Connection-specific DNS Suffix : fe80::ac74:e977:275d:fa89x11
```

5. Escrever o ip no URL (MainActivity.java):

```
public void inserirtipoanimal(String name) {
   Log.d( tag: "myTag",  msg: "This is my meksage");
   String login_url = "http://192.168.1.6/seaker/inserirtipoanimal.php";
   try {
      URL url = new URL(login_url);
      HttpURLConnection httpURLConnection = (HttpURLConnection)url.openConnection()
```

- 6. Fazer Run do projeto no Android Studio
- 7. Inserir tipo de animal:

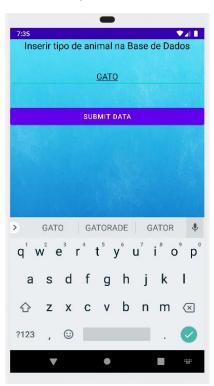

- 8. Submit Data
- 9. Fazer refresh no phpmyadmin, e verificar se inseriu o tipo de animal:



10. Apagar ip do url