



Tarea 4

Facultad de Ingeniería, Universidad Nacional de Colombia

2016701: Ingeniería de Software I

02/05/2026

Docente:

Oscar Eduardo Álvarez Rodríguez


Integrantes (Programangos):

Carlos Daniel Albarracín Cruz

Pablo Andrés Pérez Beltrán

Pantallas:

PostgreSQL instalado:

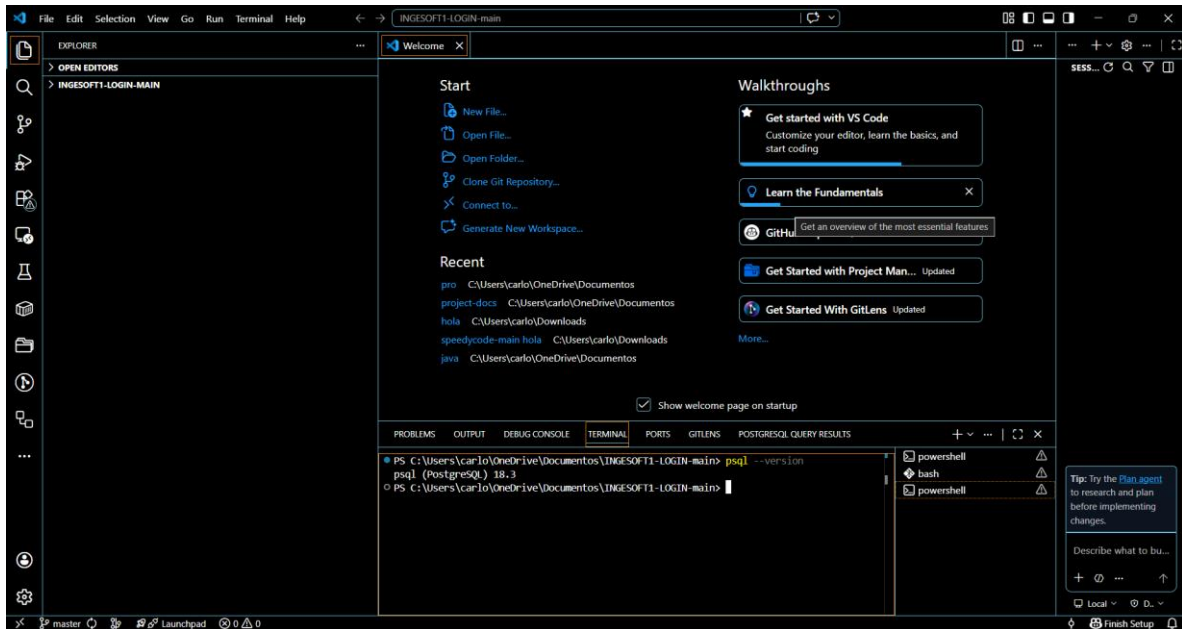

Base de datos creada:



Tabla creada:

The screenshot shows the VS Code interface with the Explorer on the left showing the project structure. The main editor displays the terminal output of a PostgreSQL command. The command executed is `psql -U ingesoft1_user -d ingesoft1_db -h localhost`, which prompts for a password. After entering the password, the `\d` command is used to show the structure of the `ingesoft1_users` table.

```
PS C:\Users\carlo\OneDrive\Documents\INGESOFT1-LOGIN-main> psql -U ingesoft1_user -d ingesoft1_db -h localhost
Password for user ingesoft1_user:
psql (18.3)
ingesoft1_db-> \d
            Table "public.ingesoft1_users"
   column   |      Type      | Collation | Nullable | Default |
-----+-----+-----+-----+-----+
 id          | bigint         |           | not null | generated by default as identity |
 correo     | character varying(254) |           | not null |                                     |
 password_hash | character varying(128) |           | not null |                                     |
 secret_phrase | character varying(255) |           | not null |                                     |
Indexes:
    "ingesoft1_users_pkey" PRIMARY KEY, btree (id)
    "ingesoft1_users_correo_6794ae2b_like" btree ((correo varchar_pattern_ops))
    "ingesoft1_users_correo_key" UNIQUE CONSTRAINT, btree (correo)
```


Usuario de prueba:

The screenshot shows the VS Code interface with the terminal output of a PostgreSQL query. The command executed is `psql -U ingesoft1_user -d ingesoft1_db -h localhost`, followed by the `\d` command to show the table structure. Then, the `SELECT` query is executed to retrieve the `correo` and `secret_phrase` columns for the `ingesoft1_users` table.


```
PS C:\Users\carlo\OneDrive\Documents\INGESOFT1-LOGIN-main> psql -U ingesoft1_user -d ingesoft1_db -h localhost
Password for user ingesoft1_user:
psql (18.3)
            Table "public.ingesoft1_users"
   column   |      Type      | Collation | Nullable | Default |
-----+-----+-----+-----+-----+
 id          | bigint         |           | not null | generated by default as identity |
 correo     | character varying(254) |           | not null |                                     |
 password_hash | character varying(128) |           | not null |                                     |
 secret_phrase | character varying(255) |           | not null |                                     |
Indexes:
    "ingesoft1_users_pkey" PRIMARY KEY, btree (id)
    "ingesoft1_users_correo_6794ae2b_like" btree ((correo varchar_pattern_ops))
    "ingesoft1_users_correo_key" UNIQUE CONSTRAINT, btree (correo)

ingesoft1_db-> SELECT correo, secret_phrase FROM ingesoft1_users;
      correo      | secret_phrase
-----+-----
 estudiante@universidad.edu.co | ¡felicitaciones! Has completado el ejercicio de Integración Full-Stack.
(1 row)
```


Estructura backend:

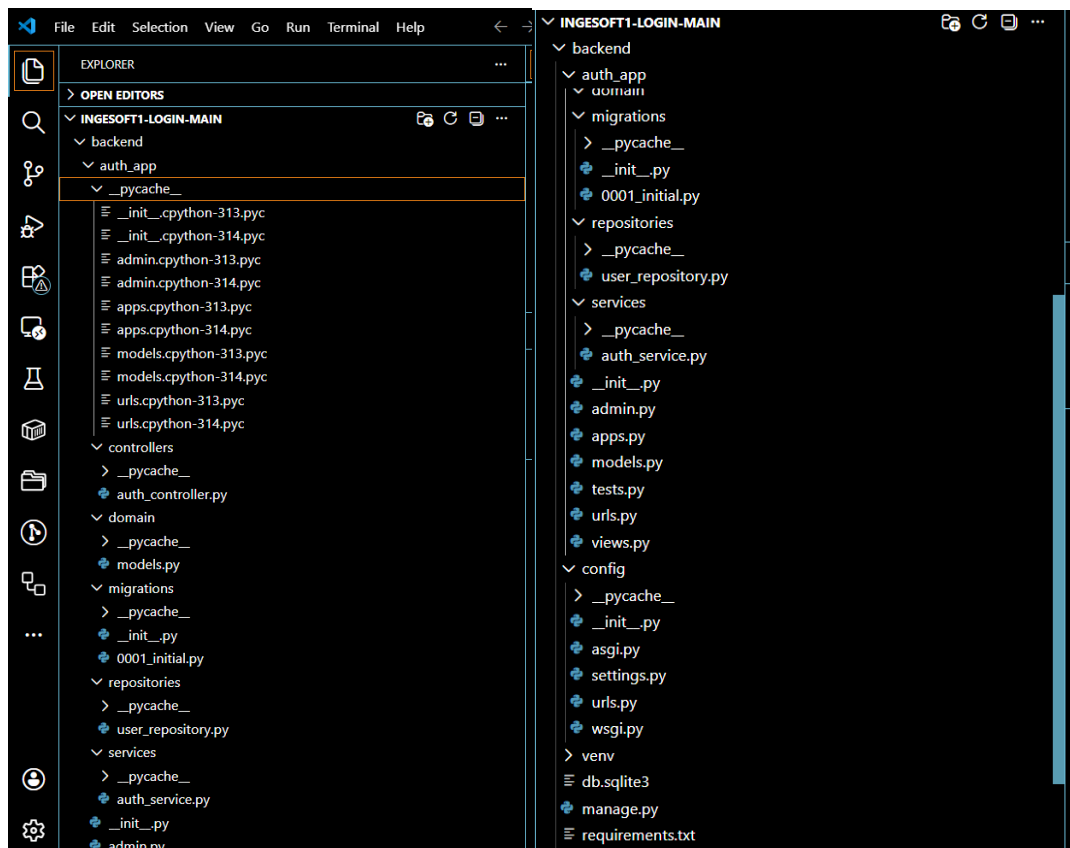

Django corriendo:

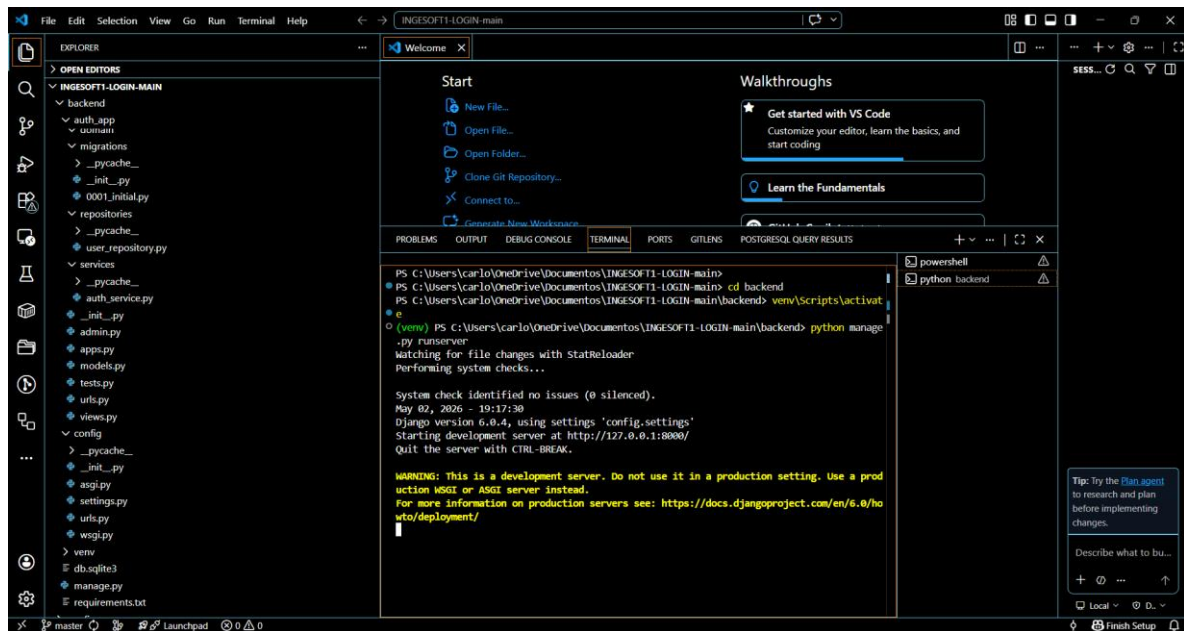

API - Login exitoso:

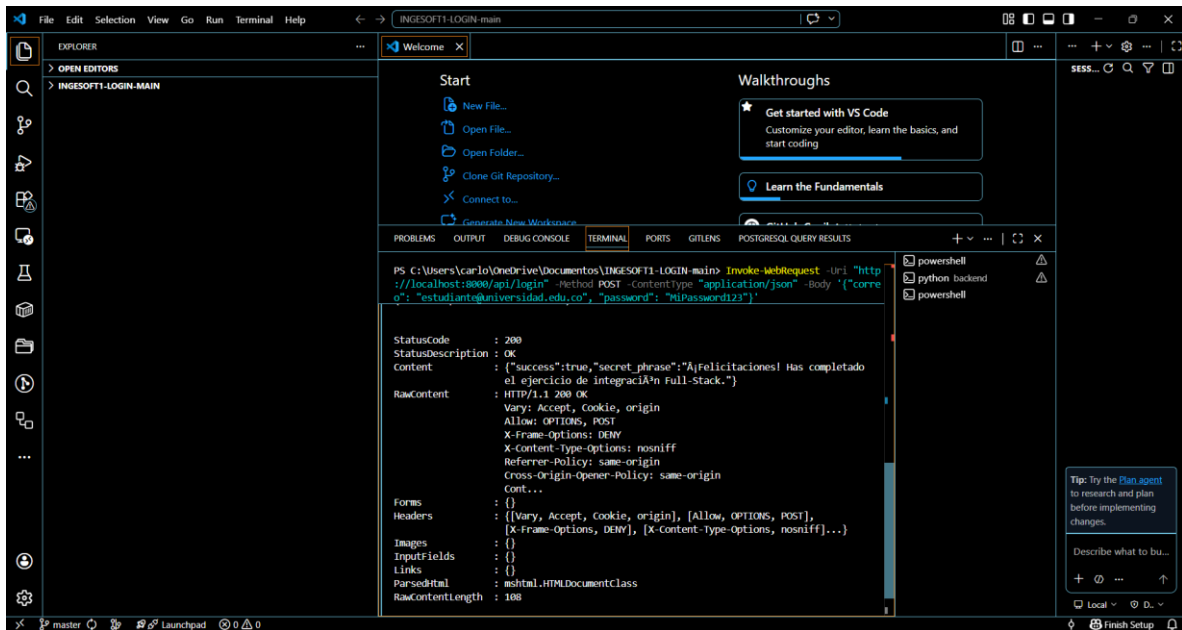


The screenshot shows the Visual Studio Code interface with the Explorer, Search, and Run and Debug views on the left. The main editor displays the 'Welcome' page with 'Start' and 'Walkthroughs' sections. The 'TERMINAL' tab is active, showing the command prompt and the output of the `Invoke-WebRequest` command. The output indicates a successful login (Status: 200 OK) with a JSON response containing success status, secret phrase, and headers. The 'DEBUG CONSOLE' tab is also visible, showing the same output.

```
PS C:\Users\carlo\OneDrive\Documentos\INGESOFT1-LOGIN-main> Invoke-WebRequest -Uri "http://localhost:8000/api/login" -Method POST -ContentType "application/json" -Body '{"correo": "estudiante@universidad.edu.co", "password": "MiPassword123"}'

Status: 200 OK
StatusDescription: OK
Content: [{"success":true,"secret_phrase":"¡Felicitaciones! Has completado el ejercicio de Integraci3n Full-Stack."}]
RawContent: HTTP/1.1 200 OK
Vary: Accept, Cookie, origin
Allow: OPTIONS, POST
X-Frame-Options: DENY
X-Content-Type-Options: nosniff
Referer-Policy: same-origin
Cross-Origin-Opener-Policy: same-origin
Content-Type: application/json
Forms: {}
Headers: [{"Vary", "Accept, Cookie, origin"}, {"Allow", "OPTIONS, POST"}, {"X-Frame-Options", "DENY"}, {"X-Content-Type-Options", "nosniff"}]
Images: {}
InputFields: {}
Links: {}
ParsedHtml: mshtml.HTMLDocumentClass
RawContentLength: 108
```

API - Login fallido:

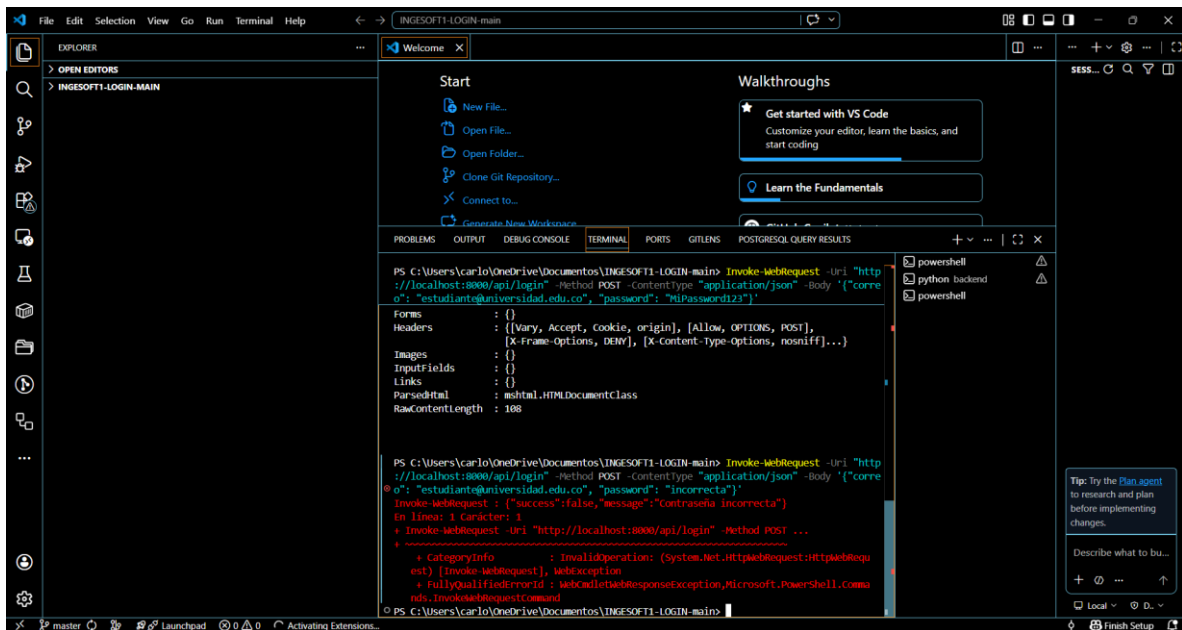


The screenshot shows the Visual Studio Code interface with the Explorer, Search, and Run and Debug views on the left. The main editor displays the 'Welcome' page with 'Start' and 'Walkthroughs' sections. The 'TERMINAL' tab is active, showing the command prompt and the output of the `Invoke-WebRequest` command. The output indicates a failed login (Status: 400 Bad Request) with a JSON response containing success status, message, and headers. The 'DEBUG CONSOLE' tab is also visible, showing the same output.

```
PS C:\Users\carlo\OneDrive\Documentos\INGESOFT1-LOGIN-main> Invoke-WebRequest -Uri "http://localhost:8000/api/login" -Method POST -ContentType "application/json" -Body '{"correo": "estudiante@universidad.edu.co", "password": "incorrecta"}'


Status: 400 Bad Request
StatusDescription: Bad Request
Content: [{"success":false,"message":"contrase\u00f1a incorrecta"}]
RawContent: HTTP/1.1 400 Bad Request
Vary: Accept, Cookie, origin
Allow: OPTIONS, POST
X-Frame-Options: DENY
X-Content-Type-Options: nosniff
Referer-Policy: same-origin
Cross-Origin-Opener-Policy: same-origin
Content-Type: application/json
Forms: {}
Headers: [{"Vary", "Accept, Cookie, origin"}, {"Allow", "OPTIONS, POST"}, {"X-Frame-Options", "DENY"}, {"X-Content-Type-Options", "nosniff"}]
Images: {}
InputFields: {}
Links: {}
ParsedHtml: mshtml.HTMLDocumentClass
RawContentLength: 108

PS C:\Users\carlo\OneDrive\Documentos\INGESOFT1-LOGIN-main> Invoke-WebRequest -Uri "http://localhost:8000/api/login" -Method POST -ContentType "application/json" -Body '{"correo": "estudiante@universidad.edu.co", "password": "incorrecta"}'
Invoke-WebRequest : [{"success":false,"message":"contrase\u00f1a incorrecta"}]
In line: 1 Character: 1
+ Invoke-WebRequest -Uri "http://localhost:8000/api/login" -Method POST ...
+ ~~~~~
+ CategoryInfo          : InvalidOperation: (System.Net.HttpWebRequest:HttpWebRequest) [Invoke-WebRequest], WebException
+ FullyQualifiedErrorId : WebCmdletWebResponseException,Microsoft.PowerShell.Commands.InvokeWebRequestCommand
```


Estructura frontend:

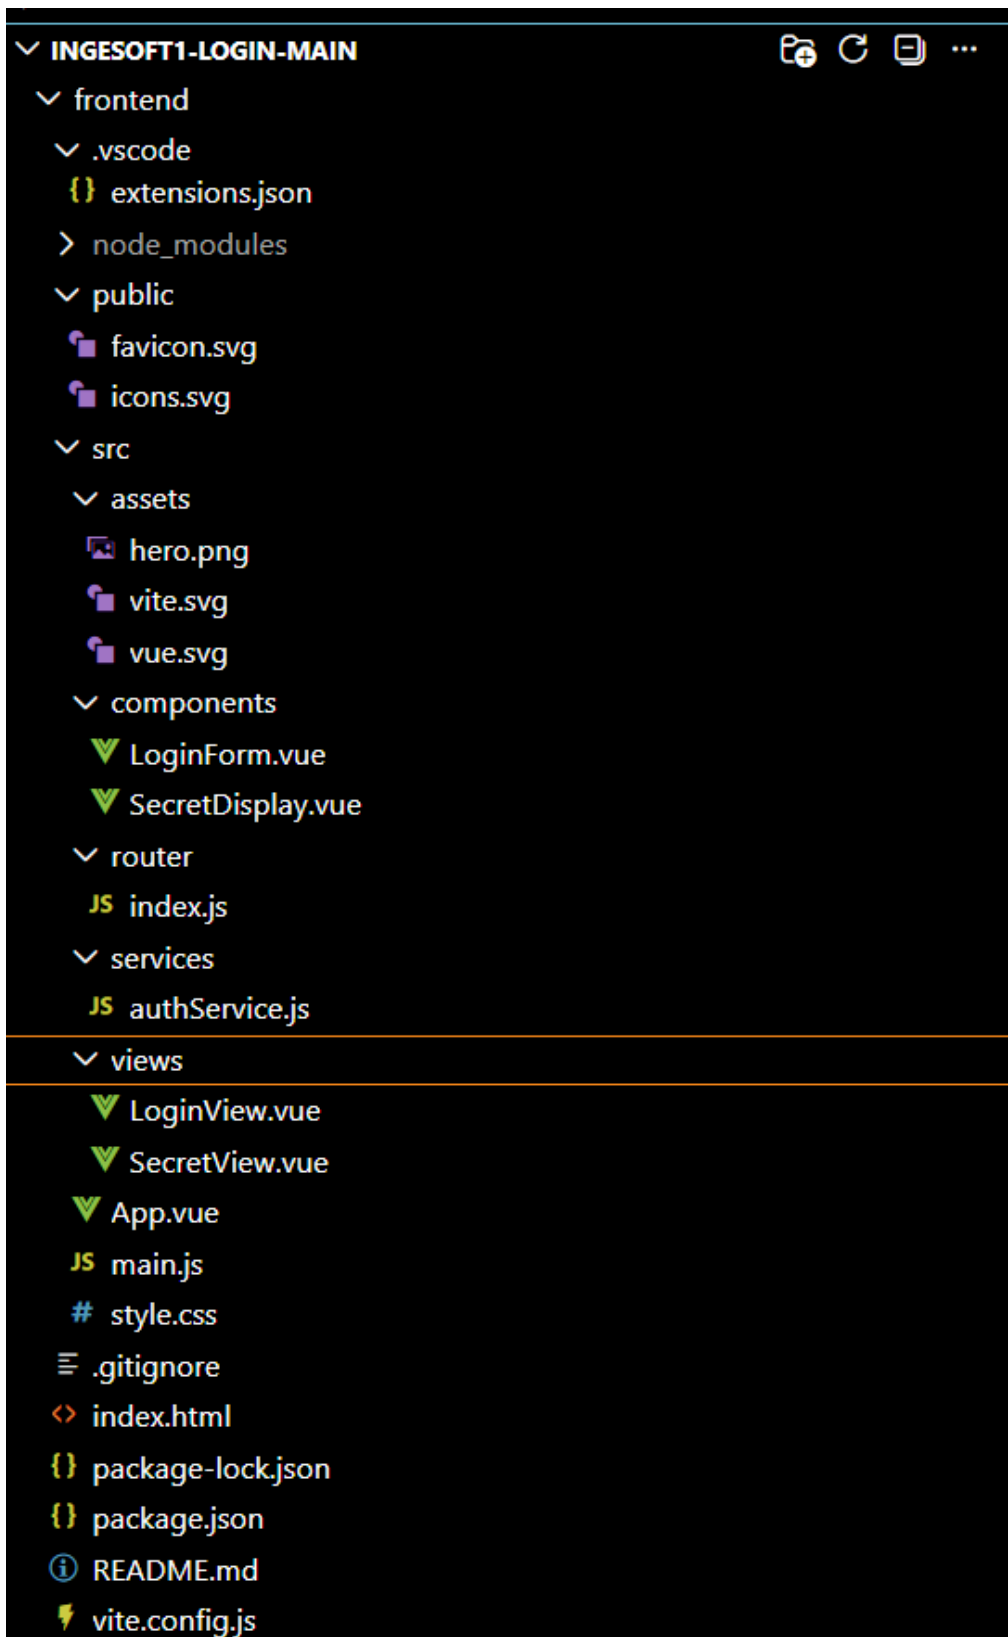


Vue corriendo:

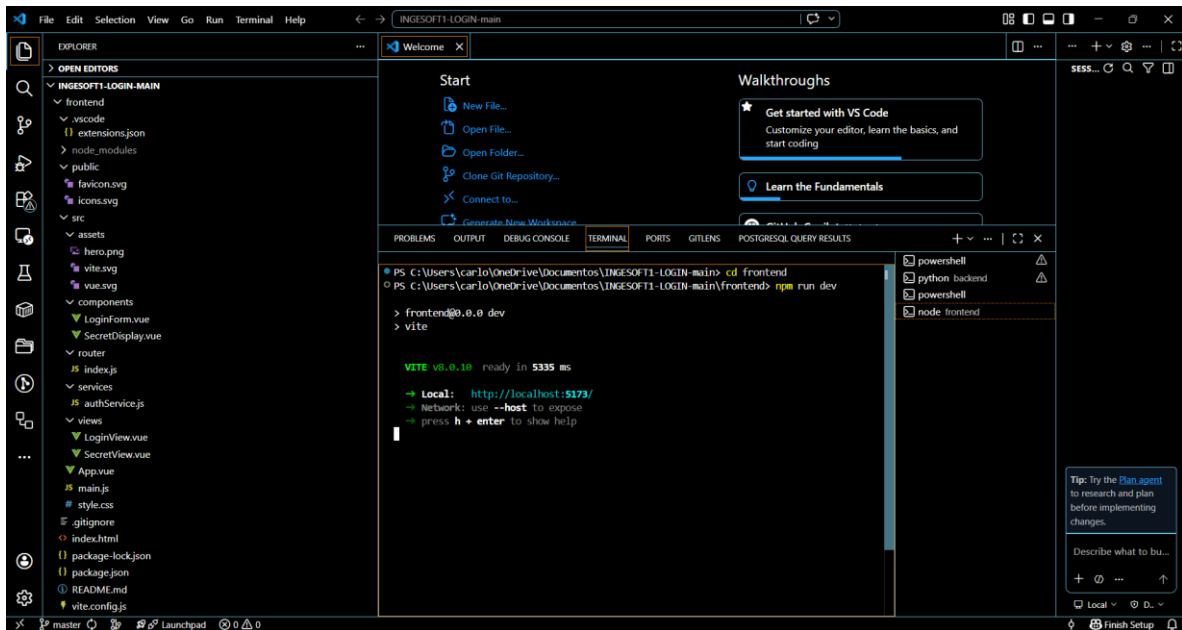


Pantalla login:

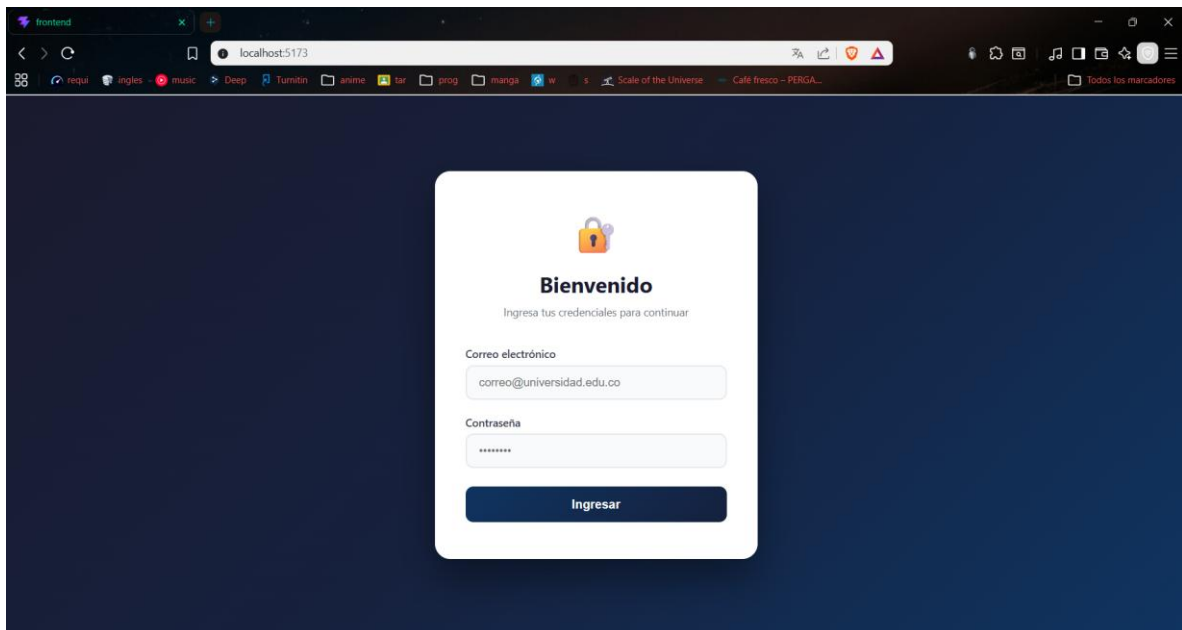


Error de login:

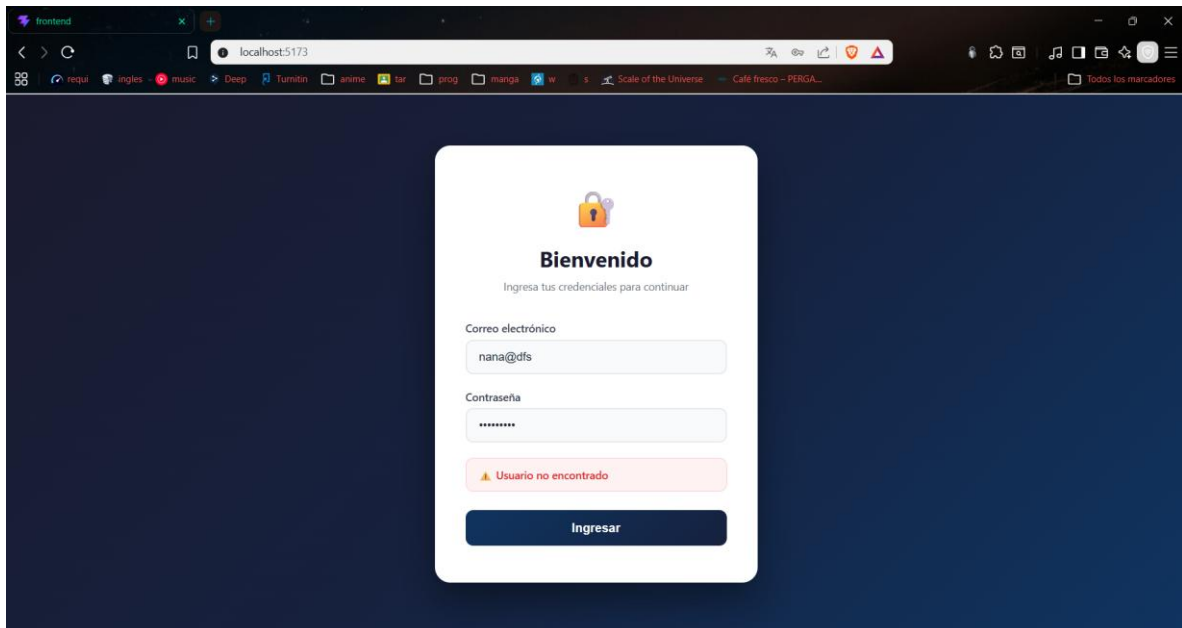


Login exitoso:

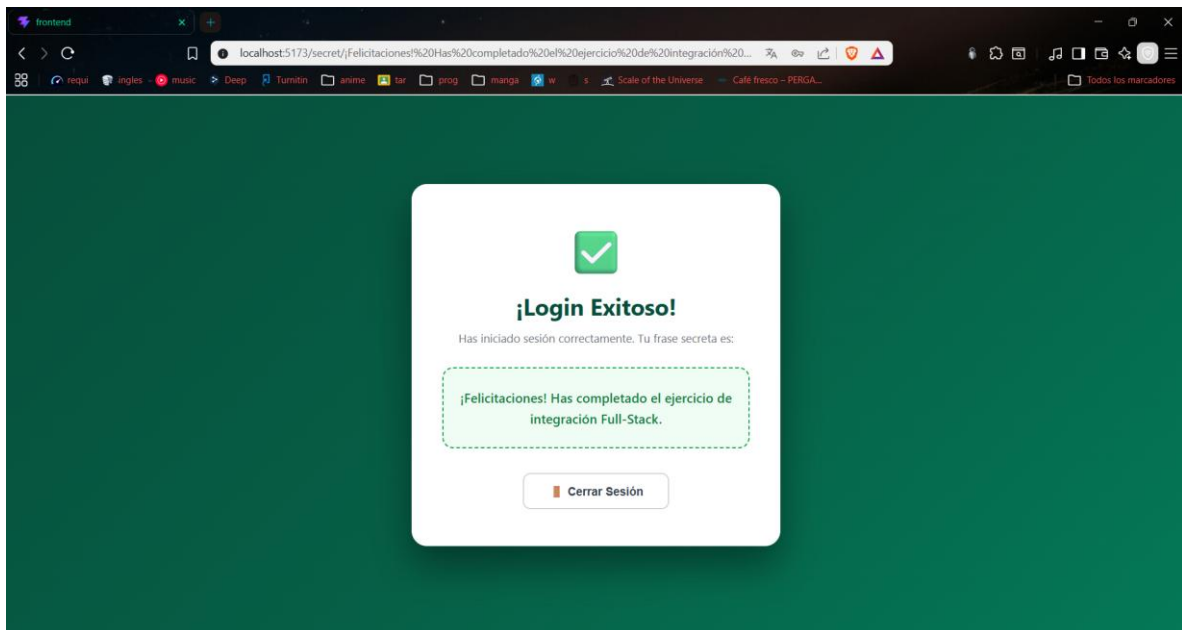

DevTools – Request:

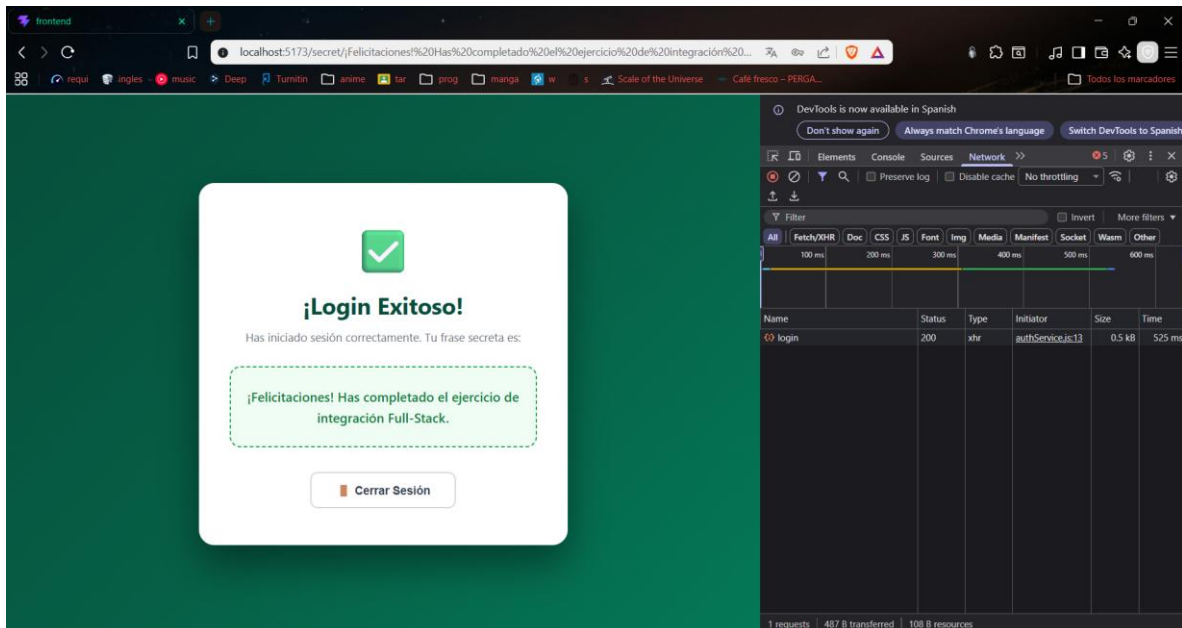

DevTools - Response

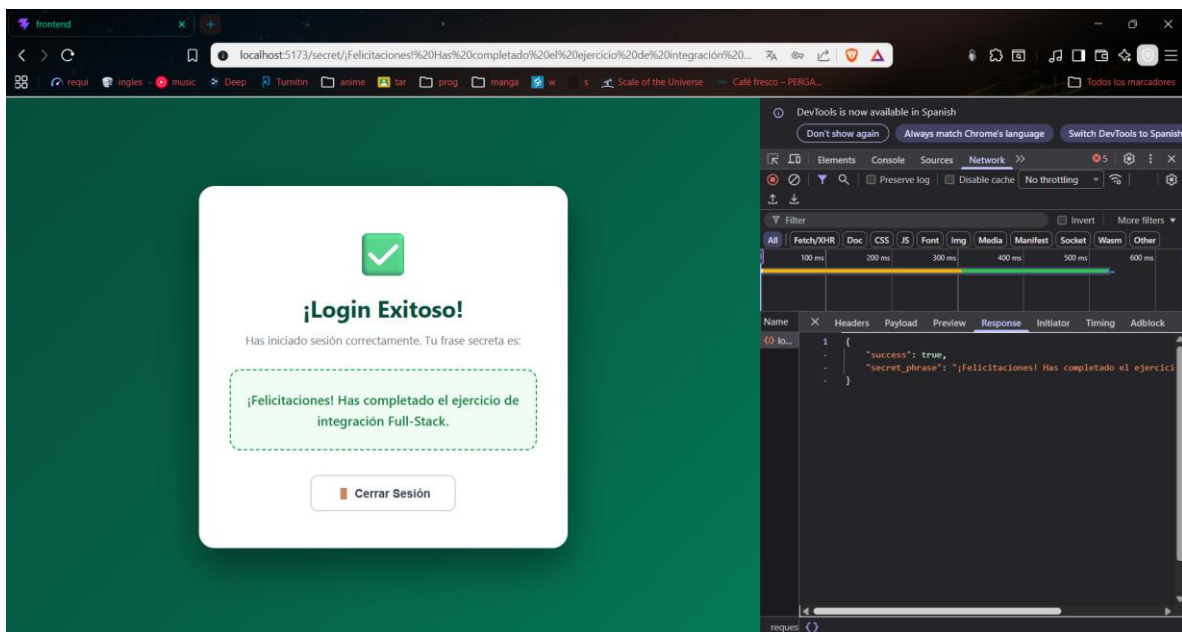

TIEMPO TOTAL INVERTIDO:

4-5horas cada uno.

Link del repositorio: <https://github.com/carprocruz/INGESOFT1-LOGIN.git>