```
create table customers(id int,name char(25),age int,address char(25),salary decimal(18,2),primary key(id));
desc customers;
```

```
Field   Type    Null    Key     Default Extra
id      int     NO      PRI     NULL
name    char(25)        YES             NULL
age     int     YES             NULL
address char(25)        YES             NULL
salary  decimal(18,2)   YES             NULL
```

2.print the total data from a table by * operator.

```
create table customers(id int,name char(25),age int,address char(25),salary decimal(18,2),primary key(id));
insert into customers(id,name,age,address,salary) values(1,'Rajesh',18,'Kolkata',25000.00);
insert into customers(id,name,age,address,salary) values(5,'Kanai',16,'Mumbai',27000.00);
insert into customers(id,name,age,address,salary) values(4,'Chirag',17,'Goa',25000.00);
insert into customers(id,name,age,address,salary) values(9,'Hardik',15,'Odisha',37000.00);
insert into customers(id,name,age,address,salary) values(2,'komal',19,'Tamilnadu',35000.00);

select * from customers;
```

```
id      name    age     address salary
1       Rajesh  18      Kolkata 25000.00
5       Kanai   16      Mumbai  27000.00
4       Chirag  17      Goa     25000.00
9       Hardik  15      Odisha  37000.00
2       komal   19      Tamilnadu       35000.00
```

3.print the id, name ,salary from customers where salary more than 35000.

```
create table customers(id int,name char(25),age int,address char(25),salary decimal(18,2),primary key(id));
insert into customers(id,name,age,address,salary) values(1,'Rajesh',18,'Kolkata',25000.00);
insert into customers(id,name,age,address,salary) values(5,'Kanai',16,'Mumbai',27000.00);
insert into customers(id,name,age,address,salary) values(4,'Chirag',17,'Goa',25000.00);
insert into customers(id,name,age,address,salary) values(9,'Hardik',15,'Odisha',37000.00);
insert into customers(id,name,age,address,salary) values(2,'komal',19,'Tamilnadu',35000.00);


select id,name,salary from customers where salary >35000;
```

```
id      name    salary
9       Hardik  37000.00
```

Print the id,name,address of name kanai

```
create table customers(id int,name char(25),age int,address char(25),salary decimal(18,2),primary key(id));
insert into customers(id,name,age,address,salary) values(1,'Rajesh',18,'Kolkata',25000.00);
insert into customers(id,name,age,address,salary) values(5,'Kanai',16,'Mumbai',27000.00);
insert into customers(id,name,age,address,salary) values(4,'Chirag',17,'Goa',25000.00);
insert into customers(id,name,age,address,salary) values(9,'Hardik',15,'Odisha',37000.00);
insert into customers(id,name,age,address,salary) values(2,'komal',19,'Tamilnadu',35000.00);


select id,name,salary from customers where name='kanai';
```

```
id      name    salary
5       Kanai   27000.00
```

Id, name,address of customers, age lessthan 17 and salary <30000

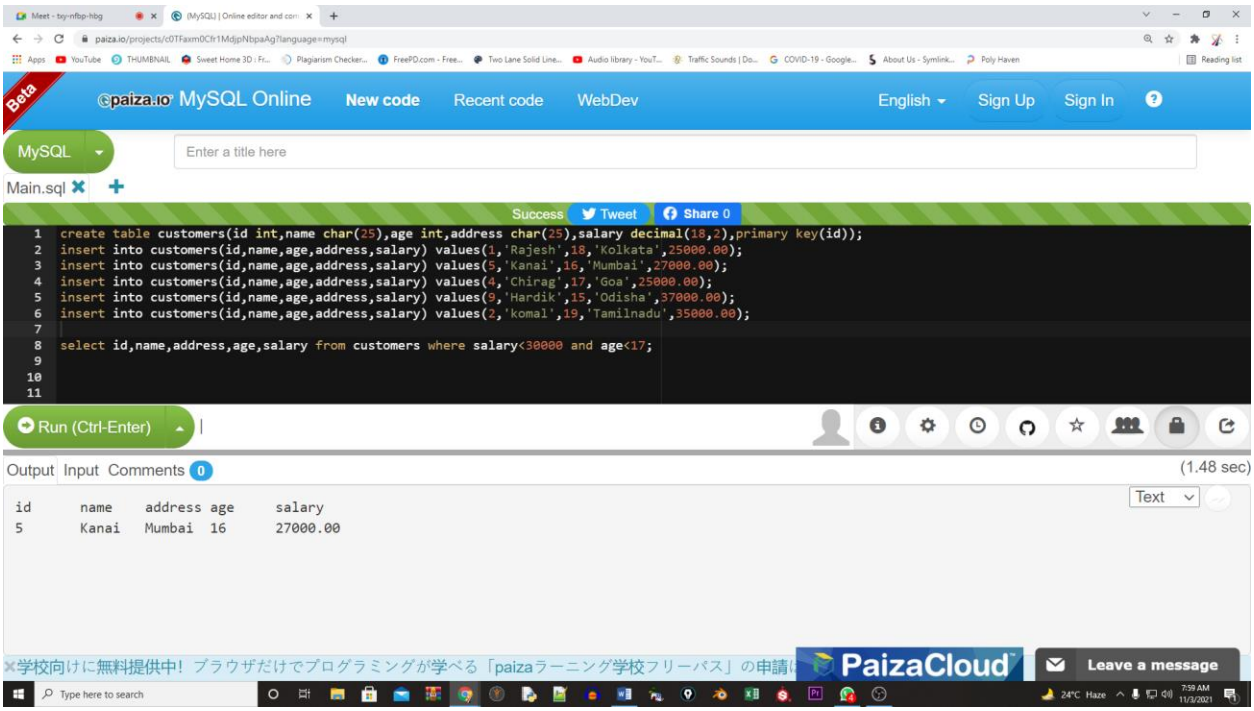

Update query -> change the address with ‘Delhi’ of id =9

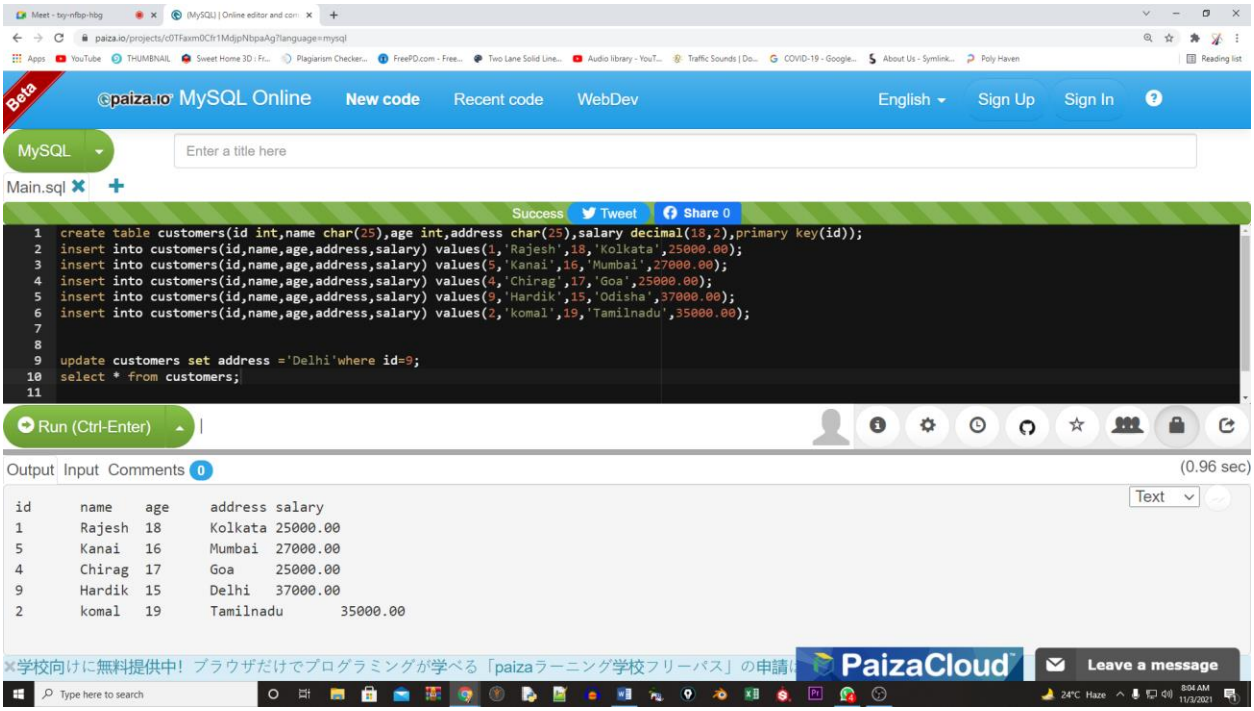

Delete from customers table a particular data

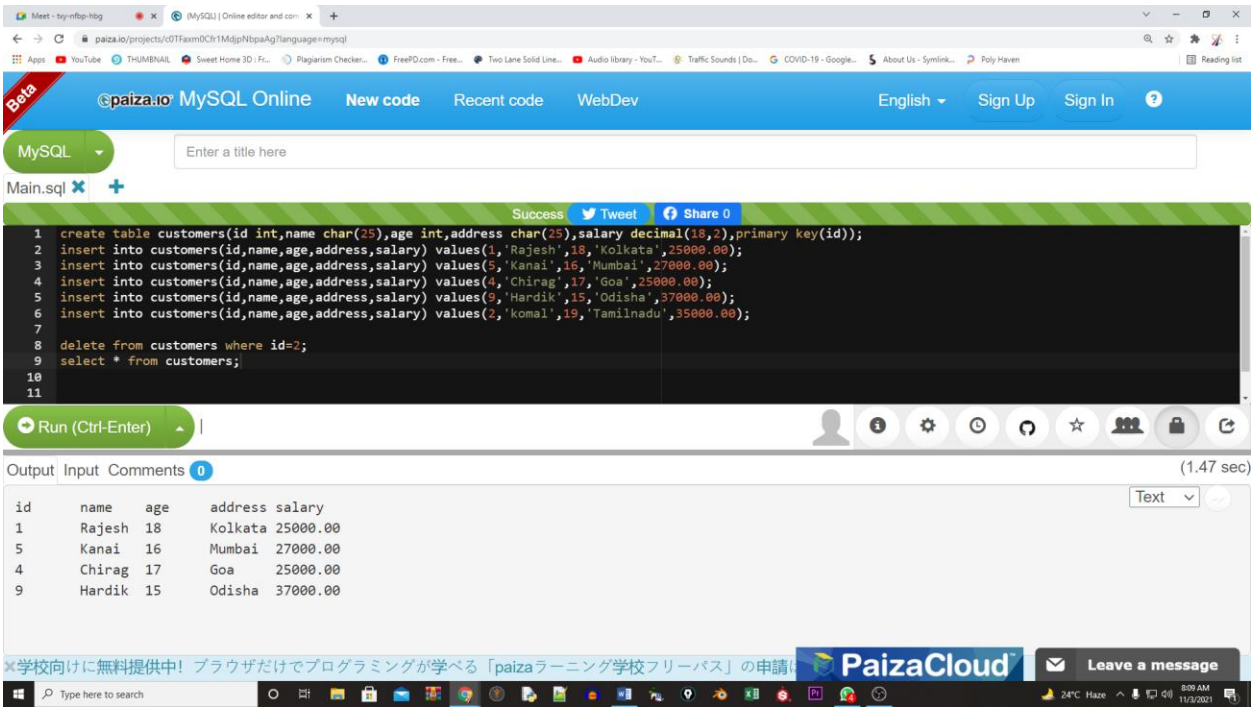

Substring:

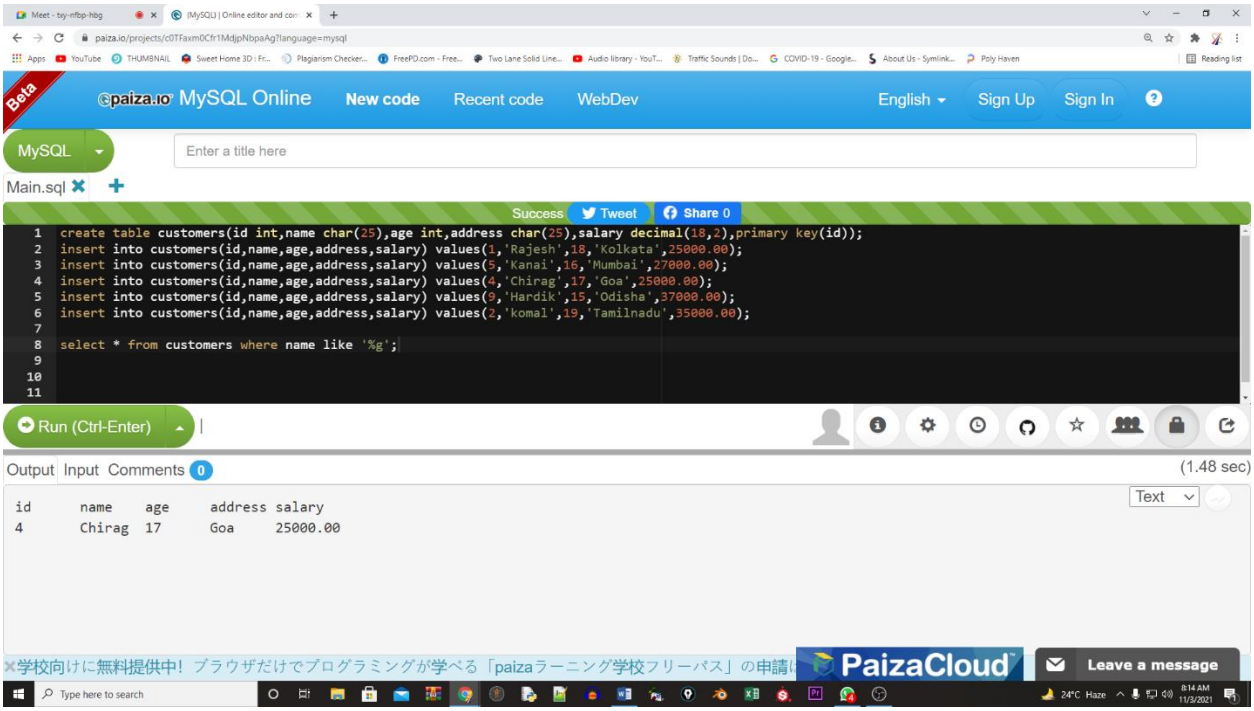

Ordered by:

paiza.io/projects/c0TFaxm0Cfr1MdjpNbpaAg?language=mysql

Beta

paiza.io MySQL Online New code Recent code WebDev English Sign Up Sign In

MySQL

Enter a title here

Main.sql

Success Tweet Share 0

```sql
create table customers(id int,name char(25),age int,address char(25),salary decimal(18,2),primary key(id));
insert into customers(id,name,age,address,salary) values(1,'Rajesh',18,'Kolkata',25000.00);
insert into customers(id,name,age,address,salary) values(5,'Kanai',16,'Mumbai',27000.00);
insert into customers(id,name,age,address,salary) values(4,'Chirag',17,'Goa',25000.00);
insert into customers(id,name,age,address,salary) values(9,'Hardik',15,'Odisha',37000.00);
insert into customers(id,name,age,address,salary) values(2,'komal',19,'Tamilnadu',35000.00);

select * from customers order by salary;
```

Run (Ctrl-Enter)

Output Input Comments 0 (0.96 sec)

Text

```
id      name    age     address salary
1       Rajesh  18      Kolkata 25000.00
4       Chirag  17      Goa     25000.00
5       Kanai   16      Mumbai  27000.00
2       komal   19      Tamilnadu       35000.00
9       Hardik  15      Odisha  37000.00
```

×学校向けに無料提供中！ ブラウザだけでプログラミングが学べる「paizaラーニング学校フリーパス」の申請は PaizaCloud Leave a message

Type here to search 24°C Haze 8:17 AM 11/3/2021

paiza.io/projects/c0TFaxm0Cfr1MdjpNbpaAg?language=mysql

Beta

paiza.io MySQL Online New code Recent code WebDev English Sign Up Sign In

MySQL

Enter a title here

Main.sql

Success Tweet Share 0

```sql
create table customers(id int,name char(25),age int,address char(25),salary decimal(18,2),primary key(id));
insert into customers(id,name,age,address,salary) values(1,'Rajesh',18,'Kolkata',25000.00);
insert into customers(id,name,age,address,salary) values(5,'Kanai',16,'Mumbai',27000.00);
insert into customers(id,name,age,address,salary) values(4,'Chirag',17,'Goa',25000.00);
insert into customers(id,name,age,address,salary) values(9,'Hardik',15,'Odisha',37000.00);
insert into customers(id,name,age,address,salary) values(2,'komal',19,'Tamilnadu',35000.00);

select * from customers order by age desc;
```

Run (Ctrl-Enter)

Output Input Comments 0 (0.96 sec)

Text

```
id      name    age     address salary
2       komal   19      Tamilnadu       35000.00
1       Rajesh  18      Kolkata 25000.00
4       Chirag  17      Goa     25000.00
5       Kanai   16      Mumbai  27000.00
9       Hardik  15      Odisha  37000.00
```

×学校向けに無料提供中！ ブラウザだけでプログラミングが学べる「paizaラーニング学校フリーパス」の申請は PaizaCloud Leave a message

Type here to search 24°C Haze 8:18 AM 11/3/2021