Project

Εργαστηρίου Βάσεων Δεδομένων

2022-2023

ΧΟΥΣΕΛΑΣ ΝΙΚΟΛΑΟΣ ΔΗΜΗΤΡΙΟΣ 5Ο ΕΤΟΣ 1067432

ΚΑΜΑΤΣΟΣ ΠΡΟΚΟΠΗΣ 4Ο ΕΤΟΣ 1072586

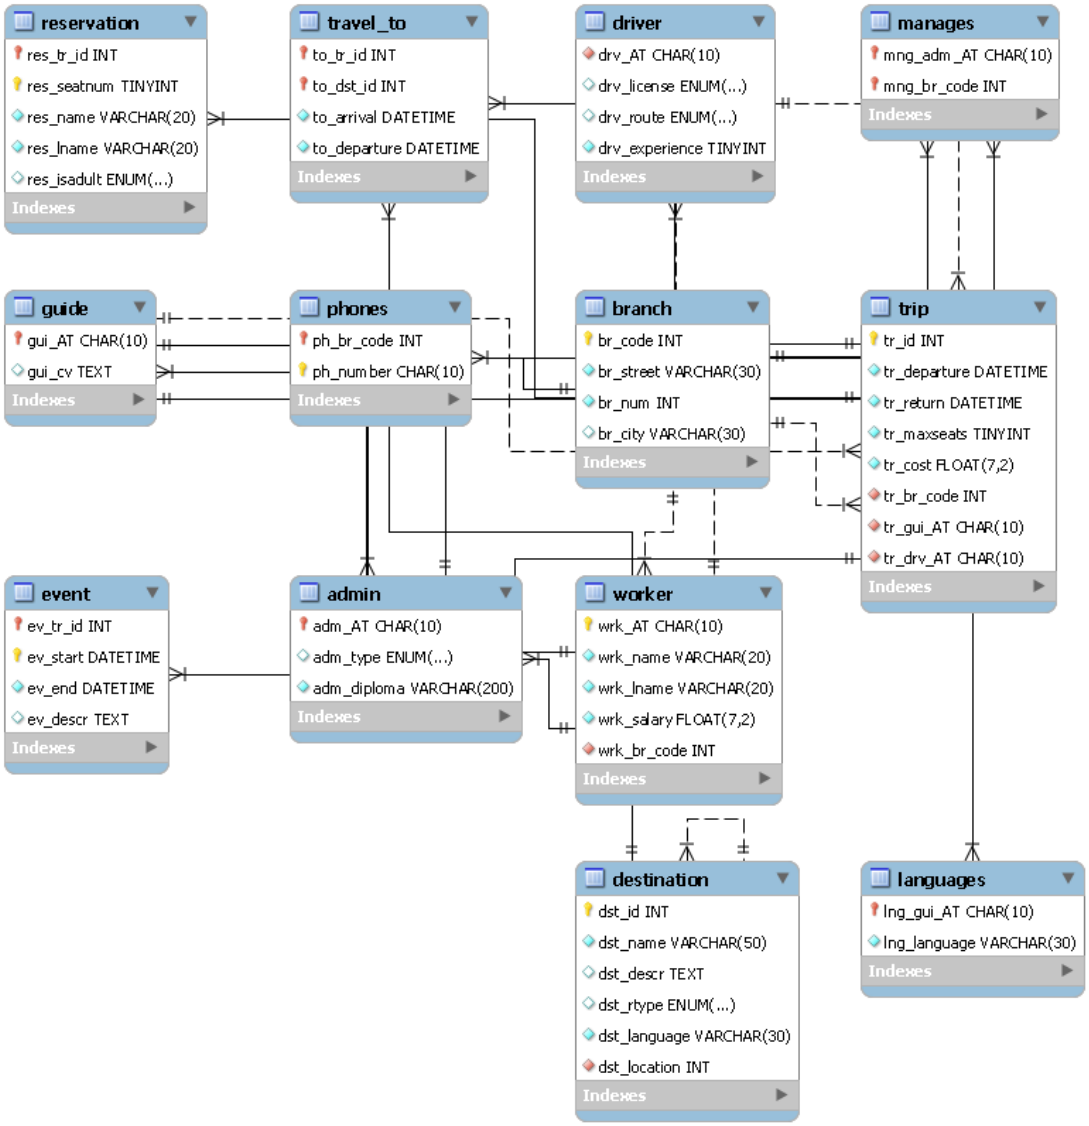

3.1.1 Προπαρασκευαστική φάση

CREATE DATABASE travel_agency;

USE travel_agency;

CREATE TABLE branch (

```
  br_code INT(11) NOT NULL,
  br_street VARCHAR(30) NOT NULL,
  br_num INT(4) NOT NULL,
  br_city VARCHAR(30) ,
  PRIMARY KEY (br_code)
);

CREATE TABLE phones (
  ph_br_code INT(11) NOT NULL,
  ph_number CHAR(10) NOT NULL,
  PRIMARY KEY (ph_br_code, ph_number),
  FOREIGN KEY (ph_br_code) REFERENCES branch (br_code)
);

CREATE TABLE worker (
  wrk_AT CHAR(10) NOT NULL,
  wrk_name VARCHAR(20) NOT NULL,
  wrk_lname VARCHAR(20) NOT NULL,
  wrk_salary FLOAT(7,2) NOT NULL,
  wrk_br_code INT(11) NOT NULL,
  PRIMARY KEY (wrk_AT),
  FOREIGN KEY (wrk_br_code) REFERENCES branch (br_code)
);

CREATE TABLE guide (
  gui_AT CHAR(10) NOT NULL,
  gui_cv TEXT,
  PRIMARY KEY (gui_AT),
  FOREIGN KEY (gui_AT) REFERENCES worker (wrk_AT)
);
```

```
CREATE TABLE languages (
  lng_gui_AT CHAR(10) NOT NULL,
  lng_language VARCHAR(30) NOT NULL,
  PRIMARY KEY (lng_gui_AT),
  FOREIGN KEY (lng_gui_AT) REFERENCES  guide (gui_AT)
);

CREATE TABLE driver (
  drv_AT CHAR(10) NOT NULL,
  drv_license ENUM('A', 'B', 'C', 'D'),
  drv_route ENUM('LOCAL', 'ABROAD'),
  drv_experience TINYINT(4) NOT NULL,
  FOREIGN KEY (drv_AT) REFERENCES worker (wrk_AT)
);

CREATE TABLE trip (
  tr_id INT(11) NOT NULL,
  tr_departure DATETIME NOT NULL,
  tr_return DATETIME NOT NULL,
  tr_maxseats TINYINT(4) NOT NULL,
  tr_cost FLOAT(7,2) NOT NULL,
  tr_br_code INT(11) NOT NULL,
  tr_gui_AT CHAR(10) NOT NULL,
  tr_drv_AT CHAR(10) NOT NULL,
  PRIMARY KEY (tr_id),
  FOREIGN KEY (tr_br_code) REFERENCES branch (br_code),
  FOREIGN KEY (tr_gui_AT) REFERENCES guide (gui_AT),
  FOREIGN KEY (tr_drv_AT) REFERENCES driver (drv_AT)
);

CREATE TABLE event (
```

```
  ev_tr_id INT(11) NOT NULL,
  ev_start DATETIME NOT NULL,
  ev_end DATETIME NOT NULL,
  ev_descr TEXT,
  PRIMARY KEY (ev_tr_id, ev_start),
  FOREIGN KEY (ev_tr_id) REFERENCES trip (tr_id)
);

CREATE TABLE admin (
  adm_AT CHAR(10) NOT NULL,
  adm_type ENUM('LOGISTICS','ADMINISTRATIVE','ACCOUNTING'),
  adm_diploma VARCHAR(200) NOT NULL,
  PRIMARY KEY (adm_AT),
  FOREIGN KEY (adm_AT) REFERENCES worker (wrk_AT),
  FOREIGN KEY (adm_AT) REFERENCES guide (gui_AT)
);

CREATE TABLE manages (
  mng_adm_AT CHAR(10) NOT NULL,
  mng_br_code INT(11) NOT NULL,
  PRIMARY KEY (mng_adm_AT, mng_br_code),
  FOREIGN KEY (mng_adm_AT) REFERENCES admin (adm_AT),
  FOREIGN KEY (mng_br_code) REFERENCES branch (br_code)
);

CREATE TABLE reservation (
  res_tr_id INT(11)NOT NULL,
  res_seatnum TINYINT(4) NOT NULL,
  res_name VARCHAR(20) NOT NULL,
  res_lname VARCHAR(20) NOT NULL,
  res_isadult ENUM('ADULT', 'MINOR'),
```

```
  PRIMARY KEY (res_tr_id, res_seatnum),
  FOREIGN KEY (res_tr_id) REFERENCES trip(tr_id)
);

CREATE TABLE destination (
  dst_id INT(11) NOT NULL,
  dst_name VARCHAR(50) NOT NULL,
  dst_descr TEXT,
  dst_rtype ENUM('LOCAL', 'ABROAD'),
  dst_language VARCHAR(30) NOT NULL,
  dst_location INT(11) NOT NULL,
  PRIMARY KEY (dst_id),
  FOREIGN KEY (dst_location) REFERENCES destination(dst_id)
);

CREATE TABLE travel_to (
  to_tr_id INT(11) NOT NULL,
  to_dst_id INT(11) NOT NULL,
  to_arrival DATETIME NOT NULL,
  to_departure DATETIME NOT NULL,
  PRIMARY KEY (to_tr_id, to_dst_id),
  FOREIGN KEY (to_tr_id) REFERENCES trip(tr_id),
  FOREIGN KEY (to_dst_id) REFERENCES destination(dst_id)
);

INSERT INTO branch (br_code, br_street, br_num, br_city) VALUES
('0', 'Main Street', '123', 'parisi'),
('1', 'Second Avenue', '456', 'romh'),
('2' ,'Third Street', '789', 'nea yorkh'),
('3', 'Fourth Avenue', '321', 'tokio'),
('4', 'Fifth Street', '654', 'sidnei'),
```

```
('5', 'Sixth Avenue', '987', 'toronto'),
('6', 'Seventh Street', '159', 'vancouver'),
('7', 'Eighth Avenue', '753', 'montreal'),
('8', 'Ninth Street', '924', 'los angeles'),
('9', 'Tenth Avenue', '286', 'miami'),
('10', 'maizwnos', '231' , 'patra'),
('11', 'patrwn', '321', 'korinthos'),
('12', 'ermou', '113', 'athina'),
('13', 'theofrastou', '542', 'larisa'),
('14', 'thermhs', '348', 'thessaloniki'),
('15', 'venetias', '974', 'karditsa');

INSERT INTO phones (ph_br_code, ph_number) VALUES
('1', '6977651477'),
('2', '6946120529'),
('3', '6972467940'),
('4', '6977780540'),
('5', '6975720302'),
('6', '6902057573'),
('7', '6978885544'),
('8', '6966227788'),
('9', '6999332277'),
('10', '6911223355'),
('11', '6977889944'),
('12', '6912345678'),
('13', '6915359575'),
('14', '6978451236'),
('15', '6987542132');

INSERT INTO worker (wrk_AT, wrk_name, wrk_lname, wrk_salary, wrk_br_code) VALUES
('1', 'giannis', 'xrysanidis', '1500','001'),
```

('2', 'giwrgos', 'aitheras','1500', '002'),

('3', 'Rodinos', 'iasonas', '1500','003'),

('4', 'Sothrhs', 'papadopoulos','1500', '004'),

('5', 'Mixalhs', 'konstantinou','1500', '005'),

('6', 'alexandros', 'thomas','1500', '006'),

('7', 'thomas', 'sdrolias','1500', '007'),

('8', 'odysseas', 'vergos','1500', '008'),

('9', 'iasonas', 'mparlos','1500', '009'),

('10', 'vaggeliss', 'tzetzoumis','1500', '010'),

('11', 'lefteris', 'vagenas','1500', '011'),

('12','dimitris', 'kanellopoulos','1500', '012'),

('13', 'trifonas', 'alexiou','1500', '013'),

('14', 'periklis', 'karvounis','1500', '014'),

('15','rafail', 'aggelopoulos', '1500','015');

INSERT INTO guide (gui_AT, gui_cv) VALUES

('1', 'touristikos odhgos gia paneurwpaika taxidia'),

('2', 'kalh gnwsh agglikwn kai gallikwn'),

('3', 'eidikos se topikh istoria'),

('4', 'phstopoimenos stis prwtes vohtheies'),

('5', 'eidikos sth fwtografia kai sto video'),

('6', 'exoikiwmenos sthn exyphrethsh pelatwn'),

('7', 'eidkos sta enallaktika taxidia'),

('8', 'empeiros se koryfaies omades pezoporias'),

('9', 'gnwsh topikhs xlwridas kai panidas'),

('10', 'eidikos stis politistikes antallages'),

('11', 'logotexnikos odhgos me pathos gia ta vilvia kai thn anangwsh'),

('12', 'odhgos mousikhs'),

('13', 'odhgos axiotheatwn'),

('14', 'odhgos viologikwn proiontwn'),

('15', 'odhgos spoudwn');

```
INSERT INTO languages (lng_gui_AT, lng_language) VALUES
('1', 'agglika'),
('2', 'gallika'),
('3', 'germanika'),
('4', 'italika'),
('5', 'ispanika'),
('6', 'portogalika'),
('7', 'iaponika'),
('8', 'kinezika'),
('9', 'rwsika'),
('10', 'aravika'),
('11', 'koreatika'),
('12', 'tourkika'),
('13', 'filandika'),
('14', 'souhdika'),
('15', 'norvigika');

insert INTO driver ( drv_AT,drv_license, drv_route, drv_experience) VALUES
('1', 'A' ,'LOCAL', '57'),
('2', 'B', 'LOCAL', '58'),
('3', 'A', 'ABROAD', '12'),
('4', 'B', 'ABROAD' , '75'),
('5', 'A', 'ABROAD' ,'63'),
('6', 'B', 'ABROAD' , '89'),
('7', 'C', 'ABROAD' ,'85'),
('8', 'B', 'ABROAD' , '24'),
('9', 'D', 'ABROAD' ,'81'),
('10', 'C', 'ABROAD', '54'),
('11', 'A', 'ABROAD' , '96'),
('12', 'D', 'LOCAL' , '42'),
```

('13', 'C', 'LOCAL' , '63'),

('14', 'A', 'LOCAL' , '63'),

('15', 'D', 'LOCAL' , '54');

INSERT INTO trip (tr_id, tr_departure, tr_return, tr_maxseats, tr_cost, tr_br_code, tr_gui_AT, tr_drv_AT) VALUES

('1','2022-12-05 12:30:00','2022-12-10 13:20:00','30','800.00','1','1','1'),

('2','2022-12-06 12:30:00','2022-12-11 13:20:00','40','900.00','2','2','2'),

('3','2022-12-07 12:30:00','2022-12-12 13:20:00','50','1000.00','3','3','3'),

('4','2022-12-08 12:30:00','2022-12-13 13:20:00','60','1100.00','4','4','4'),

('5','2022-12-09 12:30:00','2022-12-14 13:20:00','70','1200.00','5','5','5'),

('6','2022-12-10 12:30:00','2022-12-15 13:20:00','80','1300.00','6','6','6'),

('7','2022-12-11 12:30:00','2022-12-16 13:20:00','90','1400.00','7','7','7'),

('8','2022-12-12 12:30:00','2022-12-17 13:20:00','100','1500.00','8','8','8'),

('9','2022-12-13 12:30:00','2022-12-18 13:20:00','110','1600.00','9','9','9'),

('10','2022-12-14 12:30:00','2022-12-19 13:20:00','120','1700.00','10','10','10'),

('11','2022-12-15 12:30:00','2022-12-20 13:20:00','121','1800.00','11','11','11'),

(12, '2023-03-16 08:00:00', '2023-03-21 14:00:00', 122, 1900.00,'12','12', '12'),

(13, '2023-03-17 10:00:00', '2023-03-22 16:00:00', 123, 2000.00,'13','13', '13'),

('14','2022-12-18 12:30:00','2022-12-23 13:20:00','124','2100.00','14','14','14'),

('15','2022-12-19 12:30:00','2022-12-24 13:20:00','125','2200.00','15','15','15');

INSERT INTO event (ev_tr_id, ev_start, ev_end, ev_descr) VALUES

('1','2022-12-05 18:30:00','2022-12-05 20:30:00','diethnis ekthesh vivliou'),

('2','2022-12-06 18:30:00','2022-12-06 20:30:00','festival ntokimanter'),

('3','2022-12-07 18:30:00','2022-12-07 20:30:00','festival texnhths nohmosynhs'),

('4','2022-12-08 18:30:00','2022-12-08 20:30:00','festival kinhmatografoy'),

('5','2022-12-09 18:30:00','2022-12-09 23:30:00','festival mpyras'),

('6','2022-12-10 18:30:00','2022-12-10 23:30:00','festival faghtou'),

('7','2022-12-11 18:30:00','2022-12-11 23:30:00','marathonios'),

('8','2022-12-12 18:30:00','2022-12-12 23:30:00','festival theatroy'),

```
('9','2022-12-13 18:30:00','2022-12-13 23:30:00','festival moysikhs'),
('10','2022-12-09 18:30:00','2022-12-09 23:30:00','festival kainotomwn idewn'),
('11', '2023-02-10 09:00:00', '2023-02-10 13:00:00', 'gyros ths polhs'),
('12', '2023-02-11 10:00:00', '2023-02-11 14:00:00', 'taxidi me podhlato'),
('13', '2023-02-12 11:00:00', '2023-02-12 15:00:00', 'parko anapsyxhs'),
('14', '2023-02-13 08:00:00', '2023-02-13 12:00:00', 'festival psarematos'),
('15', '2023-02-14 09:00:00', '2023-02-14 13:00:00', 'ekthesh ergwn texnhs');

INSERT INTO admin (adm_AT, adm_type, adm_diploma) VALUES
('1', 'LOGISTICS', 'Bachelor of Business Administration in Logistics'),
('2', 'ADMINISTRATIVE', 'Associate of Applied Science in Administrative Assistant'),
('3', 'ACCOUNTING', 'Master of Science in Accounting'),
('4', 'LOGISTICS', 'Certificate in Logistics Management'),
('5', 'ADMINISTRATIVE', 'Bachelor of Arts in Public Administration'),
('6', 'ACCOUNTING', 'Certificate in QuickBooks'),
('7', 'LOGISTICS', 'Associate of Science in Supply Chain Management'),
('8', 'ADMINISTRATIVE', 'Bachelor of Science in Management Information Systems'),
('9', 'ACCOUNTING', 'Master of Business Administration in Accounting'),
('10', 'LOGISTICS', 'Certificate in Transportation and Logistics'),
('11', 'ADMINISTRATIVE', 'Master in Business Administration'),
('12', 'ACCOUNTING', 'Bachelor in Finance and Accounting'),
('13', 'LOGISTICS', 'Master in Global Supply Chain Management'),
('14', 'ADMINISTRATIVE', 'Bachelor in Healthcare Administration'),
('15', 'ACCOUNTING', 'Certified Public Accountant with Master in Business Administration');

INSERT INTO manages (mng_adm_AT, mng_br_code) VALUES
("1", '1'),
("2", '2'),
("3", '3'),
("4", '4'),
("5", '5'),
```

("6", '6'),

("7", '7'),

("8", '8'),

("9", '9'),

("10", '10'),

("11", '11'),

("12", '12'),

("13", '13'),

("14", '14'),

("15", '15');

INSERT INTO reservation (res_tr_id, res_seatnum, res_name, res_lname, res_isadult) VALUES

('1','1','vaggelhs','zorbas','ADULT'),

('2','2','renos','vartanian','ADULT'),

('3','3','dhmhtrhs','kokkinelos','ADULT'),

('4','4','thanasis','papadopoulos','ADULT'),

('5','5','evgenios','pietris','ADULT'),

('6','6','anastashs','gerogiannhs','ADULT'),

('7','7','nikos','aggistrioths','ADULT'),

('8','8','oresths','vazoukis','ADULT'),

('9','9','orfeas','pitsios','ADULT'),

('10','10','antreas','rothonhs','ADULT'),

('11', '11', 'sofia', 'gkizariwth', 'ADULT'),

('12', '12', 'vasilikh', 'tsantila', 'MINOR'),

('13', '13', 'kalomoira', 'pantelidou', 'ADULT'),

('14', '14', 'iwanna', 'eleftheriou', 'MINOR'),

('15', '15', 'fwteinh', 'agravani', 'ADULT');

INSERT INTO destination (dst_id, dst_name, dst_descr, dst_rtype, dst_language , dst_location) VALUES

('1','parisi', 'prwteuousa ths gallias', 'ABROAD', 'gallika','1'),

('2','romh', 'prwteuousa ths italias', 'ABROAD', 'italika','2'),

('3','nea yorkh', 'h poly poy den koimatai', 'ABROAD', 'agglika', '3'),

('4','tokio', 'prwtousa ths iapwnias', 'ABROAD', 'iaponika', '4'),

('5','sidnei', 'h megalyterh polh ths australias', 'ABROAD', 'agglika', '5'),

('6','toronto', 'h megalyterh polh toy kanada', 'LOCAL', 'agglika', '6'),

('7','vancouver', 'h omorfoterh polh tou kanada', 'LOCAL', 'agglika', '7'),

('8','montreal', 'h pio paradoasiakh polh tou kanada', 'LOCAL', 'gallika','8'),

('9','los angeles', 'h polh twn asterwn', 'ABROAD', 'agglika','9'),

('10','miami', 'h polh twn paraliwn', 'ABROAD', 'agglika','10'),

('11', 'varkelwnh', 'vasiliko anaktoro ths madriths', 'ABROAD', 'ispanika','11'),

('12', 'venetia', 'polh tou nerou', 'ABROAD', 'italika' ,'12'),

('13', 'las vegas', 'h prwteuousa ths diaskedashs', 'ABROAD', 'agglika' ,'13'),

('14','verolino', 'h megalyterh polh ths germanias', 'ABROAD', 'germanika' , '14'),

('15', 'amsterdam', 'prwteuousa ths ollandias', 'ABROAD', 'ollandika','15');

INSERT INTO travel_to (to_tr_id, to_dst_id, to_arrival, to_departure) VALUES

('1', '1', '2022-05-01 10:00:00', '2022-05-01 11:00:00'),

('2', '2', '2022-05-02 10:00:00', '2022-05-02 11:00:00'),

('3', '3', '2022-05-03 10:00:00', '2022-05-03 11:00:00'),

('4', '4', '2022-05-04 10:00:00', '2022-05-04 11:00:00'),

('5', '5', '2022-05-05 10:00:00', '2022-05-05 11:00:00'),

('6', '6', '2022-05-06 10:00:00', '2022-05-06 11:00:00'),

('7', '7', '2022-05-07 10:00:00', '2022-05-07 11:00:00'),

('8', '8', '2022-05-08 10:00:00', '2022-05-08 11:00:00'),

('9', '9', '2022-05-09 10:00:00', '2022-05-09 11:00:00'),

('10', '10', '2022-05-10 10:00:00', '2022-05-10 11:00:00'),

('11', '11', '2022-05-11 10:00:00', '2022-05-11 11:00:00'),

('12', '12', '2022-05-12 10:00:00', '2022-05-12 11:00:00'),

('13', '13', '2022-05-13 10:00:00', '2022-05-13 11:00:00'),

('14', '14', '2022-05-14 10:00:00', '2022-05-14 11:00:00'),

('15', '15', '2022-05-15 10:00:00', '2022-05-15 11:00:00');

3.1.2 ΝΕΕΣ απαιτήσεις

3.1.2.1.

```
CREATE TABLE it (
it_AT       CHAR(10) NOT NULL,
password     CHAR(10)NOT NULL,
start_date   DATE NOT NULL,
end_date     DATE NOT NULL,
PRIMARY KEY (it_AT),
FOREIGN KEY (it_AT) REFERENCES worker(wrk_AT)
);

insert into it ( it_AT, password, start_date, end_date ) VALUES
('1', '1', '2022-05-01 ', '2025-05-01');
```

3.1.2.2.

```
CREATE TABLE log (
log_id              INT(11) NOT NULL,
log_it_id           CHAR(10)          NOT NULL,
log_action          ENUM('INSERT', 'UPDATE', 'DELETE'),
log_table_name  VARCHAR(50)  NOT NULL,
```

```
log_timestamp  TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
PRIMARY KEY (log_id),
FOREIGN KEY (log_it_id) REFERENCES it (it_AT)
);
```

3.1.2.3.

```
CREATE TABLE offers (
offer_id        INT(11)         NOT NULL,
start_date      DATE            NOT NULL,
end_date        DATE            NOT NULL,
cost            FLOAT(7,2)      NOT NULL,
dst_id          INT(11)         NOT NULL,
PRIMARY KEY(offer_id)
);
CREATE TABLE reservation_offers (
reservation_code VARCHAR(255)        NOT NULL,
last_name       VARCHAR(255) NOT NULL,
first_name      VARCHAR(255) NOT NULL,
offer_code      INT(11) NOT NULL,
deposit_amount          FLOAT (7,2)  NOT NULL,
PRIMARY KEY(reservation_code),
FOREIGN KEY (offer_code) REFERENCES offers(offer_id)
);

INSERT INTO offers VALUES
('1','2022-06-01', '2022-06-10', 345.99, '1'),
('2','2022-07-15', '2022-07-25', 456.78, '2'),
('3','2022-08-01', '2022-08-15', 299.99, '3');
```

INSERT INTO reservation_offers VALUES

('1', 'Odysseas', 'Vergos', '1', '250.00'),

('2','Iasonas', 'Mparlos', '2', '300.00'),

('3', 'Vaggelis', 'Tzetzoumis', '3', '220.00');

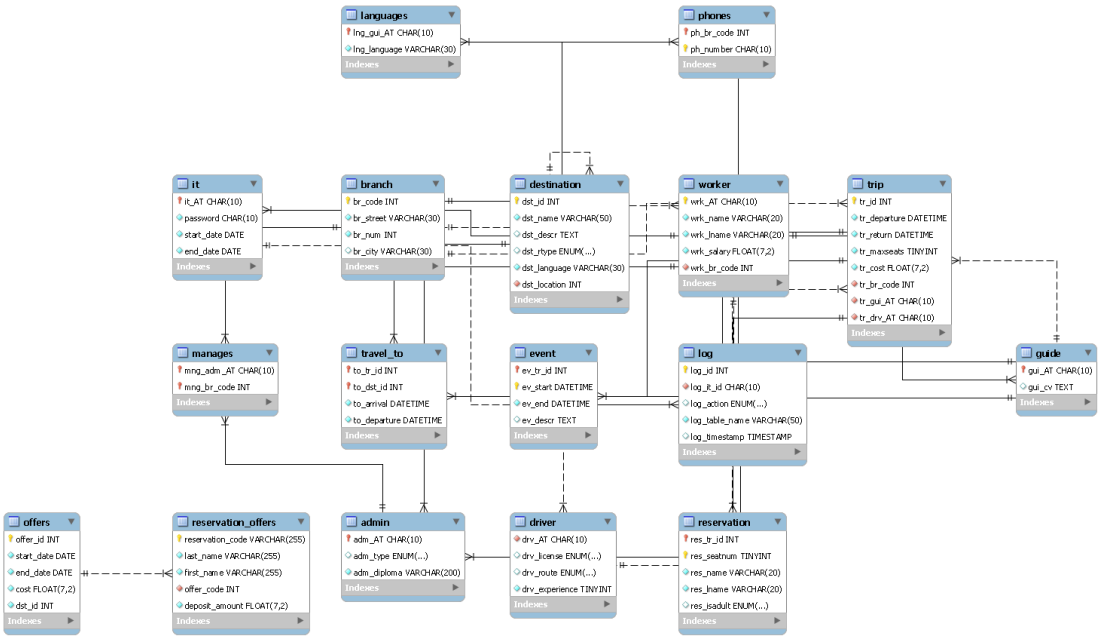

3.1.3 Δημιουργία Stored Procedure

3.1.3.1

DROP PROCEDURE IF EXISTS insert_driver;

DELIMITER $

CREATE PROCEDURE insert_driver(IN AT CHAR(10),IN name VARCHAR(20),IN lname VARCHAR(20),IN salary FLOAT, IN license_type ENUM('A', 'B', 'C', 'D', 'E'),

IN route_type ENUM('LOCAL', 'ABROAD'),IN experience TINYINT)

BEGIN

DECLARE branch_id INT;

DECLARE num_drivers INT;

```
SELECT br_code INTO branch_id FROM branch ORDER BY (SELECT COUNT(*) FROM worker
WHERE wrk_br_code = br_code) ASC LIMIT 1;


INSERT INTO worker (wrk_AT, wrk_name, wrk_lname, wrk_salary,wrk_br_code)

VALUES (AT, name, lname, salary,branch_id);


INSERT INTO driver (drv_AT, drv_license, drv_route, drv_experience)

VALUES (AT, license_type, route_type, experience);

END $


DELIMITER ;

CALL insert_driver('1234567890', 'giannis', 'xrysanidis', 2500.00, 'B', 'LOCAL', 5);
```

3.1.3.2

```
DROP PROCEDURE IF EXISTS get_trip_info;

DELIMITER $


CREATE PROCEDURE get_trip_info(IN br_code INT, IN start_date DATETIME, IN end_date
DATETIME)

BEGIN

SELECT tr_cost, tr_maxseats,

(SELECT COUNT(*) FROM reservation WHERE res_tr_id = tr_id) AS reservations, tr_maxseats
- (SELECT COUNT(*) FROM reservation WHERE res_tr_id = tr_id) AS available_seats,

gui.wrk_lname, gui.wrk_name, drv.wrk_lname, drv.wrk_name, tr_departure, tr_return
FROM trip AS tr

        JOIN worker AS gui ON tr.tr_gui_AT = gui.wrk_AT

        JOIN worker AS drv ON tr.tr_drv_AT = drv.wrk_AT

WHERE tr_br_code = br_code AND tr_departure BETWEEN start_date AND end_date;

END $
```

```
DELIMITER ;

CALL get_trip_info(1, '2022-01-01', '2022-12-31');
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

tr_cost	tr_maxseats	reservations	available_seats	wrk_lname	wrk_name	wrk_lname	wrk_name	tr_departure	tr_return
800.00	30	1	29	xrysanidis	giannis	xrysanidis	giannis	2022-12-05 12:30:00	2022-12-10 13:20:00

3.1.3.3

```
DROP PROCEDURE IF EXISTS delete_worker;

DELIMITER $


CREATE PROCEDURE delete_worker(IN name VARCHAR(20), IN lname VARCHAR(20))

BEGIN

   DECLARE position  ENUM('LOGISTICS','ADMINISTRATIVE','ACCOUNTING');

            DECLARE id CHAR(10);

   SELECT wrk_AT INTO id FROM worker WHERE wrk_name = name AND wrk_lname =
lname;

            SELECT adm_type INTO position FROM admin WHERE adm_AT = id;

   IF position = 'LOGISTICS' OR position= 'ACCOUNTING' THEN

            DELETE FROM driver WHERE drv_AT = id;

            DELETE FROM guide WHERE gui_AT=id;

            DELETE FROM admin WHERE adm_AT=id;

            DELETE FROM worker WHERE wrk_name = name AND wrk_lname = lname;

   ELSEIF position = 'ADMINISTRATIVE' THEN

      SELECT 'This worker is a ADMINISTRATIVE and cannot be deleted' AS message;

   ELSE

      SELECT 'Worker not found' AS message;

   END IF;

END$

DELIMITER ;
```

```
CALL delete_worker('giannis', 'xrysanidis');
```

3.1.4 Δημιουργία Trigger

3.1.4.1

```
CREATE TRIGGER log_trigger
AFTER INSERT OR UPDATE OR DELETE ON trip, reservation, event, travel_to, destination
FOR EACH ROW
BEGIN
DECLARE action VARCHAR(8);
DECLARE user_id CHAR(10);
IF (TG_OP = 'INSERT') THEN
SET action = 'INSERT';
ELSEIF (TG_OP = 'UPDATE') THEN
SET action = 'UPDATE';
ELSEIF (TG_OP = 'DELETE') THEN
SET action = 'DELETE';
END IF;
SET user_id = CURRENT_USER();
INSERT INTO log (log_it_id, log_action, log_table_name)
VALUES (user_id, action, TG_TABLE_NAME);
END;
```

3.1.4.2

```
CREATE TRIGGER prevent_change
BEFORE UPDATE ON trip
FOR EACH ROW
BEGIN
DECLARE reservations INT;
```

```
SELECT COUNT(*) INTO reservations FROM reservation WHERE trip_id = OLD.trip_id;

IF (reservations > 0) THEN

IF (OLD.trip_departure_date != NEW.trip_departure_date OR OLD.trip_arrival_date !=
NEW.trip_arrival_date OR OLD.trip_cost != NEW.trip_cost) THEN

SIGNAL SQLSTATE '45000' SET MESSAGE_TEXT = 'Cannot change departure date, arrival date
or cost of a trip that already has reservations';

END IF;

END IF;

END;
```

3.1.4.3

```
CREATE TRIGGER prevent_decrease

BEFORE UPDATE ON worker

FOR EACH ROW

BEGIN

IF (OLD.wrk_salary > NEW.wrk_salary) THEN

SIGNAL SQLSTATE '45000' SET MESSAGE_TEXT = 'Cannot decrease a worker salary';

END IF;

END;
```