

LexisNexis® Motor Vehicle Record (MVR)

JSON



Philip Shutovsky - JSON Writing Sample

Contents

Changes to this Publication.	6
Chapter 1: Introduction.	7
MVR Product Information.	7
Single Point of Execution.	7
About This Publication.	7
Audiences and Content Organization.	8
Conventions.	8
Support and Resources.	10
Technical Resources Portal.	10
Resource Documentation.	11
Publication Suggestions.	11
LexisNexis Technical Support.	11
Chapter 2: Features and Options.	12
Product Options and Features.	12
MVR Options and Features.	12
Chapter 3: Project Preparation.	28
Project Planning.	28
Gather Required Data.	28
Format Dependencies.	29
Know the Users.	29
Location of Systems and Users.	29
Consider Account Processing.	29
Prepare for Data Display Requirements.	30
Typical Project Flow.	30
Project Initiation.	31
Data Communication.	31
Interface Development.	32
Testing.	32
Production.	33

Chapter 4: Web Services.	34
Chapter 5: Interface Development.	36
General JSON Guidelines.	36
Special Characters Syntax.	36
Create Your First Request.	37
Request Components.	37
User Interface Development Best Practices.	37
Account Numbers.	40
Source Node.	40
Quoteback.	41
Correlation ID.	43
Third-Party Vendors (AKA Global Alliance Partners).	43
Billing Code.	44
Minimum Required and Recommended Search Criteria.	45
Response Components.	45
Prepare Screen Reviews.	45
Handle Sensitive Items.	49
Capture Response IDs.	53
Messages.	54
MVR Processing Information Messages.	54
MVR Informational Messages.	55
Processing Statuses.	57
Echoed Search Input.	60
Error Handling.	60
Monitor Transaction Logs.	60
Error Handling Layers.	61
JSON Modernized Platform Error Handling.	62
Customer Internal and Network Errors.	63
Communication Errors.	64
Insurance Platform Errors.	66
LexisNexis Risk Solutions Internal Errors.	69

Chapter 6: MVR JSON Descriptions.	82
Request Description.	82
Response Description.	89
MVRSUCCESSResponse Description.	103
ErrorResponse Description.	103
Chapter 7: Testing.	105
Testing Best Practices.	105
Customer Test Data Query Tool.	105
Internal Testing.	106
Communication Testing.	106
User Interface Testing.	106
Transactional Testing.	108
General Product Testing.	109
LexisNexis Risk Solutions Alerts and Consumer Statements.	109
MVR Testing.	110
Chapter 8: Production.	113
Screen Review.	113
Prepare For Production.	113
Production Authentication Credentials.	113
Production Contact Information.	114
Interactive Production Credentials.	114
Batch Production Credentials.	115
Production Support Team Meeting.	115
Go To Production.	115
Optional Production Smoke Testing.	116
Go Live.	116

Changes to this Publication

This publication includes the following change(s):

June 1, 2026

- Updated description for [Post-Notification Letter](#) on page 53

April 8, 2026

- Added sections [MVR Processing Information Messages](#) on page 54 and [MVR Informational Messages](#) on page 55

2025

- Added additional schema validations throughout the document
- Added multi-subject order validation throughout the document
- Updated MVR (motor vehicle record) Error Codes (see [Insurance Platform Errors](#) on page 66)
- Changed object **mvrRequestSubject** to **requestSubject** (see [Request Description](#) on page 82 and [Response Description](#) on page 89)
- Changed “driversLicenses” (type: array) to **driversLicense** (type: object) within **requestSubject** (see [Request Description](#) on page 82 and [Response Description](#) on page 89)
- Addition of **vendorProcessDate** to **mvrResponse** (see [Response Description](#) on page 89)
- Added **lexId** to the **requestSubject** object (**enhancedLexId**) (see [Response Description](#) on page 89)
- Moved consumer statements to a newly added **consumerStatement** array (see [Response Description](#) on page 89)
- Moved **alertMessages** to return below **enhancedLexId** and prior to **consumerStatements** (see [Response Description](#) on page 89)
- Added new section [MVRSuccessResponse Description](#) on page 103

Chapter 1

Introduction

LexisNexis® Risk Solutions provides access to our powerful data products through web services. With our products, you can search for the information you need to help you make important business decisions.

MVR Product Information

LexisNexis® Motor Vehicle Record (MVR) provides a more surgical ordering process that allows carriers to focus their underwriting expense dollars where they will have the most potential revenue impact. Carriers can access MVR from all 50 states and the District of Columbia, with additional service for New Brunswick (Canadian Province).

Single Point of Execution

LexisNexis Risk Solutions offers a single point-of-execution so that your organization can use the same methodology to request one product or multiple products. LexisNexis Risk Solutions can help your organization save money because you can create requests that only target the data that you need to help you make the business decision at hand.

About This Publication

This publication is designed to help you understand the components and business rules for your product that are necessary to create JSON (JavaScript object notation) requests and responses.

This publication is for personnel who understand your organization and are responsible for setting up the product, features, and options, along with personnel who need to know how to perform searches and process results.

Audiences and Content Organization

This publication contains information to support a number of audiences as your organization works through the implementation process.

The following table outlines how the content in this publication is organized to meet the needs of various audiences throughout the implementation process.

Content Organization

Chapter	Audience	Description
Introduction on page 7	Everyone	Introduces the product and tells how information is formatted. Here you can find additional product information and who to contact for support.
Features and Options on page 12	- Business analysts - Developers - QA (quality assurance)	Product features and options are described in this section.
Project Preparation on page 28	- Business analysts - Project manager	Information to prepare to support the project and a typical project flow is provided in this section
Data Communication on page 31	- Business analysts - Network professionals - Project manager	Supports the creation of secure communication connections. The section outlines communication methods available for the product.
Interface Development on page 36	Developers	The section gives interface development suggestions, important request and response requirements for the product, and error handling information.
MVR JSON Descriptions on page 82	Developers	Describes the JSON structures.
Testing on page 105	- Developers - QA	Provides some suggestions for communication, interface, and product testing.
Production on page 113	- Developers - Project manager - QA	Provides information about the steps that happen as you are ready to move to a production environment.

Conventions

This publication uses various conventions to provide specific information. These conventions are described in the following sections.

Information Icons

LexisNexis Risk Solutions uses icons to highlight specific types of information.



This note icon precedes important information.



This tip icon precedes helpful information.



This warning icon precedes information that is intended to help prevent you from negatively affecting your processes.



This restriction icon precedes information that explains data that may be restricted to contributors to the LexisNexis Risk Solutions contributory databases.

Cross-References

Cross-references link to other sections, and you can click the cross-reference to go to the referenced section.

Cross-references appear in the following format:

See [Cross-References](#) on page 9.

Example JSON Code

Example JSON code in this publication appears in highlighted sections.

The following example shows sample JSON code.

```
"requestSubject": {
  "subjectQuoteback": "Subject 1",
  "name": {
    "prefix": "DR",
    "first": "JOHN",
    "middle": "E",
    "last": "DOE",
    "suffix": "JR"
  },
  "gender": "Male",
  "dob": "1948-08-01",
  "ssn": "123456789",
  "driversLicense": [
    {
      "licenseNumber": "ABC1234567",
      "licenseState": "ID",
    }
  ],
}
```

JSON Syntax Case

JSON is case-sensitive. JSON element names are shown in the same case as the web service definition.

The element names are typically in camel case, where words are concatenated together with capital letters at the start of each word except for the first word, which is lower case (for example, **driversLicense**). The case that is shown for all of the elements is the case that you must use.

Support and Resources

Support and resources are available as you implement and use LexisNexis Risk Solutions products.

Technical Resources Portal

offers a website (<https://docs.lexisnexisrisk.com>) that hosts system-to-system technical content.

Technical Resources Portal Features

Unlock the full experience by signing in:

Smart Search

Quickly find the information you need with a powerful search engine tailored to your interests.

Filtered Library Access

Browse a curated library of product publications using intuitive filters to zero in on exactly what you are looking for.

Personalized Collections

Create and manage collections of topics that matter to you. Download them for offline use or share them with your team.

Notifications

Sign up for notifications to follow specific topics and receive email alerts whenever they are updated.

Contact your organization's authorized admin user or your LexisNexis Risk Solutions Implementation Manager or support representative to request access to the site.

Resource Documentation

Additional product information is available in the publications listed.

These publications may also be referenced where appropriate within this publication.

- *LexisNexis® Insurance Services Product Data Display Requirements*
- *LexisNexis® Motor Vehicle Record (MVR) Migration Guide – Legacy to JSON*
- *LexisNexis® Motor Vehicle Record License Class*
- *LexisNexis® Motor Vehicle Record License Status*
- *LexisNexis® Motor Vehicle Record Standardized License Class*
- *LexisNexis® Motor Vehicle Record State Activity Files*
- *LexisNexis® Motor Vehicle Record Order Requirements by State*
- *LexisNexis® MVR Standard Violation Code (SVC) Information*
- *LexisNexis® Motor Vehicle Record How to Read*
- *LexisNexis® Motor Vehicle Records—Driving Behavior 360 Technical Implementation Guide*
- *LexisNexis® OAuth 2.0 Authentication Process Quick Reference Guide*

Publication Suggestions

Your suggestions for publication improvements are welcome.

Send comments or suggestions to: TechnicalPublications@lexisnexisrisk.com.

LexisNexis Technical Support

Your LexisNexis Risk Solutions implementation manager is your primary contact. During the implementation of the web services, your implementation manager leads you through the implementation project and brings in other LexisNexis Risk Solutions teams to support various aspects of the project.

Chapter 2

Features and Options

This product offers features and options designed to help your organization make the most of the product information returned.

Product Options and Features

Along with LexisNexis® Motor Vehicle Record (MVR) features, there are several ordering options available for MVR reports. LexisNexis® Risk Solutions sets many of these options for your organization's account.

Check with your implementation manager for information on your designated account setup.

MVR Options and Features

Some MVR options are set up at the individual account level. Other MVR options can be specified in the MVR inquiry. If interested in any option that is at the account setup level, consult with your implementation manager to get account settings updated. Also, some account options that are selected at your account setup can be manually overridden by you when placing an order.

The following table shows if the options are available at account setup, by request, or both.



The names of the options in the following table are links to other sections in the document that further explain the option.

MVR Order Options

Name of Option	Account Setup	Order Request
Amplified MVRs		Y
Clean Driver License	Y	
Clear to Hit	Y	
DB 360 (Driving Behavior 360)	Y	
Driver History Age Override	Y	Y
Driver History Database	Y	
Driver History Database 2.0	Y	
 <i>MA only.</i>		

MVR Order Options (Continued)

Name of Option	Account Setup	Order Request
Driver License Class Standardization	Y	
Driver License Status Standardization	Y	
Duplicate Order Check	Y	
Force DMV		Y
No Hit Alternate Driver Data Enhancement	Y	
National Violation Search	Y	
Order Information Returned	Y	
Renewal Driver History Database 2.0	Y	
 <i>MA only.</i>		
Roll to Batch	Y	
 <i>Future enhancement, consult with your Implementation Manager regarding future availability.</i>		
Soundexing		Y
Standard Violation Code	Y	
Standard Name	Y	
State Activity Files	Y	Y

Amplified MVR

An amplified MVR is a seven, or five-year record. The standard MVR is a three-year record.

You can order a seven-year amplified MVR in Florida, or a five-year amplified MVR in Georgia for an additional fee.



All North Carolina and South Carolina MVR orders default to “amplified” regardless of the amplified option setting.

The following code sample shows how you order an amplified MVR.

```
"mvrRequestParameters": {
  "mvrOptions": {
    "amplifiedMVR": true
  }
}
```

Clean Driver License

This option returns the driver license without any spaces or dashes embedded in the numbers.

Clear to Hit

The MVR Clear to Hit option allows you to have an MVR that would normally return as CLEAR flagged to return as a HIT based on certain conditions.

If this option is turned on and certain conditions are met, LexisNexis Risk Solutions changes the MVR status from CLEAR to HIT.

Normally, CLEAR MVR results are those with no violations. However, if the MVR has no violations, but the License Status field has a value other than VALID, then the status of the MVR can be changed to HIT to force it to be treated as though there are violations.

If the MVR status is CLEAR and the MVR meets any of the following criteria, the MVR status changes to HIT.

- The License Status field contains any of the following literals:

CANC	FRAUD	REVO	NOT VALID
DENI	NON COMP	SUSP	SURRENDERED
DISQ	PHOTO ID	ELIGIBLE	
EXP	PROB	NOT LICENSED	
- The Miscellaneous area contains "STATUS:" followed by any of the above literals (with the exception of "ELIGIBLE" or "NOT LICENSED")
- The Miscellaneous area contains "SPC. REST:" followed by "ALCOHOL" somewhere in the description.
- The DOB (date of birth) on the order is different from the DOB returned by the DMV (Department of Motor Vehicles).

Due to numerous state-specific variations, the following additions and exceptions to the above rules are in place:

- Status is not changed if the driver license status or Miscellaneous area contains the literal: "NO SUSP".
- ALBERTA - Miscellaneous area contains the literal "SUSPENDED: YES".
- ARIZONA - Miscellaneous area contains the literal "STATUS:" followed by issue and expiration dates. These are not changed unless the Status field contains adverse status.
- GEORGIA - Miscellaneous area contains the literals "LIC TYPE:" and "EXP" on the same record.
- MISSOURI - Miscellaneous area contains the literals "PENDING ACTIVITY:" and "SUSP" on the same record.
- SOUTH DAKOTA - Miscellaneous area contains the literal "ADDITIONAL STATUS" and one of the following literals: "CANC", "REVO", "SUSP", or "EXP" on the same result, but the literals may return in different Miscellaneous areas due to length limitations.
- WEST VIRGINIA - Miscellaneous area does not always have literal "STATUS:" but may have actual status listed.

DB 360

LexisNexis® Motor Vehicle Records—Driving Behavior 360 (DB 360) is an optional service that appends new and unreported court violations (in-state and out-of-state) to MVR reports.

DB 360 does not alter the MVR received from the states in any way. Instead, DB 360 appends moving and non-moving violations, such as speeding, DUI, or seat belt violations, which would otherwise be unreported on the MVR from the DMV.

Refer to the [LexisNexis® Motor Vehicle Records—Driving Behavior 360 Technical Implementation Guide](#) for more information.

DB 360 Results for Indiana

Prior to July 21, 2023, if reportable violations are found for carriers utilizing Indiana DB 360 then those violations are returned as a separate report within the same result. After July 21, 2023, any carrier who decides to utilize the Indiana DB 360 file will return a one-page report which will include both the DMV violations (if the order goes to the DMV) AND the violations that are appended from the LexisNexis Risk Solutions database. Existing customers will also have the option to change their account settings to receive a one-page report as well.

For the two-page report, both reports are identified by the same order number and quoteback. The first report returned is from the DMV (if the order goes to the DMV), while the second report returned is from the LexisNexis Risk Solutions database. If LexisNexis Risk Solutions does not find any reportable violations, then the additional report will not be returned. The additional report from LexisNexis Risk Solutions is returned with a processing status of D (INFORM format) or Additional Response - Hit (Framework XML and Risk XML formats). The additional report has the following message: PERSONAL/VIOLATION DATA FROM LEXISNEXIS. DMV MVR (motor vehicle record) NOT ORDERED. Also, in the additional report, LexisNexis Risk Solutions does not return the driver's PII (personally identifiable information), namely the C and D records (INFORM), the identification structure (Framework XML), and/or the SubjectReport structure (Risk XML), depending on the format that you use. In the INFORM format, the second instance of the A record within the same result marks the beginning of the additional report from LexisNexis Risk Solutions. In the Framework XML format, the second instance of the `motor_vehicle_report` element within the same result marks the beginning of the additional report from LexisNexis Risk Solutions. In the Risk XML format, the second instance of the `Result` element within the same result marks the beginning of the additional report from LexisNexis Risk Solutions.

In JSON (JavaScript object notation) format, we recommend accounts be set up for the 1 page MVR format (the default since July 2023). If reusing an existing account for JSON and a legacy format, and the account setting remains as is, you will receive 2 reports. In JSON, the second instance of **processingInfo** within **mvrReports** mark the beginning of the additional report from LexisNexis Risk Solutions.

For more information, see [LexisNexis® Motor Vehicle Records—Driving Behavior 360 Technical Implementation Guide](#).

Driver History Age Override

This option enables you to override the maximum age of a DHDB (Driver History Database) search that is established in the account setup with the maximum search limit of 120 days. Possible values are 30, 60, 90, or 120. To bypass the override, use a value of 999 or omit the field.

The following code sample shows how you change the maximum age of a DHDB search that is established in the account setup when ordering the MVR.

```
"mvrRequestParameters": {  
  "mvrOptions": {  
    "driverHistoryAgeOverride": 30  
  }  
}
```

DHDB

DHDB returns a copy of an MVR that was previously processed through a DMV by LexisNexis Risk Solutions. DHDB provides the ability to save state registry fees on qualifying matching orders previously ordered by another carrier within a specified time frame.

Search periods are configurable by 30 days at a time, up to 120 days. Your company sets the maximum length of the search period as 30, 60, 90, or 120 days. Time periods may vary by state. This feature is controlled by the account setup.

Driver History Database States

The DHDB is only available for insurance companies and is not available in all states.

DHDB is available in the following states:

Alabama	Idaho	Nebraska	South Carolina
Alaska	Illinois	Nevada	South Dakota
Arizona	Iowa	New Hampshire	Tennessee
Arkansas	Louisiana	New York	Texas
Delaware	Maine	North Carolina	Virginia
District of Columbia	Massachusetts	Ohio	Washington
Florida	Michigan	Oklahoma	West Virginia
Georgia	Mississippi	Oregon	Wyoming
Hawaii	Montana	Rhode Island	

DHDB 2.0

DHDB 2.0 returns either a predicted clear or a full MVR through a decisioning logic process. DHDB 2.0 service evaluates LexisNexis Risk Solutions data sources to determine the likelihood of a clear MVR. DHDB 2.0 allows carriers to set their individual tolerance level for when the MVR report is ordered, thereby reducing costs.



You must be a LexisNexis® C.L.U.E.® Auto contributor to use this option.

DHDB 2.0 increases potential MVR new business savings and is available in Massachusetts.

Driver License Status Standardization

States provide driver license status either in the form of a code or text. You may choose to have LexisNexis Risk Solutions return the driver license status as standardized terms.

The following standardized terms are available:

Standardized Driver License Statuses

Code	Description
1	VALID
2	SUSPENDED
3	REVOKED
4	EXPIRED
5	CANCELED
6	DENIED
7	LIMITED
8	MILITARY

Standardized Driver License Statuses (Continued)

Code	Description
9	ID ONLY
A	DISQUALIFIED
B	ELIGIBLE
D	DECEASED
N	NO NARRATIVE AVAILA
U	UNAVAILABLE
X	NO VALID LIC

Driver License Class Standardization

States provide driver license class either in the form of code or text. You may choose to have LexisNexis Risk Solutions return the driver license class as standardized terms.

The following standardized terms are available:

Standardized License Class Output Values

Code	Description
A	PDL
B	PDL LEARNER PERMIT
C	PDL LIMITED
D	PDL NON-RESIDENT
E	PDL TEMPORARY

Standardized License Class Output Values (Continued)

Code	Description
F	PDL ATV
G	PDL CHAUFFEUR
H	PDL MOTORCYCLE
I	PDL SCOOTER
J	PDL TRAILER

Standardized License Class Output Values (Continued)

Code	Description
K	PDL WATERCRAFT
L	PDL CHF LEARN PMT
M	PDL MCYCLERN PMT
N	PDL MSCO LEARN PMY
O	PDL TRLR LEARN PMT
P	PDL TEMP SCOOTER
Q	PDL TEMP MOTORCYCLE
R	ID ONLY
S	NO LICENSE
T	UNCLASSIFIED
U	CDL
V	CDL LEARNER PERMIT
W	CDL NON-RESIDENT

Standardized License Class Output Values (Continued)

Code	Description
X	CDL TEMPORARY
Y	CDL SCHOOL BUS
Z	CDL TRAILER
1	CDL WATERCRAFT
2	CDL CHAUFFEUR
3	CDL HAZMAT PASSENGER
4	CDL MOTORCYCLE
5	CDL MCYC LEARN PMT
6	CDL HAZPS LEARN PMT
7	CDL SCBUS LEARN PMT
8	CDL WTRCR LEARN PMT
9	CDL TRLR LEARN PMT
0	MOTORCYCLE

Duplicate Order Check

Duplicate Order Check service returns a full copy of the MVR previously ordered by your company within the allowable search period. Duplicate Order Check provides the ability to save customers state registry fees on qualifying matching duplicate orders, within the same line of business.

If you choose to activate Duplicate Order Check, orders made by your company are reviewed within a set length of time, up to 120 days. Search periods are configurable in 30-day increments with the maximum length being 120 days. Time periods in which Duplicate Order Check is available vary by state. Duplicate Order Check is available in 46 states and the District of Columbia.

Duplicate Order Check is not available in Missouri, New Jersey, Pennsylvania, and South Carolina. In addition, there are several states that have limitations on how long an MVR from the DMV can be distributed after receipt by LexisNexis Risk Solutions.

State Storage Times

Time Period	States
3 Days	Louisiana
30 Days	Arkansas Washington New Hampshire West Virginia
45 Days	Maryland
60 Days	California Georgia

State Storage Times (Continued)

Time Period	States	
90 Days	Utah	
120 Days	Alabama	Montana
	Alaska	Nebraska
	Arizona	Nevada
	Colorado	New Mexico
	Connecticut	New York
	Delaware	North Carolina
	District of Columbia	North Dakota
	Florida	Ohio
	Hawaii	Oklahoma
	Idaho	Oregon
	Illinois	Puerto Rico
	Indiana	Rhode Island
	Iowa	South Dakota
	Kansas	Tennessee
	Kentucky	Texas
	Maine	Vermont
	Michigan	Virginia
	Minnesota	Wisconsin
	Mississippi	Wyoming

If LexisNexis Risk Solutions finds a match to a previous order, then the previous order is returned. If LexisNexis Risk Solutions does not find a match, the current order is processed according to your account settings and any order option overrides included in the order. If you have questions about your account settings for Duplicate Order Check, contact your implementation manager.

Duplicate Order Check Matching Process

Certain conditions need to exist for Duplicate Order Check to become active.

The following conditions must apply to the original order and subsequent order, for a duplicate MVR to return:

- Original request resulted in a CLEAR, HIT, or NO HIT MVR result from the DMV.
- Requests must be for the same insurance carrier, regardless of account number.
- Date of the requests must fall within the 30, 60, 90, or 120 day threshold setup on the account or within the state-specific duplicate threshold, whichever is shorter.

MVR Duplicate Order Check is performed on:

- Primary criteria
 - Ordering state is the same as the original ordering state AND
 - Ordering DLN (driver license number) is the same as the returned DLN from the state
- Secondary criteria
 - Ordering state is the same as the original ordering state AND
 - Ordering first name is the same as the original ordering first name AND
 - Ordering last name is the same as the original ordering last name AND
 - Ordering DOB is the same as the original ordering DOB



Only the first character of the first name and the first two characters of the last name are used in the comparison.



A message appears when there are differences between the ordered SPII (sensitive personally identifiable information) and the returned SPII. Refer to [Mismatch Indicator](#) on page 21 for more information.

Duplicate Order Check Identification

A duplicate MVR has ** OBTAINED FROM CUSTOMER DUPLICATE FILE ** on the first line of the State and Miscellaneous Information section of the MVR, found in the **miscellaneousMessages** section. The MVR date reflects the date the original MVR was obtained from the state DMV.

For states that return multiple reports in a single request, when a duplicate order match is made, LexisNexis Risk Solutions returns the most recently ordered MVR. The LexisNexis® SVC™ (Standard Violation Code) value and the CSC (customer specific code) are reapplied to the duplicate MVR.

Force DMV

The Force DMV option overrides the account setup to use the LexisNexis Risk Solutions COST savings features (Duplicate File Check, DHDB, DHDB 2.0, and Activity Files) and sends the request to the state DMV.



There are some state-based activity files where the Force DMV option will not work. See LexisNexis® Motor Vehicle Record State Activity Files for more information.

The following code sample shows you how to use the Force DMV option.

```
"forceDMV": false,
```

Mismatch Indicator

The Mismatch Indicator feature of MVR identifies a difference in data included in the request and the data returned in the response. The Mismatch Indicator is not optional and returns on every MVR where it applies.

LexisNexis Risk Solutions compares certain input data to data returned by the DMV. The data elements compared are:

- DLN
- DOB
- First name
- Gender
- Last name
- Middle name
- Name suffix

The MVR response includes a message that indicates what information triggered the mismatch. The message is similar to POSSIBLE MVR MISMATCH, PLEASE REVIEW FOR VERIFICATION: "XX", "XX".

The sets "XX" in the message refer to a two-character abbreviation for the compared data elements. The following table describes the values that can return in the message.

Data Element Codes

Data Element	Code
Driver license number	DL
Last name	LN
First name	FN
Middle name	MN
DOB	BD
Gender	GD
Suffix	SF

Multiple Return States

This is a feature of MVR, wherein under certain conditions, some states return more than one MVR for a single order.



*Tie information: Florida, Illinois, New York, and Virginia returns a single MVR; information on other drivers with the same DLN appears in the **Miscellaneous** section of the result.*

Idaho

If the licensed driver also holds an ID card, the DMV returns a second MVR containing only wallet information from the ID card.

No Hit Alternate Driver Data Enhancement

With this option turned on, LexisNexis Risk Solutions enhances the No Hit result that you receive, with alternative driver information from the LexisNexis Risk Solutions internal database.

If any part of the driver information on your request is different from that found on the LexisNexis Risk Solutions database, the entire data set is returned, including the difference. The data returned could include:

- DLN
- Name (in the sequence of First Middle Last Suffix)
- DOB

The following table shows the messages that can be returned.

No Hit Alternate Driver Messages

Status	Message
Alternate driver information found	ALTERNATE DRIVER INFORMATION FOUND IN LEXISNEXIS DATABASE
No alternate driver information found	NO ALTERNATE DRIVER INFORMATION FOUND IN LEXISNEXIS DATABASE
Alternate driver data service not available at the time of ordering	NO ALTERNATE DRIVER INFORMATION AVAILABLE IN LEXISNEXIS DATABASE

This option is turned on by default, and is available in all states, for interactive and batch orders.



Best practice if one of these messages returns is to verify the search data to determine if there is a typographic error or omission of a required or recommended piece of search data for this State. Reorder the report one time if updated search data is found.

NVS

LexisNexis® National Violation Search (NVS) is an optional service for customers utilizing MVR State Activity File services, which delivers in-state and out-of-state violations associated with submitted drivers.

NVS identifies drivers with in-state and out-of-state violations by returning traffic violation data obtained from the internal databases of LexisNexis Risk Solutions. The NVS results report is not an MVR from the applicable state DMV, and is returned only when the ordering State Activity File search is clear.

For more information, see *LexisNexis® National Violation Search (NVS) Technical Implementation Guide*.

Order Information Returned

LexisNexis Risk Solutions will return the order information you provided in your request as part of the MVR result.

The following code sample shows how, with this option enabled, the response will include the order information you submitted in your request.

```
"requestSubject": {  
  "lexId": "12345678",  
  "name": {  
    "first": "JOHN",  
    "middle": "DOE"  
  },  
  "driversLicenses": [  
    {  
      "licenseNumber": "0000000000",  
      "licenseState": "ND"  
    }  
  ]  
},
```

Renewal Driver History Database 2.0

Renewal DHDB 2.0 service evaluates LexisNexis Risk Solutions data sources to determine the likelihood of adverse activity appearing on the MVR renewal business order. Renewal DHDB 2.0 orders the MVR only on drivers with the highest potential for adverse activity.



You must be a C.L.U.E. Auto contributor to use this option.

Renewal DHDB 2.0 is available in Massachusetts.

Roll-to-Batch (Future Enhancement) – Consult with Your Implementation Manager Regarding Future Availability

The roll-to-batch service is set at the account level. The service rolls an interactive order into a batch order if certain circumstances occur during processing, such as if a state is down or if ordering in HI, which is a batch-only state.

After your account is set up to roll to batch in test, a successful response will return the message code ML (future enhancement). Message code MK is returned if the MVR could not be fulfilled interactively, and the account is not set up to roll to batch (that is, the report is not in progress and has not been fulfilled).

The following code sample shows an example of an MK error:

```
"messages": [
  {
    "type": "Error",
    "code": "MK",
    "message": "MVR interactive unavailable, batch order not submitted for
subject JOHN DOE."
  }
]
```



Please note that Roll-to-Batch is a planned future enhancement. For details on availability, please consult with your Implementation Manager.

Soundexing

Soundexing generates a DLN based on the name and other information entered on the order; for some states, this option compares the entered DLN to the generated number.

Soundexing is available in New Hampshire.

```
"soundex": true
```

SVC

SVC is designed to permit efficient and accurate translation of state violations to a standard code. The standard code enables you to recognize and understand violations from different states despite the wide variety of terminology and codes used by different jurisdictions. The information provided by SVC is a supplement to the state-supplied information. The state-provided codes are not in any way altered or reduced by the addition of the SVC in the result.

SVC facilitates automated processing of state-supplied information through translating the state code to a standard code.

SVC uses a five-character, alphanumeric coding scheme. The codes are classified into nine general categories.

- Equipment Violations
- Financial Responsibility and Accidents
- Miscellaneous
- Motorcycle Violations
- Parking Violations
- Registration, Titling and Licensing
- Serious Offenses
- Speeding and Other Traffic-related Violations
- Uncategorized Citation or Assigned from MVR Status or Conditions

For more information about the master code list, see [LexisNexis® MVR Standard Violation Code \(SVC\) Information](#).

Customer Specific Codes

Using the SVC table as a base, customers assign their specific values, such as rating codes, to SVC for return on their orders. This is an optional service. As the ordered MVR returns from the state DMV, the system automatically sorts them by customer account number and matches the CSC to the SVC. The MVR arrives in the underwriting environment in usable form, saving both programming and underwriting time. If you wish to implement Customer Specific Codes, contact your implementation manager.

Standard Name

When your account is set up with this option enabled, LexisNexis Risk Solutions returns the name in a standard format regardless of the format in which the state returns the name.

The format in which the name is returned is: Last Name, First Name, Middle Name.

State Activity Files

The MVR State Activity File Database consists of the Activity Files, Driver Monitoring Service, and State Database Service.

Activity Files

This is a LexisNexis Risk Solutions database which identifies drivers with adverse driving history. Searching this database provides driver records at substantial savings over requesting records from the state DMV. This service enables more economical new business and renewal business underwriting. For state-specific details, refer to the [LexisNexis® Motor Vehicle Record State Activity Files](#).

New Business Activity File Availability

New Business Activity Files are available in the following states:

Alabama	Kansas	North Carolina
Alaska	Kentucky	North Dakota
Arizona	Louisiana	Ohio
Arkansas	Maine	Oklahoma
California	Maryland	Oregon
Connecticut	Michigan	Pennsylvania
Delaware	Mississippi	Rhode Island
Florida	Montana	South Carolina
Georgia	Nebraska	South Dakota
Hawaii	Nevada	Tennessee
Idaho	New Hampshire	Texas
Illinois	New Jersey	Utah
Indiana	New Mexico	Vermont
Iowa	New York	Virginia

Washington
West Virginia

Wisconsin
Wyoming

Renewal Business Activity File Availability

Renewal Business Activity Files are available in the following states:

Alabama	Kansas	Oklahoma
Alaska	Kentucky	Oregon
Arizona	Louisiana	Pennsylvania
Arkansas	Maine	Rhode Island
California	Maryland	South Carolina
Colorado	Michigan	South Dakota
Connecticut	Montana	Tennessee
Delaware	Nebraska	Texas
Florida	New Hampshire	Utah
Georgia	New Jersey	Vermont
Hawaii	New Mexico	Virginia
Idaho	New York	Washington
Illinois	North Carolina	West Virginia
Indiana	North Dakota	Wisconsin
Iowa	Ohio	Wyoming

Driver Monitoring Service

The Driver Monitoring Service monitors drivers on a monthly basis for new adverse driving activity and reports back when activity is found on the MVR. Customers may have the option to have LexisNexis Risk Solutions store the monthly results allowing for future retrieval at 6 and 12-month renewal times. For state-specific details, refer to the *LexisNexis® Motor Vehicle Record State Activity Files*.

Driver Monitoring Service Availability

Driver Monitoring Service is available in the following states:

Arkansas	Michigan	New York
Georgia	Montana	Utah
Kansas	Nevada	Virginia

State Database Service

The State Database service generates a full MVR information at a substantial savings over the DMV. The Database service contains driving history from the DMV which is updated daily, weekly, or monthly depending on the state.

State Database Service Availability

The State Database Service is available in the following states:

Minnesota	Missouri	Ohio
-----------	----------	------

Activity File Override

This override enables you to change the standard search period that is established in the account setup.

Search periods can be 1, 6, 12, 36, 60, or 84 months, or you can bypass the Activity File. Available search periods vary by state.



To bypass the activity file override, use a value of 999 or omit the field.

The following code sample demonstrates how to use the Activity File Override to customize the standard search period defined during account setup.

```
"prescreenSearchPeriod": 36
```

Chapter 3

Project Preparation

To get started on this implementation, review the following steps that you can take to prepare for the project and a general outline of how typical projects flow.

Project Planning

As you begin this product implementation with LexisNexis® Risk Solutions, use the information provided in this section to prepare for the project.

Your LexisNexis Risk Solutions Implementation Manager will discuss this information to help you plan for your project.

Gather Required Data

This section lists the input that is required and recommended to create a successful product request. For MVR (motor vehicle record), LexisNexis Risk Solutions recommend that you refer to the [Motor Vehicle Record Order Requirements by State](#) document.

Along with these elements, additional elements may be required by the system. See [Minimum Required and Recommended Search Criteria](#) on page 45 for more information.

MVR Required and Recommended Request Data

Data	Required	Notes
Name	Yes	The first and last name must be provided in a parsed format.
DOB (date of birth)	Yes	
DLN (driver license number)	Yes	
State issuing the driver license	Yes	



When you provide both required and recommended data elements as shown in the MVR Order Requirements by State document, you are more likely to get high-quality results.

Format Dependencies

The examples and terminology in this publication are JSON (JavaScript object notation) specific.

Other formats may be available and supported. Consult with your Implementation Manager to confirm that you are using the proper document and format for your needs.

Know the Users

As you consider the design of your system, think about the users' roles, system privileges, and content privileges.

Beyond basic user information, you may need to associate additional identifying data elements with each user account. These may be based on the user's job within the organization (support agents, managers, agents, and underwriters) or they may be based on factors unique to your system. Consider the following questions:

- What system privileges should users have? Who can order products, generate summary reports, or override standard processes?
- What product access should users have? For example, who should be able to re-order reports or submit orders with certain product options?
- What product results should users have access to? For example, who should be able to view status codes or PII (personally identifiable information)?
- Do users need to be associated with LexisNexis Risk Solutions account numbers? This may apply if your organization plans on using different account numbers based on agent-type, location, agency, or product line. For more information, see [Account Numbers](#) on page 40.

Location of Systems and Users

LexisNexis Risk Solutions restricts access to servers.

LexisNexis Risk Solutions product results cannot be transmitted outside of the U.S. If personnel outside of the U.S. need access to the information, they must proxy into a U.S.-based server to both order products and review the results.

Consider Account Processing

Discuss your organization's structure with your LexisNexis Risk Solutions Implementation Manager. Scenarios such as independent or captive agents, multiple locations, multiple agencies, or multiple product lines require using separate account numbers specific to different lines of business, business teams, roles (such as agent versus underwriter, new versus renewal business), and individual agencies.

Prepare for Data Display Requirements

LexisNexis Risk Solutions products require that PII and SPII (sensitive personally identifiable information) data be carefully displayed, masked, or withheld from different user groups. In addition, certain product result data elements may have display requirements based on user groups.

Throughout your development cycle, LexisNexis Risk Solutions recommends that you continuously review and implement the internal controls necessary to support the *LexisNexis® Insurance Services Product Data Display Requirements* for this product. More information is also available at [Handle Sensitive Items](#) on page 49 and [Prepare Screen Reviews](#) on page 45.

If your project is using FCRA (Fair Credit Reporting Act) information, screen shots will be required prior to moving to production. In order to keep your project on schedule, we recommend allocating time early in the process to submit screen shots for review and feedback.

Production credentials will not be released until all screen reviews and feedback have been incorporated.



The LexisNexis® Insurance Services Product Data Display Requirements publication is available on the Technical Resources Portal. To gain access to the site, request access from your organization's administrator or your LexisNexis Risk Solutions Implementation Manager.

Typical Project Flow

LexisNexis Risk Solutions Implementation Managers work with you and your team throughout the project to support your implementation. Your Implementation Manager may involve other LexisNexis Risk Solutions teams during your implementation. The LexisNexis Risk Solutions organization is committed to the success of your project.

The following resources at your organization can help support this project:

- Technology
- Information Security
- Customer Support
- Technical Support

Generally, implementation projects follow a process that generally matches the outline of this publication. The typical process is:

- [Project Initiation](#) on page 31
- [Data Communication](#) on page 31
- [Interface Development](#) on page 32
- [Testing](#) on page 32
- [Production](#) on page 33

Project Initiation

To begin the project, you will meet with LexisNexis Risk Solutions to outline your organization's goals and significant aspects of the project.

Depending on the complexity of your project, LexisNexis Risk Solutions may request that you complete a project questionnaire regarding your overall project plans and covering your organization's account settings and product options. During a kick-off meeting, LexisNexis Risk Solutions discusses the project and identifies milestones and deadlines.

Your Implementation Manager works with you to engage the correct business and technical contacts at your organization to establish roles and responsibilities within LexisNexis Risk Solutions and on your team. Your Implementation Manager also gives you access to the technical documentation site (<https://docs.lexisnexisrisk.com>), which provides various documentation resources that are needed to implement the product.

Your Implementation Manager works to get you access to a database that contains fictitious information, called the Customer Test Data Query Tool.

Your Implementation Manager schedules meetings to support your organization during its implementation. The meetings will cover topics such as the setup of product features and options, technical information, and data communication methods.

Data Communication

LexisNexis Risk Solutions technical experts work with your technical experts to establish data communication protocols for data exchange.

Your Implementation Manager sends you an email with account details, such as:

- Account numbers
- Node ID
- API (application programming interface) Endpoints for test and production
- Basic Authentication User ID(s) for test and production



You will receive a test account number and a production account number to be used for testing and in production, respectively.



Please see [Web Services](#) on page 34 section for additional connection details.

Interface Development

During this phase, your organization works to create an interface to LexisNexis Risk Solutions products and to display product information in your systems.

Your Implementation Manager supports your development process to implement the product or products. Your Implementation Manager answers questions that you have to help you get up and running quickly. Find information to support those efforts in [Interface Development](#) on page 36.

Consider the audience that you deliver the product to and their role. Include the proper controls to ensure that the interface displays and masks SPII for each audience, such as underwriter, independent agent, or consumer-facing portal. In addition to SPII, some product-specific data elements must also be masked in some cases.



During your development, refer to the [LexisNexis® Insurance Services Product Data Display Requirements](#) for this product.

Testing

LexisNexis Risk Solutions supports your organization's testing with access to a customer test environment and a database that contains fictitious information, called the Customer Test Data Query Tool.

LexisNexis Risk Solutions recommends that you conduct all testing in the LexisNexis Risk Solutions customer test environment.

This test environment searches against a database that contains fictitious information, and you may process test transactions against this database at no charge. Contact your Implementation Manager to gain access to our Customer Test Data Query Tool, which houses an electronic copy of this fictitious test data. Your Implementation Manager will give you instructions on using this test data to access our customer test environment for development and testing purposes.

For more information about testing, this publication outlines testing at various levels, in [Testing](#) on page 105.

Production

Before moving to the production environment, LexisNexis Risk Solutions examines the user interfaces and any reports that you developed based on the data that your organization receives from us.

After you and LexisNexis Risk Solutions sign off on the deliverables that were agreed on during the project initiation phase, LexisNexis Risk Solutions provides you with the production account information so that you can switch to a production environment.

When your organization is ready to move to production, you work with your Implementation Manager to schedule your move to production. Your account is turned over to our System-to-System Production Support team, and a technical account manager is assigned to your account. You are provided with production support documentation that includes contact information for the team and after-hours and weekend contact information, should issues arise after you are in the production environment. For more information, see [Production](#) on page 113.

Chapter 4

Web Services

LexisNexis® Risk Solutions provides technical support in establishing data communication protocols. It supports various real-time and batch (future release) communication methods.

In implementing secure data communication for JSON (JavaScript object notation), the following technologies will be used:

- HTTPS POST
- SSL (secure sockets layer) certificates
- Basic Authentication
- OAuth 2.0
- IP Address restrictions

Additionally, LexisNexis Risk Solutions provides format specific communication protocols for JSON and SFTP (secure file transfer protocol)(future release).

Basic Authentication

Preferably, two users at your organization will each have two sets of credentials (username and password)—one set for the test environment and one set for production environment.

The Establish Secure Internet Connection section of the [LexisNexis Risk Solutions Insurance Solutions Data Communication Setup Guide](#) gives more information about requesting credentials.

OAuth 2.0 Token

Authentication is a 2-step process.

1. Using Basic Authentication credentials, pick up token using the OAuth TIG for instructions. The token can be used repeatedly for product ordering authentication for the time limit specified in the 'expires_in' element of the token payload. Set up a timer to repeat token retrieval step prior to the 'expires_in' deadline or if you start receiving authentication errors.
2. Use the OAuth token to order products for a specific time frame before picking up a new token.

If you receive a 401 Authentication Failure error message, in addition to troubleshooting the basic authentication step to pick up a token, make sure that your token has not expired. The expiration timing is shown in the token payload transaction: expires_in 43200. Ensure that you set up an automated process to pick a new token prior to the expiration time.

For the most up-to-date information on LexisNexis Risk Solutions OAuth standards, please see the [LexisNexis Risk Solutions OAuth 2.0 Authentication Process Quick Reference Guide](#).

Credentials for the HTTPS Header

To build a successful request, start with the header and the following credentials. An example JSON header is included in the Interactive Method Setup section of the Data Communication document.

Correct URL

LexisNexis Risk Solutions test and production environments have a unique URL by environment (test vs production), product requested, and customer name/alliance provider name. They are provided to you by your LexisNexis Risk Solutions Implementation Manager. Be sure to use the correct URL in the corresponding environment.

Valid Token Required for This Environment

Use the instructions above to pick up a valid token.

Correlation ID

It is best practice to include a Correlation ID in the HTTPS header with the label “X-Correlation-ID” in addition to the Correlation ID in the body of the order. We recommend sending the same unique Correlation ID in both places which can be used for research.

Chapter 5

Interface Development

Use this information to develop the front-end and back-end interface to LexisNexis® Risk Solutions product servers.

General JSON Guidelines

LexisNexis Risk Solutions suggests that you follow general JSON (JavaScript object notation) guidelines as you integrate with web services.

The order of elements within a given hierarchy is subject to change and is not guaranteed. You should code to accommodate changes to the element order.

Response elements may not be returned because there is no information available for the search data. You should code to accommodate the presence and absence of response elements.

Special Characters Syntax

Current JSON standards do not allow for special characters other than those found in the elements.

The following table contains a list of the conversion codes for each symbol in JSON.

Special Character Syntax

Symbol	Instruction
Left curly bracket {	Begin object
Right curly bracket }	End object
Left square bracket [	Begin array
Right square bracket]	End array
Colon :	Separation of name-value pair in a name-value pair
Comma ,	Separation of name-value pair in an object or separating a value in an array

Create Your First Request

The steps below give an overview of the process needed to prepare your first order.

Procedure:

1. Request access to the JSON Swagger/OpenAPI Spec from your LexisNexis Risk Solutions Implementation Manager.
 *The URL in the OpenAPI Spec is an example. See your Implementation Manager for your precise URL.*
 *Best Practice: Use the Technical Resources Portal Watch functionality to bookmark the content and sign up for content update notifications.*
2. Download the OpenAPI Spec and import it as a collection into Postman for initial unit testing.
3. Install the SSL (secure sockets layer) certificate in this environment.
4. Use the Data Query Tool to pull test cases that you can use to populate test requests. See [Customer Test Data Query Tool](#) on page 105.

Request Components

Use the information in this section to build a successful product request.

User Interface Development Best Practices

Use this information to help build a robust user interface.



In various places throughout this document, you find recommendations and suggestions for handling certain items. Please note that how you ultimately handle these scenarios will be based on the combined information you have from your legal, compliance, underwriting, and business teams.

Identify Users

Design your system in such a way that you know each user's role, system privileges, and content privileges.

As discussed in [Know the Users](#) on page 29, consider who will access the system and what functionality and information those users should have access to. It is important to have the correct user-identifying elements in place so that your system identifies users appropriately at sign in and at product order.

At sign in

- Basic authentication of user
- User role (for example, but not limited to: agent, underwriter, manager, support personnel)
- User privileges (for example, but not limited to: override standard process or re-order reports)
- User content privileges (for example, what information can the user see and what should be masked)
- User account number and suffix

At product order

- Include the user's account number in requests.
- Control how results are shown to the user, masking data appropriately for the user.
- Control users' ability to reorder products or select options.

Repeat Order Safeguard

To help your organization save product costs, build your organization's system in a way that prevents users from making duplicate, repetitive product requests except under certain conditions, such as if the search data has changed.

As you develop your interface, create mechanisms that prevent users from submitting multiple requests of the same product information from LexisNexis Risk Solutions. You may choose to limit the ability to make a duplicate request, for example, by role.

Consider the following suggestions to help reduce the need for multiple product requests:

- Carefully review possible error messages that are returned by the product. Not all error messages indicate that another request is needed.
- Store product results and quotes for a time and reuse the information when appropriate.
- Query stored data on a match key. Possible keys include:
 - First and last name
 - Address
 - DOB (date of birth)
 - Date of order
 - SSN (Social Security number) (if used)
 - DL (driver license) (if used)
 - DL state (if used)
 - LexID® (if returned and you store it)

In some cases, it may be appropriate to reorder a product. For example, you may wish to trigger a reorder when one of these scenarios occurs:

- When results are more than 14 days old.
- Original results included a No Hit or Not Found message.
- Critical search data has changed, such as:
 - Name
 - Address
 - DOB
 - SSN
 - FEIN (federal employer identification number)
 - DL or DL state
- The user's role allows a reorder.



Consider implementing a pop-up message that says that the request has previously been placed, are you sure you want to reorder?

Masking SPII for Regulated Data

SPII (sensitive personally identifiable information) must be masked for certain users who have access to regulated data. For information about these requirements, see the [LexisNexis® Insurance Services Product Data Display Requirements](#) publication.



Your LexisNexis Risk Solutions implementation managers review the interfaces that you develop to help you verify that your interface complies with our data display requirements. You must obtain approval from LexisNexis Risk Solutions regarding the display of the SPII data.

Display FCRA Warning

Plan for displaying an FCRA (Fair Credit Reporting Act) warning to remind end users to only order products if they have permissible purpose.

Some LexisNexis Risk Solutions products require an FCRA warning to be displayed. Consider at what point in the system workflow to show the warning appropriately so that users must accept it, but in a way that prevents users from having to accept multiple warnings as they move from product to product. The warning verbiage may come from your compliance or legal teams.

Account Numbers

Your organization is assigned a minimum of two account numbers—one for the test environment and one for the production environment. Your Implementation Manager provides these numbers to you.

If your organization supports independent or captive agents, separate lines of business, or end users in multiple locations, you will need to support additional account numbers by group. For more information, see [Consider Account Processing](#) on page 29.

Include the **accountNumber** in **requesterInformation**.

```
"requesterInformation": {  
  "requesterName": "CarrierName",  
  "accountNumber": "123456TST",
```

Source Node

The source node is an identifier that is unique to your organization. For batch requests it is required, and LexisNexis Risk Solutions recommends that you include it in all requests. It is echoed in responses.

Your LexisNexis Risk Solutions Implementation Manager provides the SourceNode identifier. If the product is available in batch, and your organization will submit both batch and interactive requests, then your organization will be assigned source nodes for batch and interactive requests. Also, your organization will be assigned different source nodes for the test and production environments.



Source node may also be called a 'node ID.'

Be sure to keep track of all of the pertinent source nodes:

- Interactive for test environment
- Interactive for production environment
- If applicable, batch for test environment
- If applicable, batch for production environment

Include the **sourceNode** in the **requesterInformation** structure. For example:

```
"requesterInformation": {  
  ... "sourceNode": "IP1234500",
```


Quoteback

This is an optional element that you can include in your request to uniquely identify components of the request, for example, the transaction, the subject, or the policy.

The quoteback is a string that you can build and include in a request to identify it. The same quoteback string is returned in the response, and it is included (optionally) in the LexisNexis Risk Solutions invoice to help you reconcile charges and allocate expenses. You can also use the quoteback to route the response back to the correct system and policy.



LexisNexis Risk Solutions recommends that you capture the quoteback that you include in the request to support the reconciliation of the results.

For batch queries, quoteback values can help match batch results to applicable quotes, policies, or records. In batch submissions there is time between the file upload and the results being returned. You can use the quoteback to help match results to requests, which is helpful when the results do not closely match the submitted request information.

Build a Quoteback

LexisNexis Risk Solutions recommends that you build a routine/service to automatically generate a quoteback that is unique for every product request and is interpretable to your support teams. The Quoteback can be included in your request at several levels—the entire request, the subject level, or the product level. Including product-level quoteback is useful when there are multiple product requests in one order.



Quoteback for the request (`transactionRequestDetails.quoteBacks`) is passed through to the LexisNexis Risk Solutions invoice. The subject-level or product-level quoteback is not.

Quoteback Type and Restrictions

A quoteback is a string of up to 60 characters. It can be made up of most printable characters. Character exceptions can be found in [Special Characters Syntax](#) on page 36.

Possible Quoteback Components

These are suggestions for components of your quoteback. Not all components will apply depending on type of requests that are submitted. For example, an agency name may not be appropriate to include in a quoteback when you are using the product for interactive claims or in batch. Use the following as appropriate for the use case:

- Subject last name and the initial of the first name
- Agency, department, or team generating the quote, application, or policy
- Agent or underwriter ID codes (for example, user ID, agency code, and initials)
- Carrier name or carrier code
- Product or line of business
- Code for office placing the request
- Date and time of quote, application, or policy processing
- Quote number, policy number, and record number

Here is an example quoteback made up of: <Last name>-<First name initial>/<Agency name>/<Agent ID>/<Carrier code>/<Date>:<Time>/<Quote number>

```
SMITH-J/BIG INS/KIMK/NAWL#H/030722:13.42ET/123456789
```

This is a request-level quoteback example, which is an element of **transactionRequestDetails**.

```
"quoteBacks": [
  {
    "name": "TC",
    "value": "Johnson-J/BIG INS/JonesA/Renew/030822:13.42ET/123455555"
  }
],
```

The **name** can include any text to help identify the related request or subject within your organization. For example, you could populate **name** with the requestor's user ID, your organization's name, or an identifier used in your system.



***quoteBacks.name** is not passed through to the invoice. **quoteBacks.value** is passed through to the invoice.*

Correlation ID

A correlation ID is a required unique customer identifier for each transaction, sent in the inquiry, returned in the results, and used by technology to track a transaction internally. In the **clientCorrelationId** field, we recommend using the following UUID (Universally Unique Identifier) format: A UUID in its standard textual format is a 32-character hexadecimal string, grouped into five sections separated by hyphens, following the pattern 8-4-4-4-12.

This results in a total of 36 characters, including the four hyphens. The string is often represented as xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx, where each 'x' represents a hexadecimal digit (0-9 or a-f).

Maximum length: 36 characters in UUID format.

The following is a sample of the error received if **clientCorrelationID** is left out of the inquiry.

```
{
  "responseDetails": {
    "status": "Failure",
    "code": "4000003",
    "codeDescription": "Bad Request",
    "dateTimeCompleted": "2025-06-30T12:18:51.974",
    "messages": [
      {
        "type": "ERROR",
        "code": "XX",
        "message": "Error: $.requestDetails.clientCorrelationId: does not match the
        uuid pattern must be a valid RFC 4122 UUID"
      }
    ]
  }
}
```

Third-Party Vendors (AKA Global Alliance Partners)

A third-party vendor (processor) must provide their account number plus the account name and account number of the carrier that they are ordering for.



If you are a software provider developing a system for an insurance carrier, please check with your LexisNexis Risk Solutions Implementation Manager to determine if these requirements apply to you.

Your LexisNexis Risk Solutions Implementation Manager provides you with your account number. LexisNexis Risk Solutions recommends that you set the account numbers up as variables.

A third-party vendor must populate the **accountNumber** element with their organization's account number as provided by LexisNexis Risk Solutions. The carrier name, for whom the third-party vendor is working, goes into **carrierId**. Carrier ID is an alphanumeric string of up to 50 characters. The LexisNexis Risk Solutions account number for the carrier goes into the **carrierAgencyAcctNo** element, as shown in the below structure. This should be coded as a variable based on the end user. See [Consider Account Processing](#) on page 29 and [Know the Users](#) on page 29.

The following code sample shows how a third-party vendor includes both their own and the carrier's account information in a request.

```
"requesterInformation": {  
  "requesterName": "ABC Insurance",  
  "accountNumber": "123456ABC",  
  "carrierId": "Sample Insurance",  
  "carrierAgencyAcctNo": "234567ZYX",  
  ...  
},
```

If the request does not contain the proper carrier account information, you receive an error message (with message code such as C5) and your order is rejected.

```
{  
  "messageType": "ERROR",  
  "messageCode": "C5",  
  "message": "Carrier Acct Number or Agency Acct Number value is blank or invalid."  
}
```

Billing Code

The billing code request element is available for your organization to add information that is echoed back in the results and in LexisNexis Risk Solutions invoices.

Your organization may wish to use **requesterInformation.billingCode** to provide additional information in billing invoices. For example, your organization may wish to include a billing code indicating which team, office, or region the request is from.

The following code sample shows how to include a billing code in the **requesterInformation** section to support internal tracking and invoicing.

```
"requesterInformation": {  
  ...  
  "billingCode": "123"
```

Please contact your Implementation Manager for information on setting up this feature. Coordination with the accounting department is required.



The maximum length is 10 characters. Please note, only the first 5 bytes are passed to the invoice.

Minimum Required and Recommended Search Criteria

To minimize No Hit scenarios, it is essential to capture and incorporate all key elements in your search data.

It is important to review the request structure and identify the data elements required for a search and recommended for successful product results. The tendency is to require the minimum amount of input to save the user time. However, from a cost perspective, you do not want to repeat searches because the minimum input is returning poor search results. LexisNexis Risk Solutions recommends that your organization code to recommended search criteria. Each state has different search criteria. Refer to the [Motor Vehicle Record Order Requirements by State](#) for state specific search criteria.



If your organization is implementing multiple products in one project, work with your LexisNexis Risk Solutions Implementation Manager to discuss how to identify the required and recommended search criteria for multiple products.

Response Components

Use the information in this section to set up result handling for the product.

Search requests go through several systems as they are processed by LexisNexis Risk Solutions. Success and failure can occur at different points in the processing.

This section covers messages, transaction details, and product results, and how to interpret them.

Prepare Screen Reviews

LexisNexis Risk Solutions reviews the data that your systems share with end users. Use this section to prepare for the screen review process.

Your organization must follow the LexisNexis® *Insurance Services Product Data Display Requirements* when building your user interface. The publication includes data display requirements for several audiences.

At least two weeks prior to production, prepare screenshots of your user interface to show how it meets the data masking requirements for each audience that your system supports. Each audience may have different requirements. Prepare screenshots that clearly display your organization's compliance with these requirements for each audience. Share this information with your LexisNexis Risk Solutions Implementation Manager.

Your document should include:

- Data entered by the end user
- LexisNexis Risk Solutions data returned in the result
- LexisNexis Risk Solutions data returned to the end user

Please show a screenshot for the application flow, demonstrating each step in your process. Include examples with minimum, partial and complete search data provided. Provide this information for each applicable end user audience covered in the *LexisNexis® Insurance Services Product Data Display Requirements*.

The screenshots below are provided to help give you an example of how to represent the information. Use the *LexisNexis® Insurance Services Product Data Display Requirements* to determine what information is to be considered.



The following example screenshots are for illustrative purposes only.

Audience: Consumer User

Search Data Provided

Enter Subject Information

Subject One

* Required fields.

Subject Name

Last *

First *

Middle

Suffix

Gender

DOE

JOHN

▼

- ▼

Date of Birth

01/17/2001

(MM/DD/YYYY)

SSN

NNN-NN-NNNN

(Ex.: 123-45-6789, 123456789)

Enter Address

Primary Address (1)

Prior Address (0)

* Required fields.

Number

Street Name*

Apt/Suite/Unit Number

Street

123

ANYSREET

City*

ANYTOWN

State*

GA-Georgia ▼

Zip Code*

30001

Enter License Information

Driver License

License State

Select State ▼

Prior License State

Select State ▼

License Number

Prior License Number

INS0509-EN_US — 1 June 2026

LexisNexis MVR JSON Guide | Page 47

Data Returned

Search Data

Search Information		
Subject 1		
Current Information		
Name: JOHN DOE	LexID:	Date of Birth: 01/17/2001
DLN State:	DLN:	SSN:
Gender:		
Address: 123 ANYSTREET ANYTOWN GA 30001		
Policy Type:	Policy Number:	Policy Issuing Company:

Found Data

Search Information		
Subject 1		
Current Information		
Name: JOHN DOE	LexID:	Date of Birth: 01/17/2001
DLN State: GA	DLN: 100000000	SSN: 232120000
Gender:		
Address: 123 ANYSTREET ANYTOWN GA 30001		
Policy Type:	Policy Number:	Policy Issuing Company:

Product Data

Product Data

Additional Drivers		
Subject 1		
Name: JOHN DOE	Date of Birth: 01/17/2001	Gender: Male
Driver License Type:	DL State: GA	DL Number: 100000000
DL Expiration Date:		
SSN: 232120000		
Subject 2		
Name: JANE DOE	Date of Birth: 06/11/1974	Gender: Female
Driver License Type:	DL State: GA	DL Number: 200000000
DL Expiration Date:		
SSN: 233130000		



LexisNexis Risk Solutions reviews your screenshots to ensure compliance with the LexisNexis[®] Insurance Services Product Data Display Requirements. Please be available to answer questions regarding the user interface and allow sufficient time to update or repair the interface if any updates in masking are required prior to your production date.

Handle Sensitive Items

Some information shared with LexisNexis Risk Solutions and returned by the product is considered sensitive and must be handled according to compliance regulations and your contract with LexisNexis Risk Solutions.

With all sensitive items, work with your compliance or legal team to determine how they should be handled by your system.

LexisNexis Risk Solutions Alert Messages

LexisNexis Risk Solutions returns alerts in this product.

The majority of alert messages are flags that a consumer can add to their report indicating: identity theft, fraud alert, security freeze. An alert can also indicate that a legal hold has been placed on the consumer's report. Depending on the type of alert, all the consumer's information may be withheld or only a portion of it. Similarly, the consumer may be able to grant access to the blocked information or not, depending on the alert.

Four types of alert messages could be returned: security freeze, fraud alert, legal hold and identity theft.

In the event of a security freeze or fraud alert, the entire report is suppressed, and consumer statements, if applicable, are returned. In the case of a legal hold, the entire report is suppressed. In the case of an identity theft, only the data associated with the identity theft is suppressed, and all other information about the consumer is returned.

Alerts are returned with these codes and messages. For alert messages of SF, FA and LH, the status will return as 'Alert Message', the product processing status code will return as F, and an LexisNexis® SVC™ (Standard Violation Code) code that reflects a no-hit. Suggested handling of the alerts varies depending on the alert type.



Please note, the “Suggested Handling” information regarding LexisNexis® Advanced Linking Initiative records shows possibilities, and how you ultimately handle them will be based on your legal and compliance team’s recommendations, business decisions, underwriting philosophy, the states you do business in, and the consumer base you target. It is up to you to ultimately decide what to do with the record and consumer-level statements, as well as what to do with the three alerts that suppress data.

For these 3 alerts, it is not recommended to rate the customer in some default way, such as by treating them as a no-hit and issue the policy, as you have limited or no underwriting information on the consumer. Using this method may inadvertently attract poor risks to your company. Unlike a true “No Hit” situation, Alerts generally apply across all FCRA products, limiting the information you have to accurately rate the consumer. Remember that Security Freeze is the only completely voluntary alert, and does not require “cause”. A savvy consumer could try to hide one or more dirty report(s) behind a Security Freeze alert.

For a consumer facing portal, if an alert for Legal Hold, Fraud Alert, or Security Freeze is found when ordering a report, it is best to display a slightly modified version of the ALi alert message to the consumer customer:

OUR ATTEMPT TO ORDER REPORTS FROM LEXISNEXIS RETURNED AN ALERT MESSAGE ON THE FOLLOWING PERSON'S FILES: ___[customer name]___.

TO CONTINUE THE QUOTING PROCESS, THIS PERSON MUST LIFT THE ALERT BY CALLING LEXISNEXIS RISK SOLUTIONS AT 800-456-1244.

LexisNexis Risk Solutions recommends that your website displays that an alert message was returned and provides next steps for the consumer. LexisNexis Risk Solutions does not recommend that you display which alert was found as that may give away sensitive information on a customer's family member of which they had no knowledge.

The following code sample shows a product processing status that indicates the data has been suppressed due to an alert.

```
"productProcessingStatusDescription": "Alert Message",
```

The following code sample shows an example of an SVC code section.

```
"standardViolation": {
  "fullSVC": "09110",
  "primarySVC": "09110",
  "description": "MVR RECORD NOT FOUND",
  "violationClassification": "Uncategorized_Citation_or_Assigned_from_MVR_Status_or_Conditions"
```

Fraud Alert

Message Code: FA

Message: THE SUBJECT OF THIS CONSUMER REPORT CURRENTLY HAS A SECURITY FRAUD ALERT ON FILE PREVENTING THE RETURN OF THE INFORMATION YOU REQUESTED. IF THE CONSUMER WOULD LIKE THEIR SECURITY FRAUD ALERT LIFTED PLEASE INSTRUCT THEM TO CALL LEXISNEXIS RISK SOLUTIONS INC. AT 800-456-1244.



If the consumer has provided a phone number, then LexisNexis Risk Solutions returns the following additional message - THE CONSUMER HAS PROVIDED THE FOLLOWING PHONE NUMBER FOR VERIFICATION PURPOSES: XXX-XXX-XXXX.

Suggested handling: Display the message to end users. Ask the consumer to contact LexisNexis Risk Solutions to lift the alert. After the alert is lifted, re-order the report one time.

Identity Theft

Message Code: IT

Message: THE SUBJECT OF THIS CONSUMER REPORT CURRENTLY HAS AN IDENTITY THEFT ALERT ON FILE PREVENTING THE RETURN OF SOME OR ALL OF THE INFORMATION YOU REQUESTED.

Suggested handling: You can use all data returned in the report as normal for underwriting and quoting purposes.

Legal Hold

Message Code: LH

Message: THE FILE FOR THIS CONSUMER IS NOT CURRENTLY AVAILABLE.

Suggested handling: Display the message to end users. Ask the consumer to contact LexisNexis Risk Solutions for assistance.

Security Freeze

Message Code: SF

Message: THE SUBJECT OF THIS CONSUMER REPORT CURRENTLY HAS A SECURITY FREEZE ON FILE PREVENTING THE RETURN OF THE INFORMATION YOU REQUESTED. IF THE CONSUMER WOULD LIKE THEIR SECURITY FREEZE LIFTED PLEASE INSTRUCT THEM TO CALL LEXISNEXIS RISK SOLUTIONS INC. AT 800-456-1244.

Suggested handling: Display the message to end users. Ask the consumer to contact LexisNexis Risk Solutions to lift the alert. After the alert is lifted, re-order the report one time.

LexisNexis Risk Solutions Consumer Statements

LexisNexis Risk Solutions returns consumer statements in this product.

Consumers can add brief statements to their reports that, for example, give additional information or disagree with outcome of an investigation. Consumers can add statements to their reports at two levels, giving information related to the entire report (called the consumer level), or giving information about one particular record within the report (called the record level). Record-level statements are available for most products.

Consumer-level statements are returned in a **alertMessage.message** structure. Record-level statements, when available, are typically returned in a structure related to a particular record.

This product may return up to 20 consumer statements. Each statement text can be up to 3000 characters in length.

LexisNexis Risk Solutions Consumer Statement Examples

Use these examples to help you understand how consumer statements are returned.

Consumer-level statements

Consumer-level statements appear in the **alertMessages** structure along with a code of "CS". Each statement text can be up to 3000 characters in length.

The following code sample shows how a consumer-level statement is represented in the **alertMessages** structure using the code "CS".

```
"consumerStatements": [
  {
    "statement": "I AM A CONSUMER AND THIS IS MY STATEMENT TO INFORM: MY FIRST NAME IS INCORRECT ON MY PROFILE. END OF CONSUMER STATEMENT.",
    "statementDate": "2018-07-17"
```



*In the event the **statementDate** is not returned, it will be included in the **Message**.*

Suggested Handling

LexisNexis Risk Solutions recommends that you display consumer level and record level statements to your internal end users, such as agents, call center representatives, and underwriters as talking points when interacting with the consumer. In some cases, the contents of the consumer statement may give some indication of a "Significant Life Event" per the carriers underwriting rules. This may include any statements that indicate that the consumer was affected by COVID-19, or other similar triggers. Set up some type of process to ensure these are handled based on your underwriting rules.



Please note, the "Suggested Handling" information regarding ALi records shows possibilities, and how you ultimately handle them will be based on your legal and compliance team's recommendations, business decisions, underwriting philosophy, the states you do business in, and the consumer base you target. It is up to you to ultimately decide what to do with the record and consumer-level statements, as well as what to do with the three alerts that suppress data.

Record-level statements

Record-level or violation-level statements appear as a message within the structure of **MVRReport**, in the **ViolationDescriptions** element. The message is returned in one or more **ViolationDescription** elements.

The following code sample illustrates how a record-level statement is returned within the **ViolationDescriptions** element of an LexisNexis® Motor Vehicle Record (MVR) report.

```
"recordType": "Conviction",
"recordDescription": "NO INSURANCE",
"violationDate": "2024-05-12",
"convictionDate": "2024-05-25",
"stateViolationCode": "INS",
"descriptions": [
  "LOC: BEADLE",
  "CONSUMER STATEMENT AS OF 01/01/2019",
```

**"THIS IS A VIOLATION RECORD-LEVEL STATEMENT",
"END OF CONSUMER STATEMENT"**

],

Adverse Action Information and Post Notification

To meet FCRA requirements, consumers must be notified if the information that your organization receives from LexisNexis Risk Solutions causes your organization to make a decision that negatively impacts the consumer.

Examples of negative impact to consumers due in part or in whole due to product results include:

- Customer rates affected
- Customer denied insurance
- Customer insurance canceled
- Customer insurance not renewed

To prepare to handle consumer notifications, work with your compliance or legal teams to determine what results would trigger an adverse action and what information you need to send to your organization's adverse action notification system.

In the event of an adverse action made against a consumer, send relevant information to your organization's adverse action notification system. Your system should capture some product information for inclusion in a post notification, for example:

- The LexisNexis Risk Solutions Consumer Disclosure address and contact information
- The product reference number, as mentioned in [Capture Response IDs](#) on page 53
- If applicable, product reason codes and descriptions

Post-Notification Letter

Some state insurance departments may require that you report more specific reasons to the consumer about the action you take based on their credit information. You should consult your legal counsel to determine how your company should handle post-notifications to your consumers.

Capture Response IDs

LexisNexis Risk Solutions products include IDs to help your organization track how the product information is used.

This product includes an order ID to help your organization track how the result information is used. For example, these IDs can be used in adverse action notifications or in troubleshooting efforts.

Order ID

The **orderId** element is a unique 6-13 character ID generated by the API in the response. It encompasses all products included in the request. It returns in the **responseDetails.orderId** element.

The following code sample shows how the **orderId** element appears in the **responseDetails** section to uniquely identify the entire order.

```
responseDetails": {
  ...
  "orderId": "6WCJI470W74",
```

Product Reference Number

The **processingInfo.referenceNumber** is a unique identifier for a specific product result. This number may appear multiple times in the response if you requested multiple products in one order.

The following code sample shows how the **processingInfo.referenceNumber** is used to uniquely identify a specific product result within a response.

```
"processingInfo": {
  "productProcessingStatusCode": "R",
  "productProcessingStatusDescription": "Activity File Clear",
  "referenceNumber": "UTTUSTQEMMLNH",
  ...
},
```

Messages

Important system and product information is returned in messages.

The **alertMessages**, **productMessages**, **miscellaneousMessages**, and **dataNotIdentifiedMessages** will return at the bottom of the JSON response for each report.

MVR Processing Information Messages

MVR returns messages with a type of Processing Information. The Processing Information messages return for batch transactions when the status is Invalid Order.

The following table lists the possible messages that have a type of Processing Information.

MVR Error Messages

Code	Message
1200	ORDER REJECTED – GENERAL

MVR Error Messages (Continued)

Code	Message
1201	ORDER REJECTED - INVALID DRIVERS' LICENSE NUMBER
1202	ORDER REJECTED - INVALID LAST NAME FIELD
1203	ORDER REJECTED - INVALID FIRST NAME FIELD
1204	ORDER REJECTED - INVALID MIDDLE NAME FIELD
1205	ORDER REJECTED - INVALID NAME SUFFIX FIELD
1206	ORDER REJECTED - INVALID DATE OF BIRTH FIELD
1207	ORDER REJECTED - INVALID SEX CODE FIELD
1208	ORDER REJECTED - INVALID SOCIAL SECURITY NUMBER FIELD
1209	ORDER REJECTED - INVALID AIDS FIELD COUNTS
1210	ORDER REJECTED - IDENTIFICATION NO. ONLY
1213	ORDER REJECTED - UPDATED STATE ACCESS CODE/AUTHORIZATION FORM REQUIRED
1214	ORDER REJECTED - CALL CPS 1-800-456-6432
1215	ORDER REJECTED - JUVENILE RECORD NOT AVAILABLE VIA AUTOMATION. RESUBMIT
1216	ORDER AND JUVENILE INFORMATION RELEASE FORM TO LEXISNEXIS VERBAL
1217	CENTER OR DIRECTLY TO STATE OF HAWAII
1219	ORDER REJECTED - NOT ELIGIBLE TO RECEIVE MVR FROM STATE - CONTACT DMV
1220	ORDER REJECTED - MISSING NAIC NUMBER, CALL CPS 1-800-456-6432
1301	SOUNDEX REJECT - INVALID DRIVER'S LICENSE #
1302	SOUNDEX REJECT - INVALID LAST NAME
1303	SOUNDEX REJECT - INVALID FIRST NAME
1304	SOUNDEX REJECT - INVALID MIDDLE NAME
1305	SOUNDEX REJECT - INVALID NAME SUFFIX
1306	SOUNDEX REJECT - INVALID DATE OF BIRTH
1307	SOUNDEX REJECT - INVALID SEX CODE
1308	SOUNDEX REJECT - INVALID SOCIAL SECURITY #
1309	SOUNDEX REJECT - INVALID LAST NAME OR DL NUMBER
1310	SOUNDEX REJECT - INVALID DATE OF BIRTH OR DL NUMBER
4000	MVR REFORMAT ERRORS
4100	UNIDENTIFIED DATA WAS RECEIVED FROM THE DMV - PLEASE CONTACT LEXISNEXIS
7000	SVC ERRORS

MVR Informational Messages

MVR returns informational messages, which may contain information about the driver license or the data source that the information originated from.

These messages are for informational purposes only and no action needs to be taken.

MVR Informational Message Descriptions

Code	Database Message
1005	NO ACTIVITY FOR THIS LICENSE NUMBER IN THE PAST 6 MONTHS
1006	NO ACTIVITY FOR THIS LICENSE NUMBER IN THE PAST 12 MONTHS
1007	INFORMATION OBTAINED FROM CPS DATA BASE LAST UPDATED THROUGH **/**/**
1008	NO ACTIVITY FOR THIS LICENSE NUMBER SINCE MM/YY
1009	NO ACTIVITY FOR THIS LICENSE NUMBER IN THE PAST 60 MONTHS
1010	NO ACTIVITY FOR THIS LICENSE NUMBER IN THE PAST 36 MONTHS
1011	NO ACTIVITY FOR THIS LICENSE NUMBER IN THE PAST 1 MONTH
1013	RECORD NOT FOUND. PLEASE RESUBMIT ORDER FOR BATCH DMV PROCESSING.
1014	DATABASE CURRENT AS OF **/**/**
1015	PLEASE VERIFY PERSONAL DATA. PERSONAL DATA OBTAINED FROM CPS DATABASE.
1016	ACTIVITY FILE HIT - PARTIAL VIOLATION LISTING
1017	NO ACTIVITY FOR THIS LICENSE NUMBER FOUND BETWEEN **/**/** AND **/**/**
1018	ACTIVITY FOR THIS LICENSE NUMBER FOUND BETWEEN **/**/** AND **/**/**
1019	DRIVER HAS BEEN MONITORED SINCE **/**/**
1020	DRIVER NOT FOUND IN YOUR MONITORING LIST
1021	DRIVER NO LONGER BEING MONITORED
1022	ORIGINAL NO HIT - MONITORING SERVICE
1023	NO HIT CONDITION EXISTS - MONITORING SERVICE
1024	DRIVER FOR MONITORING ADDED **/**/**
1025	DRIVER HISTORY PREDICTED CLEAR AS OF **/**/****. MVR NOT ORDERED.
1026	DRIVER NOT RECEIVED FOR MONITORING
1027	DRIVER NOT FOUND AT STATE
1028	DRIVER MONITORING LAPSE FROM **/**/** TO **/**/**
1029	LICENSE STATUS - *****
1030	LICENSE EXPIRED EXCEEDS 12 MONTHS - **/**/**
1031	NON-LICENSE CLASS - *****
1032	RENEWAL DRIVER HISTORY RESULT ABOVE THRESHOLD. MVR NOT ORDERED.
1033	RENEWAL DRIVER HISTORY ORDER DID NOT MEET CRITERIA. MVR NOT ORDERED.
1034	PREVIOUS MONITOR RESULT RETURNED MM/DD/YY
1035	NO ACTIVITY FOR THIS LICENSE NUMBER IN THE PAST 84 MONTHS
1036	PERSONAL/VIOLATION DATA FROM LEXISNEXIS DATABASE. DMV MVR NOT ORDERED.
1047	ACTIVITY FOUND FOR THIS LICENSE NUMBER IN THE PAST 36 MONTHS
1048	ACTIVITY FOUND FOR THIS LICENSE NUMBER IN THE PAST 60 MONTHS
1049	ACTIVITY FOUND FOR THIS LICENSE NUMBER IN THE PAST 84 MONTHS

Processing Statuses

These statuses indicate the outcome of the transaction and may be returned with product results.

Transaction Processing Statuses

These transaction processing statuses may be returned with product results.

In the **responseDetails.status** element, a transaction processing status returns indicating whether the transaction processed successfully or not. Review each status and determine how your interface will respond to the status.

The following code sample shows how a transaction processing status is returned in the **responseDetails.status** element to indicate the outcome of the transaction.

```
"responseDetails": {  
  "status": "Success",  
  "code": "2000001",  
  "codeDescription": "Result(s) returned for all order(s) within the transaction."  
}
```



Some of these statuses are product-specific and may not return for this product.

The following table outlines common transaction processing statuses, including their HTTP status codes, response codes, descriptions, and recommended actions.

Transaction Processing Statuses

Transaction Status	Response Code	Code Description	Recommended Response
Success	2000001	Result returned	Review product processing status.
Incomplete	2070002	Waiting for product result	Consult with your implementation manager for common turnaround times (vary by product) in order to create a workflow to determine expected fulfillment time.
Failure	4000003	Bad Request	Review responseDetails.status , code , and codeDescription . Review the messages section for the failed order to determine why and identify your next steps.
Failure	4010001	Unauthorized	Review Basic Authentication credentials, Test vs Production environment, Token URL, Token value and Token Expiration time.
Failure	4030002	Forbidden	Review credentials, status codes, descriptions and messages for details.
	4030003		
	4030004		

Transaction Processing Statuses (Continued)

Transaction Status	Response Code	Code Description	Recommended Response
Failure	4220019	Invalid data	Review credentials, status, status codes, codeDescriptions and messages in both the responseDetails and inside of the {xxx}Responses element.
	4220021		
	4220022		
	4220023		
Failure	5000010	Internal Server Error	Review credentials, status codes, descriptions and messages for details.
Failure	5030060	Service Unavailable	For the Beta rollout, Customers must use their existing order format to fulfill batch and roll to batch orders. Some examples of the 503 Service Unavailable messages are: SERVICE TEMPORARILY UNAVAILABLE, THIS STATE DOES NOT ALLOW ONLINE ACCESS – REORDER IN BATCH, REQUESTED STATE IS DISABLED BY LEXISNEXIS – TRY AGAIN LATER, DMV CLOSED OR DOWN FOR SCHEDULED MAINTENANCE – TRY AGAIN LATER, LEXISNEXIS TIMEOUT – DELAY IN SEND/ RECEIVE, REQUESTED STATE IS CURRENTLY UNAVAILABLE, DATABASE AT DMV TEMPORARI.
	5030061		
	5030062		
	5030063		
Product Failure	2070003	Bad Request Unauthorized Forbidden Invalid data Internal Server Error Service Unavailable	Review the messages section for the failed order to determine why and identify your next steps. See above for suggestions on handling Service Unavailable, Invalid Data, Unauthorized, and Bad Request errors.
Product Failure	2070004	Internal Processing Error	Review credentials, status codes, descriptions and messages for details.
Pending	2070005	Waiting for product result	Consult with your implementation manager for common turnaround times (vary by product) in order to create a workflow to determine expected fulfillment time.

Product Processing Statuses

This section provides a comprehensive list of processing status codes for MVR. Each status code is accompanied by a clear description, providing detailed insights into the processing outcomes for different orders.

The following table lists MVR product processing status codes, their descriptions, and additional details to help interpret the results returned in a driving history report.

MVR Product Processing Status Codes

MVR Processing Status Code	MVR Processing Status Description	Details
A	Activity Found	Activity found in the LexisNexis Risk Solutions database.  <i>Status code A will only be returned for violation check.</i>
C	Clear	There is no activity in the driving history section.
F	Alert Message	Alert Message on file for LexisNexis Risk Solutions Advanced Linking Initiative Fraud Alert, Security Freeze or Legal Hold.
H	Hit – Activity Found	There is activity in the driving history section.
N	No Hit	The DMV (Department of Motor Vehicles) returned a “not found ” indication in the response to the order.
O	Invalid Order	The order failed in editing or in another phase of order processing. It was not processed through the DMV.
P	Pending Information	The DMV responded to the order by indicating another response would be forthcoming within a certain time period. Used for California only.
R	Activity File Clear	This status is returned when the order processed within the LexisNexis Risk Solutions infrastructure did not find activity during the requested search period for Activity Files, or meet the recommended threshold for a 2.0 request. This order will not go to the state for a LexisNexis Risk Solutions MVR (motor vehicle record).
S	Soundex Rejected	For soundexing states, the order was rejected because the required soundexing elements were not passed.
U	Unreturned	The DMV did not respond to the order.
D	Additional response – Hit	Additional Response is a Hit.
X	Additional response – No Hit	Additional Response is a No Hit.
Y	Additional response – Clear	Additional Response is a Clear.

Echoed Search Input

The JSON response structure returns the input search values.

The inquiry data that was sent to the product is included in the **requestSubject** element of the results. For some products, this information may reflect enhanced data.

Error Handling

Requests pass through several different systems as they route from your organization to LexisNexis Risk Solutions and back. Develop error handling to address issues at various phases within that process.



Along with developing your system to handle errors, test for errors at different points in the process to help support the development of a robust system that can handle a variety of real-world problems.

Monitor Transaction Logs

Build monitoring into your transaction logs to support the health of your system.

Monitoring can provide the following alerts, which may support your organization's business:

- Your organization's system is down
- Your organization's slow response times
- Sporadic errors, which may indicate problems with:
 - Customer orders
 - LexisNexis Risk Solutions response times
 - LexisNexis Risk Solutions system
- Number of errors or repeated errors
- Reduction in ordering volumes
- Business conditions, such as greater than expected responses returning 'not found' results


Error Handling Layers

Errors can occur at several places during result processing. LexisNexis Risk Solutions recommends that you develop error handling to address possible errors at various points within the life of a transaction.

Error Handling Layers

Report Interpretation: Error Handling:

Errors can occur at any layer / stage of the transaction:

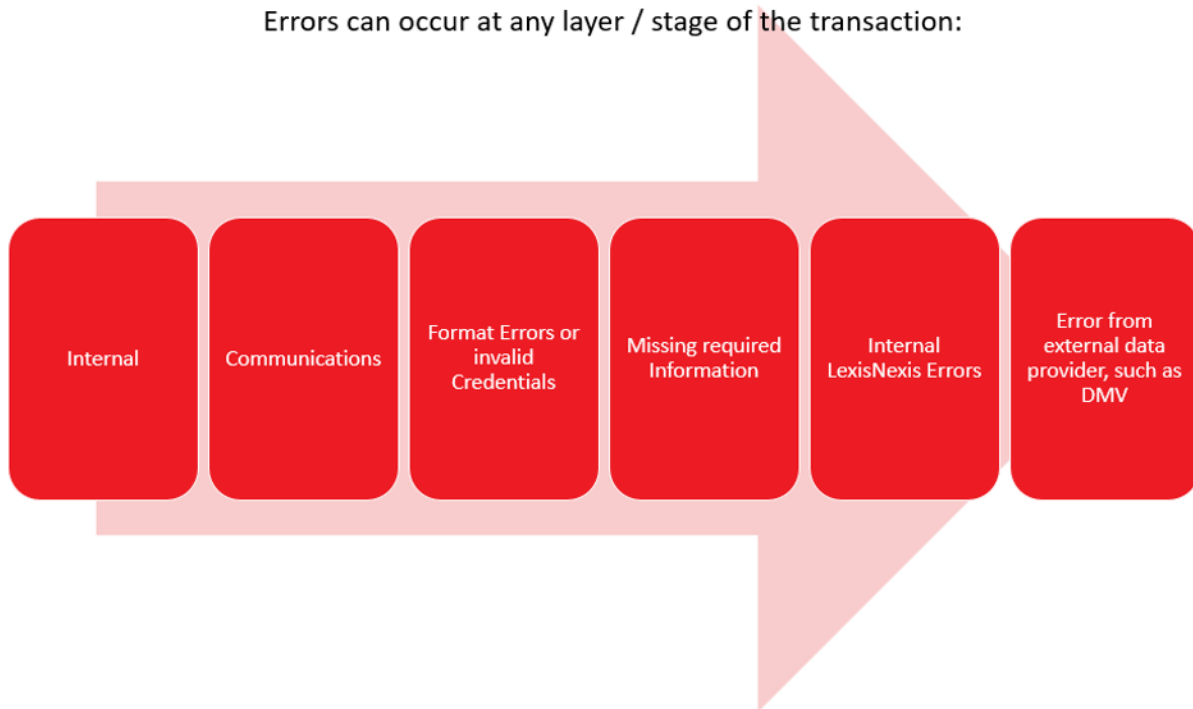

JSON Modernized Platform Error Handling

The modernized platform has standardized the reporting of the results status in two ways.

1. A set of high level flags inside of **responseDetails** that details success vs failure, and returns a code and a **codeDescription** that gives additional details.

The following code samples demonstrate how the modernized platform reports result statuses using high-level flags within the **responseDetails** element, including **status**, **code**, and **codeDescription** values.

```
responseDetails": {  
  "status": "Success",  
  "code": "2000001",  
  "codeDescription": "Result(s) returned for all order(s) within the transaction."
```

```
"responseDetails": {  
  "status": "Failure",  
  "code": "2070003",  
  "codeDescription": "Service Unavailable",
```

2. If the order successfully generated a product order, then a product response will also contain a **status**, **code**, and **codeDescription**.
 - Success – the product was successfully ordered and a result was received.
 - Failure – the order was not successfully processed.
 - Product Failure – review both the Transaction level and the Product level status codes and messages.
 - Incomplete – product dependent. Applies to products available in Batch or Roll to Batch. *Future enhancement
 - Pending – product dependent. *Future products

Errors can be easily identified by checking the **responseDetails.status** field. Anything that does not return “Success” requires further analysis.

Step-by-step error handling suggestions:

1. If `responseDetails.status = failure`, do the following:
 - a. Check the **status**, **code**, and **codeDescription** to identify the general category of error.
 - b. Check the messages section found in the transaction and/or within the product responses element for details. Information will be found in {xxx}Response where xxx is replaced by the product name such as **driverDiscoveryResponse**.
 - c. Check the product processing status.
2. Certain families of errors may indicate an error in credentials or the authentication process, or order data and may be repaired and resubmitted on your side.
 - a. 400 series response codes may indicate authentication problems, such as basic authentication errors, O-Auth Token failures and other similar issues which should trigger a troubleshooting process on your side.
 - b. Invalid Data errors indicate account number or search data problems for the product requested and should trigger a troubleshooting process on your side. In some cases, they can be self-repaired and reordered if you display the error message to the end user. For example, “missing last name” is an example of this scenario.
3. See the Transaction Processing Statuses table on [Processing Statuses](#) on page 57 for a summary of the high-level statuses.
4. See the Error Codes table on [Insurance Platform Errors](#) on page 66 for a summary of the specific error codes and messages.
5. If receiving an ALi alert that suppressed the data (SF, FA, LH), the Transaction Status = Success, and the `productProcessingStatus = “Alert Message”`.
For best practices for handling these scenarios, see [LexisNexis Risk Solutions Alert Messages](#) on page 49.
6. If `responseDetails.status = Success`, do the following:
 - a. Follow normal workflow for each possible product processing status.
 - b. Review all messages within the product results for product information.
 - c. Review all messages in the general messages section for supplemental information.

Customer Internal and Network Errors

Create error handling to address classes and volumes of issues that may occur within your systems or network.

Communication Errors

Create processes to handle communications errors.

Errors can occur during system to system communication. As you develop the interface, work to identify the communication error scenario and initiate the appropriate troubleshooting workflow. Create error handling methods for issues such as, but not limited to:

- Requests sent in an unsecured method
- Web services using HTTP versus HTTPS
- When your network is down for maintenance
- Requests when LexisNexis Risk Solutions systems are unavailable during the maintenance window
- The request times out
- Incorrect authentication, which covers both basic authentication and O-Auth token issues
- Problems with your internet connection

The following is an example of a web server error.

```
{
  "timestamp": 1749667477430,
  "path": "/green-service-gateway/placeRulesOrder",
  "status": 405,
  "error": "Method Not Allowed",
  "requestId": "c6803590-10028"
}
```

Authentication Failure

Verify the following if you receive an Authentication Failure or Authorization Failure:

- You are including Basic Authentication in the HTTPS Header call to token server.
- You are using the proper credentials for either the test environment or the production environment.
- You have encoded the username and password using Base 64.
- If you are transmitting from new servers, you have sent the IP addresses for the new servers to LexisNexis Risk Solutions to add to the allow lists using the standard contact methods.
- Verify using OAuth 2.0.
- Verify that the new token is still valid and that the **expires_in** value has not been exceeded.
- If you are still having problems, contact the following, and have the order ReferenceNumber or OrderID:
 - Your Implementation Manager if you are ordering in the Customer Test environment.
 - Your TAM Production Support team if you are ordering in the Production environment at 1.800.236.9993 or S2sproduction@lexisnexisrisk.com.

The following is an example of a basic authentication or OAuth token error.

```
{
  "responseDetails": {
    "status": "Failure",
    "code": "4010001",
    "codeDescription": "Unauthorized",
    "dateTimeCompleted": "2025-06-04T13:34:45.731",
    "messages": [
      {
        "type": "ERROR",
        "message": "Authentication Failure"
      }
    ]
  }
}
```



LexisNexis Risk Solutions recommends you log the status, code, and code description, and add monitoring for these authentication failures to your error handling routines. Call LexisNexis Risk Solutions Production support for assistance.

The following is an example of an authorization error.

```
{
  "responseDetails": {
    "status": "Failure",
    "code": "4030004",
    "codeDescription": "Forbidden",
    "orderId": "8DOBON5ZWG0",
    "clientCorrelationId": "ABC12345",
    "dateTimeOrdered": "2025-01-09T17:32:28.401",
    "dateTimeReceived": "2025-06-20T11:45:08.767",
    "dateTimeCompleted": "2025-06-20T11:45:08.777",
    "quoteBacks": [
      {
        "name": "rp300",
        "value": "TC01_CS"
      }
    ],
    "messages": [
      {
        "type": "ERROR",
        "message": "Authorization Failure"
      }
    ]
  }
}
```



If you receive this error, contact your Implementation Manager during testing or Production support during production.

Insurance Platform Errors

These errors may be returned by the LexisNexis Risk Solutions insurance platform.

These errors often indicate that LexisNexis Risk Solutions is experiencing an issue which is preventing the transaction from being completed.

The following table shows error messages that may be returned by the LexisNexis Risk Solutions insurance platform.

Error Codes

Message Code	Message Type	Message	Comments	Code	Code Description
MK	ERROR	MVR interactive unavailable, batch order not submitted for subject {FIRSTNAME MIDDLENAME LASTNAME NAMESUFFIX}.	MVR Interactive unavailable. Batch order not submitted since roll-to-batch option is not enabled.	5030063	Service Unavailable.
XX	ERROR	N/A	Request is not a well-formed error. Schema validation error message will vary based on input error.	4000003	Bad Request.
EM	ERROR	Invalid Account Number : \$ACCOUNT_NUMBER.	Order contains an invalid account number.	4220019	Invalid data.
C5	ERROR	Carrier Acct Number or Agency Acct Number value is blank or invalid.	Carrier Acct Number or Agency Acct Number value is blank or invalid.	4220021	Invalid data.

Error Codes (Continued)

Message Code	Message Type	Message	Comments	Code	Code Description
G3	ERROR	Account number {} is not authorized for rule plan id {}.	Account number is not configured with the required rule plan or the customer is utilizing the incorrect product PDF.	4030002	Forbidden.
S6	ERROR	Shared Image Service Error. Please call LexisNexis at 1-800-236-9993.	This will return if a PDF/TIFF is unavailable.	5030060	Service Unavailable.
I1	ERROR	Minimum data missing: {xxxx}.	This will return if minimum order data is missing.	4220022	Invalid data.
M2	ERROR	Missing USER and/or TERMINAL information required to order CA MVR.	Missing user and/or terminal information.	4220023	Invalid data.
M9	ERROR	Account not authorized for CA Online Access for MVR; unable to place MVR order for subject {FIRSTNAME MIDDLENAME LASTNAME NAMESUFFIX}.	Account not authorized for CA online access for MVR. Verify CA State forms are on file and current.	4030003	N/A
CE	ERROR	MVR communications error has occurred. Please call LexisNexis at 1-800-236-9993.	MVR Processing Error	5030066	Service Currently Unavailable.

Error Codes (Continued)

Message Code	Message Type	Message	Comments	Code	Code Description
ML	ERROR	MVR interactive unavailable, batch order submitted for subject {FIRSTNAME MIDDLENAME LASTNAME NAMESUFFIX}.	MVR Interactive unavailable because of communication error. Batch order submitted since roll-to-batch option is enabled. If error is received, contact your implementation manager to review account settings.	5030064	Service Unavailable.
M0	ERROR	PA - Order Rejected - Updated state access code/ authorization form required for {FIRSTNAME MIDDLENAME LASTNAME NAMESUFFIX}.	Account not authorized for PA access for MVR. Verify PA State forms are on file and current.	403005	Forbidden.
DV	ERROR	The field [insert field] value is not valid. Value is not one of the following [insert options].	MVR Product data validation error.	4220025	Invalid Data.



Please note S6 is a future enhancement.

These messages typically return in the initial **messages** structure.

The following code sample shows how common authorization and validation errors appear in the **messages** structure.

```
"messages": [
  {
    "type": "ERROR",
    "code": "EM",
    "message": "Invalid account number: 123456TST."
  }
]
```

LexisNexis Risk Solutions Internal Errors

Create error handling to address classes and volumes of issues that may occur within LexisNexis Risk Solutions systems.

LexisNexis Risk Solutions may report errors at various places within the response structure to indicate, for example, when a service is unavailable, or a product is experiencing technical issues.

Here is an example of a product error.

```
"mvrResponse": {
  "responseDetails": {
    "status": "Failure",
    "code": "4220014",
    "codeDescription": "Invalid data",
    "dateTimeCompleted": "2025-06-20T13:54:30.515",
    "quoteBacks": [
      {
        "name": "TEST",
        "value": "Test Sample"
      }
    ],
    "messages": [
      {
        "type": "Error",
        "code": "010074",
        "message": "INVALID STATE POSTAL CODE"
      }
    ]
  }
}
```

Service Error Codes

These errors may be returned by the LexisNexis Risk Solutions insurance platform.

Plan to respond to errors that are related to the platform the directs product requests. These errors often indicate that LexisNexis Risk Solutions is experiencing an issue which is preventing the transaction from being completed.

MVR Communications/Application Errors

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010002	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010004	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010005	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010006	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010007	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010008	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010009	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010010	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010011	COMM	LEXISNEXIS TIMEOUT -DELAY IN SEND/ RECEIVE.	Attempt to reorder during non-peak business hours. Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5040001	Server Error/ Gateway Timeout
010012	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010014	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010015	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010016	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010017	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010018	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010019	APP	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010020	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010021	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010024	APP	SERVICE TEMPORARILY UNAVAILABLE.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4000003	Bad request
010025	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010026	APP	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010028	COMM	THIS STATE DOES NOT ALLOW ONLINE ACCESS – REORDER IN BATCH.	Resubmit the orders that resulted in a NO HIT in batch mode to obtain the MVR from the state.	5030001	Service Unavailable
010029	APP	INVALID LEXISNEXIS ACCOUNT NUMBER.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220001	Invalid data
010030	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010031	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010032	APP	NOT ALL FIELDS REQUIRED FOR ONLINE ORDER PROCESSING WERE ENTERED.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220002	Invalid data
010033	APP	LEXISNEXIS REJECT: LAST NAME INVALID OR MISSING.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220003	Invalid data

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010034	APP	LEXISNEXIS REJECT: FIRST NAME INVALID OR MISSING.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220004	Invalid data
010035	APP	LEXISNEXIS REJECT: MIDDLE NAME INVALID OR MISSING.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220005	Invalid data
010036	APP	LEXISNEXIS REJECT: BIRTH DATE INVALID OR MISSING.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220006	Invalid data
010037	APP	LEXISNEXIS REJECT: SEX CODE FIELD INVALID OR MISSING.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220007	Invalid data
010038	APP	LEXISNEXIS REJECT: SOCIAL SECURITY NUMBER FIELD INVALID OR MISSING.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220008	Invalid data
010039	APP	LEXISNEXIS REJECT: DRIVER LICENSE NUMBER FIELD INVALID OR MISSING.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220009	Invalid data
010041	APP	INVALID PROCESSING OPTIONS SELECTED.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220010	Invalid data
010042	COMM	LEXISNEXIS INTERNAL USE ONLY.	N/A	5000001	Internal server error

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010043	COMM	REQUESTED STATE IS DISABLED BY LEXISNEXIS – TRY AGAIN LATER.	Contact LexisNexis Risk Solutions or refer to automated email notification for status.	5000002	Internal server error
010044	COMM	MULTIPLE RECORDS SATISFY REQUEST. REORDER IN BATCH.	Reorder in batch. Contact LexisNexis Risk Solutions.	5000003	Internal server error
010045	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010046	COMM	DMV CLOSED OR DOWN FOR SCHEDULED MAINTENANCE – TRY AGAIN LATER.	Resubmit during scheduled DMV hours or resubmit in a batch file.	5000004	Internal server error
010047	APP	ORDER REJECTED – UPDATED STATE ACCESS CODE/ AUTHORIZATION FORM REQUIRED.	New restrictions are frequently implemented by each state's DMV. Contact LexisNexis Risk Solutions for additional details.	4030001	Forbidden
010048	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010049	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010054	COMM	DRIVER HISTORY SYSTEM UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030002	Service Unavailable

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010056	APP	SOUNDEX REJECT: INVALID OR MISSING DRIVER LICENSE NUMBER.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220011	Invalid data
010058	APP	SEARCH CRITERIA TOO BROAD. REORDER WITH PRIMARY.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4220012	Invalid data
010059	COMM	AMPLIFIED MVR NOT AVAILABLE ONLINE. REORDER IN BATCH.	Correct and resubmit, or resubmit in a batch file.	5030003	Service Unavailable
010060	COMM	THIS DL# HAS JUST BEEN ORDERED. RESUBMIT.	Although rare, if you receive this error, wait a moment before reordering. If the error persists, re-order during non-peak business hours (Peak business hours are from 10:00 to 12:00 or 14:00 to 16:00, local time) or resubmit in a batch file. Execute retry (maximum three times) or resubmit in a batch file.	5030004	Service Unavailable
010061	COMM	ADVERSE CONDITION FOUND – PLEASE REORDER THROUGH BATCH.	Resubmit in a batch file.	5000005	Internal server error

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010066	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Resubmit in a batch file.	5030001	Service Unavailable
010067	COMM	ORDER REJECTED BY DMV BECAUSE OF BAD ORDER DATA.	Contact LexisNexis Risk Solutions.	4220012	Invalid data
010068	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010069	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010070	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010071	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010072	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010073	APP	INVALID ORDER RECORD: MISSING HDR, DTL OR TRL RECORD.	Correct and resubmit, or contact LexisNexis Risk Solutions.	4000002	Bad request
010074	APP	INVALID STATE POSTAL CODE.	Correct and resubmit.	4220013	Invalid data
010076	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010077	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010078	COMM	MVR RETURNED FROM DMV DOES NOT MATCH ORDER.	Verify the search criteria being used and attempt to reorder with data that is more accurate. Resubmit in a batch file. If the error persists, contact LexisNexis Risk Solutions.	4220014	Invalid data
010079	COMM	TOO MANY PAGES, REORDER IN BATCH.	Resubmit in a batch file.	5000006	Internal server error
010080	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010081	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010082	APP	INCORRECT PRODUCT CODE FOR THIS ACCOUNT.	Research and resubmit the order with the correct product code. For assistance in determining the correct product code, contact LexisNexis Risk Solutions.	4220013	Invalid data
010083	COMM	LEXISNEXIS TIMEOUT -DELAY IN SEND/RECEIVE.	Attempt to reorder during non-peak business hours. Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030005	Service Unavailable

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010084	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010085	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010086	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010087	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010088	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010089	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010090	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010091	COMM	INVALID TERMINAL/ USER ID IN SUI RECORD.	Resubmit with the correct terminal/user ID. Contact LexisNexis Risk Solutions.	4220013	Invalid data
010092	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010093	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010095	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010096	COMM	REQUESTED STATE IS CURRENTLY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010097	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010098	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010099	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010100	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010101	COMM	RECORD LOCKED BY DMV – TRY AGAIN LATER.	Reorder later, or contact LexisNexis Risk Solutions. Execute retry -three times maximum.	5030001	Service Unavailable

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010102	COMM	DMV CAPACITY EXCEEDED.	Reorder during non-peak business hours (Peak business hours are from 10:00 to 12:00 or 14:00 to 16:00, local time). Execute retry - three times maximum. Resubmit in a batch file.	5000007	Internal server error
010103	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010104	COMM	DATABASE AT DMV TEMPORARILY.	Reorder later or contact LexisNexis Risk Solutions. Execute retry -three times maximum. Resubmit in a batch file.	5000008	Internal server error
010112	COMM	RECORD UNAVAILABLE THROUGH ONLINE. REORDER IN BATCH.	Resubmit in a batch file.	5000009	Internal server error
010113	COMM	SERVICE TEMPORARILY UNAVAILABLE.	Execute retry -three times maximum. Contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010115	APP	9 NUMERIC DLN SEARCH UNSUCCESSFUL. PLEASE REORDER IN 24 HOURS.	Reorder the next day (24 hours) to determine if secondary vendor search was successful.	5030001	Service Unavailable

MVR Communications/Application Errors (Continued)

TypeCode	APP/Comm Error	Message	Customer Procedure	Code	Code Description
010116	COMM	ACTIVITY FILE NOT AVAILABLE ONLINE – PLEASE RE-ORDER IN BATCH.	Resubmit the batch or contact LexisNexis Risk Solutions.	5030001	Service Unavailable
010118	APP	INVALID INSURANCE NAIC CODE.	Contact LexisNexis Risk Solutions.	4220013	Invalid data

The following code sample shows an example of a service error.

```
"messages": [
  {
    "type": "Error",
    "code": "010074",
    "message": "INVALID STATE POSTAL CODE"
  }
]
```

Chapter 6

MVR JSON Descriptions

The map provides a description of the elements used for ordering and receiving LexisNexis® Motor Vehicle Record (MVR).

Request Description

To properly process MVR requests, specific data is required. The following table describes data requirements for MVR requests. As a best practice, exclude any request fields without values to avoid schema validation errors.

Request Description

Name	Description
Request	Request
>requesterInformation	Requester information Structure that contains details of the entity submitting the request
>>requesterName	Requester name Maximum length 50 characters
>>accountNumber	Account number The account number is provided by your implementation manager. It is either a six digit number or a six digit number plus three character suffix. Maximum length 9 characters  <i>Required field</i>
>>carrierId	Carrier name Maximum length 50 characters  <i>Required if third-party vendor</i>
>>carrierAgencyAcctNo	Carrier account number Maximum length 9 characters  <i>Required if third-party vendor</i>

Request Description (Continued)

Name	Description
>>lineOfBusiness	Line of business Possible values: • Auto • Property • Life • Commercial (requires prior legal approval)
>>endUser	Structure that contains the end user details  <i>Commercial use only</i>
>>>companyName	Company name Maximum length 50 characters
>>>streetAddress1	Street address line 1 Includes street number and street name Maximum length 20 characters  <i>Commercial use only</i>
>>>city	City Maximum length 20 characters
>>>state	State (two-letter abbreviation) Maximum length 2 characters
>>>zip5	5-digit ZIP Code Maximum length 5 characters
>>sourceNode	Node ID The node ID is customer specific and is used to route and track orders. It is provided by your implementation manager. Maximum length 15 characters
>>billingCode	Special Billing ID You may choose to have this optional field returned on your billing invoice. (Only the first 5 characters are returned.) Contact your LexisNexis® Risk Solutions implementation manager for more details. Maximum length 10 characters
>requestDetails	Structure that contains the transaction details

Request Description (Continued)

Name	Description
>>clientCorrelationId	Client Correlation ID The client correlation ID is a unique customer identifier for each transaction returned in successful results. We recommend that you use the following UUID (Universally Unique Identifier) format: A UUID in its standard textual format is a 32-character hexadecimal string, grouped into five sections separated by hyphens, following the pattern 8-4-4-4-12. This results in a total of 36 characters, including the four hyphens. The string is often represented as xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx, where each 'x' represents a hexadecimal digit (0-9 or a-f). Maximum length 36 characters  <i>Required field</i>
>>dateTimeOrdered	Date and time of the order Structure that contains the date and time of the order YYYY-MM-DDTHH:mm:ss.sss format
>>quoteBacks	Structure that could contain one to multiple name/value pairs
>>>name	Quoteback name Maximum length 30 characters
>>>value	Quoteback value This is a transaction-level quoteback field used to match inquiries to results. It may also be the requesting/ordering company's identification code for the report. Information submitted in this element is optionally displayed on your invoices for reconciliation purposes. Therefore, the field may consist of information such as the applicant's name, or policy number. Maximum length 60 characters
>requestSubject	Structure that contains the details of the search  <i>Each state has different search criteria. Refer to LexisNexis® Motor Vehicle Record Order Requirements by State for state-specific search criteria.</i>
>>subjectQuoteback	Subject quoteback This field is the requesting/ordering company's identification code for this subject. Therefore, the field may consist of information such as the applicant's name or policy number. Maximum length 60 characters
>>lexId	LexID®  <i>Future enhancement</i> Maximum length 15 characters
>>name	Structure that contains the subject's name details

Request Description (Continued)

Name	Description
>>>prefix	Subject's name prefix (for example, Mr., Ms., Dr.) This field can contain any special characters that are valid according to state-specific editing requirements for the DLN (driver license number) and that are not reserved for use in JSON (JavaScript object notation). Maximum length 4 characters
>>>first	Subject's first name This field can contain any special characters that are valid according to state-specific editing requirements for the DLN and that are not reserved for use in JSON. Maximum length 20 characters
>>>middle	Subject's middle name This field can contain any special characters that are valid according to state-specific editing requirements for the DLN and that are not reserved for use in JSON. Maximum length 15 characters
>>>last	Subject's last name or surname This field can contain any special characters that are valid according to state-specific editing requirements for the DLN and that are not reserved for use in JSON. Maximum length 20 characters
>>>suffix	Subject's name suffix (for example, Sr., Jr., III) This field can contain any special characters that are valid according to state-specific editing requirements for the DLN and that are not reserved for use in JSON. Maximum length 3 characters
>>gender	Gender • Male • Female • Unknown • X • I  <i>This field is required by some states. See LexisNexis® Motor Vehicle Record Order Requirements by State for more details on primary and secondary search criteria for each state.</i>
>>dob	DOB (date of birth) YYYY-MM-DD format
>>ssn	SSN (Social Security number) Maximum length 9 digits (no formatting spaces or other characters)
>>driversLicense	Structure that contains driver license details
>>>licenseNumber	DLN This field can contain any special characters that are valid according to state-specific ordering requirements for the DLN. Maximum length 25 characters

Request Description (Continued)

Name	Description
>>>licenseState	Drivers license state (two-letter abbreviation) Length is 2 characters
>>>classification	Driver license classification Possible values: • Current Personal • Current Commercial • Current Learner's Permit • Previous Commercial • Previous Personal  <i>Values are case sensitive.</i>
>>addresses	Structure that contains addresses
>>>classification	Address classification Possible values: • Current • Former • Risk(Used in property products only)  <i>Values are case sensitive.</i>
>>>streetAddress1	Street address line 1 Includes street number and street name Maximum length 29 characters
>>>streetAddress2	Street address line 2 Includes information such as apartment number or suite number Maximum length 5 characters
>>>city	City Maximum length 20 characters
>>>state	State (two-letter abbreviation) Maximum length 2 characters
>>>zip5	5-digit ZIP Code Maximum length 5 characters
>>>zip4	ZIP plus-4 code Maximum length 4 digits
>mvrRequestParameters	Structure that contains MVR (motor vehicle record) product request parameters
>>clientIdentification	Structure that contains details of the client identification
>>>userId	User ID (California) Maximum length 8 characters  <i>Required for California</i>

Request Description (Continued)

Name	Description
>>>terminalId	Terminal ID (California) Maximum length 12 characters  <i>Required for California</i>
>>mvrOptions	MVR product options
>>>typeCode	Option to order a specific MVR service type If the order state is a state other than those listed below, this field should be omitted. The contents of this field varies in the following states for the type of record being requested (such as insurance or commercial). Available service types for Oregon: • Court • Driver Available service types for New Hampshire: • Life • Insurance  <i>Values are case sensitive.</i>
>>>prescreenSearchPeriod	Option to override MVR Activity File Account setting This Activity File bit is primarily used to override the MVR account setup for the number of months considered in activity file searches. Use of the Activity File bit varies by state.  <i>For California, this bit is required because there is no Master File account setup for California search period.</i> The following codes are used to specify an Activity File search period, but not all are available in every state. Possible values: • 999 (Bypass) • 1 (1 month) • 6 (6 months) • 12 (12 months) • 36 (36 months) • 60 (60 months) • 84 (84 months) See LexisNexis® <i>Motor Vehicle Record State Activity Files</i> for more information.

Request Description (Continued)

Name	Description
>>>driverHistoryAgeOverride	Option to override DHDB (Driver History Database) search period This field indicates the maximum age of the search allowed if you want to override your account setup. Possible values: • 999 (No override) • 30 (30 days) • 60 (60 days) • 90 (90 days) • 120 (120 days)
>>>soundex	MVR with Soundex This field indicates whether or not to order the New Hampshire MVR report with soundexing. Possible values: • true • false
>>>amplifiedMVR	Amplified MVRThis field indicates if an Amplified MVR is being requested. Each state has different search criteria. Refer to <i>LexisNexis® Motor Vehicle Record Order Requirements by State</i> for state-specific search criteria. Possible values: • true • false  Available in Georgia and Florida
>>>forceDMV	Indicates whether to force the MVR order to the DMV (Department of Motor Vehicles) This overrides the MVR account options for LexisNexis Risk Solutions database searches and goes directly to the DMV. Possible values: • true • false
>>>noDMV	Process MVR without going to the DMV Possible values: • true • false

Response Description

The MVR result contains specific fields. The following table describes the fields and the possible values that can be returned in the MVR result.

Response Description

Name	Description
Response	Response
>responseDetails	Structure that contains product response information
>>status	Transaction processing status
>>code	Response code
>>codeDescription	Description for response code
>>orderId	Order ID Unique identifier returned by LexisNexis Risk Solutions for every transaction
>>clientCorrelationId	Client Correlation ID The client correlation ID is a unique customer identifier for each transaction returned in successful results. We recommend that you use the following UUID (Universally Unique Identifier) format: A UUID in its standard textual format is a 32-character hexadecimal string, grouped into five sections separated by hyphens, following the pattern 8-4-4-4-12. This results in a total of 36 characters, including the four hyphens. The string is often represented as xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx, where each 'x' represents a hexadecimal digit (0-9 or a-f). Maximum length 36 characters  <i>Required field</i>
>>dateTimeOrdered	Date and time of the order Structure that contains the date and time of the order
>>dateTimeReceived	Date and time order was received Structure that contains the date and time the order was received (YYYY-MM-DDTHH:mm:ss.sss format)
>>dateTimeCompleted	Date and time the order is completed YYYY-MM-DDTHH:mm:ss.sss format
>>quoteBacks	Structure that contains one to multiple Quoteback elements
>>>name	Quoteback name Maximum length 30 characters
>>>value	Quoteback value This is a transaction level quoteback field used to match inquiries to results. It may also be the requesting/ordering company's identification code for the report. Information submitted in this element is optionally displayed on your invoices for reconciliation purposes. Therefore, the field may consist of information such as the applicant's name or policy number. Maximum length 60 characters

Response Description (Continued)

Name	Description
>>messages	Transaction messages
>>>type	Message type Possible Values: • General • Error
>>>code	Message code For more details, please see Service Error Codes on page 69.
>>>message	Message text
>requesterInformation	Requester information Structure that contains details of the entity submitting the request
>>requesterName	Requester name Maximum length 50 characters
>>accountNumber	Account number The account number is provided by your implementation manager. It is either a six digit number or a six digit number plus three character suffix.  <i>Required field</i>
>>carrierId	Carrier name Maximum length 50 characters  <i>Required if third-party vendor</i>
>>carrierAgencyAcctNo	Carrier account number  <i>Required if third-party vendor</i>
>>lineOfBusiness	Line of business Possible values: • Auto • Property • Life • Commercial (requires prior legal approval)  <i>Values are case sensitive.</i>
>>endUser	Structure that contains the end user details
>>>companyName	Company name Maximum length 50 characters
>>>streetAddress1	Street address line 1 Includes street number and street name

Response Description (Continued)

Name	Description
>>>city	City Maximum length 20 characters
>>>state	State (two-letter abbreviation) Maximum length 2 characters
>>>zip5	5-digit ZIP Code Maximum length 5 characters
>>sourceNode	Node ID The node ID is customer specific and is used to route and track orders. It is provided by your implementation manager. Maximum length 15 characters
>>billingCode	Special Billing ID You may choose to have this optional field returned on your billing invoice. (Only the first 5 characters are returned.) Contact your LexisNexis Risk Solutions implementation manager for more details. Maximum length 10 characters
>mvrResponse	Structure that may contain multiple MVR reports
>>>requestSubject	Structure that contains input search values sent to the product
>>>>subjectQuoteback	Subject quoteback This field is the requesting/ordering company's identification code for this subject. Therefore, it may consist of information such as the applicant's name or policy number. Maximum length 60 characters
>>>>lexId	LexID  <i>Future enhancement</i> Maximum length 15 characters
>>>>name	Structure that contains the subject's name details
>>>>>prefix	Subject's name prefix (for example, Mr., Ms., Dr.) This field can contain any special characters that are valid according to state-specific editing requirements for the DLN and that are not reserved for use in JSON. Maximum length 4 characters
>>>>>first	Subject's first name This field can contain any special characters that are valid according to state-specific editing requirements for the DLN and that are not reserved for use in JSON. Maximum length 20 characters
>>>>>middle	Subject's middle name This field can contain any special characters that are valid according to state-specific editing requirements for the DLN and that are not reserved for use in JSON. Maximum length 15 characters

Response Description (Continued)

Name	Description
>>>>last	Subject's last name or surname This field can contain any special characters that are valid according to state-specific editing requirements for the DLN and that are not reserved for use in JSON. Maximum length 20 characters
>>>>suffix	Subject's name suffix (for example, Sr., Jr., III) This field can contain any special characters that are valid according to state-specific editing requirements for the DLN and that are not reserved for use in JSON. Maximum length 3 characters
>>>>gender	Gender Possible values: • Male • Female • Unknown • X • I
>>>>dob	DOB YYYY-MM-DD format
>>>>ssn	SSN Maximum length 9 digits (no formatting spaces or other characters)
>>>>driversLicense	Structure that contains driver license details
>>>>>licenseNumber	DLN This field can contain any special characters that are valid according to state-specific ordering requirements for the DLN. Maximum length 25 characters
>>>>>licenseState	Driver license state (two-letter abbreviation)
>>>>>classification	Driver license classification Possible values: • Current Personal • Current Commercial • Current Learner's Permit • Previous Commercial • Previous Personal
>>>>addresses	Structure that contains addresses
>>>>>classification	Address classification Possible values: • Current • Former • Risk(Used in property products only)

Response Description (Continued)

Name	Description
>>>>>streetAddress1	Street address line 1 Includes street number and street name
>>>>>streetAddress2	Street address line 2 Includes information such as apartment number or suite number
>>>>>city	City
>>>>>state	State (two-letter state abbreviation) Maximum length 2 characters
>>>>>zip5	5-digit ZIP Code
>>>>>zip4	ZIP plus-4 code
>>>>>enhancedLexID	Alphanumeric identifier that is returned by the product for the inquiry subject Maximum length 15 characters
>>>>>alertMessages	Structure that contains LexisNexis® Advanced Linking Initiative alert messages. There are five types of alert messages that may be returned: • Security Freeze • Fraud Alert • Legal Hold • Identity Theft In the case of Fraud Alert, Legal Hold, and Security Freeze, the entire MVR report is suppressed and a processing status of Alert Message is returned. In INFORM, Framework XML and Risk XML, this was previously a No Hit (N) for MVR reports. Consumer statements, if present, are returned for the overall MVR report. In the case of Identity Theft, only the data associated with the identity theft event is suppressed. All other information about the consumer is returned with successful Hit or Clear results. Alerts previously returned in messages, but had a type of processing information.
>>>>>code	Message code ALI alert message code possible values: • SF - Security Freeze (Previously 1040) • FA - Fraud Alert (Previously 1039) • LH - Legal Hold (Previously 1041) • IT - Identity Theft (Previously 1038)

Response Description (Continued)

Name	Description
>>>>>message	ALi alert message text Possible values: • IT - THE SUBJECT OF THIS CONSUMER REPORT CURRENTLY HAS AN IDENTITY THEFT ALERT ON FILE PREVENTING THE RETURN OF SOME OR ALL OF THE INFORMATION YOU REQUESTED. • FA - THE SUBJECT OF THIS CONSUMER REPORT CURRENTLY HAS A SECURITY FRAUD ALERT ON FILE PREVENTING THE RETURN OF THE INFORMATION YOU REQUESTED. IF THE CONSUMER WOULD LIKE THEIR SECURITY FRAUD ALERT LIFTED PLEASE INSTRUCT THEM TO CALL LEXISNEXIS RISK SOLUTIONS INC. AT 800-456-1244. • SF - THE SUBJECT OF THIS CONSUMER REPORT CURRENTLY HAS A SECURITY FREEZE ON FILE PREVENTING THE RETURN OF THE INFORMATION YOU REQUESTED. IF THE CONSUMER WOULD LIKE THEIR SECURITY FREEZE LIFTED PLEASE INSTRUCT THEM TO CALL LEXISNEXIS RISK SOLUTIONS INC. AT 800-456-1244. • LH - THE FILE FOR THIS CONSUMER IS NOT CURRENTLY AVAILABLE.
>>>>consumerStatements	Structure that contains zero to multiple general statements provided by the consumer Up to 20 statements may be returned for MVR
>>>>>statement	Message text
>>>>>statementDate	Message date YYYY-MM-DD format
>>>mvrReports	Structure that contains the MVR report details
>>>>processingInfo	Structure that contains the processing information
>>>>>productProcessing StatusCode	Product-level processing status code Possible values: • A (Activity Found) • C (Clear) • F (Alert Message) • H (Hit - Activity Found) • N (No Hit) • O (Invalid Order) • P (Pending Information) • R (Activity File Clear) • S (Soundex Rejected) • U (Unreturned) • D (Additional response - Hit) • X (Additional response - No Hit) • Y (Additional response - Clear) Max length 1 character

Response Description (Continued)

Name	Description
>>>>>productProcessing StatusDescription	Product-level processing status description Indicates the state's response to an order, or the status of the order within the system's active order control record The processing status is critical to interpreting MVR results received in a system-to-system transaction. It should be assessed to determine what results are received and how to handle those results. Possible values: • Activity Found (Activity found in the LexisNexis Risk Solutions database.) • Clear MVR (No activity in the driving history section.) • Alert Message (There is an ALi Alert on file for this consumer suppressing the MVR Report. Alert types include Fraud Alert, Security Freeze, and Legal Hold.) • Hit (There is activity in the driving history section.) • No Hit (The DMV returned a "not found" indication in response to the order.) • Invalid Order (The order failed in editing or in some phase of order processing. The order was not processed through the DMV.) • Pending MVR (The DMV responded to the order by indicating another response would be forthcoming within a certain time period). Used for California only. • Renewal Clear (The order has been processed against LexisNexis Risk Solutions Prescreen/Activity File and has been flagged as Clear.) • Soundex Reject (For soundexing states, the order was rejected because the required soundexing elements were not passed.) • Unreturned MVR (The DMV did not respond to this order.) The following status codes are used when multiple results are returned for one order: • Additional response is a Hit • Additional response is a No Hit • Additional response is a Clear
>>>>>referenceNumber	Product-specific report reference number
>>>>>accountNumber	Account number The account number is provided by your implementation manager. It is either a six digit number or a six digit number plus three character suffix. Maximum length 9 characters  <i>Required field</i>

Response Description (Continued)

Name	Description
>>>>>informationSource	Indicates where the MVR information is obtained Possible values: • DMV • DriverHistoryDatabase • DuplicateOrderCheckFile • DatabaseFile • Precycle • Recycle • DHDB2.0Batch • RENDDHDB2.0Interactive • RENDDHDB2.0Batch • DHDB2.0Interactive • BatchToInteractive • Unknown
>>>>>informationOrigin	Indicates how the MVR information is obtained Possible values: • DMV • DriverHistoryDatabase • DuplicateOrderCheckFile • DatabaseFile • DHDB2.0Batch • RENDDHDB2.0Interactive • RENDDHDB2.0Batch • DHDB2.0Interactive • BatchToInteractive • Unknown
>>>>>returnCount	Total number of MVR results returned for a single order Is 1-9 or blank
>>>>>vendorProcessDate	Structure that contains the date and time the order is completed YYYY-MM-DDTHH:mm:ss.sss format
>>>>>noHitCreditCode	Indicates if a registry credit is applied to the order due to a NO HIT status Possible values: • Yes (Registry credit applied to this order due to a NO HIT) • No (No registry credit applied to the order due to a NO HIT) • Blank (Processing status other than NO HIT)
>>>>>responseSubject	Structure that contains the discovered information on the subject or subjects
>>>>>name	Name
>>>>>full	Full Name

Response Description (Continued)

Name	Description
>>>>>gender	Gender Possible values: • Male • Female • Unknown • X • I  <i>Values are case sensitive.</i>
>>>>>dob	DOB YYYY-MM-DD format
>>>>>ssn	SSN Maximum length 9 digits (no formatting spaces or other characters)
>>>>>height	Driver's height on the MVR
>>>>>weight	Driver's weight on the MVR
>>>>>eyeColor	Driver's eye color on the MVR
>>>>>hairColor	Driver's hair color on the MVR
>>>>>aka	Other names the driver may be known by, such as maiden name
>>>>>addresses	Structure that contains addresses
>>>>>>streetAddress1	Street address line 1 Includes street number and street name
>>>>>>streetAddress2	Street address line 2 Includes information such as apartment number or suite number
>>>>>>city	City Maximum length 20 characters
>>>>>>state	State (two-letter state abbreviation) Maximum length 2 characters
>>>>>>zip5	5-digit ZIP Code Maximum length 5 digits
>>>>>>zip4	ZIP plus-4 code Maximum length 4 digits
>>>>>>cityStateZip	City, state, and postal code returned by the DMV
>>>>>>county	County
>>>>>>country	Country
>>>>>>driversLicenses	Structure that contains driver license details
>>>>>>licenseNumber	DLN This field can contain any special characters that are valid according to state-specific ordering requirements for the DLN. Maximum length 25 characters
>>>>>>licenseState	Driver license state (two-letter abbreviation)

Response Description (Continued)

Name	Description
>>>>>licenseClass	Class of driver license (for example, operator or chauffeur)
>>>>>issuedDate	Driver license issue date YYYY-MM-DD format
>>>>>expireDate	Driver license expiration date YYYY-MM-DD format
>>>>>licenseStatus	Driver license status (for example, restricted, suspended, or revoked) Please refer to <i>LexisNexis® Motor Vehicle Record License Status</i> for more details.
>>>>>restrictions	Driver license restrictions (for example, corrective lenses or daylight hours only)  <i>If the field is not enough to accommodate all the data, the restrictions are continued in the miscellaneousMessages.</i>
>>>>driverHistoryRecords	Structure that contains zero to multiple MVR records
>>>>>recordType	Record type returned from DMV or LexisNexis Risk Solutions sources Possible values: • Accident • Cancellation • Conviction • Departmental • Disqualified • Financial Responsibility • Miscellaneous • Probation • Reinstatement • Revocation • Suspension • Unclassified • Violation • Warning
>>>>>recordDescription	Record description
>>>>>violationDate	Violation date or license suspension date on MVR The violation/suspension date is returned only in MVR violations. YYYY-MM-DD format
>>>>>effectiveDate	Effective date for suspensions, revocations, cancellations, disqualified, departmental, probation, warning, and miscellaneous YYYY-MM-DD format
>>>>>accidentDate	Accident date YYYY-MM-DD format
>>>>>actionEndDate	Action end date for departmental, probation, warning, miscellaneous, and unclassified YYYY-MM-DD format

Response Description (Continued)

Name	Description
>>>>>convictionDate	Conviction or reinstatement date on MVR YYYY-MM-DD format  <i>The reinstatement date may be returned as all nines.</i>
>>>>>reinstatementDate	Reinstatement date for suspensions, revocations, cancellations, and disqualified YYYY-MM-DD format
>>>>>stateViolationCode	State-specific violation code This is the violation code returned from the state. Not all states return violation codes. However, if they do, the code can be returned in MVR violations. The code is returned in the description field of the MVR violation with the label STATUTE. The symbol * in this field indicates that the code returned from the state is greater than 10 characters.  <i>For California, the state may return multiple violation codes for the same event and the same dates.</i>
>>>>>dmvPoints	Points associated with the violation The points are returned from the state. Not all states return points. However, if they do, the points can be returned in MVR violations. Points can be expressed as whole numbers, decimals, or text.  <i>For California, the state may return a total number of points for all violations associated with the same event and dates.</i>
>>>>>descriptions	Contains MVR record descriptions and record-level statements (if present)
>>>>>standardViolation	Structure that contains zero to multiple standard violation elements
>>>>>fullSVC	LexisNexis® SVC™ (Standard Violation Code) value See LexisNexis® MVR Standard Violation Code (SVC) Information for more details.
>>>>>primarySVC	Primary SVC value: the first 5 digits of the SVC
>>>>>description	SVC description See LexisNexis® MVR Standard Violation Code (SVC) Information for more information.

Response Description (Continued)

Name	Description
>>>>>caseStatusIndicator	Case status indicator (additional underwriting) information Possible values: • AboveAbstractDismissed • ChargeableIf3PlusSameViolationWithin12Months • ChargeableOnlyWithOtherPermissibleViolation • ContactTheNVD0IToDetermineHowThisItemMayBeChargedForPersonalLinesAuto • CourseCompleted • FirstOffenseNotChargeable • FirstViolationNotChargeable • FourPointViolation • MultipleSameDateSuspensions(CT)ORAttempted(MI) • NonchargeableViolation • NVD0IHasIndicatedThisIsNotChargeableForPersonalLinesAuto • OutOfStateFirstOffenseNonChargeable • OutOfStateViolation • RDCombinationViolation
>>>>>pointsAssigned	Points assigned Possible values: • 000 through 020 • 021Plus • Unknown
>>>>>speedingOverTheLimit	Structure that contains zero to multiple speedOverTheLimit elements
>>>>>speedOverTheLimit	Speed over the limit Possible values: • MPHOverLimit1_10 • MPHOverLimit11_15 • MPHOverLimit16_20 • MPHOverLimit21_25 • MPHOverLimit26_30 • MPHOverLimit31_35 • MPHOverLimit36_45 • MPHOverLimit46Plus • SpeedingGenerally

Response Description (Continued)

Name	Description
>>>>>>speedLimit	Speed limit Possible values: • SpeedLimit10MPH • SpeedLimit15MPH • SpeedLimit20MPH • SpeedLimit25MPH • SpeedLimit30MPH • SpeedLimit35MPH • SpeedLimit40MPH • SpeedLimit45MPH • SpeedLimit50MPH • SpeedLimit55MPH • SpeedLimit5MPH • SpeedLimit60MPH • SpeedLimit65MPH • SpeedLimit70MPH • SpeedLimit75MPH • SpeedLimit80MPH • SpeedLimit85MPH • SpeedLimitUnknown
>>>>>>exceptionIndicator	Exception (LN Violation) Indicator for LexisNexis® Violations Possible values: • AnLNViolationThatIsInAStatusOfClosed/Guilty • AnLNViolationThatIsInAStatusOtherThanClosed/Guilty
>>>>>>commercial Hazardous	Commercially hazardous violation Possible values: • CommercialViolation • CommercialViolationThatInvolvedAnAccident • EitherCommercialOrHazardousMaterialsViolation • HazardousMaterialsViolation • HazardousMaterialsViolationThatInvolvedAnAccident • NA • NoncommercialViolationThatInvolvedAnAccident • NoneCommercialViolation

Response Description (Continued)

Name	Description
>>>>>violation Classification	Violation classification Possible values: - Uncategorized_Citation_or_Assigned_from_MVR_Status_or_Conditions - Registration_Titling_Licensing - Financial_Responsibilities_Accidents - Speeding_and_Other_Traffic-related_Violations - Motorcycle_Violations - Serious_Offenses - Equipment_Violations - Parking_Violations - Miscellaneous_Violations - Unknown
>>>>>customerSpecific Code	Customer-defined violation code as translated from the SVC
>>>>>severityCode	Customer-defined severity code as translated from the SVC This field can be used only in conjunction with the CSC (customer specific code). This field is only returned if configured with your LexisNexis Risk Solutions implementation manager and MVR team.
>>>>productMessages	Structure that contains product messages
>>>>>code	MVR product processing informational message codes See MVR Informational Messages on page 55 for a complete list of codes.
>>>>>message	MVR product processing informational message text See MVR Informational Messages on page 55 for the complete list of messages.
>>>>miscellaneous Messages	Miscellaneous messages
>>>>>message	Message text
>>>>>dataNotIdentified Messages	Structure that contains unidentifiable raw data Unidentifiable raw data records are generated whenever LexisNexis Risk Solutions is unable to identify the driving history data. Normally a driving record data, LexisNexis Risk Solutions handles them as unidentifiable raw data.
>>>>>code	Message code
>>>>>message	Message text stating: Miscellaneous Information that could not be identified was received from the DMV - Please contact LexisNexis.

MVRSuccessResponse Description

The MVR **MVRSuccessResponse** object contains structured data returned when an MVR request is successful. The following table describes the fields and their possible values.

MVRSuccessResponse Description (Continued)

Name	Description
>>>responseDetails	Response details
>>>>status	Transaction processing status
>>>>code	Response code
>>>>codeDescription	Description for response code
>>>>productOrderId	Unique product order ID
>>>>dateTimeCompleted	Date and time the order is completed YYYY-MM-DDTHH:mm:ss.sss format
>>>>quoteBacks	Structure that contains one to multiple Quoteback elements
>>>>>name	Quoteback name Quoteback name
>>>>>value	Quoteback value This is a transaction level quoteback field used to match inquiries to results. It may also be the requesting/ordering company's identification code for the report. Information submitted in this element is optionally displayed on your invoices for reconciliation purposes. Therefore, the field may consist of information such as the applicant's name or policy number. Maximum length 60 characters
>>>>messages	Transaction messages
>>>>>type	Message type Possible Values: • General • Error
>>>>>code	Message code
>>>>>message	Message text

ErrorResponse Description

The MVR **ErrorResponse** section contains specific fields. The following table describes the fields and the possible values that can be returned in the MVR ErrorResponse.

ErrorResponse Description

Name	Description
ErrorResponse	Error response
>responseDetails	Structure that contains product response information
>>status	Order status
>>code	Response code
>>codeDescription	Response code description
>>orderId	Order ID Unique identifier returned by LexisNexis for every transaction
>>clientCorrelationId	Unique identifier submitted by the carrier to track and identify the transaction
>>dateTimeOrdered	Date and time of the orderStructure that contains the date and time of the order
>>dateTimeReceived	Date and time order was received Structure that contains the date and time the order was received (YYYY-MM-DDTHH:mm:ss.sss format)
>>dateTimeCompleted	Date and time the order is completed YYYY-MM-DDTHH:mm:ss.sss format
>>quoteBacks	Structure that contains one to multiple quoteback elements
>>>name	Quoteback name Maximum length 30 characters
>>>value	Quoteback value This is a transaction level quoteback field used to match inquiries to results. It may also be the requesting/ordering company's identification code for the report. Information submitted in this element is optionally displayed on your invoices for reconciliation purposes. Therefore, the field may consist of information such as the applicant's name or policy number. Maximum length 60 characters
>>messages	Transaction messages
>>>type	Message type Possible Values: • General • Error
>>>code	Message code For more details, please see Service Error Codes on page 69.
>>>message	Message text

Chapter 7

Testing

Use this information to support your testing efforts.

Testing Best Practices

The following section outlines essential best practices for testing LexisNexis® Risk Solutions, including proper use of test environments, guidance on avoiding fictitious PII (personally identifiable information) in production, and recommendations to ensure accurate, compliant, and reliable testing outcomes.

- **Test Environments Are Available:** We provide dedicated test systems and fictitious data/records for implementation and product response testing.
- **Avoid Testing with Fictitious PII in Production:** Do not introduce fictitious personal information or intentionally incorrect data into production systems or contribution files.
- **How to Test Safely:** Always use the customer test environment for testing. More than 250,000 test cases are available in the Data Query Tool (DQT).
- **Why It Matters:** Protecting the integrity of our data ecosystem is essential. Following these guidelines helps ensure accurate results and maintains trust in our solutions.

Customer Test Data Query Tool

The information in Customer Test Data Query Tool supports your efforts to test your interface against the content of the LexisNexis Risk Solutions customer test environment.

The Data Query Tool (<https://customertestdata.lexisnexisrisk.com>) is populated with more than 250,000 test cases to support the testing of your system. Use this information to populate requests against the customer test environment. The database includes a large variety of records to support your testing of a number of different scenarios.

Procedure:

1. Contact your LexisNexis Risk Solutions Implementation Manager to request access to the tool.
2. After you have gained access to the tool, review the FAQs and the legend that are available from the site.
3. Use available search options to find records that represent various scenarios reflected in your user population.

4. Download those records.
5. Filter the records to find ones that represent the specific situations that you want to test.

Internal Testing

Test situations that may occur within your systems or networks.

Consider testing common system or network scenarios to confirm that your interface behaves as you would like.

Communication Testing

Test situations that could occur during communications between your organization and LexisNexis Risk Solutions.

As you test your interface, consider testing the communication processes. Test these scenarios to confirm that the interface identifies them correctly and initiates an appropriate workflow.

Communication Test Scenarios

Scenario	Suggested Test
Incorrect protocol	Send a request over HTTP instead of HTTPS.
Requests when systems unavailable	• Send a request when your system or network is unavailable. • Send a request to LexisNexis Risk Solutions during the maintenance window.
Header information incorrect	Submit requests with incorrect information in the header: • With a GET instead of a POST command • Wrong URL • Incorrect basic authentication username and password • Basic authentication username and password in a non-encoded format • Use an expired authentication token

User Interface Testing

Test the interface to make sure it follows LexisNexis Risk Solutions requirements and supports your users.

Consider adding these testing scenarios to your interface test cases.

User Interface Testing Scenarios

Scenario	Suggested Test
User authentication	Confirm that users with different roles and permissions are required to sign in.
Display FCRA (Fair Credit Reporting Act) warning	Sign in as different users. Confirm that users with different permissions see the FCRA on sign in. For non-FCRA products, consider adding a place in the user authentication process that would support the warning for future development.
Account Number assignment/usage	- Build a table to store and maintain account numbers as appropriate to your user groups - Independent agencies receive a carrier-level 6-digit account number followed by a unique 3-letter suffix based on the agency address, such as 315111AAA or 315111AAB. - Underwriter New Business team typically share a single account number. - Separate account numbers required for each LOB, such as Auto, Life, Commercial, and Claims.
Account Maintenance process as applicable	Carriers with independent and captive agents should set up processes to maintain the account tables for each agency and to update tables in the event of: - Sponsorship of new agency - Termination of sponsorship of an agency - Address change for an agency - Ownership change of an agency - Control of accounts for agencies who have access to order multiple lines of business, such as Personal Lines and Commercial Lines
Adverse Action / Post Notification Letter process (Applicable only to FCRA Products)	Deliver appropriate data to system that generates Adverse Action Letters, aka Post notification letters. This includes (at a minimum): - Reference Number - Reason codes if product returns them - Appropriate verbiage as required by FCRA - Consumer Disclosure Center contact information - Recommended templates available for review upon request These letters are required to be delivered for multiple reasons, such as: - Insurance denied or cancelled - Policy not renewed - Rates increase - Policy termination - Change of policy type offered  <i>Always consult with your legal and compliance team for content, layout and appropriate delivery methods for these letters.</i>
Masked data	Use the LexisNexis® Insurance Services Product Data Display Requirements to confirm that data is masked correctly for various audiences, for users with different roles - both as data is entered and as product results are returned.

User Interface Testing Scenarios (Continued)

Scenario	Suggested Test
Error messages	Trigger errors to confirm that users are prompted to correct them or take appropriate action, such as: • Internal to your systems • Communication errors • Invalid username and password • JSON (JavaScript object notation) formatting errors • Missing required input • LexisNexis Risk Solutions system errors • Data provider errors • Other errors listed in this section
Repeat order safeguard	Confirm that when errors or system unavailability occur, that the interface controls repeat orders to prevent repeated product requests and charges. See Repeat Order Safeguard on page 38.

Transactional Testing

Test situations that can prevent a product result from being returned by triggering responses from the API.

As part of your testing regimen, consider adding testing scenarios that show how the interface is addressing situations when there is no product result.

Transactional Level Test Scenarios

Scenario	Suggested Test
Field error/Record error	Submit request with no ending JSON element.
Invalid account number	• Submit 000000TST in the accountNumber. • If appropriate, omit the carrierAgencyAcctNo.
Missing request data	Submit requests missing required information, for example: • First name • Last name • Address • Address components, such as postal code or city • DL (driver license) • Other information required by the product

General Product Testing

Test basic product functionality with these suggestions.

Consider adding these test scenarios to your test cases. When possible, the suggested test indicates how you can find test cases in the Data Query Tool.



Each carrier will be provided with separate accounts for the customer test environment and the production environment. Production accounts will not work in the test environment, and vice versa.

General Product Testing Scenarios

Scenario	Suggested Test
Search results with minimum and maximum input elements	Submit a combination of required and recommended input data elements to determine which provide the best results. Select target cases in the Data Query Tool records, and determine how changing the input affects identification of the target cases. Use various test cases that you have identified to see how changing the amount and type of input elements changes the results.
Capture of OrderID	Confirm that this number is stored with record in your systems and that it is available to you upon request by our System-to-System Support team if you report problems or have questions regarding a specific production request.

LexisNexis Risk Solutions Alerts and Consumer Statements

Test the return of LexisNexis Risk Solutions alerts and consumer statements with these suggestions.

Consider adding these test scenarios to your test cases. When possible, the suggested test indicates how you can find test cases in the Data Query Tool. Find more information about these topics at [LexisNexis Risk Solutions Alert Messages](#) on page 49.

In the Data Query Tool, search for records related to LexisNexis® Advanced Linking Initiative. Find more testing information in *LexisNexis® Advanced Linking Initiative (ALi) Quick Reference Guide*.

LexisNexis Risk Solutions Alerts and Consumer Statement Test Scenarios

Scenario	Suggested Test
Consumer statement	Submit a request for a record that has consumer statements. Find test cases in the Statement Type column with a value of CS.
Fraud alert	Submit a request for a record that has a fraud alert. Find test cases in the Statement Type column with a value of FA.
Identity theft	Submit a request for a record that has an identity theft alert. Find test cases in the Statement Type column with a value of IT.

LexisNexis Risk Solutions Alerts and Consumer Statement Test Scenarios (Continued)

Scenario	Suggested Test
Legal hold	Submit a request for a record that has a legal hold alert. Find test cases in the Statement Type column with a value of LH.
Record-level statement	Submit a request for a record that has consumer statements for particular records. Find test cases in the Statement Type column with a value of RS.
Security freeze alert	Submit a request for a record that has a security freeze alert. Find test cases in the Statement Type column with a value of SF in the following states - CA, ME, NJ, NV, NY.
Multiple alerts or statements	Submit a request for a record that has multiple statements or alerts to test how the interface handles a combination of them. Filter results by # Statements by LexisNexis Risk Solutions Subject or # Statements by Address to find results with multiple statements or alerts.

MVR Testing

Test LexisNexis® Motor Vehicle Record (MVR) product functionality with these suggestions.

Consider adding these test scenarios to your test cases. When possible, the suggested test indicates how you can find test cases in the Data Query Tool.

MVR Test Scenarios

Scenarios	Suggested Test
Processing statuses	Test at least one each of the testable MVR Processing statuses as found in the MVR Test Case Catalog, and ensure you can handle each processing status, along with the appropriate downstream workflow.
Invalid Data	Omit licenseState from order Use licenseState PR.
Invalid DLN (driver license number)	Generate a test order with a DLN that does not meet the required format for that state's valid DLN pattern as shown in the "Order Edits" document. A message will return, such as MVR APP ERROR: TX-LEXISNEXIS REJECT:DRIVER LICENSE NUMBER INVALID OR MISSING for unit S1.
Multiple Return States	Order 1 MVR (motor vehicle record), get 2 MVR's back - Idaho, Nebraska.
Activity Files	Test for Activity Files Clear and Dirty for the states you do business in, using the test cases labeled MVR Prescreen-In-house.
Activity File Override	If appropriate for your workflow, test the ability to override the default search period for specific activity file orders.  <i>This can generate additional costs by transaction.</i>

MVR Test Scenarios (Continued)

Scenarios	Suggested Test
ALi Records	Test for a variety of ALi scenarios, to include each of the ALi alerts, and combinations of Alerts and Statements, Record Level Statements, multiple statements, and maximum length statements. Please see LexisNexis Risk Solutions Alerts and Consumer Statements on page 109 for more information.
DB360	Test a variety of test cases that return MVR Clear with appended violations, an MVR Hit with appended violations, and an MVR Hit without any appended violations. Use the test cases labeled MVR DB360.
DB360	Ensure you can identify each DB360 scenario by the supplemental message that returns, such as VIOLATION INFORMATION PROVIDED BY LEXISNEXIS.
DB360 - Multiple Return States	Order 1 MVR, get 2 MVR's back - Indiana.
MVR No Hit	Test for MVR No Hit, and verify your workflow to determine appropriate follow-up actions.
Out of State DLN	As appropriate for your workflow, test for scenarios where the consumer has a valid out of state DLN not normally in your candidate set.
Force DMV (Department of Motor Vehicles)	As appropriate for your workflow, test for scenarios where you want a fresh MVR from the DMV, and bypass the ability to get a copy of a previously stored MVR.  <i>This is an additional cost option, so set up appropriate roles or protections on the use of this flag, as desired.</i>
California MVR Ordering	If you are authorized to order interactive CA MVR's, ensure you have set up any appropriate logging per the state requirements. In addition, ensure you are sending the appropriate terminal id and user id that identifies the requestor in the order.
Invalid State Access Code/ Authorization	Send an interactive order for CA without sending the User ID and /or Terminal ID, to generate this error. Set up appropriate workflow to handle this scenario.
Service Temporarily Unavailable	Set up a workflow to handle errors from the DMV when they are unavailable. They will return the error Service Temporarily Unavailable.
Variety of DL Status and DL Class values	Test a variety of test cases that return various DL Classes and DL Statuses. If you are interested in standardized versions, discuss this option with your IM.
Dirty Scenarios	Find test cases where the Violations column has a higher number, such as >15 to ensure you can handle a wide variety of results.
LexisNexis® SVC™ (Standard Violation Code)	Ensure you can pick up and use the SVC Information if your account is set up for this feature.
SVC - Supplemental Information	Ensure you can identify and use the supplemental indicators that return along with SVC for your workflow.
Alternate Data Found	Test this scenario by varying the spelling of the first or last name of a valid test case, such as Mike versus Michael. Set up appropriate workflow to handle this scenario. This informational message will return, along with additional records with details: ALTERNATE DRIVER INFORMATION FOUND IN LEXISNEXIS DATABASE.

MVR Test Scenarios (Continued)

Scenarios	Suggested Test
MVR Mismatch	Generate a valid test order with a valid test case, but vary 1 field by 1 letter, such as the DLN, the First or Last Name, or the DOB (date of birth) by 1 digit. A supplemental message will return, such as: POSSIBLE MVR MISMATCH, PLEASE REVIEW TO VERIFY: FN.
Batch Only State	Generate an interactive test order for Hawaii and verify your handling of the warning message that returns, such as interactive unavailable, batch order not submitted for subject S1.
Roll to Batch	Future Enhancement.

Chapter 8

Production

This section lists the typical activities to support the move to production.

Screen Review

Please confirm that all Screen Shots have been submitted and approved during previous development sprints for all user groups, including Agents, Underwriters, and Consumer Portals.

Production credentials will not be released until all screen reviews and feedback have been incorporated.

Prepare For Production

Coordinate with your Implementation Manager at least five business days before production to allow LexisNexis® Risk Solutions to coordinate production support procedures.

Production Authentication Credentials

Request production usernames and passwords from LexisNexis Risk Solutions.

Complete two usernames request forms for production authentication. Include the IP addresses of your production servers.

For production OAuth 2.0 token pickup, convert to production OAuth 2.0 URL as shown in the [LexisNexis Risk Solutions OAuth 2.0 Authentication Process Quick Reference Guide](#).

Production Contact Information

Share production support information with your Implementation Manager.

LexisNexis Risk Solutions sends email notifications to customers on various topics. LexisNexis Risk Solutions recommends that you create internal email distribution lists to make sure that information is distributed to the correct people at your organization. Consider creating internal email distribution lists for the following:

- Product changes and updates
- Outage notifications
- Data structure changes

Provide contact information (name, email, and phone number) for the following:

- Implementation and business contacts
- Technical contacts
- Production support contacts



Be sure to keep your email distribution list information updated regularly to prevent loss of service.

Interactive Production Credentials

For interactive communication methods, LexisNexis Risk Solutions provides you with production credentials.

You need the following production credentials for interactive communication:

- Production client ID (node ID)
- Production URL
- Production underwriter account numbers
- Production agent account numbers (If applicable)
- Production basic authentication credentials

Batch Production Credentials

For batch communication methods, LexisNexis Risk Solutions will provide you with production credentials.

You need the following production credentials for batch communication:

- Production client ID
- Production URL
- Production account numbers
- SFTP (secure file transfer protocol) credentials
- SFTP directory location
- PGP (Pretty Good Privacy) keys
- File name pattern
- Agent account list (if applicable)



Please note that Batch is a planned future enhancement for LexisNexis® Motor Vehicle Record (MVR).

Production Support Team Meeting

Prior to production, your Implementation Manager sets up a joint meeting with your production support team.

In this meeting, your Implementation Manager and System-to-System Production Support team representative review the LexisNexis Risk Solutions production support document.

Give your Implementation Manager at least a 48-hour warning before sending product request to the production environment. The 48-hour warning time allows LexisNexis Risk Solutions to properly coordinate production support procedures and verify contact information.

Go To Production

LexisNexis Risk Solutions supports your production release plan, which can include several different stages.

After you have moved into the production environment, contact the System-To-System Support team if any issues occur.

The System-to-System Production Support Team is available 24 hours a day at S2SProduction@lexisnexisrisk.com or 800.236.9993.

Optional Production Smoke Testing

You have the option of working with LexisNexis Risk Solutions to test your system by conducting a production smoke test.

After production begins, there is no true testing available. True testing can only be completed in the testing environment. Any transactions in the production environment will bill normally, and all FCRA (Fair Credit Reporting Act) product orders must comply with Permissible Purpose Requirements per FCRA regulations. Discuss any plans and options for a production smoke test carefully with your Implementation Manager.



The decision to do a production smoke test rests solely with you. LexisNexis Risk Solutions recommends discussing production smoke testing thoroughly with your organization before making a decision.

Go Live

During this phase of production, your Implementation Manager works with you to take your system live.

On your scheduled production date, when you are ready, you can turn on your system to your end users. If you notice any issues, suspend ordering and contact your System-to-System Production Support team representative. If the issue is with your side, repair or correct in the test region. Be aware that any beta testing when in production bills and posts normally. Therefore, you must follow all rules for permissible purpose for ordering. For example, do not quote yourselves and do not reorder reports over and over.