



Task 1 : PHP Initialization and Setup:

```
<?php  
echo "Hello World<br>";  
echo "Its Parthiv Gajjar here !"  
?>
```

Step 1: GO to C:/XAMPP/htdocs/(create you project folder here and create file index.php)

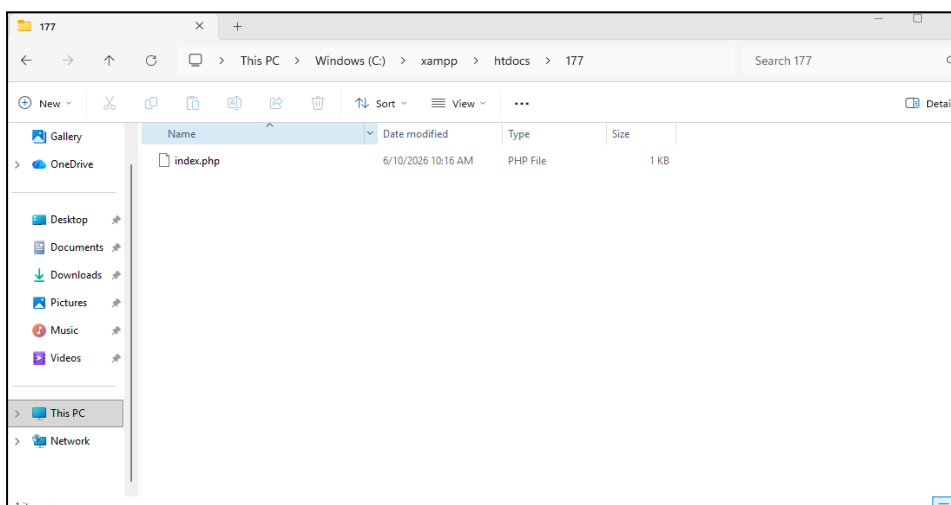

Step 2: Open in browser (<http://localhost/foldername>)

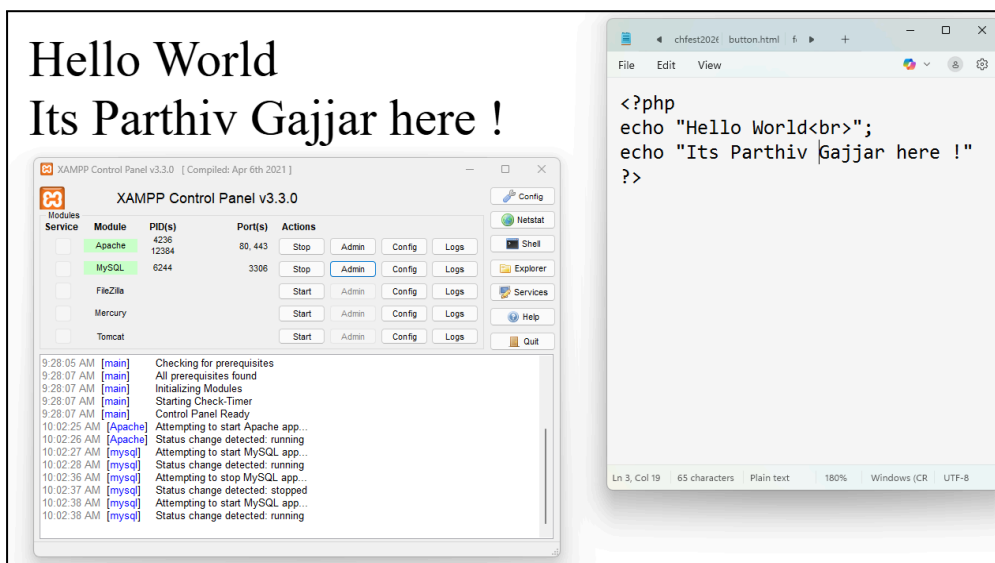

Task 2 : Name and the address in PHP

Directory : C:/XAMPP/htdocs/177/name.php

```
<?php  
echo "My Name is Parthiv Umeshkumar Gajjar !<br>";  
echo "My address: A-102 Pushpak apartment near smrutimandir  
ghodasar canal road, Ahmedabad, Gujarat 380008"  
  
?>
```

Output:

My Name is Parthiv Umeshkumar Gajjar !
My address: A-102 Pushpak apartment near smrutimandir ghodasar canal road, Ahmedabad, Gujarat 380008

Task 3 : Variables in php

```
<?php

// sample default number

$name = "Parthiv Gajjar";
$age = 19;
$sgpa = 9.63;


$a = 10;
$b = 20;

$add = ($a * $b);

echo"The name is : $name<br>";
echo"The age of $name is $age<br>";
echo"The Semester SGPA of $name is $sgpa<br>";
echo"The sample arithmetic operation is : $add";

?>
```

Output:

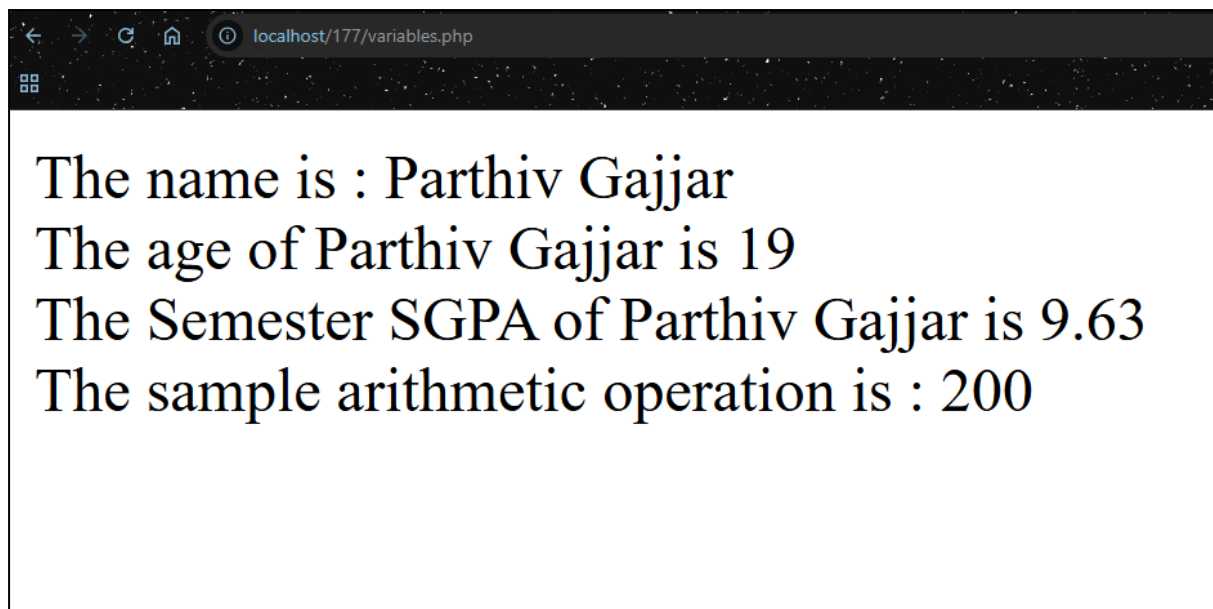

Task 4 : Variables in php

```
<?php
```

```
// sample default number
```

```
$name = "Parthiv Gajjar";  
echo "The name is : $name<br>";  
$age = 19;  
echo "The age of $name is $age<br>";  
$sgpa = 9.63;  
echo "The Semester SGPA of $name is $sgpa<br>";
```


```
$a = 10;  
$b = 20;
```

```
// this is the heading  
//print"<h1>Hello Its Parthiv Here !!</h1>"
```

```
$add = ($a * $b);  
echo "The sample arithmetic operation is : $add";
```

```
?>
```

Output :

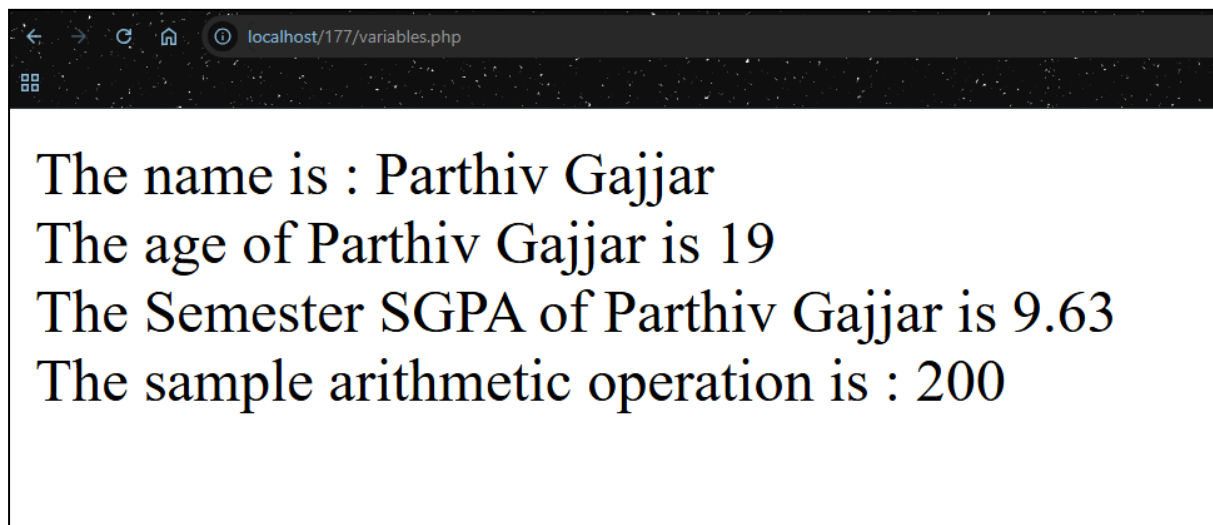

Task : Addition in variables

```
<?php  
  
$a = 10;  
$b = 20;  
  
$total = ($a + $b) ;  
  
echo"Addition is :$total";  
  
?>
```

Output:

Task : Decision Statement in PHP (if-else)


```
<?php

// decision making

$num = 19;

if ($num < 18 || $num == 0){
    echo"You are under age !";
}
Else{
    echo"You are eligible for license ";
}

?>
```

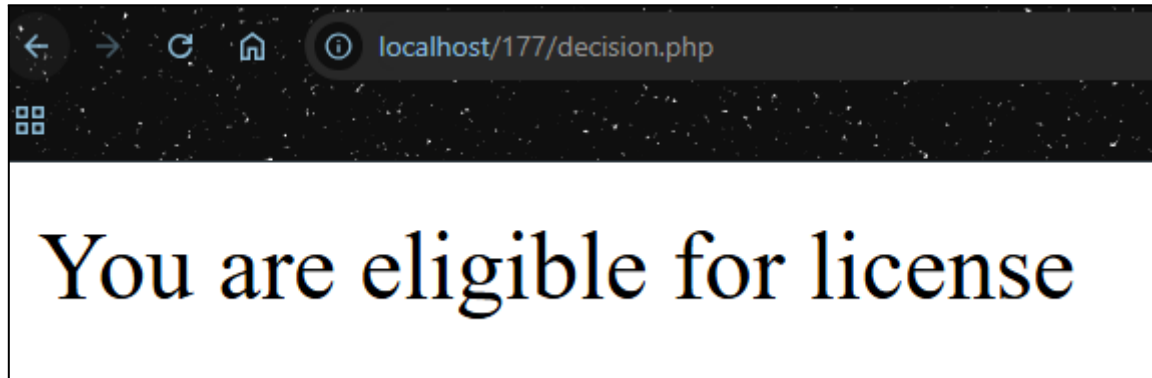Output:

Task : Loops in PHP (for, while , do-while)

```
<?php
```

```
/* WHILE LOOP
```

```
$i = 1 ;
```

```
while($i<=5){
```

```
echo $i."<br>";
```

```
$i++;
```

```
}
```

```
*/
```

```
// DO-WHILE LOOP
```

```
$i=1;
```

```
do{
```

```
echo $i."<br>";
```

```
$i++;
```

```
}
```

```
while($i<=5);
```

```
/* FOR LOOP
```


```
for($i = 0 ; $i<= 5 ; $i++)
```

```
echo $i."<br>";
```

```
*/
```

```
?>
```

Output :

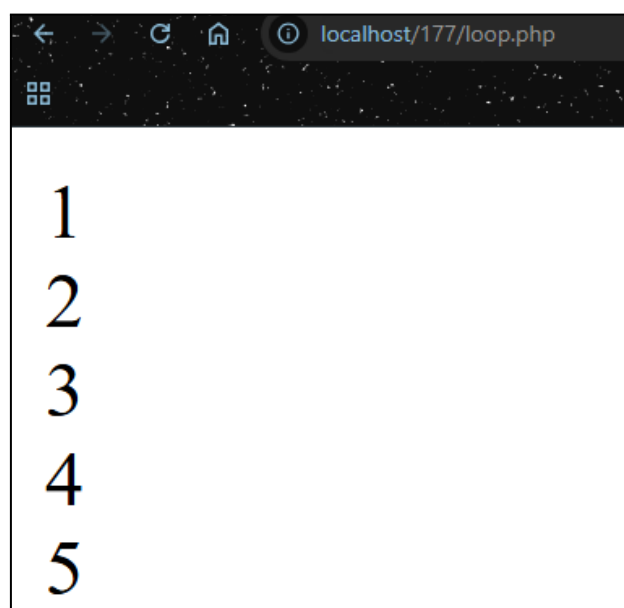


Task : Switch Case (Switch, case, break, continue):

```
<?php
```

```
$num = 2;
```

```
switch($num){  
case 1:  
echo"Matched with 1";  
break;  
case 2:  
echo"Matched with 2";  
break;  
case 3:  
echo"Matched with 3";  
break;  
  
default:  
echo"Try again noob";  
}
```

```
?>
```

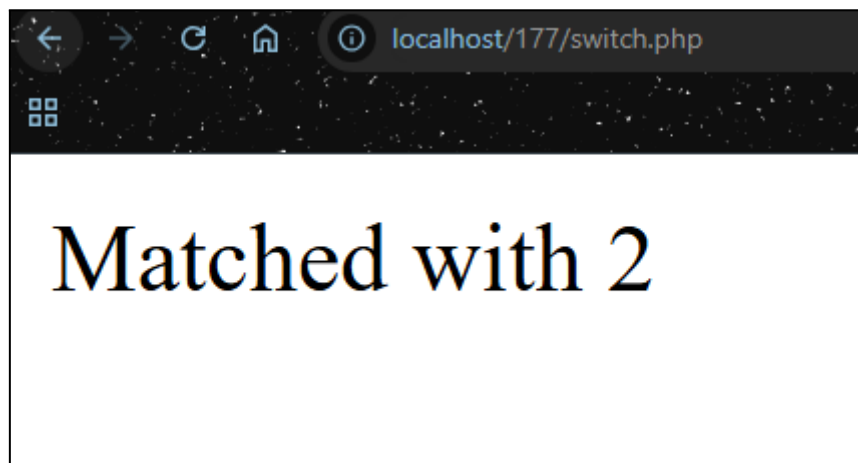Output :

Task : Arrays in PHP

```
<?php


$student = array(

"name"=>"parthiv",
"age"=>19,
"course"=>"CSE B.Tech"
);

echo $student["name"];
echo"<br>";
echo $student["age"];
echo"<br>";
echo $student["course"];
echo"<br>";

foreach($student as $key => $value){
echo $key." : ".$value."<br>";
}

?>
```

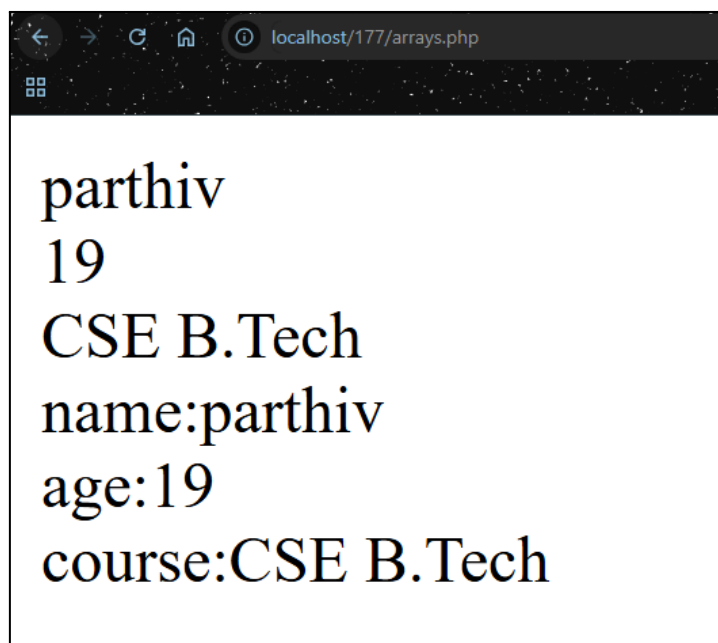Output :

Task : 2D_Array in PHP

```
<?php
```

```
$students = array(
    array("parthiv", 19, "CSE B.Tech"),
    array("rahul", 20, "IT")
);

for($row = 0; $row < count($students); $row++) {
    for($col = 0; $col < count($students[$row]); $col++) {
        echo $students[$row][$col] . " ";
    }
    echo "<br>";
}
```

```
?>
```

Output :

Task : Built-in Functions in php :

```
<?php

echo "<h2>PHP Built-in Functions Demonstration</h2>";

/* =====
   STRING FUNCTIONS
   ===== */
echo "<h3>String Functions</h3>";

$str = "Hello PHP World";

echo "strlen(): " . strlen($str) . "<br>";
echo "strtoupper(): " . strtoupper($str) . "<br>";
echo "strtolower(): " . strtolower($str) . "<br>";
echo "substr(): " . substr($str, 6, 3) . "<br>";
echo "str_replace(): " . str_replace("PHP", "Java", $str) . "<br>";
echo "strpos(): " . strpos($str, "PHP") . "<br>";

/* =====
   ARRAY FUNCTIONS
   ===== */
echo "<h3>Array Functions</h3>";

$arr = [10, 20, 30, 40, 50];

echo "count(): " . count($arr) . "<br>";
echo "max(): " . max($arr) . "<br>";
echo "min(): " . min($arr) . "<br>";

sort($arr);
echo "sort(): ";
print_r($arr);
echo "<br>";

array_push($arr, 60);
echo "array_push(): ";
print_r($arr);
echo "<br>";

echo "array_sum(): " . array_sum($arr) . "<br>";
```

```
/* =====
   MATHEMATICAL FUNCTIONS
   ===== */
echo "<h3>Math Functions</h3>";

$num = 25.75;

echo "abs(-10): " . abs(-10) . "<br>";
echo "sqrt(25): " . sqrt(25) . "<br>";
echo "pow(2,5): " . pow(2,5) . "<br>";
echo "round($num): " . round($num) . "<br>";
echo "floor($num): " . floor($num) . "<br>";
echo "ceil($num): " . ceil($num) . "<br>";
echo "rand(): " . rand(1,100) . "<br>";

/* =====
   DATE & TIME FUNCTIONS
   ===== */
echo "<h3>Date Functions</h3>";

echo "date(): " . date("Y-m-d H:i:s") . "<br>";
echo "time(): " . time() . "<br>";

/* =====
   TYPE CHECKING FUNCTIONS
   ===== */
echo "<h3>Type Checking</h3>";

$x = 100;
$y = "PHP";

echo "is_int(x): " . (is_int($x) ? "True" : "False") . "<br>";
echo "is_string(y): " . (is_string($y) ? "True" : "False") . "<br>";
echo "is_numeric('123'): " . (is_numeric('123') ? "True" : "False") . "<br>";

/* =====
   VARIABLE FUNCTIONS
   ===== */
echo "<h3>Variable Functions</h3>";

$name = "John";

echo "isset(name): " . (isset($name) ? "True" : "False") . "<br>";
```

```
unset($name);

echo "empty(name): " . (empty($name) ? "True" : "False") . "<br>";

/* =====
   JSON FUNCTIONS
   ===== */
echo "<h3>JSON Functions</h3>";

$data = [
    "name" => "Alice",
    "age" => 25
];

$json = json_encode($data);

echo "json_encode(): " . $json . "<br>";

$decoded = json_decode($json, true);

echo "json_decode(): ";
print_r($decoded);
echo "<br>";

/* =====
   FILE FUNCTIONS
   ===== */
echo "<h3>File Functions</h3>";

$file = "sample.txt";

file_put_contents($file, "Hello PHP");

echo "file_exists(): " . (file_exists($file) ? "Yes" : "No") . "<br>";
echo "filesize(): " . filesize($file) . " bytes<br>";
echo "file_get_contents(): " . file_get_contents($file) . "<br>";

/* =====
   NUMBER FORMATTING
   ===== */
echo "<h3>Formatting Functions</h3>";

echo "number_format(): " . number_format(1234567.891, 2) . "<br>";
```

```
/* =====  
    INFORMATION FUNCTIONS  
===== */  
echo "<h3>PHP Information</h3>";  
  
echo "PHP Version: " . phpversion() . "<br>";  
  
?>
```

Output :

PHP Built-in Functions Demonstration

String Functions

```
strlen(): 15  
strtoupper(): HELLO PHP WORLD  
strtolower(): hello php world  
substr(): PHP  
str_replace(): Hello Java World  
strpos(): 6
```

Array Functions

```
count(): 5  
max(): 50  
min(): 10  
sort(): Array ( [0] => 10 [1] => 20 [2] => 30 [3] => 40 [4] => 50 )  
array_push(): Array ( [0] => 10 [1] => 20 [2] => 30 [3] => 40 [4] => 50 [5] => 60 )  
array_sum(): 210
```

Math Functions

```
abs(-10): 10  
sqrt(25): 5  
pow(2,5): 32  
round(25.75): 26  
floor(25.75): 25  
ceil(25.75): 26  
rand(): 48
```

Date Functions

date(): 2026-06-10 09:56:19

time(): 1781078179

Type Checking

is_int(x): True

is_string(y): True

is_numeric('123'): True

Variable Functions

isset(name): True

empty(name): True

JSON Functions

json_encode(): {"name":"Alice","age":25}

json_decode(): Array ([name] => Alice [age] => 25)

File Functions

file_exists(): Yes

filesize(): 9 bytes

file_get_contents(): Hello PHP

Formatting Functions

number_format(): 1,234,567.89

PHP Information

PHP Version: 8.2.4

Task : Functions in PHP (User Defined):

```
<?php
// functions in php


function messege(){
    echo"Hello PHP world !!!";
}

function add($x,$y){
    $sum = $x + $y;
    echo"$sum ";
}

function mul($num){
    return $num*$num ;
}

messege();
echo"<br>";
add(1,2);
echo"<br>";
$result = mul(5);
echo "$result"

?>
```

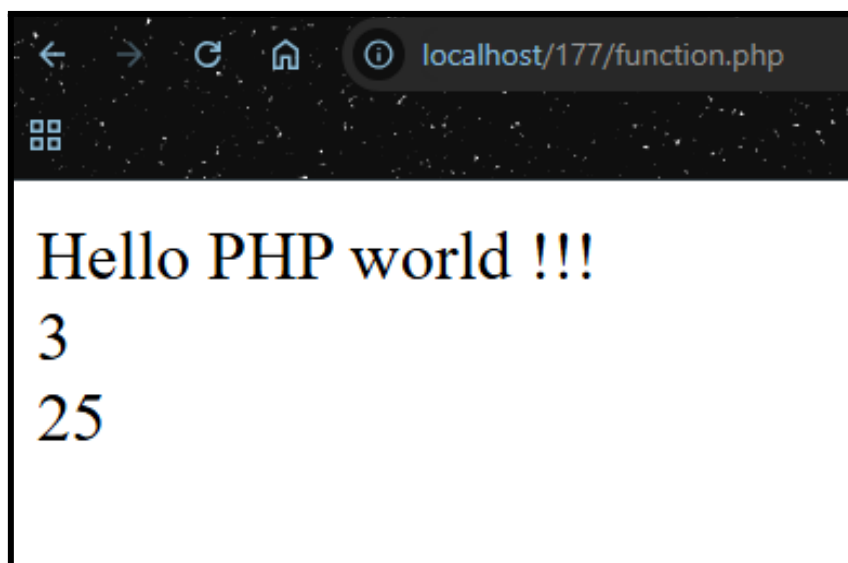Output :

Task : GET Method

```
<!DOCTYPE html>
<html>
<head>
  <title>GET Form Example</title>
</head>
<body>

  <h2>Enter Your Name (GET Method)</h2>

  <form method="get">

    Name:


    <input type="text" name="username">
    <input type="submit" value="Submit">

  </form>

  <?php
  if(isset($_GET['username']))
  {
    $name = $_GET['username'];
    echo "<h3>Hello, $name</h3>";
  }
  ?>

</body>
</html>
```

Output :

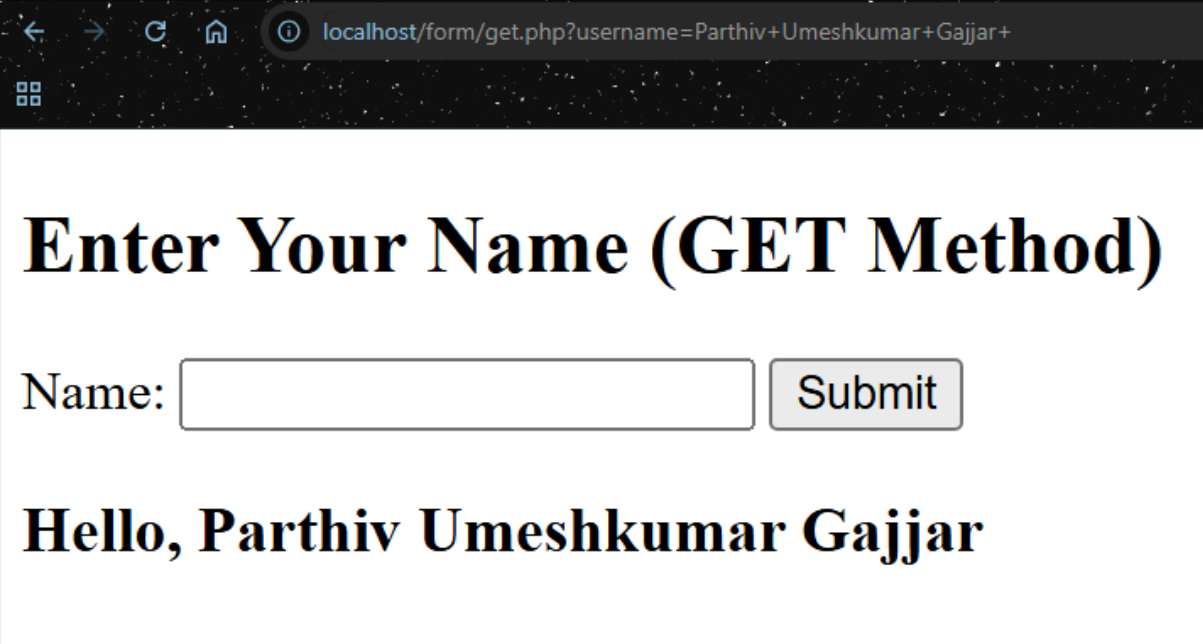

localhost/form/get.php?username=Parthiv+Umeshkumar+Gajjar+

Enter Your Name (GET Method)

Name:

Hello, Parthiv Umeshkumar Gajjar

Task : POST Method


```
<!DOCTYPE html>
<html>
<head>
  <title>POST Form Example</title>
</head>
<body>

  <h2>Enter Your Name (POST Method)</h2>

  <form method="post">
    Name:
    <input type="text" name="username">
    <input type="submit" value="Submit">
  </form>

  <?php
  if(isset($_POST['username']))
  {
    $name = $_POST['username'];
    echo "<h3>Hello, $name</h3>";
  }
  ?>

</body>
</html>
```

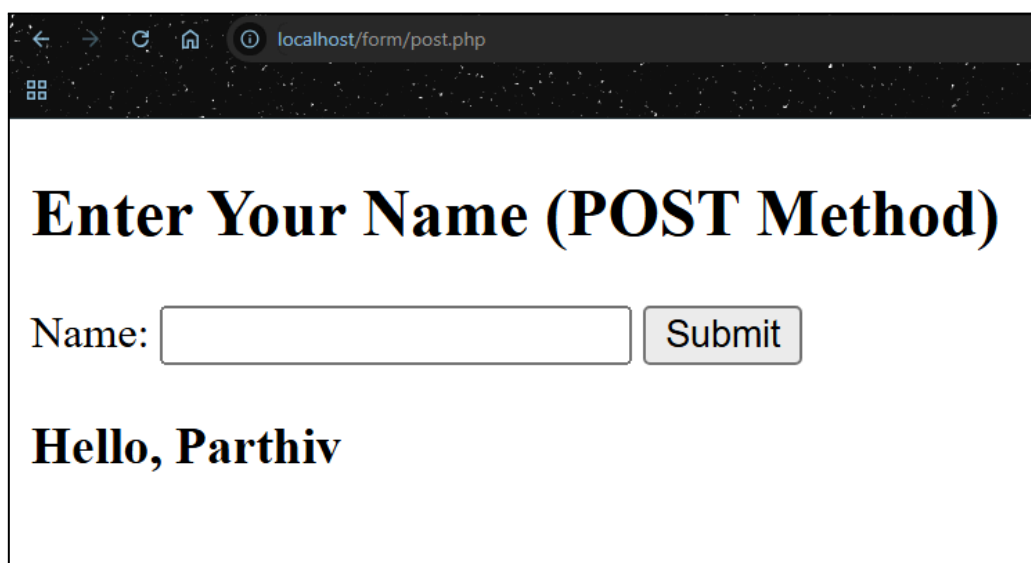Output :

Mini Project : Calculator

```
<!DOCTYPE html>
<html>
<head>
  <title>Simple Calculator</title>
</head>
<body>

  <h2>Calculator</h2>

  <form method="post">
    Number 1:
    <input type="number" name="num1" required><br><br>

    Number 2:
    <input type="number" name="num2" required><br><br>

    Operation:
    <select name="op">
      <option value="+">Addition</option>
      <option value="-">Subtraction</option>
      <option value="*">Multiplication</option>
      <option value="/">Division</option>
    </select><br><br>

    <input type="submit" value="Calculate">
  </form>

  <?php
  if(isset($_POST['op']))
  {
    $a = $_POST['num1'];
    $b = $_POST['num2'];
    $op = $_POST['op'];

    switch($op)
    {
      case '+':
        $result = $a + $b;
        break;
```

```
    case '-':
        $result = $a - $b;
        break;

    case '*':
        $result = $a * $b;
        break;

    case '/':
        $result = $a / $b;
        break;
}

echo "<h3>Result = $result</h3>";
}
?>

</body>
</html>
```

Output:

Calculator

Number 1:

Number 2:

Operation:

Addition

▼

Calculate

Result = 24