

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan


School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

1. Use MongoDB to implement the following DB operations

1. Create a database called 'vehicles' and *write* a MongoDB query to select database as "vehicles".

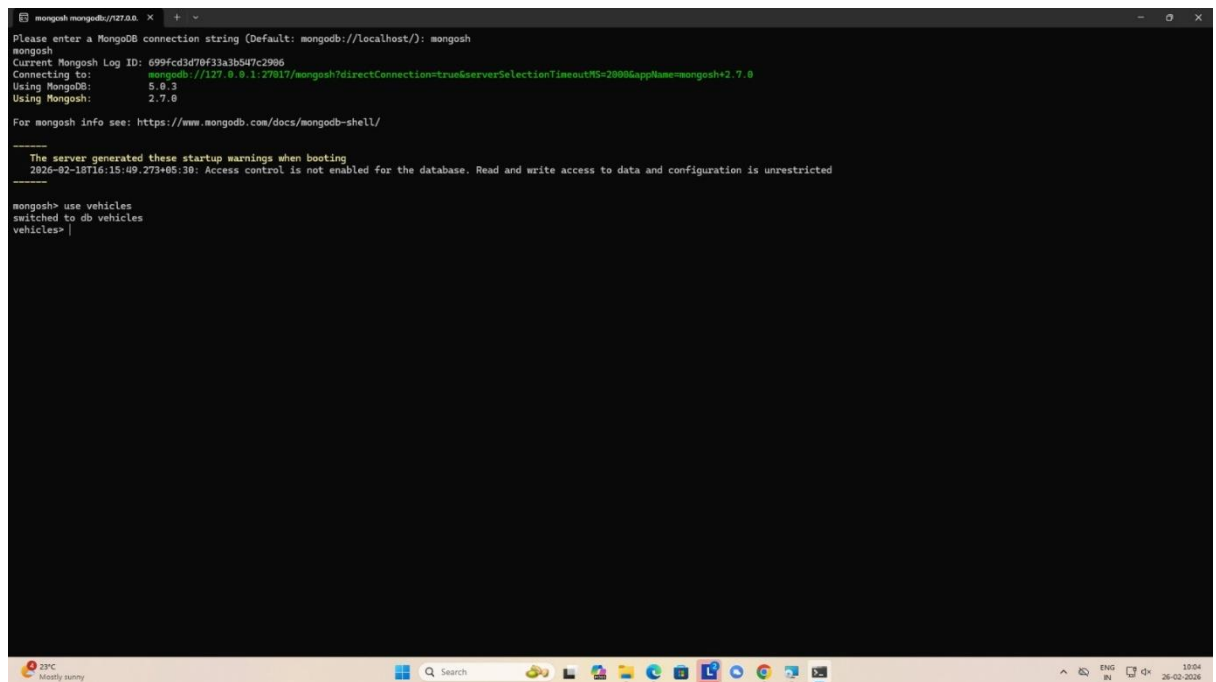

```
mongosh mongodb://127.0.0.1:27020
Please enter a MongoDB connection string (Default: mongodb://localhost/): mongosh
Current Mongosh Log ID: 699fcd3d70f33a3b547c2996
Connecting to:  mongodb://127.0.0.1:27020/?directConnection=true&serverSelectionTimeoutMS=2000&appName=mongosh+2.7.0
Using MongoDB:  5.0.3
Using Mongosh:   2.7.0

For mongosh info see: https://www.mongodb.com/docs/mongosh-shell/

-----
The server generated these startup warnings when booting
2026-02-18T16:15:49.273+05:30: Access control is not enabled for the database. Read and write access to data and configuration is unrestricted
-----

mongosh> use vehicles
switched to db vehicles
vehicles> |
```

2. Write a MongoDB query to display all the databases.

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

```
mongo> show dbs
animal 56.00 KiB
CCC     56.00 KiB
Shibu   88.00 KiB
admin   48.00 KiB
blog    48.00 KiB
config  108.00 KiB
local   88.00 KiB
vehicles 88.00 KiB
web_lab 72.00 KiB
mongo>
```

3. Create a collection called 'two_wheelers'. (use capping) and Create a collection called 'four_wheelers'.

```
vehicles> use vehicles
already on db vehicles
vehicles> db.createCollection("two_wheelers", { capped: true, size: 100000 })
{ ok: 1 }
vehicles>
```

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech


Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

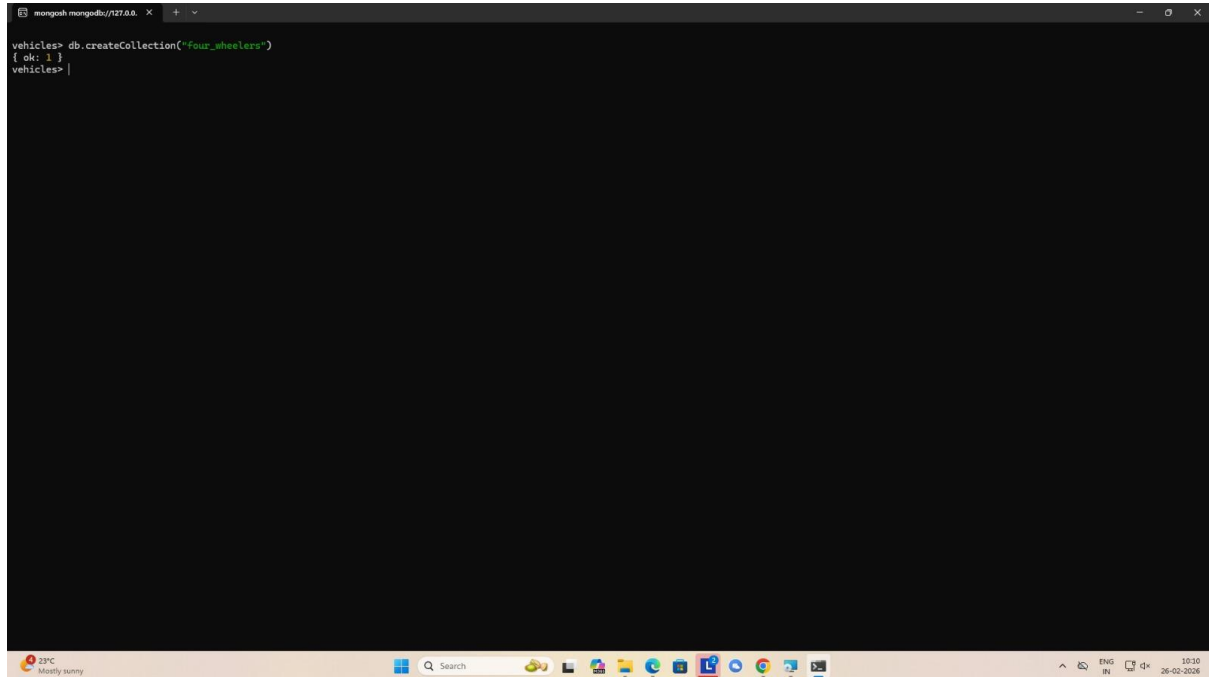

```
vehicles> db.createCollection("four_wheelers")
{ ok: 1 }
vehicles> |
```

4. Add 5 two-wheeler details to the collection named 'two_wheelers'. Each document consists of following fields as bike_name, model (gear or gearless), category (100cc, 125cc, 150cc, 200cc), colors_available (red, black, blue, sport red etc) as array, manufacturer, performance (out of 10), timestamp (date and year release) and price.

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

```
vehicles> db.two_wheelers.insertMany([
  {
    bike_name: "Apache RTR 160",
    model: "gear",
    category: "160cc",
    colors_available: ["red", "black", "blue"],
    manufacturer: "TVS",
    performance: 8,
    timestamp: new Date("2022-05-10"),
    price: 120000
  },
  {
    bike_name: "Activa 6G",
    model: "gearless",
    category: "125cc",
    colors_available: ["white", "black"],
    manufacturer: "Honda",
    performance: 7,
    timestamp: new Date("2021-03-15"),
    price: 90000
  },
  {
    bike_name: "Pulsar 150",
    model: "gear",
    category: "150cc",
    colors_available: ["black", "sport red"],
    manufacturer: "Bajaj",
    performance: 8,
    timestamp: new Date("2020-08-20"),
    price: 110000
  },
  {
    bike_name: "FZ V3",
    model: "gear",
    category: "125cc",
    colors_available: ["blue", "black"],
    manufacturer: "Yamaha",
    performance: 9,
    timestamp: new Date("2023-01-01"),
    price: 130000
  },
  {
    bike_name: "Dopiter",
    model: "gearless",
    category: "110cc",
    colors_available: ["grey", "white"],
    manufacturer: "TVS",
    performance: 7,
    timestamp: new Date("2019-09-10"),
    price: 85000
  }
])
```

```
vehicles> db.two_wheelers.insertMany([
  {
    bike_name: "Activa 6G",
    model: "gearless",
    category: "125cc",
    colors_available: ["white", "black"],
    manufacturer: "Honda",
    performance: 7,
    timestamp: new Date("2021-03-15"),
    price: 90000
  },
  {
    bike_name: "Pulsar 150",
    model: "gear",
    category: "150cc",
    colors_available: ["black", "sport red"],
    manufacturer: "Bajaj",
    performance: 8,
    timestamp: new Date("2020-08-20"),
    price: 110000
  },
  {
    bike_name: "FZ V3",
    model: "gear",
    category: "125cc",
    colors_available: ["blue", "black"],
    manufacturer: "Yamaha",
    performance: 9,
    timestamp: new Date("2023-01-01"),
    price: 130000
  },
  {
    bike_name: "Dopiter",
    model: "gearless",
    category: "110cc",
    colors_available: ["grey", "white"],
    manufacturer: "TVS",
    performance: 7,
    timestamp: new Date("2019-09-10"),
    price: 85000
  }
])
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('699fcf0170f33a3b507c2907'),
    '1': ObjectId('699fcf0170f33a3b507c2908'),
    '2': ObjectId('699fcf0170f33a3b507c2909'),
    '3': ObjectId('699fcf0170f33a3b507c290a'),
    '4': ObjectId('699fcf0170f33a3b507c290b')
  }
}
```

5. Add 5 four-wheeler details to the collection named 'four_wheelers'. Each document consists of following fields as vehicle_name, model (commercial or own), category (car, lorry, bus, mini truck, heavy truck, containers), variants (vxi, zxi, petrol, diesel

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

7. Write a MongoDB query to display only vehicle name and price in all the collection of the database

```
vehicles> db.two_wheelers.find({}, {bike_name:1, price:1, _id:0})
[
  { bike_name: 'Apache RTR 160', price: 120000 },
  { bike_name: 'Activa 6G', price: 90000 },
  { bike_name: 'Pulsar 160', price: 110000 },
  { bike_name: 'FZ V3', price: 130000 },
  { bike_name: 'Jupiter', price: 85000 }
]
vehicles> |
```

```
vehicles> db.four_wheelers.find({}, {vehicle_name:1, price:1, _id:0})
[
  { vehicle_name: 'Swift', price: 800000 },
  { vehicle_name: 'Innova', price: 1500000 },
  { vehicle_name: 'Ashok Leyland Truck', price: 2500000 },
  { vehicle_name: 'Eicher Bus', price: 3000000 },
  { vehicle_name: 'Tata Ace', price: 600000 }
]
vehicles> |
```

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Faculty Name: Prof. S.Gopikrishnan


Student name: KODURU PUJITHA

Date: 26/02/2026

School: SCOPE

Reg. no.: 23BCE20090

8. Write a MongoDB query to display two_wheelers from a particular company

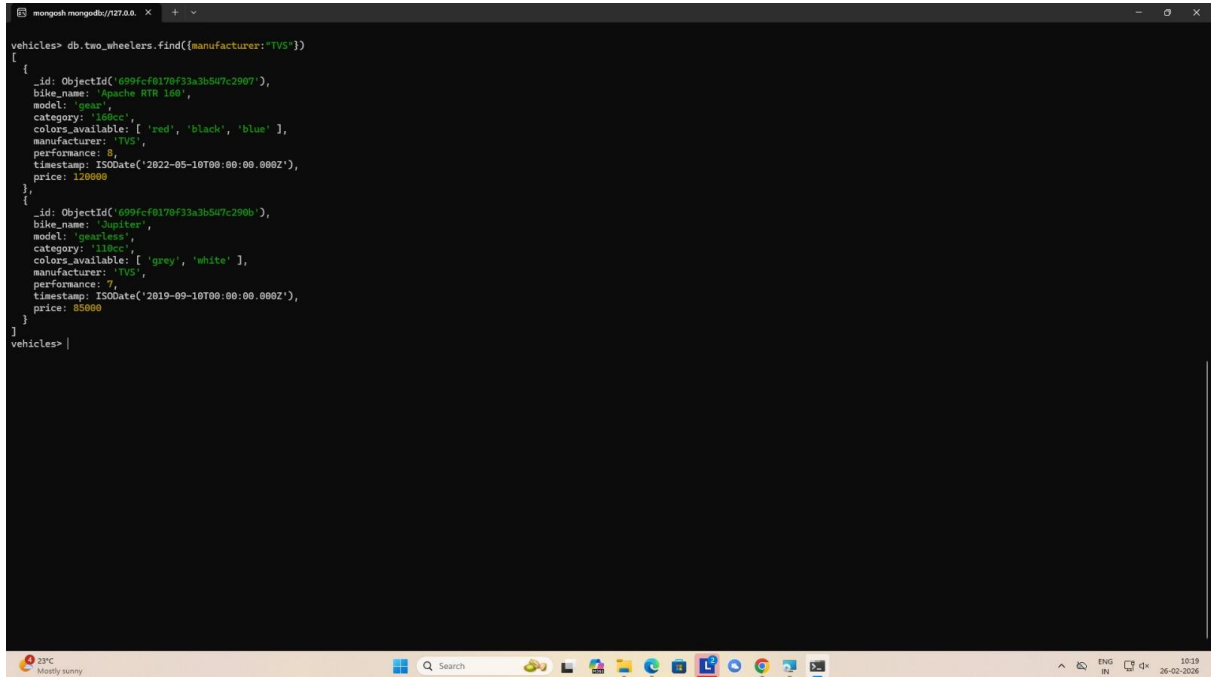

```
vehicles> db.two_wheelers.find({manufacturer:'TVS'})
[
  {
    _id: ObjectId('699fcf0170f33a3b5d7c2907'),
    bike_name: 'Apache RTR 160',
    model: 'gear',
    category: '160cc',
    colors_available: [ 'red', 'black', 'blue' ],
    manufacturer: 'TVS',
    performance: 8,
    timestamp: ISODate('2022-05-10T00:00:00.000Z'),
    price: 120000
  },
  {
    _id: ObjectId('699fcf0170f33a3b5d7c290b'),
    bike_name: 'Jupiter',
    model: 'gearless',
    category: '110cc',
    colors_available: [ 'grey', 'white' ],
    manufacturer: 'TVS',
    performance: 7,
    timestamp: ISODate('2019-09-10T00:00:00.000Z'),
    price: 85000
  }
]
vehicles> |
```


Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

9. Write a MongoDB query to display four_wheelers available in diesel variants

```
vehicles> db.four_wheelers.find({'variants':'diesel'})
{
  "_id": ObjectId('699fcf3670f31a3b5d7c290d'),
  "vehicle_name": 'Innova',
  "model": 'commercial',
  "category": 'car',
  "variants": [ 'diesel', 'zxi' ],
  "manufacturer": 'Toyota',
  "performance": 9,
  "timestamp": ISODate('2021-06-18T00:00:00.000Z'),
  "price": 1500000
},
{
  "_id": ObjectId('699fcf3670f31a3b5d7c290e'),
  "vehicle_name": 'Ashok Leyland Truck',
  "model": 'commercial',
  "category": 'heavy truck',
  "variants": [ 'diesel' ],
  "manufacturer": 'Ashok Leyland',
  "performance": 7,
  "timestamp": ISODate('2020-11-05T00:00:00.000Z'),
  "price": 2500000
},
{
  "_id": ObjectId('699fcf3670f31a3b5d7c290f'),
  "vehicle_name": 'Eicher Bus',
  "model": 'commercial',
  "category": 'bus',
  "variants": [ 'diesel' ],
  "manufacturer": 'Eicher',
  "performance": 8,
  "timestamp": ISODate('2019-12-12T00:00:00.000Z'),
  "price": 3000000
},
{
  "_id": ObjectId('699fcf3670f31a3b5d7c2910'),
  "vehicle_name": 'Tata Ace',
  "model": 'commercial',
  "category": 'mini truck',
  "variants": [ 'diesel', 'petrol' ],
  "manufacturer": 'Tata',
  "performance": 6,
  "timestamp": ISODate('2018-07-07T00:00:00.000Z'),
  "price": 600000
}
vehicles> |
```

10. Write a MongoDB query to display vehicles name, category and manufacturer details whose rating is more than 5.

```
vehicles> db.two_wheelers.find({'performance': {'$gt':5}},
{'bike_name':1, 'category':1, 'manufacturer':1, '_id':0})
{
  "bike_name": 'Apache RTR 160', "category": '160cc', "manufacturer": 'TVS' },
  { "bike_name": 'Activa 6G', "category": '125cc', "manufacturer": 'Honda' },
  { "bike_name": 'Palstan 150', "category": '150cc', "manufacturer": 'Bajaj' },
  { "bike_name": 'FZ V3', "category": '150cc', "manufacturer": 'Yamaha' },
  { "bike_name": 'Jupiter', "category": '110cc', "manufacturer": 'TVS' }
}
vehicles>
```

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

```
vehicles>
{ db.four_wheelers.find({performance: {$gt:5}}),
  {vehicle_name:1, category:1, manufacturer:1, _id:0}}
[
  { vehicle_name: 'Swift', category: 'car', manufacturer: 'Maruti' },
  { vehicle_name: 'Innova', category: 'car', manufacturer: 'Toyota' },
  {
    vehicle_name: 'Ashok Leyland Truck',
    category: 'heavy truck',
    manufacturer: 'Ashok Leyland'
  },
  { vehicle_name: 'Eicher Bus', category: 'bus', manufacturer: 'Eicher' },
  {
    vehicle_name: 'Tata Ace',
    category: 'mini truck',
    manufacturer: 'Tata'
  }
]
vehicles> |
```

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan


School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

2. Use MongoDB to implement the following DB operations for a Zoo

1. Create a database called 'animal' and *write* a MongoDB query to select database as 'animal'.

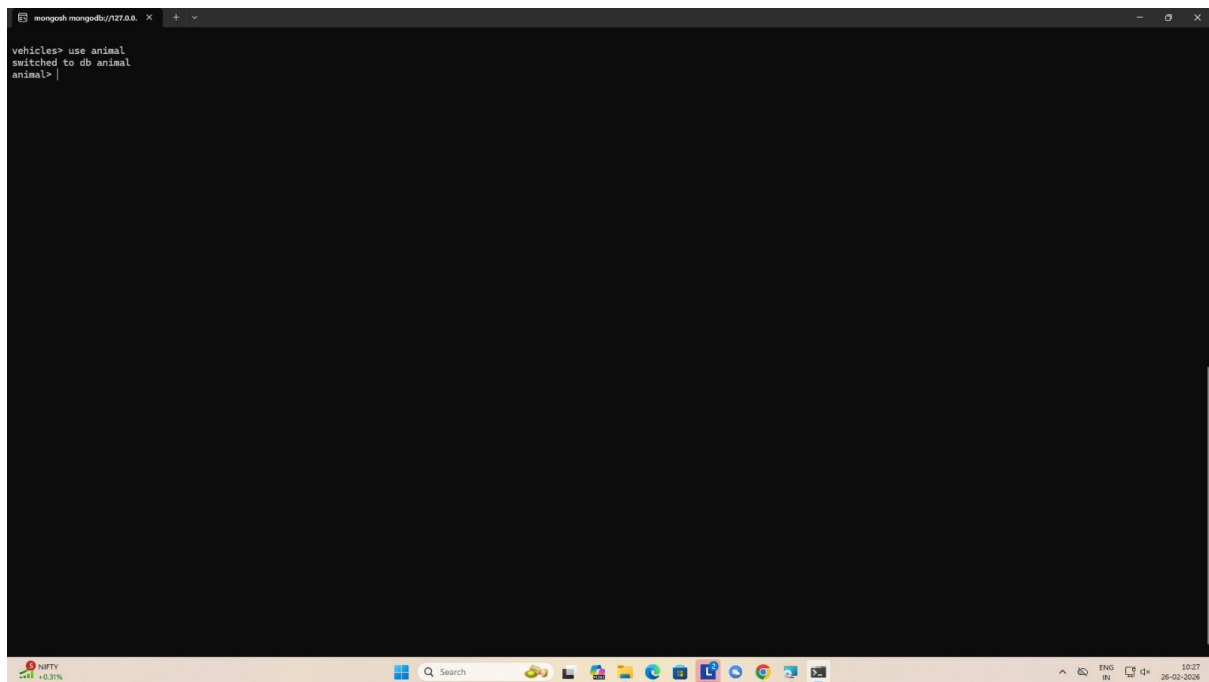

```
vehicles> use animal
switched to db animal
animal> |
```

The screenshot shows a terminal window titled 'mongosh mongoDb://127.0.0.1'. The prompt is 'vehicles>'. The user enters 'use animal', and the prompt changes to 'switched to db animal'. The user then enters 'animal> |'. The terminal window is dark-themed. The Windows taskbar is visible at the bottom, showing the time as 10:27 on 26-02-2026.

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

2. Write a MongoDB query to display all the databases.

```
mongosh mongodb://127.0.0.1:27020
animal> show dbs
CCC          56.00 KiB
Shibu        88.00 KiB
admin        48.00 KiB
blog         48.00 KiB
config       108.00 KiB
local        88.00 KiB
vehicles     88.00 KiB
web_lab      72.00 KiB
animal> |
```

```
mongosh mongodb://127.0.0.1:27020
animal> db.adminCommand({ listDatabases: 1, nameOnly: true, authorizedDatabases: true })
{
  databases: [
    { name: 'CCC' },
    { name: 'Shibu' },
    { name: 'admin' },
    { name: 'blog' },
    { name: 'config' },
    { name: 'local' },
    { name: 'vehicles' },
    { name: 'web_lab' }
  ],
  ok: 1
}
animal> |
```

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026


Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

3. Create a collection called 'wild_animals'.(use capping) and Create a collection called 'domestic_animals'.

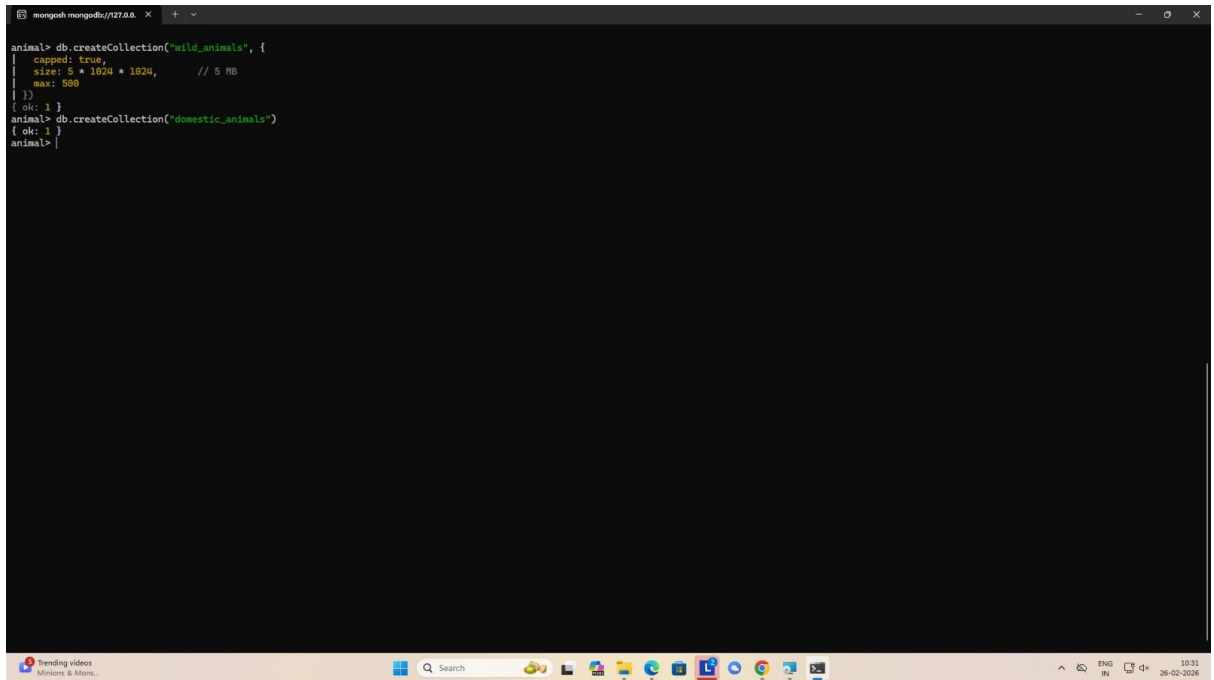

```
mongosh mongodb://127.0.0.1:27020
> use animal
animal> db.createCollection("wild_animals", {
  capped: true,
  size: 5 * 1024 * 1024, // 5 MB
  max: 500
})
{ ok: 1 }
animal> db.createCollection("domestic_animals")
{ ok: 1 }
animal>
```


Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

```
mongo> db.domestic_animals.insertMany([
  {
    animal_name: "Labrador",
    gender: "Male",
    favorite_foods: ["chicken", "rice", "pedigree", "carrot"],
    animal_petname: "Bruno",
    life_span: 12,
    timestamp: ISODate("2024-05-10T13:40:00Z"),
  }
])
mongo> db.wild_animals.find().pretty()
{
  "_id": ObjectId("699fd3d370f33a3b547c2911"),
  "animal_name": "Bengal Tiger",
  "nature": "harm",
  "favorite_foods": [ "meat", "deer", "wild boar" ],
  "care_taker_name": "Ravi Kumar",
  "life_span": 12,
  "timestamp": ISODate("2024-03-15T09:30:00.000Z"),
  "expenses": 450000
},
{
  "_id": ObjectId("699fd3d370f33a3b547c2912"),
  "animal_name": "African Lion",
  "nature": "harm",
  "favorite_foods": [ "meat", "zebra", "buffalo" ],
  "care_taker_name": "Priya Sharma",
  "life_span": 14,
  "timestamp": ISODate("2023-11-20T14:15:00.000Z"),
  "expenses": 620000
},
{
  "_id": ObjectId("699fd3d370f33a3b547c2913"),
  "animal_name": "Indian Elephant",
  "nature": "harmless",
  "favorite_foods": [ "grass", "bamboo", "fruits", "leaves" ],
  "care_taker_name": "Ravi Kumar",
  "life_span": 65,
  "timestamp": ISODate("2022-06-08T10:00:00.000Z"),
  "expenses": 900000
},
{
  "_id": ObjectId("699fd3d370f33a3b547c2914"),
  "animal_name": "Red Panda",
  "nature": "harmless",
  "favorite_foods": [ "bamboo", "fruits", "eggs" ],
  "care_taker_name": "Anjali Verma",
  "life_span": 15,
  "timestamp": ISODate("2025-01-12T11:45:00.000Z"),
  "expenses": 280000
},
}
```

6. Write a MongoDB query to display all documents available in wild_animals and domestic_animals.

```
mongo> db.getCollectionNames().forEach(function(coll) {
  | print("Collection: " + coll);
  | db[coll].find({}).pretty();
  | })
Collection: domestic_animals
Collection: wild_animals
mongo> |
```

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

7. Write a MongoDB query to display only animal name and expenses in all the collection of the database

```
mongo> use domestic_animals
switched to db domestic_animals
mongo> find(
  { life_span: 15 },
  { animal_name: 1, animal_petname: 1, life_span: 1, gender: 1 }
).pretty()
{
  _id: ObjectId('699fd417bf33a3b547c2917'),
  animal_name: 'Persian Cat',
  gender: 'female',
  animal_petname: 'Snowy',
  life_span: 15
}
mongo> var years = 12;
mongo> db.domestic_animals.find({ life_span: years }).pretty()
{
  _id: ObjectId('699fd417bf33a3b547c2916'),
  animal_name: 'Labrador',
  gender: 'male',
  favorite_foods: [ 'chicken', 'rice', 'pedigree', 'carrot' ],
  animal_petname: 'Bruno',
  life_span: 12,
  timestamp: ISODate('2024-05-10T13:40:00.000Z'),
  expenses: 85000
}
mongo>
```

8. Write a MongoDB query to display domestic_animals whose life is a particular year

```
mongo> use domestic_animals
switched to db domestic_animals
mongo> find(
  { animal_name: 'Giraffe',
    expenses: 380000 },
  { animal_name: 1, expenses: 1 }
).pretty()
{
  animal_name: 'Giraffe',
  expenses: 380000
}
mongo> find(
  { animal_name: 'Gray Wolf',
    expenses: 328000 },
  { animal_name: 1, expenses: 1 }
).pretty()
{
  animal_name: 'Gray Wolf',
  expenses: 328000
}
mongo> use domestic_animals
switched to db domestic_animals
mongo> find(
  { animal_name: 'Cow',
    expenses: 85000 },
  { animal_name: 1, expenses: 1 }
).pretty()
{
  animal_name: 'Cow',
  expenses: 85000
}
mongo> find(
  { animal_name: 'Dog',
    expenses: 65000 },
  { animal_name: 1, expenses: 1 }
).pretty()
{
  animal_name: 'Dog',
  expenses: 65000
}
mongo> find(
  { animal_name: 'Goat',
    expenses: 45000 },
  { animal_name: 1, expenses: 1 }
).pretty()
{
  animal_name: 'Goat',
  expenses: 45000
}
mongo> find(
  { animal_name: 'Horse',
    expenses: 150000 },
  { animal_name: 1, expenses: 1 }
).pretty()
{
  animal_name: 'Horse',
  expenses: 150000
}
mongo> find(
  { animal_name: 'Rabbit',
    expenses: 25000 },
  { animal_name: 1, expenses: 1 }
).pretty()
{
  animal_name: 'Rabbit',
  expenses: 25000
}
mongo> db.domestic_animals.find({ life_span: 12 }).pretty()
{
  _id: ObjectId('699fd8fdeef8d9caa7c290d'),
  animal_name: 'Dog',
  gender: 'male',
  favorite_foods: [ 'meat', 'chicken', 'rice', 'biscuits' ],
  animal_petname: 'Rocky',
  life_span: 12,
  timestamp: ISODate('2023-10-08T09:00:00.000Z'),
  expenses: 65000
}
mongo>
```


Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

9. Write a MongoDB query to display wild_animals available under a particular care_taker

```
mongodb mongoDB (/127.0.0.1)
{
  animal_name: 'Rabbit',
  expenses: 25000
}
animal> db.domestic_animals.find({ life_span: 12 }).pretty()
[
  {
    _id: ObjectId('699fd8fde6ef8d9caa7c298d'),
    animal_name: 'Dog',
    gender: 'male',
    favorite_foods: [ 'meat', 'chicken', 'rice', 'biscuits' ],
    animal_petname: 'Rocky',
    life_span: 12,
    timestamp: ISODate('2023-10-08T00:00:00.000Z'),
    expenses: 60000
  }
]
animal> db.wild_animals.find({ care_taker_name: "Ravi Kumar" }).pretty()
[
  {
    _id: ObjectId('699fd8c6e6ef8d9caa7c2907'),
    animal_name: 'Bengal Tiger',
    nature: 'harm',
    favorite_foods: [ 'meat', 'deer', 'wild boar', 'buffalo' ],
    care_taker_name: 'Ravi Kumar',
    life_span: 15,
    timestamp: ISODate('2023-05-12T00:00:00.000Z'),
    expenses: 450000
  },
  {
    _id: ObjectId('699fd8c6e6ef8d9caa7c290b'),
    animal_name: 'Gray Wolf',
    nature: 'harm',
    favorite_foods: [ 'meat', 'deer', 'rabbits', 'small mammals' ],
    care_taker_name: 'Ravi Kumar',
    life_span: 12,
    timestamp: ISODate('2023-07-25T00:00:00.000Z'),
    expenses: 320000
  }
]
animal> |
```

Lab Sheet 6: MongoDB Basic commands

Branch/ Class: B.Tech/M.Tech

Date: 26/02/2026

Faculty Name: Prof. S.Gopikrishnan

School: SCOPE

Student name: KODURU PUJITHA

Reg. no.: 23BCE20090

10. Write a MongoDB query to display animal name, favorite_foods and expenses details whose lifespan is more than 5 years.

```
mongo> print("From wild_animals:");
| db.wild_animals.find(
|   { life_span: { $gt: 5 } },
|   { animal_name: 1, favorite_foods: 1, expenses: 1, life_span: 1, _id: 0 }
| ).pretty()
From wild_animals:
{
  animal_name: 'Bengal Tiger',
  favorite_foods: [ 'meat', 'deer', 'wild boar' ],
  life_span: 12,
  expenses: 450000
},
{
  animal_name: 'African Lion',
  favorite_foods: [ 'meat', 'zebra', 'buffalo' ],
  life_span: 14,
  expenses: 620000
},
{
  animal_name: 'Indian Elephant',
  favorite_foods: [ 'grass', 'bamboo', 'fruits', 'leaves' ],
  life_span: 65,
  expenses: 980000
},
{
  animal_name: 'Red Panda',
  favorite_foods: [ 'bamboo', 'fruits', 'eggs' ],
  life_span: 15,
  expenses: 250000
}
mongo> print("From domestic_animals:");
| db.domestic_animals.find(
|   { life_span: { $gt: 5 } },
|   { animal_name: 1, favorite_foods: 1, expenses: 1, life_span: 1, _id: 0 }
| ).pretty()
From domestic_animals:
{
  animal_name: 'Labrador',
  favorite_foods: [ 'chicken', 'rice', 'pedigree', 'carrot' ],
  life_span: 12,
  expenses: 35000
},
{
  animal_name: 'Persian Cat',
  favorite_foods: [ 'fish', 'chicken', 'whiskas' ],
  life_span: 15,
  expenses: 120000
},
{
  animal_name: 'Cow',
  favorite_foods: [ 'grass', 'hay', 'grains', 'molasses' ],
  life_span: 18,
  expenses: 150000
},
{
  animal_name: 'Rabbit',
  favorite_foods: [ 'carrot', 'lettuce', 'pellets' ],
  life_span: 8,
  expenses: 32000
},
{
  animal_name: 'Parrot',
  favorite_foods: [ 'seeds', 'fruits', 'nuts' ],
  life_span: 25,
  expenses: 68000
}
mongo>
```

```
mongo> print("From wild_animals:");
| db.wild_animals.find(
|   { life_span: { $gt: 5 } },
|   { animal_name: 1, favorite_foods: 1, expenses: 1, life_span: 1, _id: 0 }
| ).pretty()
From wild_animals:
{
  animal_name: 'Bengal Tiger',
  favorite_foods: [ 'meat', 'deer', 'wild boar' ],
  life_span: 12,
  expenses: 450000
},
{
  animal_name: 'African Lion',
  favorite_foods: [ 'meat', 'zebra', 'buffalo' ],
  life_span: 14,
  expenses: 620000
},
{
  animal_name: 'Indian Elephant',
  favorite_foods: [ 'grass', 'bamboo', 'fruits', 'leaves' ],
  life_span: 65,
  expenses: 980000
},
{
  animal_name: 'Red Panda',
  favorite_foods: [ 'bamboo', 'fruits', 'eggs' ],
  life_span: 15,
  expenses: 250000
}
mongo> print("From domestic_animals:");
| db.domestic_animals.find(
|   { life_span: { $gt: 5 } },
|   { animal_name: 1, favorite_foods: 1, expenses: 1, life_span: 1, _id: 0 }
| ).pretty()
From domestic_animals:
{
  animal_name: 'Labrador',
  favorite_foods: [ 'chicken', 'rice', 'pedigree', 'carrot' ],
  life_span: 12,
  expenses: 35000
},
{
  animal_name: 'Persian Cat',
  favorite_foods: [ 'fish', 'chicken', 'whiskas' ],
  life_span: 15,
  expenses: 120000
},
{
  animal_name: 'Cow',
  favorite_foods: [ 'grass', 'hay', 'grains', 'molasses' ],
  life_span: 18,
  expenses: 150000
},
{
  animal_name: 'Rabbit',
  favorite_foods: [ 'carrot', 'lettuce', 'pellets' ],
  life_span: 8,
  expenses: 32000
},
{
  animal_name: 'Parrot',
  favorite_foods: [ 'seeds', 'fruits', 'nuts' ],
  life_span: 25,
  expenses: 68000
}
mongo>
```