

Sesión 1 - Bases de datos relacionales

Angel Gonzalez - angonpad@gmail.com

Create database [Info](#)

Choose a database creation method

☒ Full configuration
You set all of the configuration options, including ones for availability, security, backups, and maintenance.

☐ Easy create
Use recommended best-practice configurations. Some configuration options can be changed after the database is created.

Engine options

Engine type [Info](#)

☐ Aurora (MySQL Compatible) 

☐ Aurora (PostgreSQL Compatible) 

☒ MySQL 

☐ PostgreSQL 

☐ MariaDB 

☐ Oracle 

☐ Microsoft SQL Server 

☐ IBM Db2 

Edition

☒ MySQL Community

Engine version [Info](#)
View the engine versions that support the following database features.

☒ Hide filters

☒ Show only versions that support the Multi-AZ DB cluster [Info](#)
Create a Multi-AZ DB cluster with one primary DB instance and two readable standby DB instances. Multi-AZ DB clusters provide up to 2x faster transaction commit latency and automatic failover in typically under 35 seconds.

☒ Show only versions that support the Amazon RDS Optimized Writes [Info](#)
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.

Engine version

MySQL 8.0.45

☐ Enable RDS Extended Support [Info](#)
Amazon RDS Extended Support is a [paid offering](#). By selecting this option, you consent to being charged for this offering if you are running your database major version past the RDS end of standard support date for that version. Check the end of standard support date for your major version in the [RDS for MySQL documentation](#).

Templates

Choose a sample template to meet your use case.

☒ Production
Use defaults for high availability and fast, consistent performance.

☐ Dev/Test
This instance is intended for development use outside of a production environment.


☐ Sandbox
To develop new applications, test existing applications, or gain hands-on experience with Amazon RDS.

Availability and durability

Deployment options [Info](#)
Choose the deployment option that provides the availability and durability needed for your use case. AWS is committed to a certain level of uptime depending on the deployment option you choose. Learn more in the [Amazon RDS service level agreement \(SLA\)](#).


☒ Single-AZ DB instance deployment (1 instance)
Creates a single DB instance without standby instances. This setup provides:

- 99.95% uptime
- No data redundancy




☐ Multi-AZ DB instance deployment (2 instances)
Creates a primary DB instance with a non-readable standby instance in a separate Availability Zone. This setup provides:

- 99.95% uptime
- Redundancy across Availability Zones

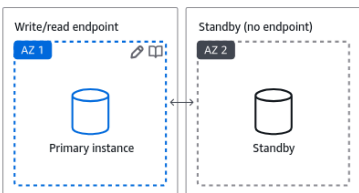

☐ Multi-AZ DB cluster deployment (3 instances)
Creates a primary DB instance with two readable standbys in separate Availability Zones. This setup provides:

- 99.95% uptime
- Redundancy across Availability Zones
- Increased read capacity
- Reduced write latency



Settings

DB instance identifier [Info](#)

Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.

RDS-angelGonzalez

The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

Credentials Settings

Master username [Info](#)

Type a login ID for the master user of your DB instance.

admin

1 to 16 alphanumeric characters. The first character must be a letter.

Credentials management

You can use AWS Secrets Manager or manage your master user credentials.

☐ Managed in AWS Secrets Manager - *most secure*
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.

☒ Self managed
Create your own password or have RDS create a password that you manage.

☐ Auto generate password

Amazon RDS can generate a password for you, or you can specify your own password.

Master password [Info](#)

Password strength

Very strong

Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / ' " @

Confirm master password [Info](#)

Instance configuration

The DB instance configuration options below are limited to those supported by the engine that you selected above.

DB instance class [Info](#)

▼ Hide filters

☒ Show instance classes that support Amazon RDS Optimized Writes [Info](#)

Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.

☒ Include previous generation classes

☒ Standard classes (includes m classes)

☐ Memory optimized classes (includes r and x classes)

☐ Burstable classes (includes t classes)

Instance type

db.m7g.large (supports Amazon RDS Optimized Writes)
2 vCPUs 8 GiB RAM EBS Bandwidth: Up to 10,000 Mbps Network: Up to 12.5 Gbps

Storage

Storage type [Info](#)

Provisioned IOPS SSD (io2) storage volumes are now available.

General Purpose SSD (gp2)
Baseline performance determined by volume size

Allocated storage [Info](#)

20 GiB

Allocated storage value must be 20 GiB to 65,536 GiB

ⓘ For high-throughput workloads, we recommend provisioning at least 100 GiB of General Purpose (SSD) storage. Lower values might result in higher latencies when the initial I/O credit balance is used up. [Learn more](#)

▼ Additional storage configuration

Storage autoscaling [Info](#)

Provides dynamic scaling support for your database's storage based on your application's needs.

☒ Enable storage autoscaling

Enabling this feature will allow the storage to increase after the specified threshold is exceeded.

Maximum storage threshold [Info](#)

Charges will apply when your database autoscales to the specified threshold

1000 GiB

Allocated storage value must be 22 GiB to 65,536 GiB

Connectivity [Info](#)

Compute resource

Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.

☒ Don't connect to an EC2 compute resource
Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.

☐ Connect to an EC2 compute resource
Set up a connection to an EC2 compute resource for this database.

Network type [Info](#)

To use dual-stack mode, make sure that you associate an IPv6 CIDR block with a subnet in the VPC you specify.

☒ IPv4
Your resources can communicate only over the IPv4 addressing protocol.

☐ Dual-stack mode
Your resources can communicate over IPv4, IPv6, or both.

Virtual private cloud (VPC) [Info](#)

Choose the VPC. The VPC defines the virtual networking environment for this DB instance.

Default VPC (vpc-00f479057476a2db8)
12 Subnets, 6 Availability Zones

After a database is created, you can't change its VPC. Only VPCs with a corresponding DB subnet group are listed.

ⓘ After a database is created, you can't change its VPC.

DB subnet group [Info](#)

DB subnet group

Info

Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.

default-vpc-00f479057476a2db8

6 Subnets, 6 Availability Zones

Public access

Info

☒ Yes

RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.

☐ No

RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.

VPC security group (firewall)

Info

Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.

☐ Choose existing

Choose existing VPC security groups

☒ Create new

Create new VPC security group

New VPC security group name

RDS-SG-AngelGonzalez

Availability Zone

Info

No preference

RDS Proxy

RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.

☐ Create an RDS Proxy

Info

RDS automatically creates an IAM role and a Secrets Manager secret for the proxy. RDS Proxy has additional costs. For more information, see [Amazon RDS Proxy pricing](#).

Certificate authority - optional

Info

Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.

rds-ca-rsa2048-g1 (default)

Expiry: May 25, 2061

If you don't select a certificate authority, RDS chooses one for you.

DB subnet group

Info

Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.

default-vpc-00f479057476a2db8

6 Subnets, 6 Availability Zones

Public access

Info

☒ Yes

RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.

☐ No

RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.

VPC security group (firewall)

Info

Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.

☐ Choose existing

Choose existing VPC security groups

☒ Create new

Create new VPC security group

New VPC security group name

RDS-SG-AngelGonzalez

Availability Zone

Info

No preference

RDS Proxy

RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.

☐ Create an RDS Proxy

Info

RDS automatically creates an IAM role and a Secrets Manager secret for the proxy. RDS Proxy has additional costs. For more information, see [Amazon RDS Proxy pricing](#).

Certificate authority - optional

Info

Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.

rds-ca-rsa2048-g1 (default)

Expiry: May 25, 2061

If you don't select a certificate authority, RDS chooses one for you.

Monitoring

Info

Choose monitoring tools for this database. Database Insights provides a combined view of Performance Insights and Enhanced Monitoring for your fleet of databases. **Database Insights** pricing is separate from RDS monthly estimates. See [Amazon CloudWatch pricing](#).

☐ Database Insights - Advanced

- Retains 15 months of performance history
- Fleet-level monitoring
- Integration with CloudWatch Application Signals

☒ Database Insights - Standard

- Retains 7 days of performance history, with the option to pay for the retention of up to 24 months of performance history

Performance Insights

☐ Enable Performance Insights

With Performance Insights dashboard, you can visualize the database load on your Amazon RDS DB instance load and filter the load by waits, SQL statements, hosts, or users.

Additional monitoring settings

Enhanced Monitoring, CloudWatch Logs and DevOps Guru

Enhanced Monitoring

☐ Enable Enhanced monitoring

Enabling Enhanced Monitoring metrics are useful when you want to see how different processes or threads use the CPU.

Maintenance

Auto minor version upgrade [Info](#)

☒ Enable auto minor version upgrade

Enabling auto minor version upgrade will automatically upgrade your database minor version. For limitations and more details, see [Automatically upgrading the minor engine version documentation](#).

Maintenance window [Info](#)

Select the period you want pending modifications or maintenance applied to the database by Amazon RDS.

☐ Choose a window

☒ No preference

☒ Enable deletion protection

Protects the database from being deleted accidentally. While this option is enabled, you can't delete the database.

▼ Additional configuration

Database options, encryption turned on, backup turned on, backtrack turned off, maintenance, CloudWatch Logs, delete protection turned on.

Database options

Initial database name [Info](#)

db_init

If you do not specify a database name, Amazon RDS does not create a database.

DB parameter group [Info](#)

default.mysql8.0

Option group [Info](#)

default.mysql-8.0

Backup

☒ Enable automated backup

Creates a point-in-time snapshot of your database

⚠ Please note that automated backups are currently supported for InnoDB storage engine only. If you are using MyISAM, refer to details [here](#).

Backup retention period [Info](#)

The number of days (1-35) for which automatic backups are kept.

7

days

Backup window [Info](#)

The daily time range (in UTC) during which RDS takes automated backups.

☐ Choose a window

☒ No preference

Backup tags [Info](#)

Copies tags from the source database to the automated backup and snapshots respectively.

☐ Copy tags to automated backup

This is a one-time setting. Future tag modifications need manual updates.

☒ Copy tags to snapshots

Backup replication [Info](#)

☐ Enable replication in another AWS Region

Enabling replication automatically creates backups of your DB instance in the selected Region, for disaster recovery, in addition to the current Region.

☒ Enable encryption

Choose to encrypt the given instance. Master key IDs and aliases appear in the list after they have been created using the AWS Key Management Service console. [Info](#)

AWS KMS key [Info](#)

(default) aws/rds

Account

654654478122

KMS key ID

alias/aws/rds

Maintenance

Auto minor version upgrade [Info](#)

☒ **Enable auto minor version upgrade**

Enabling auto minor version upgrade will automatically upgrade your database minor version. For limitations and more details, see [Automatically upgrading the minor engine version documentation](#).

Maintenance window [Info](#)

Select the period you want pending modifications or maintenance applied to the database by Amazon RDS.

☐ Choose a window

☒ No preference

☒ **Enable deletion protection**

Protects the database from being deleted accidentally. While this option is enabled, you can't delete the database.