

EXPLORED

OPEN EDITORS

CODE

OUTLINE

TIMELINE

Welcome

C roll number.c X

C roll number.c > main()

```
1  #include <stdio.h>
2
3  int main()
4  {
5      int n, x, i;
6
7      printf("Enter number of students: ");
8      scanf("%d", &n);
9
10     int arr[n];
11
12     printf("Enter roll numbers: ");
13     for(i = 0; i < n; i++)
14     {
15         scanf("%d", &arr[i]);
16     }
17
18     printf("Enter roll number to search: ");
19     scanf("%d", &x);
20
21     for(i = 0; i < n; i++)
22     {
23         if(arr[i] == x)
24         {
25             printf("Found at index %d", i);
26             return 0;
27         }
28     }
29
30     printf("Not Found");
31
32     return 0;
33 }
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

```
pulkitmittal230207icloud.com@192 output % cd "/Users/pulkitmittal230207icloud.com/Library/Mobile Documents/com~apple~CloudDocs/Documents/vs/code/output"
pulkitmittal230207icloud.com@192 output % ./"roll number "
Enter number of students: 5
Enter roll numbers: 101 105 113 110 130
Enter roll number to search: 110
Found at index 3
pulkitmittal230207icloud.com@192 output %
```

+ - ... | {} X

C/C++ Compile R... ✓

C/C++ Compile Run...

Ln 15, Col 30


Spaces: 4

UTF-8

LF

{ } C

macos-clang-x64

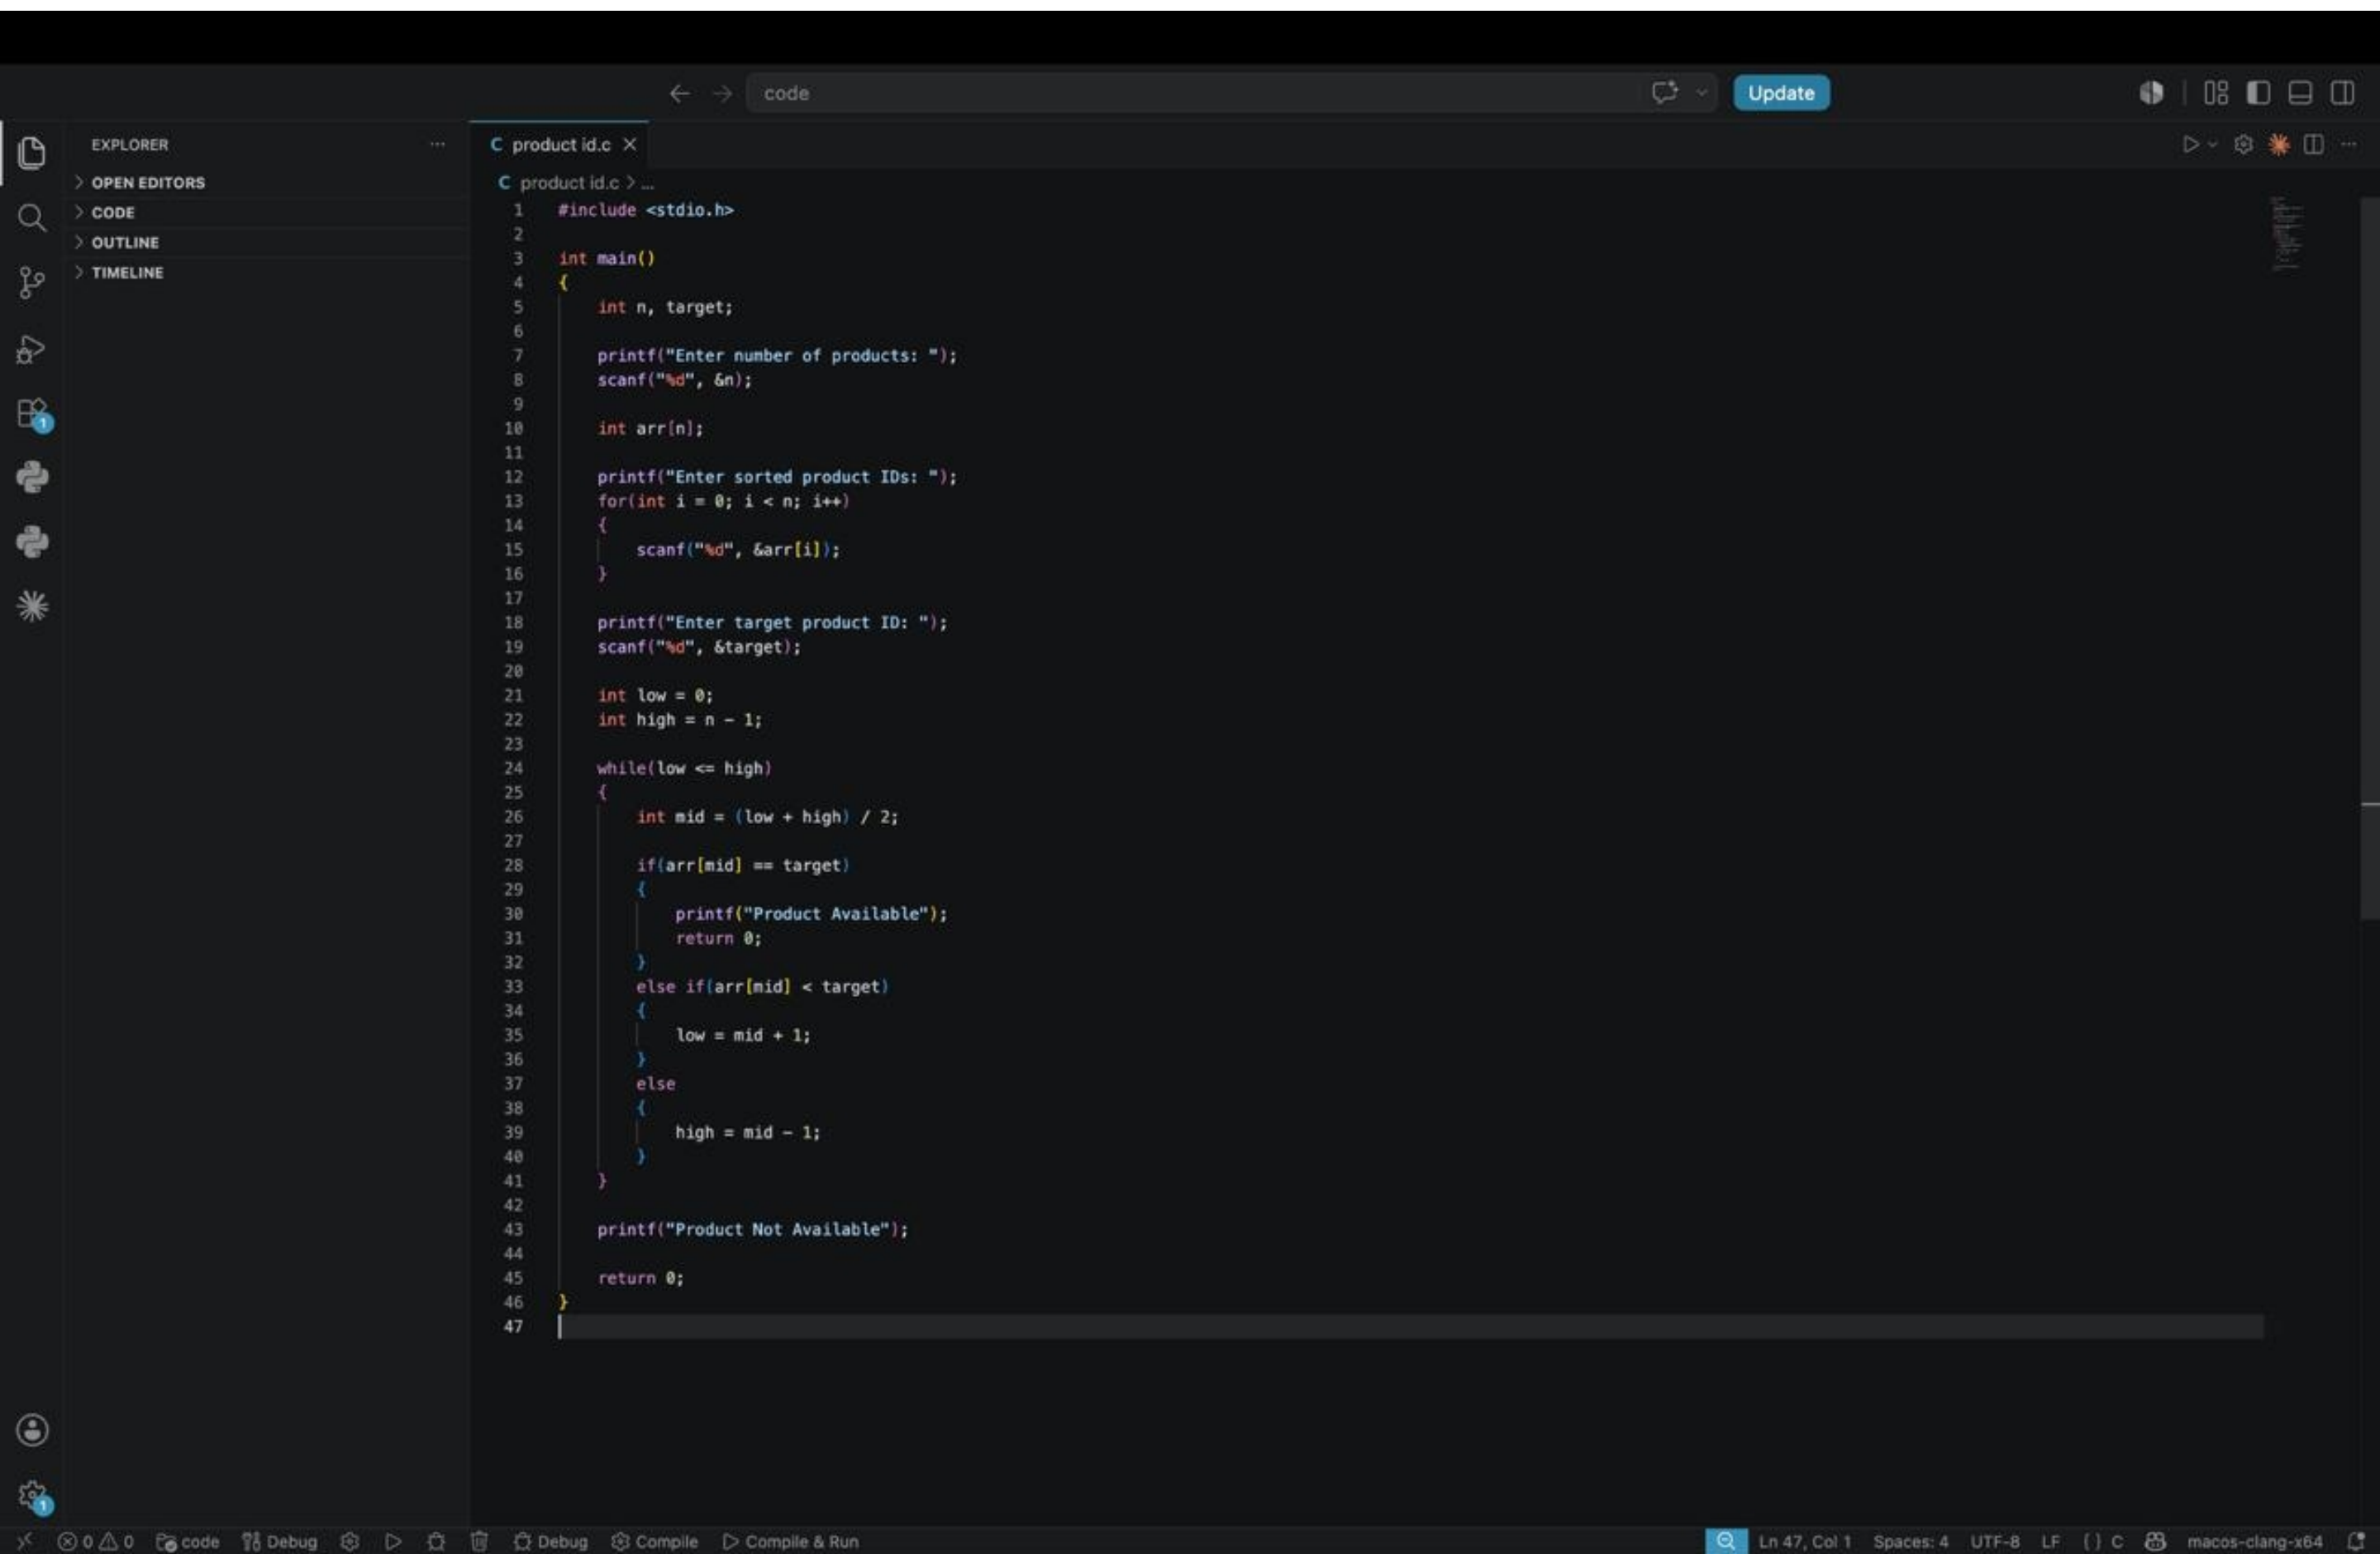

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
pulkitmittal230207icloud.com@192 output % cd "/Users/pulkitmittal230207icloud.com/Library/Mobile Documents/com~apple~CloudDocs/Documents/vs/code/output"
pulkitmittal230207icloud.com@192 output % ./"product id"
Enter number of products: 6
Enter sorted product IDs: 10 20 30 40 50 60
Enter target product ID: 40
Product Available%
pulkitmittal230207icloud.com@192 output % █
```

code

Update

EXPLORER

OPEN EDITORS 1 unsaved

CODE

OUTLINE

TIMELINE

product id.c

Arrange Exam Score.c

Arrange Exam Score.c

main()

```
1  #include <stdio.h>
2  int main()
3  {
4      int n;
5      printf("Enter number of scores: ");
6      scanf("%d", &n);
7      int arr[n];
8      printf("Enter scores: ");
9      for(int i = 0; i < n; i++)
10     {
11         scanf("%d", &arr[i]);
12     }
13     for(int i = 0; i < n - 1; i++)
14     {
15         for(int j = 0; j < n - i - 1; j++)
16         {
17             if(arr[j] > arr[j + 1])
18             {
19                 int temp = arr[j];
20                 arr[j] = arr[j + 1];
21                 arr[j + 1] = temp;
22             }
23         }
24     }
25     printf("Sorted Scores: ");
26     for(int i = 0; i < n; i++)
27     {
28         printf("%d ", arr[i]);
29     }
30     return 0;
31 }
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

pulkitmittal230207icloud.com@192 output % ./"Arrange Exam Score"

Enter number of scores: 5

Enter scores: 89 45 78 12 99

Sorted Scores: 12 45 78 89 99

pulkitmittal230207icloud.com@192 output %

pulkitmittal230207icloud.com@192 output %

C/C++ Compile R... ✓

C/C++ Compile Run...

Ln 30, Col 2

Spaces: 4

UTF-8

LF

{ } C

macos-clang-x64

code

Update

product id.c

Arrange Exam Score.c

Arrange Library Book Numbers.c

EXPLORES

OPEN EDITORS

CODE

OUTLINE

TIMELINE

1#include <stdio.h>

2int main()

3{

4int n;

5printf("Enter number of books: ");

6scanf("%d", &n);

7int arr[n];

8printf("Enter book numbers: ");

9for(int i = 0; i < n; i++)

10{

11scanf("%d", &arr[i]);

12}

13for(int i = 1; i < n; i++)

14{

15int key = arr[i];

16int j = i - 1;

17while(j >= 0 && arr[j] > key)

18{

19arr[j + 1] = arr[j];

20j--;

21}

22arr[j + 1] = key;

23}

24printf("Sorted Book Numbers: ");

25for(int i = 0; i < n; i++)

26{

27printf("%d ", arr[i]);

28}

29return 0;

30}

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

cd "/Users/pulkitmittal230207icloud.com/Library/Mobile Documents/com~apple~CloudDocs/Documents/vs/code/output"

./"Arrange Library Book Numbers"

pulkitmittal230207icloud.com@192 code % cd "/Users/pulkitmittal230207icloud.com/Library/Mobile Documents/com~apple~CloudDocs/Documents/vs/code/output"

pulkitmittal230207icloud.com@192 output % ./"Arrange Library Book Numbers"

Enter number of books: 5

Enter book numbers: 55 23 87 11 34

Sorted Book Numbers: 11 23 34 55 87

pulkitmittal230207icloud.com@192 output %

C/C++ Compile R... ✓

C/C++ Compile Run...

Ln 1, Col 19

Spaces: 4

UTF-8

LF

{ }

C

macos-clang-x64

code

Update

product id.c

Arrange Exam Score.c

Arrange Library Book Numbers.c

Rank Players by Score.c X

Rank Players by Score.c > ...

```
1  #include <stdio.h>
2  int main()
3  {
4      int n;
5      printf("Enter number of players: ");
6      scanf("%d", &n);
7      int arr[n];
8      printf("Enter player scores: ");
9      for(int i = 0; i < n; i++)
10     {
11         scanf("%d", &arr[i]);
12     }
13     for(int i = 0; i < n - 1; i++)
14     {
15         int minIndex = i;
16         for(int j = i + 1; j < n; j++)
17         {
18             if(arr[j] < arr[minIndex])
19             {
20                 minIndex = j;
21             }
22         }
23         int temp = arr[i];
24         arr[i] = arr[minIndex];
25         arr[minIndex] = temp;
26     }
27     printf("Sorted Scores: ");
28     for(int i = 0; i < n; i++)
29     {
30         printf("%d ", arr[i]);
31     }
32     return 0;
33 }
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

```
uments/vs/code/output"
• pulkitmittal230207icloud.com@192 output % ./"Rank Players by Score"
Enter number of players: 5
Enter player scores: 70 20 90 10 40
Sorted Scores: 10 20 40 70 90
○ pulkitmittal230207icloud.com@192 output %
```

C/C++ Compile R... ✓

C/C++ Compile Run...

Ln 33, Col 3

Spaces: 4

UTF-8

LF

{ }

C

macos-clang-x64