


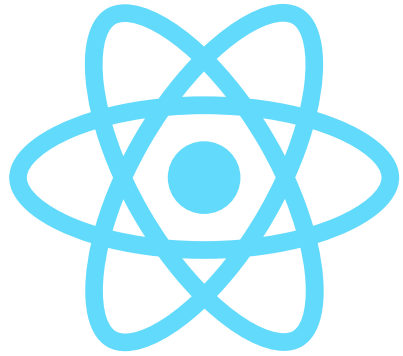


Activity 11 Cart and Bootstrap

Part 1 – Cart 

Part 2 - Bootstrap 

Product Catalog

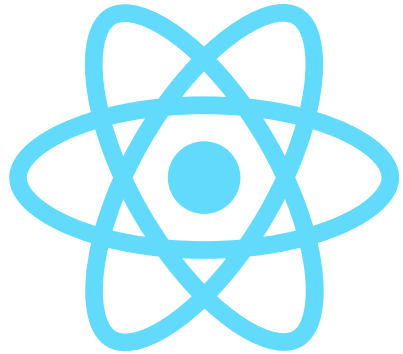

CART



Read JSON files

 Bootstrap


 {JSON}
JavaScript Object Notation

Reference:

<https://dev.to/papasanto/build-a-react-hooks-shopping-cart-with-usestate-and-useeffect-39hk>

Sarfaraz Ahmed Mohammed, Ph.D.
Ali Jannesari, Ph.D.

Let's start constructing a Cart using Hooks

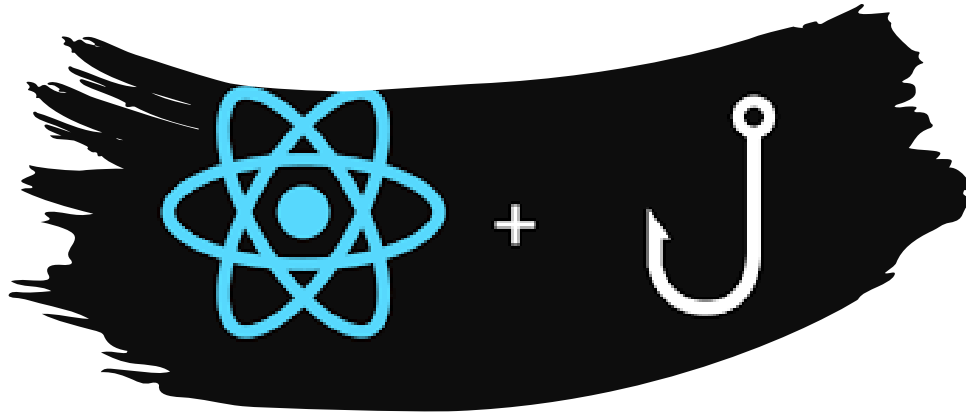



Long sleeve Jacket
women
150



Jacket with wollen hat
women
65



Compact fashion t-shirt
women
55.99



Blue jins
women
50



We are going to use the Fashion Catalog from Fake Store

```
[  
  {  
    "_id": 1,  
    "title": "Long sleeve Jacket",  
    "isNew": true,  
    "oldPrice": "200",  
    "price": 150,  
    "discountedPrice": 135,  
    "description": "Lorem ipsum dolor sit amet, consectetur  
adipisicing elit. Nulla non magni facili blanditiis molestias soluta  
eveniet illum accusantium eius mollitia eligendi, ex iste doloribus  
magnam.",  
    "category": "women",  
    "type": "jacket",  
    "stock": 50,  
    "brand": "FashionTrend",  
    "size": [  
      "S",  
      "M",  
      "L"  
    ],  
    "image": "https://images.pexels.com/photos/2584269/pexels-  
photo-2584269.jpeg",  
    "rating": 4  
  },  
  ...  
]
```

... to continue

Fake Store

<https://fakestoreapi.reactbd.com>

Construct an `main.jsx` file :

`main.jsx`

```
import React from "react";
import ReactDOM from "react-dom/client";
import Shop from './Shopping.jsx';

const root = ReactDOM.createRoot(document.getElementById("root"));
root.render(
  <React.StrictMode>
    <Shop />
  </React.StrictMode>
);
```

Construct a **Shopping.jsx** Module :

Shopping.jsx

```
import React, { useState, useEffect } from "react";
```

```
const Shop = () => {
```

```
    return (  
        <div> Hello </div>  
    );  
}
```

```
export default Shop;
```

Hooks



Export



Import **Shop** Component from Shopping Module in **main.jsx**:

```
import React from "react";
import ReactDOM from "react-dom/client";
import Shop from "./Shopping.jsx";

const root = ReactDOM.createRoot(document.getElementById("root"));

root.render(
  <React.StrictMode>
    <Shop />
  </React.StrictMode>
);
```

Continue with **Shopping.jsx** Module :

Add two state variables :

```
import React, { useState, useEffect } from "react";
```

```
const Shop = () => {
```

```
  const [cart, setCart] = useState([]);
```

```
  const [cartTotal, setCartTotal] = useState(0);
```

```
  return (  
    <div> Hello </div>  
  );
```

```
}
```

```
export default Shop;
```

`cart` is an array which will store the products we are interested in buying.

Import `fashion.json` catalog :

```
import React, { useState, useEffect } from "react";  
import item from "../data/fashion.json";
```

```
const Shop = () => {  
  const [cart, setCart] = useState([]);  
  const [cartTotal, setCartTotal] = useState(0);
```

```
  return (  
    <div> Hello </div>  
  );  
}
```

```
export default Shop;
```

The next functions will be inside the Shop Component :

- `const listItems`
- `const addToCar`
- `const removeFromCart`
- `const cartItem`
- `const total`


And the `useEffect`

- `useEffect(() =>`

Show the Selected Products :

```
const listItems = items.map((el) => (  
  <div key={el.id}>  
    <img class="img-fluid" src={el.image} width={150} /> <br/>  
  
    {el.title} <br/>  
    {el.category} <br/>  
    {el.price} <br/>  
  </div>  
));  
  
return (  
  <div>  
    {listItems}  
  </div>  
>);  
};  
  
export default Shop;
```

Shopping.jsx

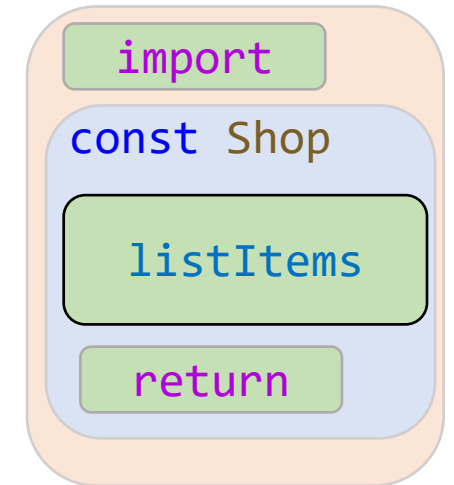

Temporarily,
we can add
this :
`width={150}`

Add Products to Cart

Add Products to Cart :



```
const [cart, setCart] = useState([]);
```



Add Products to Cart :


```
const addToCart = (el) => {  
  setCart([...cart, el]);  
};
```

setCart
modifies
cart Hook

Spread
operator
(...)


products to
Cart

Shopping.js

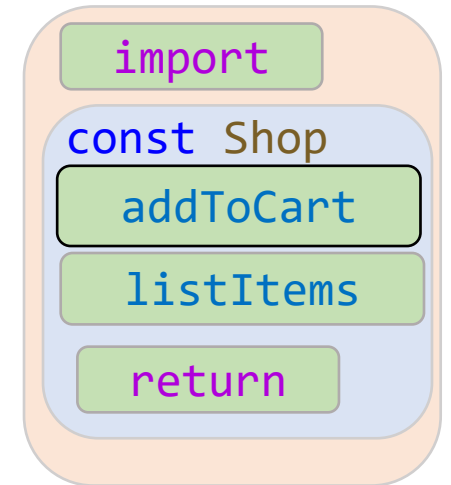

Remove Products from Cart

Remove Products from Cart :

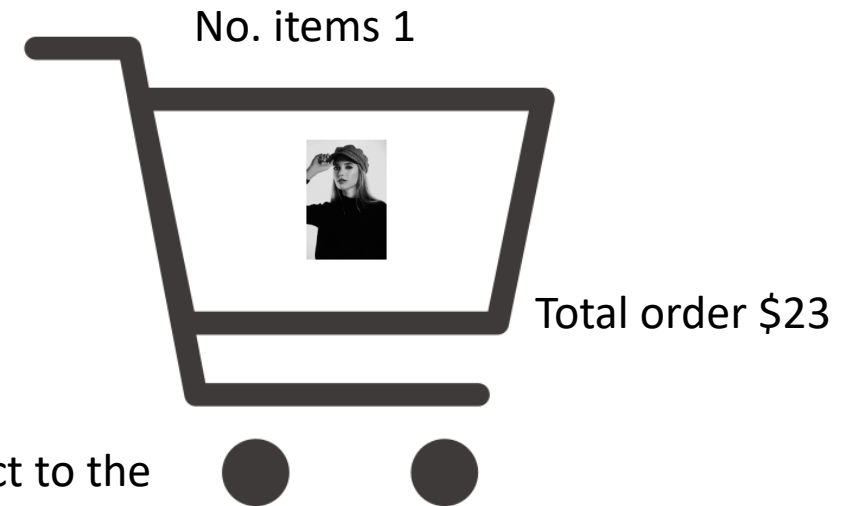

In reality, we do not return the product to the catalog, we just remove it from Cart.




```
const [cart, setCart] = useState([]);
```

Remove Products from Cart :

```
const removeFromCart = (el) => {  
  let hardCopy = [...cart];  
  hardCopy = hardCopy.filter((cartItem) => cartItem.id !== el.id);  
  setCart(hardCopy);  
};
```

Note, that we make a copy of the Cart state before replacing it.

Shop.js

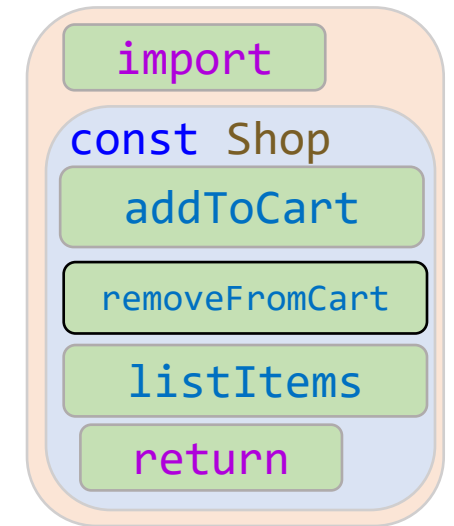

```
// fixing removing only one item from cart  
  
const removeFromCart = (el) => {  
  let itemFound = false;  
  const updatedCart = cart.filter((cartItem) => {  
    if (cartItem.id === el.id && !itemFound) {  
      itemFound = true;  
      return false;  
    }  
    return true;  
  });  
  if (itemFound) {  
    setCart(updatedCart);  
  }  
}
```

Add one `<button` to `add` and one `<button` to `remove` items (products) from Cart :

```
const listItems = items.map((el) => (  
  <div key={el.id}>  
    <img class="img-fluid" src={el.image} width={100} />  
    {el.title}  
    {el.category}  
    {el.price}  
    <button type="button" onClick={() => removeFromCart(el)}>-</button>{" "  
    <button type="button" variant="light" onClick={() => addToCart(el)}> + </button>  
  </div>  
));
```

```
const addToCart = (el) => {  
    setCart([...cart, el]);  
};
```

Observe, that every Click in the “+” symbol `addToCart` is called.

```
<button type="button" variant="light" onClick={() => addToCart(el)}> + </button>
```

initial_app

←

↺

local...

🔍

☆

📁

Verify it's you

➤

⋮

📁

☆ Bookmarks

🌐 Welcome To TRANS...

➤

📁 All Bookmarks



Long sleeve Jacket
women

150

-

+



Jacket with wollen hat
women

65

-

+



Compact fashion t-shirt
women

55.99

-

+



Blue jins
women

50

-

+


Show the content of the Cart

Show the content of the Cart :

```
const cartItem = cart.map((el) => (  
  <div key={el.id}>  
    <img class="img-fluid" src={el.image} width={150} />  
    {el.title}  
    ${el.price}  
  </div>  
));
```

Display the information that
you prefer...

This function won't be used
in the final Shopping Cart.



```
return (  
  <div>  
    <div>{listItems}</div>  
    <h1>Items in Cart :</h1>  
    <div>{cartItem}</div>  
  </div>  
);
```

```
import  
const Shop
```

```
addToCart
```


```
removeFromCart
```

```
cartItems
```

```
listItems
```


```
return
```

We can show the items in the Cart :

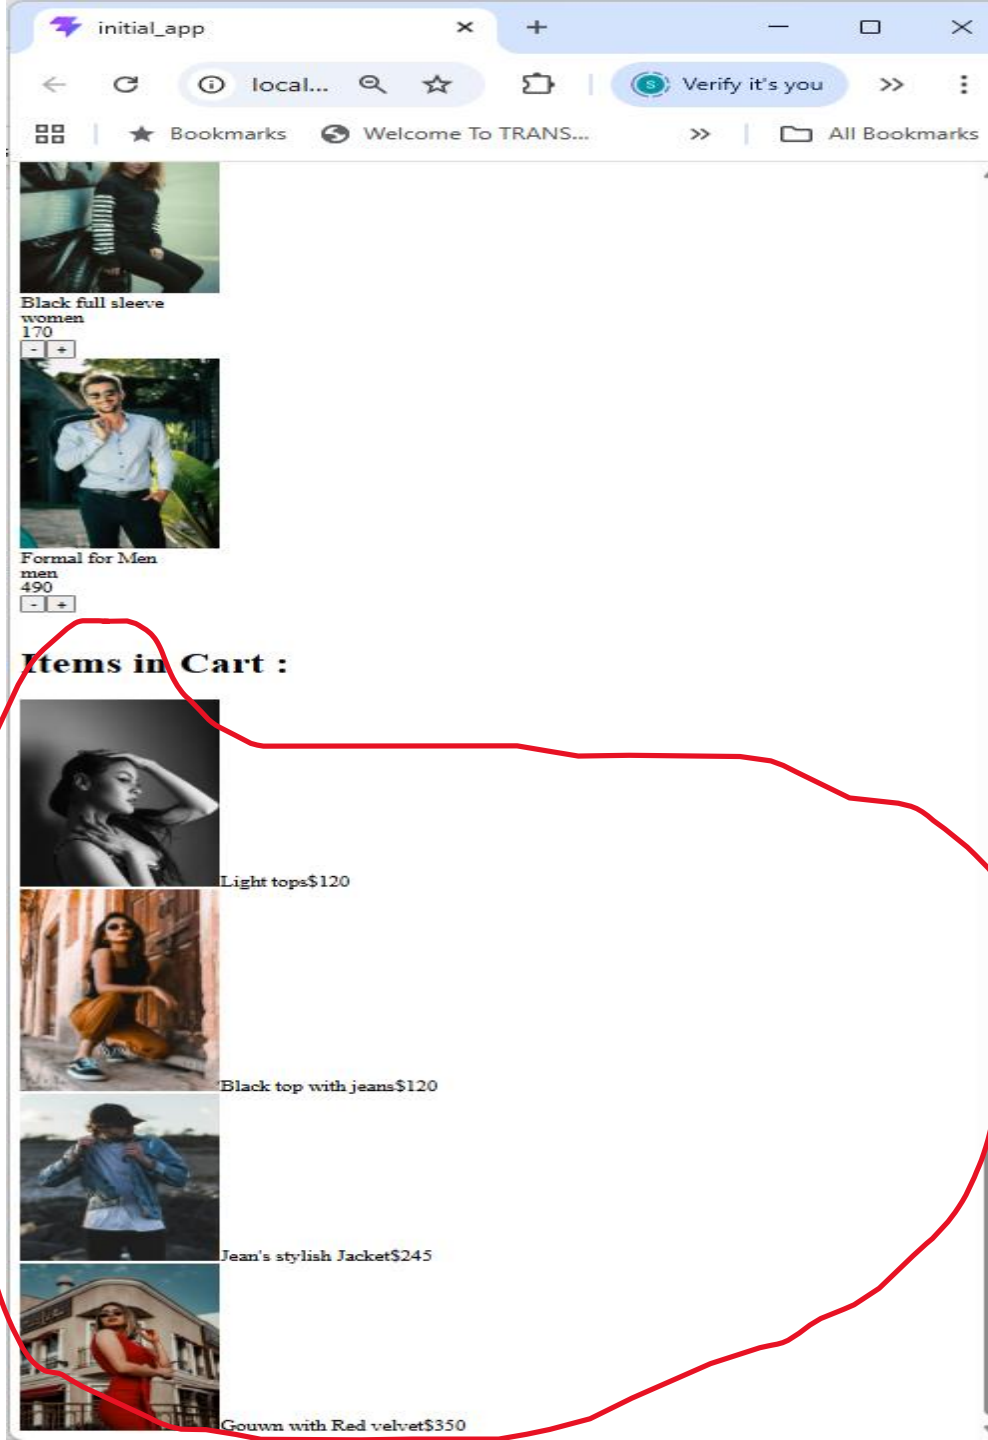

Compute the Order total to pay

Shopping.js

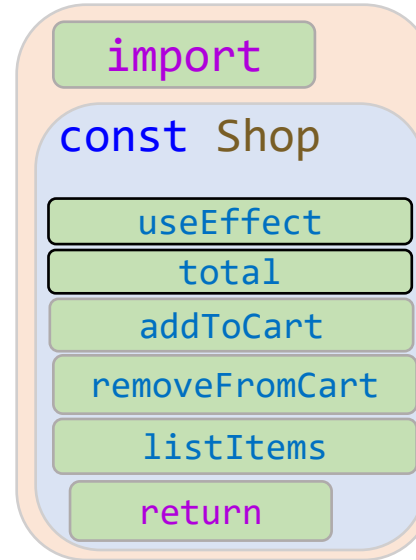

```
useEffect(() => {  
  total();  
}, [cart]);
```


Observe that every time the state variable **cart** changes, **useEffect** is called.

```
const total = () => {  
  let totalVal = 0;  
  for (let i = 0; i < cart.length; i++) {  
    totalVal += cart[i].price;  
  }  
  setCartTotal(totalVal);  
};
```


There, **total** is executed where the prices are added and finally **carTotal** is updated.

const [cartTotal, setCartTotal] = useState(0);


```
return (  
  <div>  
    <div>{listItems}</div>  
    <h1>Items in Cart :</h1>  
    <div>{cartItem}</div>  
    <h1>Order total to pay :${cartTotal}</h1>  
  </div>  
);
```

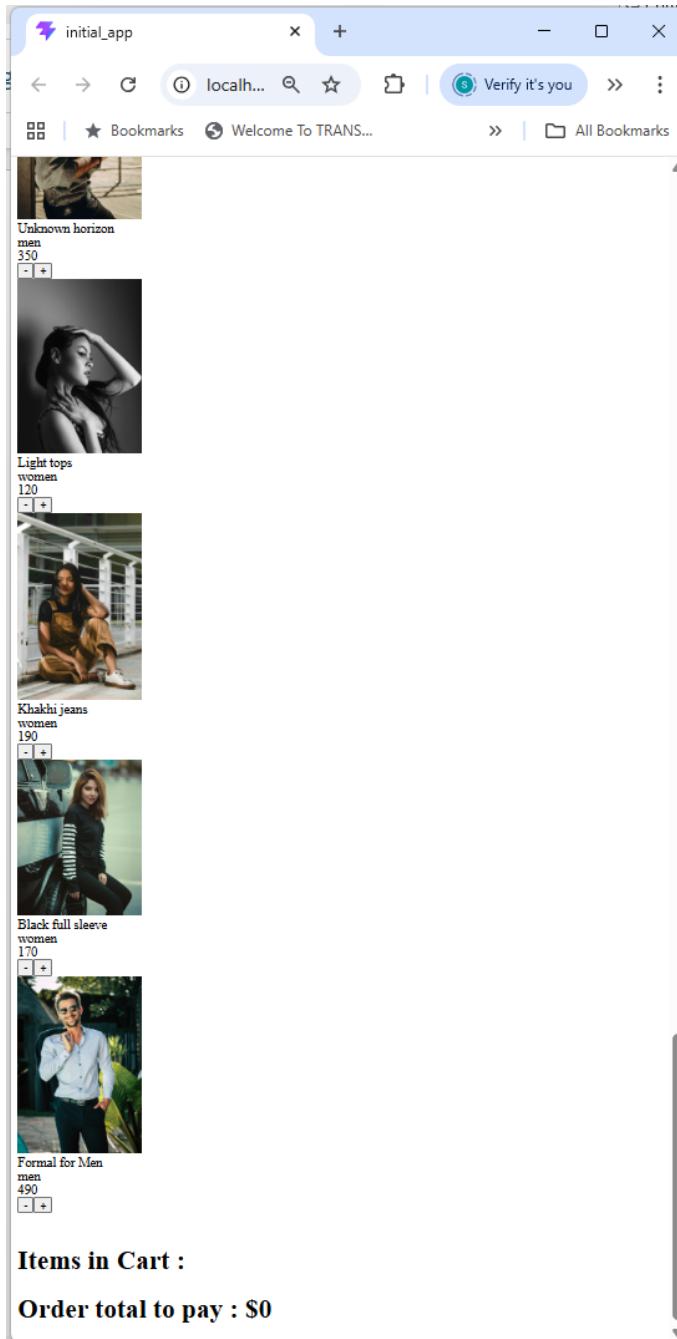

It shows the
Order Total :

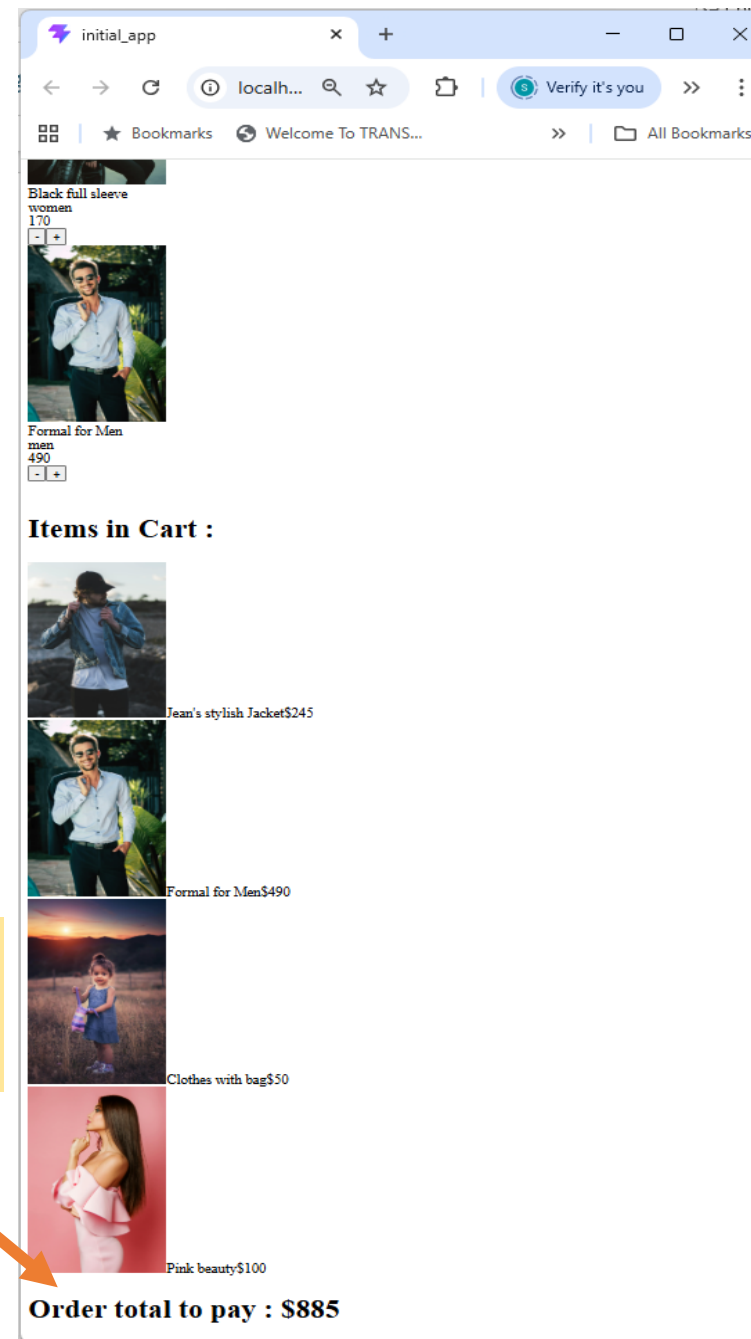

Test the Shopping Cart

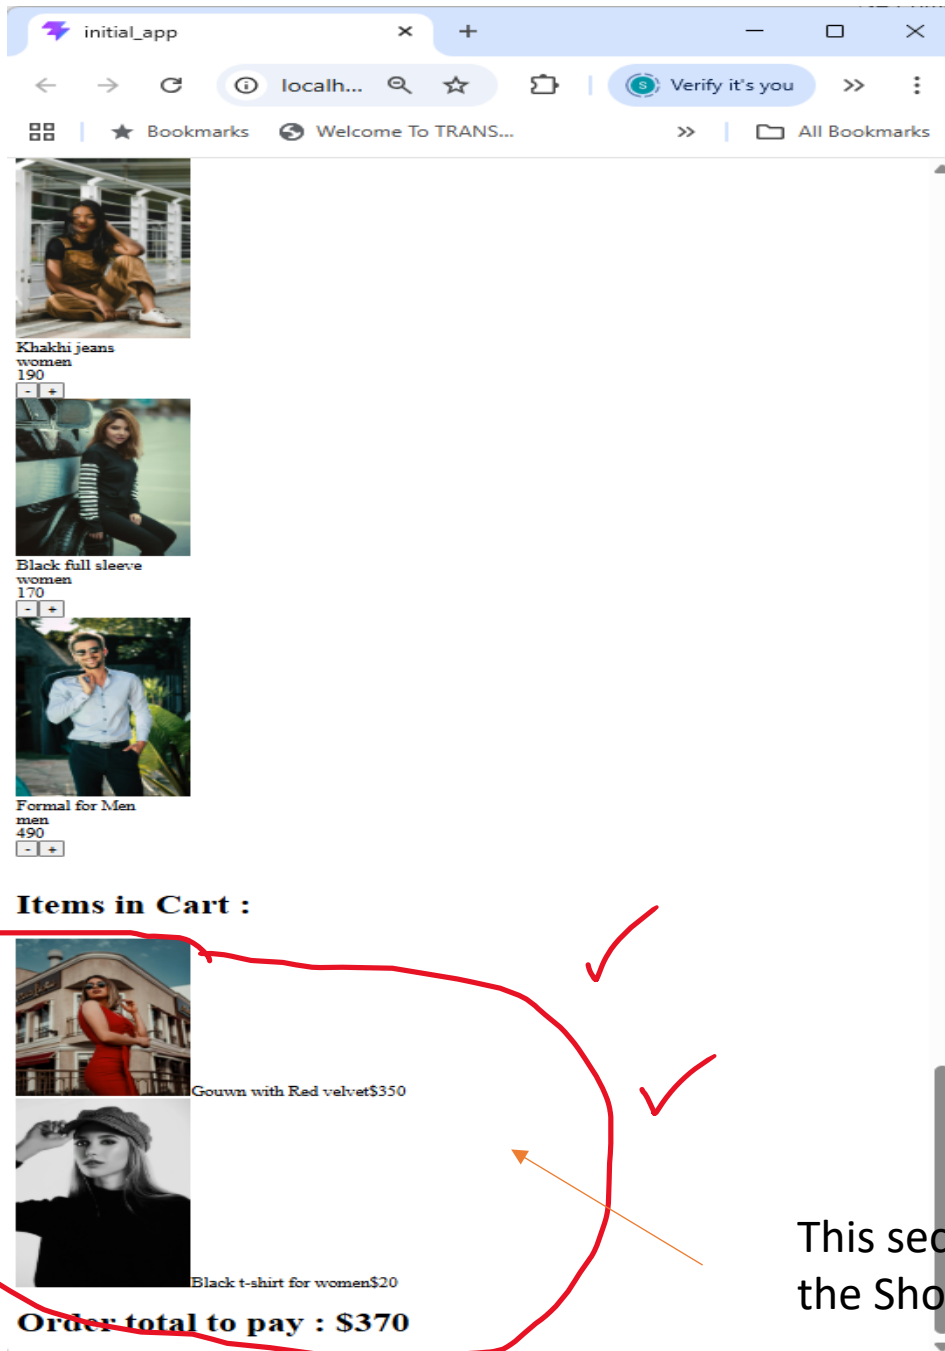

Add + and Remove -
some products and
observe the items in
the **Cart** ...

This section won't be part of
the Shopping Cart at the end.