

First part Activity08 in-class

MoviesFromJSON

MoviesFromJSON

Including images from URL



Let's create a HTML
Web page similar to
this :



Follow the
instructions
of your
Professor.






<https://freepngimg.com/>

Given the next JSON file : **MoviesFromJSON.json**


```
{
  "movies": [
    {
      "movieId": "1234",
      "title": "Avengers",
      "year": 2012,
      "url": "https://freepngimg.com/thumb/avengers/5-2-avengers-png-picture.png"
    },
    {
      "movieId": "A124",
      "title": "The Last Airbender",
      "year": 2005,
      "url": "https://freepngimg.com/save/37589-aang-transparent-background/480x486"
    },
    {
      "movieId": "76788",
      "title": "The Iron Giant",
      "year": 1999,
      "url": "https://upload.wikimedia.org/wikipedia/en/thumb/d/d3/The_Iron_Giant_poster.JPG/220px-The_Iron_Giant_poster.JPG"
    },
    {
      "movieId": "BB124",
      "title": "Mulan",
      "year": 1998,
      "url": "https://freepngimg.com/thumb/disney/113364-picture-mulan-disney-free-photo.png"
    }
  ]
}
```

Test the JSON in <https://jsonlint.com/> :

Open the given file `MoviesFromJSON.json`
And past it to the validator :

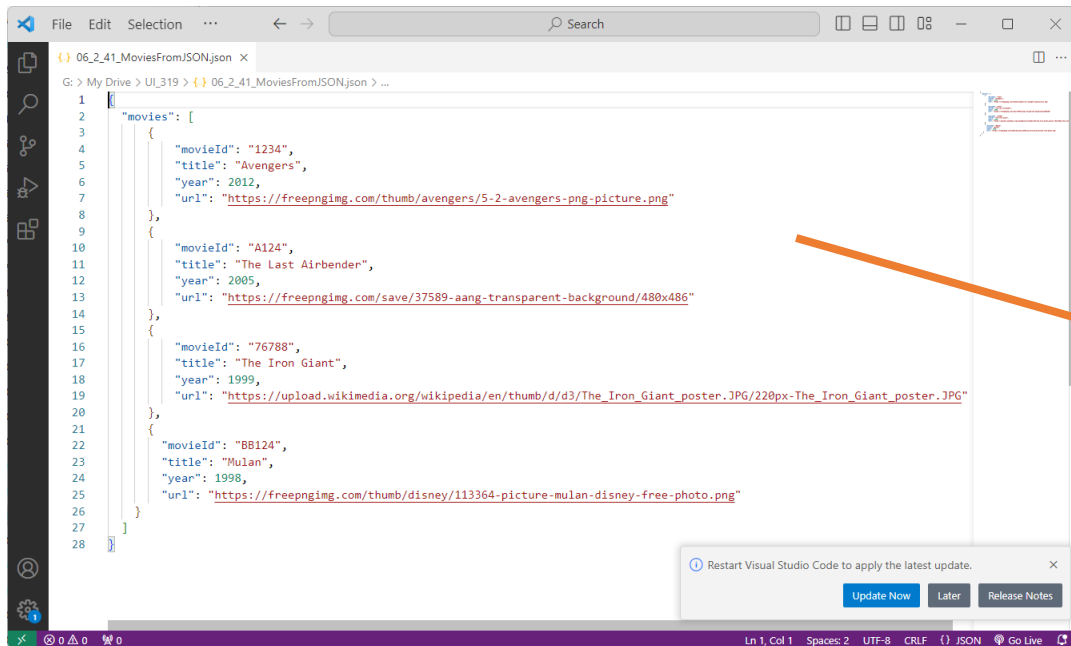

```
1 {
2   "movies": [
3     {
4       "movieId": "1234",
5       "title": "Avengers",
6       "year": 2012,
7       "url": "https://freepngimg.com/thumb/avengers/5-2-avengers-png-picture.png"
8     },
9     {
10      "movieId": "A124",
11      "title": "The Last Airbender",
12      "year": 2005,
13      "url": "https://freepngimg.com/save/37589-aang-transparent-background/480x486"
14    },
15    {
16      "movieId": "76788",
17      "title": "The Iron Giant",
18      "year": 1999,
19      "url": "https://upload.wikimedia.org/wikipedia/en/thumb/d/d3/The_Iron_Giant_poster.JPG/220px-The_Iron_Giant_poster.JPG"
20    },
21    {
22      "movieId": "88124",
23      "title": "Mulan",
24      "year": 1998,
25      "url": "https://freepngimg.com/thumb/disney/113364-picture-mulan-disney-free-photo.png"
26    }
27  ]
28 }
```

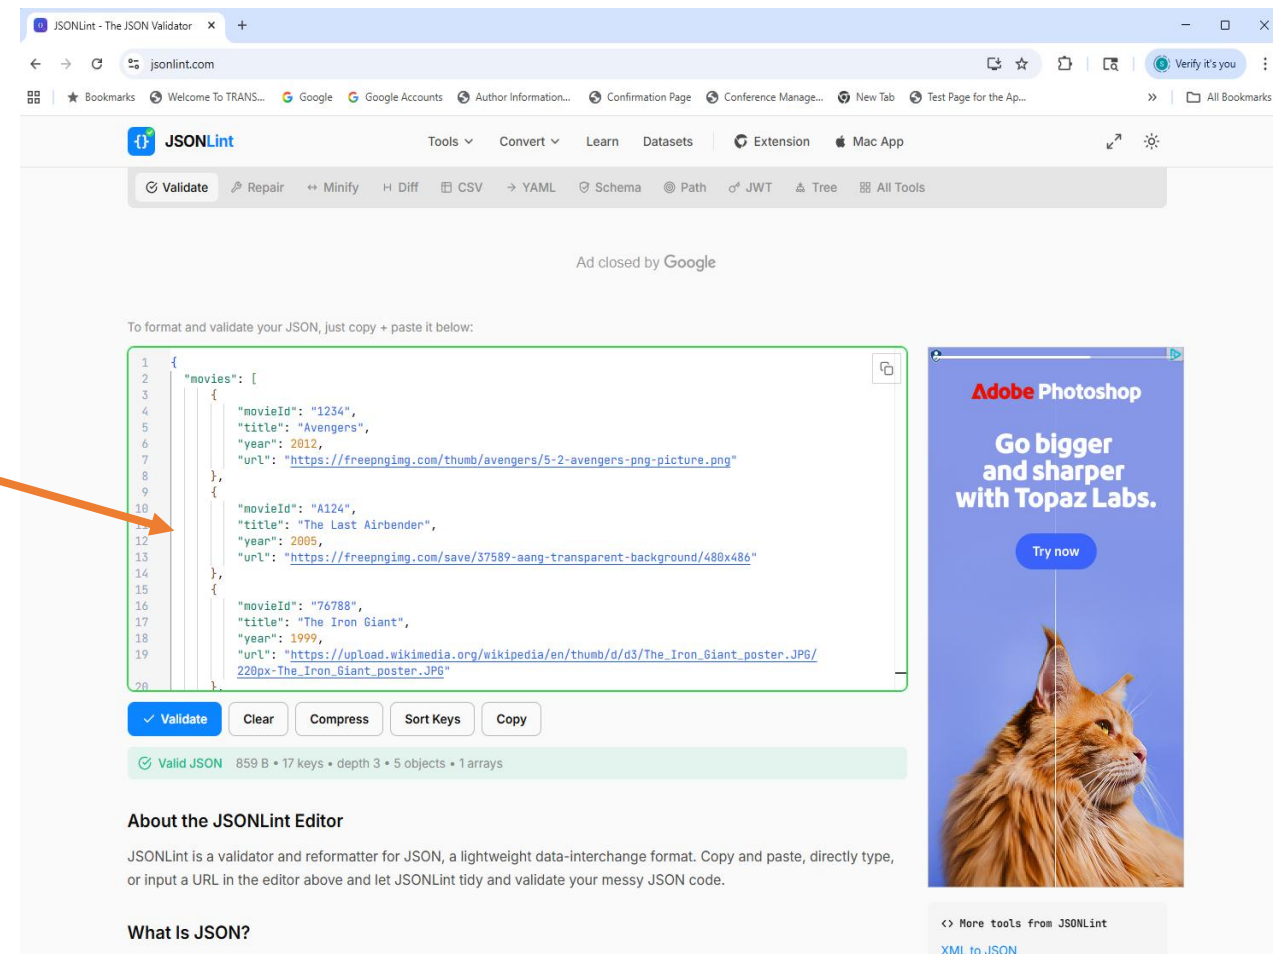

JSONLint - The JSON Validator

Tools ▾ Convert ▾ Learn Datasets ▾ Extension Mac App

Validate Repair Minify Diff CSV YAML Schema Path JWT Tree All Tools

Ad closed by Google

To format and validate your JSON, just copy + paste it below:

```
1 {
2   "movies": [
3     {
4       "movieId": "1234",
5       "title": "Avengers",
6       "year": 2012,
7       "url": "https://freepngimg.com/thumb/avengers/5-2-avengers-png-picture.png"
8     },
9     {
10      "movieId": "A124",
11      "title": "The Last Airbender",
12      "year": 2005,
13      "url": "https://freepngimg.com/save/37589-aang-transparent-background/480x486"
14    },
15    {
16      "movieId": "76788",
17      "title": "The Iron Giant",
18      "year": 1999,
19      "url": "https://upload.wikimedia.org/wikipedia/en/thumb/d/d3/The_Iron_Giant_poster.JPG/220px-The_Iron_Giant_poster.JPG"
20    }
21  ]
22 }
```

✓ Validate Clear Compress Sort Keys Copy

✓ Valid JSON 859 B • 17 keys • depth 3 • 5 objects • 1 arrays

About the JSONLint Editor

JSONLint is a validator and reformatter for JSON, a lightweight data-interchange format. Copy and paste, directly type, or input a URL in the editor above and let JSONLint tidy and validate your messy JSON code.

What Is JSON?

<> More tools from JSONLint
[XML to JSON](#)

First .- Create a HTML :

netId_Activity08_MoviesFromJSON.html

1) id="goodmovies" :

```
<body>
    <h1>List of movies, text and images from JSON file.</h1>

    <div id="goodmovies">    </div>

    <script src="./netId_Activity08_MoviesFromJSON.js"></script>
</body>
```

Second .- Create a Javascript : **MoviesFromJSON.js**

2) Fetch :

```
fetch("./netId_Activity08_MoviesFromJSON.json")  
  .then(response => response.json())  
  .then(myMovies => loadMovies(myMovies));
```




When we use fetch, we require a
http server
to execute the web page.

Remember the one previous exercise where we added superheroes to a web page : Superman, Batman and Spiderman.

We use a function to create the web page :

```
JS index.js
JS index.js > ...
1 fetch("./persons.json")
2   .then(function (response) {
3     return response.json();
4   })
5   .then(function (data) {
6     console.log(data);
7     appendMoreData(data);
8   })
9   .catch(function (err) {
10    console.log("error:" + err);
11  });
12
13 function appendMoreData(data) {
14   let mainContainer = document.getElementById("myData2");
15   for (let person of data) {
16     console.log(person);
17     let div = document.createElement("div");
18     div.innerHTML = `<br>
19       <h1> Superhero : </h1>
20       Firstname : ${person.firstName} <br>
21       Lastname: ${person.lastName} <br>
22       Job : ${person.job} <br>
23       Roll : ${person.roll}`;
24     mainContainer.appendChild(div);
25   }
26 } // end of function appendMoreData
27
```

Develop the function, use DOM statement getElementById :

3) Function **loadMovies**(myMovies) :

```
function loadMovies(myMovies) {  
    var mainContainer = document.getElementById("goodmovies");
```

I saw you
before

Your Professor will show the code if necessary to write,
understand and execute it.

```
{  
  "movies": [  
    {  
      "movieId": "1234",  
      "title": "Avengers",  
      "year": 2012,  
      "url": "https://freepngimg.com/  
    },  
    {  
      "movieId": "A124",  
      "title": "The Last Airbender",  
      "year": 2005,  
      "url": "https://freepngimg.com/  
    },  
    {  
      "movieId": "76788",  
      "title": "The Iron Giant",  
      "year": 1999,  
      "url": "https://upload.wikimedia.org/wikipedia/commons/8/80/Iron_Giant.jpg",  
    },  
    {  
      "movieId": "BB124",  
      "title": "Mulan",  
      "year": 1998,  
      "url": "https://freepngimg.com/  
    }  
  ]  
}
```

}

Show some results in the `console.log()`