# Follow the steps to execute the project :

1. Download Apache tomcat9 from the link:

   [https://tomcat.apache.org/download-90.cgi](https://tomcat.apache.org/download-90.cgi)

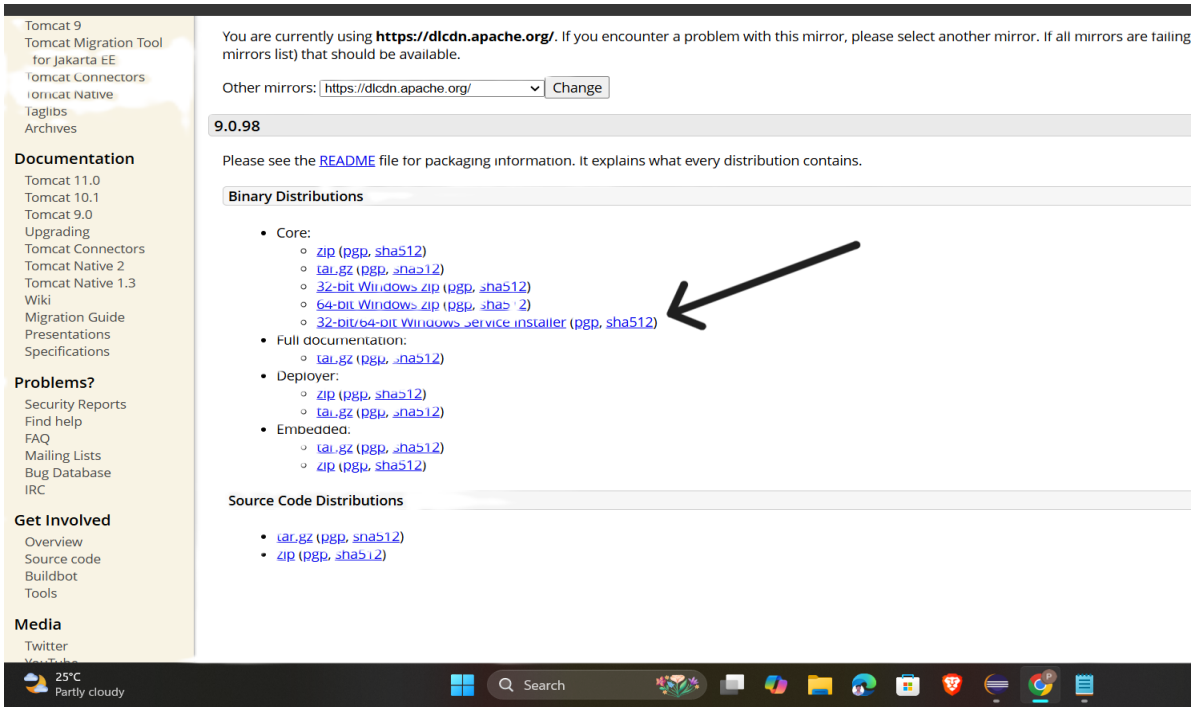


2. After downloading you have to change only “server port” and “connector port”

   follow the steps to change port number’s

   tomcat9 ---> conf ---> service.xml ---> server port = "8000" & connector port = "9090"

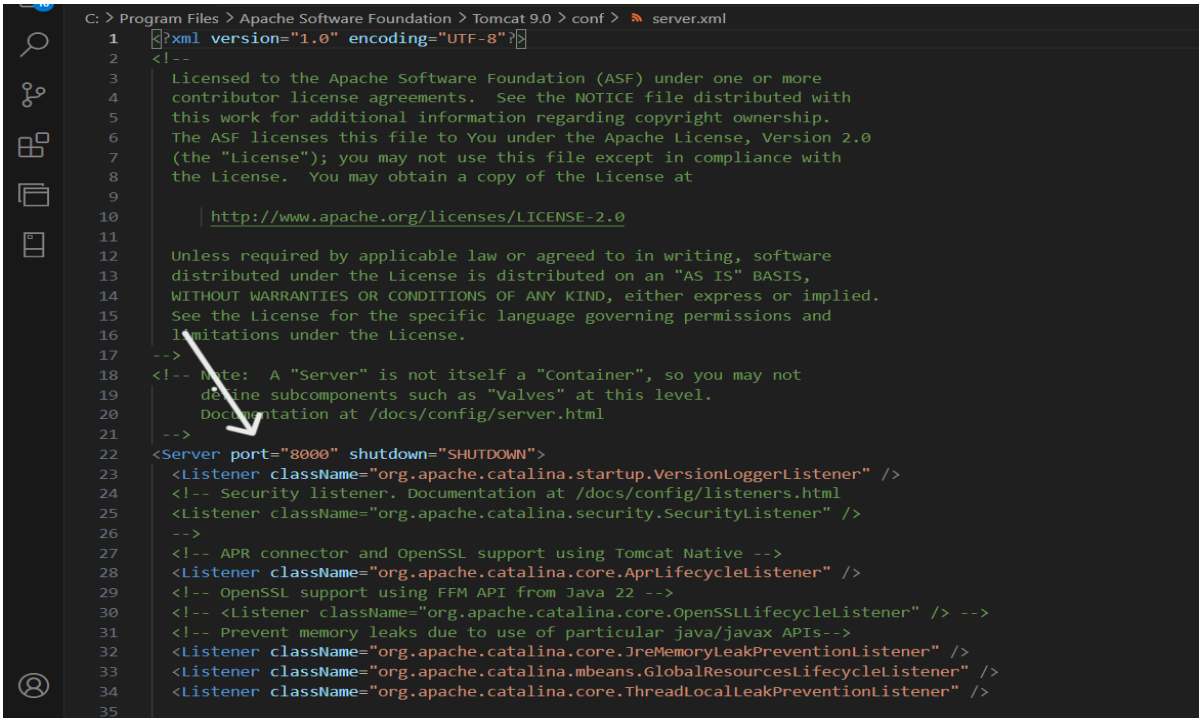

```
C: > Program Files > Apache Software Foundation > Tomcat 9.0 > conf > server.xml
22    <Server port="8000" shutdown="SHUTDOWN">
55      <Service name="Catalina">
62
63
64        <!-- A "Connector" represents an endpoint by which requests are received
65             and responses are returned. Documentation at :
66             Java HTTP Connector: /docs/config/http.html
67             Java AJP  Connector: /docs/config/ajp.html
68             APR (HTTP/AJP) Connector: /docs/apr.html
69             Define a non-SSL/TLS HTTP/1.1 Connector on port 8080
70        -->
71        <Connector port="9090" protocol="HTTP/1.1"
72                   connectionTimeout="20000"
73                   redirectPort="8443"
74                   maxParameterCount="1000"
75                   />
76        <!-- A "Connector" using the shared thread pool-->
77        <!--
78        <Connector executor="tomcatThreadPool"
79                   port="8080" protocol="HTTP/1.1"
80                   connectionTimeout="20000"
81                   redirectPort="8443"
82                   maxParameterCount="1000"
83                   />
84        -->
85        <!-- Define an SSL/TLS HTTP/1.1 Connector on port 8443
86             This connector uses the NIO implementation. The default
87             SSLImplementation will depend on the presence of the APR/native
88             library and the useOpenSSL attribute of the AprLifecycleListener.
89             Either JSSE or OpenSSL style configuration may be used regardless of
90             the SSLImplementation selected. JSSE style configuration is used below.
91        -->
92        <!--
93        <Connector port="8443" protocol="org.apache.coyote.http11.Http11NioProtocol"
94                   maxThreads="150" SSLEnabled="true"
95                   maxParameterCount="1000"
```

3. Add **MySQL jar connecter 8.3.0** file in tomcat9/lib folder.
   - Download MySQL jar connector file from the link:

[https://downloads.mysql.com/archives/c-j/](https://downloads.mysql.com/archives/c-j/)

## MySQL Product Archives

MySQL Connector/J (Archived Versions)

**Please note that these are old versions. New releases will have recent bug fixes and features!**
To download the latest release of MySQL Connector/J, please visit MySQL Downloads.

Product Version: 8.3.0

Operating System: Platform Independent

| | | | |
|---|---|---|---|
| **Platform Independent (Architecture Independent), Compressed TAR Archive** (mysql-connector-j-8.3.0.tar.gz) | Dec 13, 2023 | 4.1M | Download<br>MD5: d29a0a1f3920e62be749cde[illegible]3e1e \| Signature |
| **Platform Independent (Architecture Independent), ZIP Archive** (mysql-connector-j-8.3.0.zip) | Dec 13, 2023 | 4.8M | Download<br>MD5: 8b4e005c4371adb851bf070c4365fa30 \| Signature |

We suggest that you use the MD5 checksums and GnuPG signatures to verify the integrity of the packages you download.

MySQL open source software is provided under the GPL License.

4. In MySQL workbench
   - create MySQL database named "studentresult"
   - create two tables inside the “studentresult” database named

     table 1 : user  table 2 : result

- create user table like:

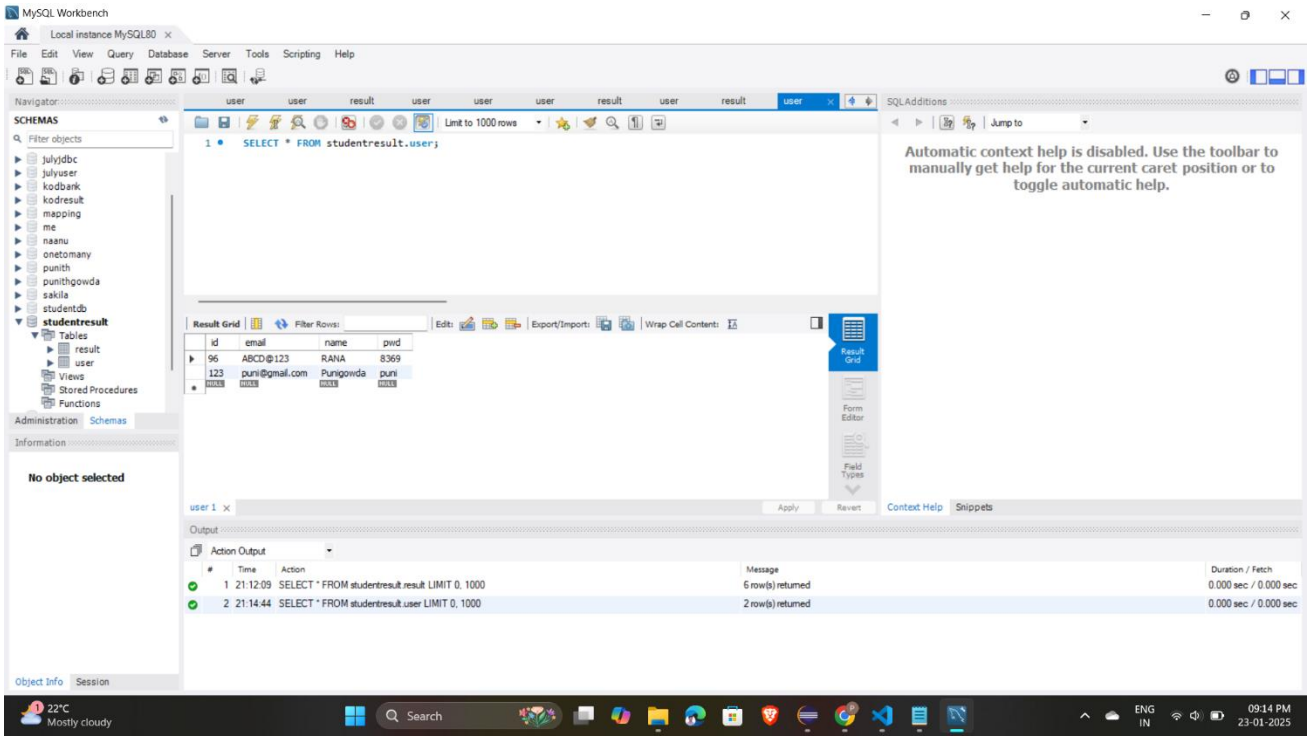


- create result table like:

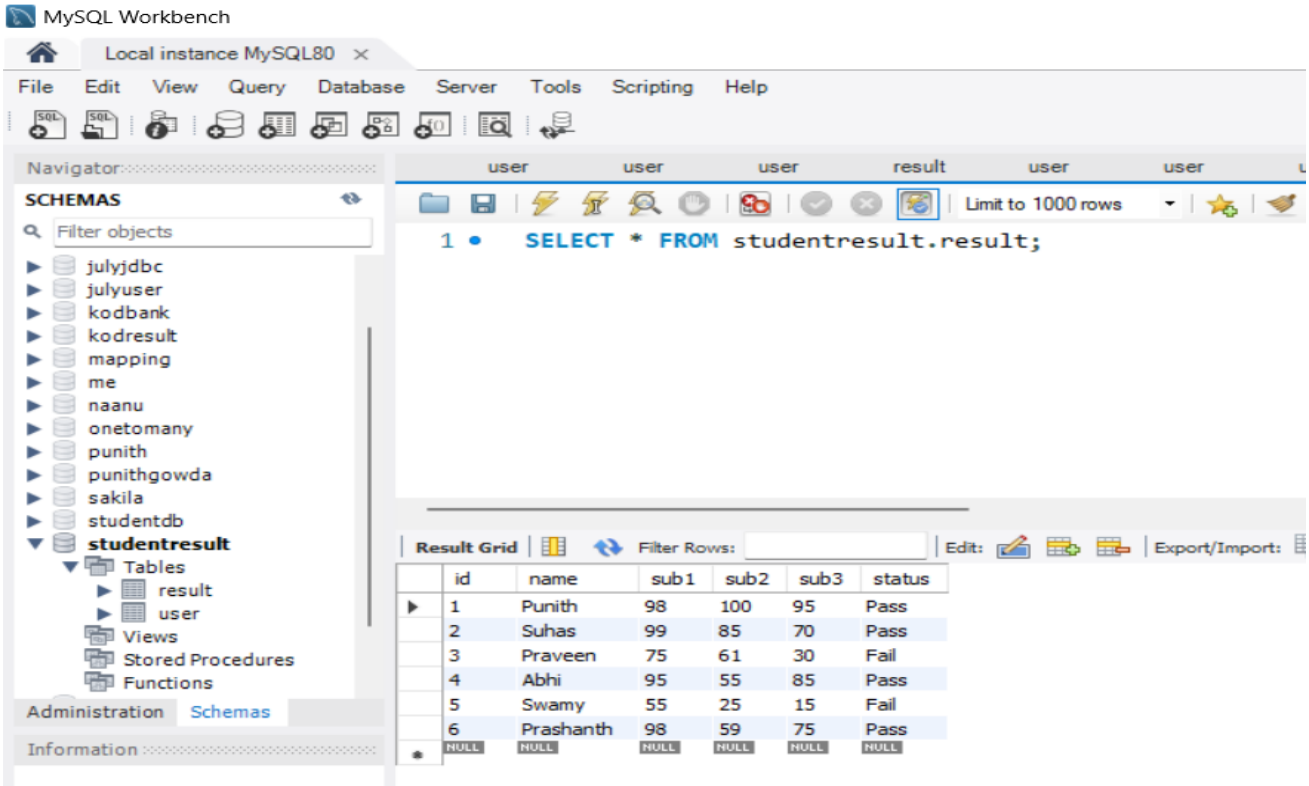


5. Import all files to any of the IDE, For example, Eclipse
6. Run the project and open any browser
7. Using the following URL you have to Login to fetch the result
   URL : http://localhost:9090/StudentResult/Signup.html