Pocket Rough 2

Operation booklet

Operation snapshot

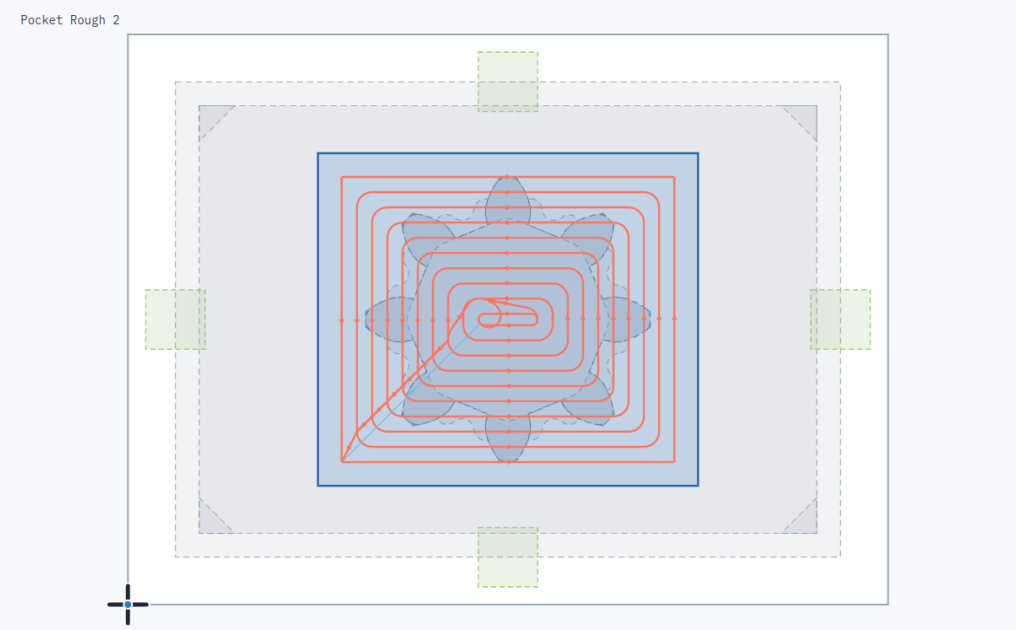

OVERVIEW

Project	booklet-test-01	**Generated**	2026-11-08 19:41 UTC-05:00
Units	Inch	**Stock size**	4 in x 3 in x 0.75 in
Origin Z	0.75 in		

SETUP

Setup	02 · Bottom	**Stock**	Bottom face up, flipped about X
Registration	None declared		

TOOL

Name	1/4" Endmill	**Type**	flat endmill
Diameter	0.25 in	**Flutes**	2
Material	carbide	**Max cut depth**	1 in

OPERATION SETTINGS

Kind	Pocket	**Pass**	Rough
Target	Rect 57	**Feed**	30 in/min
Plunge feed	12 in/min	**RPM**	18000 rpm
Stepdown	0.125 in	**Stepover**	0.32

Cut direction	Conventional	**Machining order**	Feature first
Round outside corners	Enabled	**Round link junctions**	Enabled
Pattern	offset	**Pocket angle**	0 deg
Slot feed	60 % of feed	**Stock to leave radial**	0 in
Stock to leave axial	0 in		

TOOLPATH

Moves	1506	**Cut moves**	1500
Rapid moves	4	**Plunge moves**	2
Estimated feed time	2 min 31 s (excludes G0 rapid time)	**Feed travel**	73.82 in (feed and plunge moves)
Rapid travel	1.81 in (G0 speed machine-defined)	**Toolpath Z top**	0.95 in
Toolpath Z bottom	0.5 in		