


API Documentation

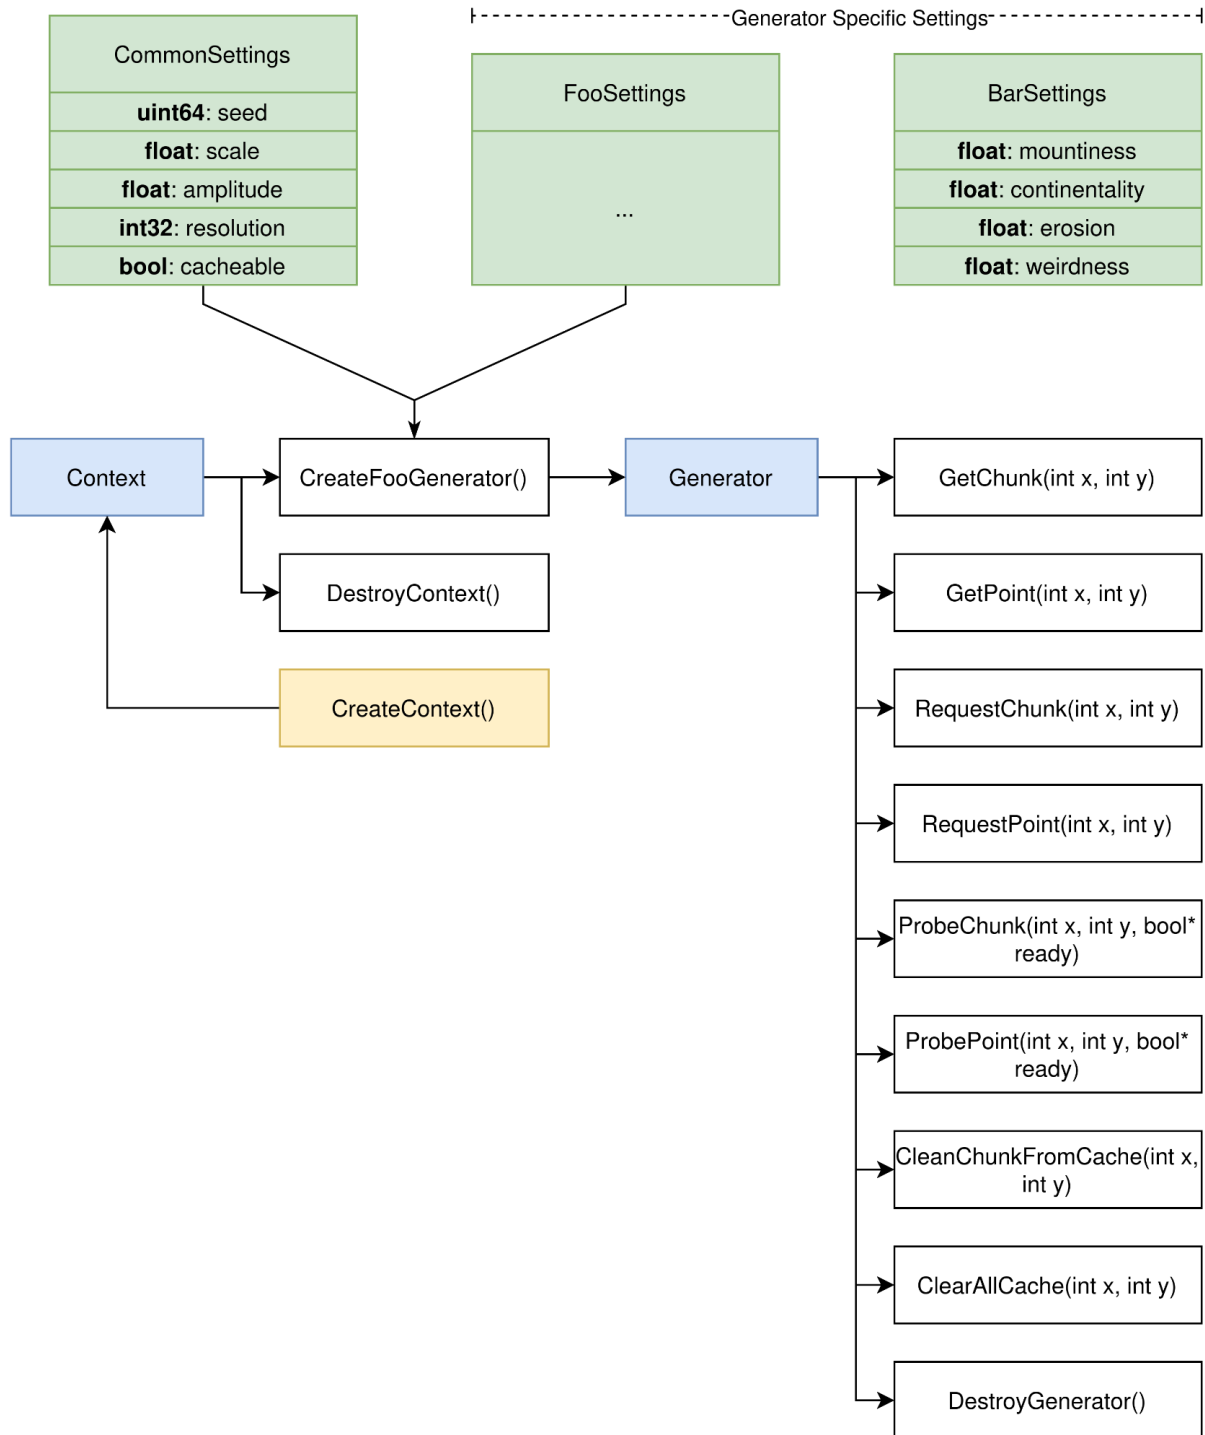

Documentation

CreateContext(): Context

Creates a new instance of the context object. All resources associated with objects created from a context are freed when the context is destroyed. Use *DestroyContext(Context)* to destroy the context object.

DestroyContext(Context): void

Frees all resources and all generators created from the context.

CreateFooGenerator(Context, CommonSettings, FooSettings): Generator

Create a new generator, each provided generator will have a separate CreateFooGenerator() and a FooSettings struct. Use *DestroyGenerator(Generator)* to destroy the generator object.

DestroyGenerator(Generator): void

Frees all resources associated with the generator object.

GetChunk(Generator generator, int x, int y): float*

Returns a float buffer of *resolution*² elements, with packed rows. *x, y* - chunk number on a given axis, where 0,0 represents the chunk at the center of the world. does not represent position in space (as dictated by scale).

GetPoint(Generator generator, int x, int y): float

Returns a single sample at the given position, this function is at least as fast as using GetChunk if chasing is enabled in the common settings. *x, y* - global coordinate of the data point. The amount of samples in each axis in a single chunk is represented by the **resolution** field inside **CommonSettings**, therefore it does not correspond to physical location in space (as dictated by scale).

RequestChunk(Generator generator, int x, int y): void

Begin generation of the requested chunk, the chunk will be made available later and needs to be queried for with ProbeChunk(). Caching must be enabled for this generator, otherwise the function does nothing. *x, y* - chunk number on a given axis, where 0,0 represents the chunk at the center of the world. does not represent position in space.

RequestPoint(Generator generator, int x, int y): void

Returns value at a certain point in space coordinates, it can, but doesn't guarantee to be quicker than requesting a chunk containing a given point. Caching must be enabled for this generator,

otherwise the function does nothing. **x**, **y** - global coordinate of the data point. The amount of samples in each axis in a single chunk is represented by the **resolution** field inside **CommonSettings**, therefore it does not correspond to physical location in space (as dictated by scale).

ProbeChunk(Generator generator, int x, int y, bool* ready): float*

Sets the ready flag to true, and returns a float buffer of $resolution^2$ elements, with packed rows, if the chunk is already generated, otherwise return value is undefined and ready flag is set to false. Caching must be enabled for this generator, otherwise the function will always set red flag to false. **x**, **y** - chunk number on a given axis, where 0,0 represents the chunk at the center of the world. does not represent position in space (as dictated by scale).

ProbePoint(Generator generator, int x, int y, bool* ready): float

Sets the ready flag to true, and returns a float, if the point (or the chunk it belongs to) is already generated, otherwise return value is undefined and ready flag is set to false. Caching **must** be enabled for this generator, otherwise the function will always set the ready flag to false. **x**, **y** - global coordinate of the data point. The amount of samples in each axis in a single chunk is represented by the **resolution** field inside **CommonSettings**, therefore it does not correspond to physical location in space (as dictated by scale).

CleanChunkFromCache(Generator generator, int x, int y): void

Delete a single chunk from cache. The function has no effect if the chunk at the given position is not cached. Caching must be enabled for this generator, otherwise the function does nothing. **x**, **y** - chunk number on a given axis, where 0,0 represents the chunk at the center of the world. does not represent position in space (as dictated by scale).

ClearAllCache(Generator generator): void

Delete all cached chunks. Caching must be enabled for this generator, otherwise the function does nothing.