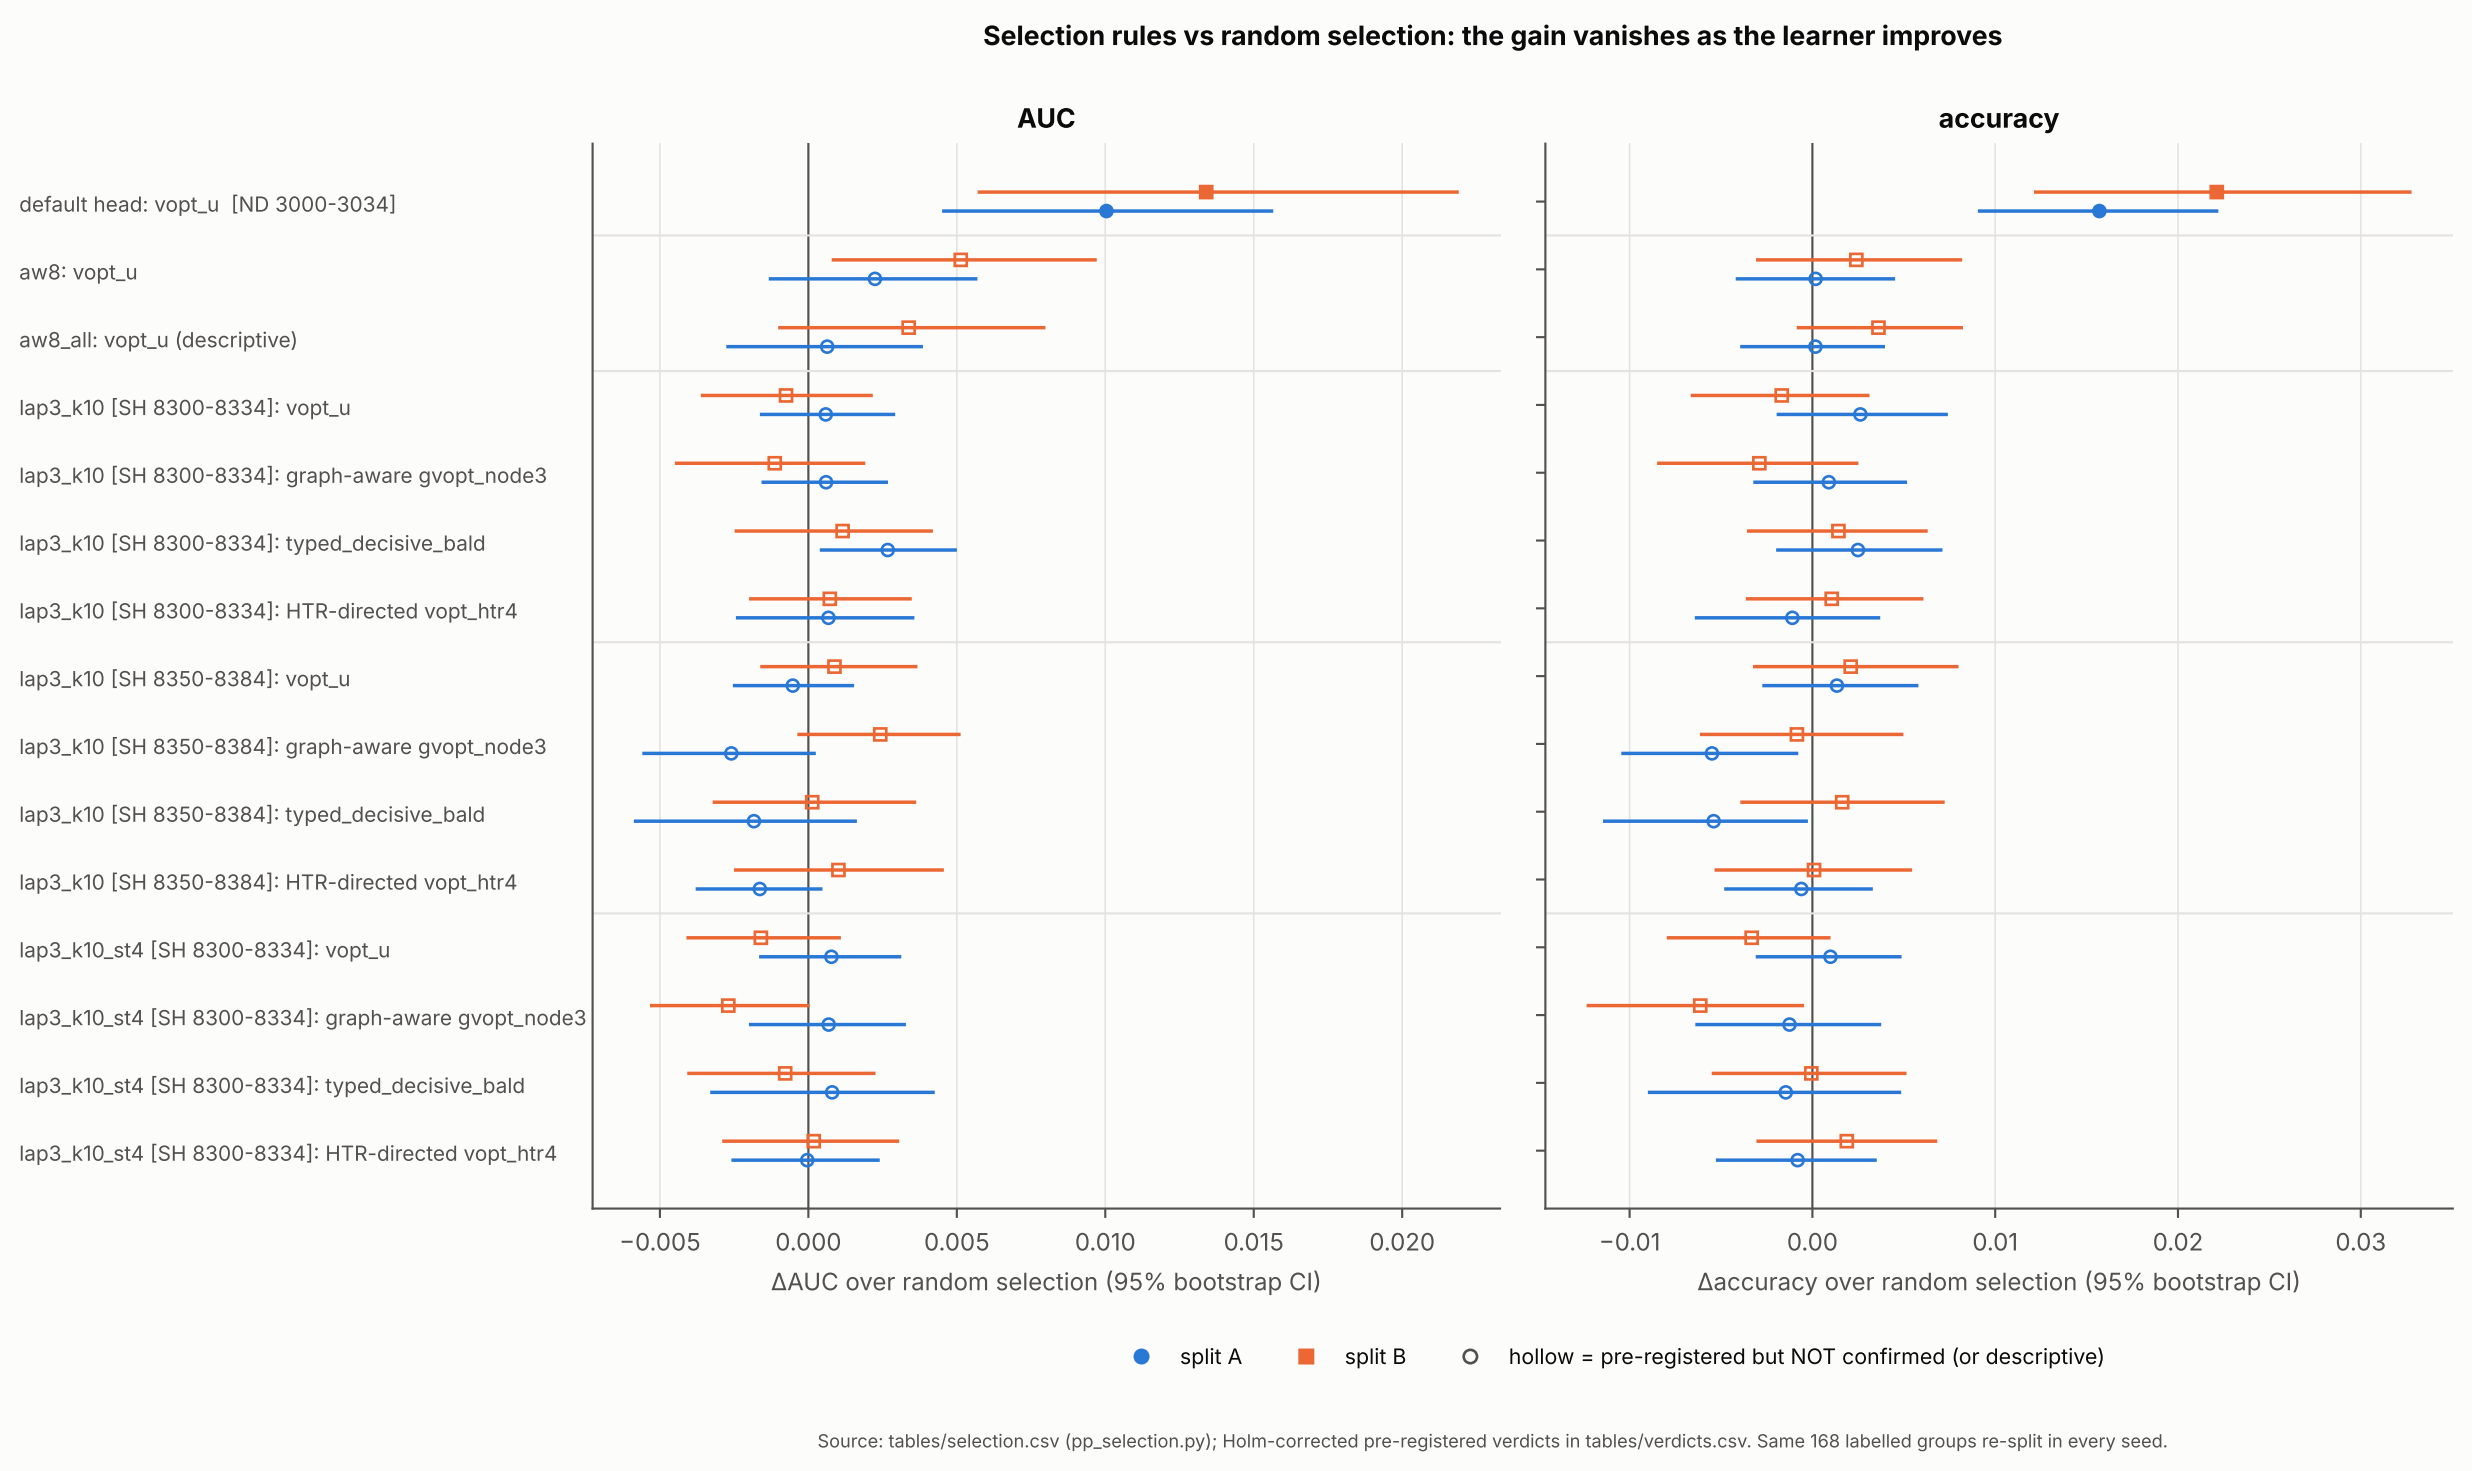
Selection rules vs random selection: the gain vanishes as the learner improves
AUC
accuracy
default head: vopt_u [ND 3000-3034]
aw8: vopt_u
aw8_all: vopt_u (descriptive)
lap3_k10 [SH 8300-8334]: vopt_u
lap3_k10 [SH 8300-8334]: graph-aware gvopt_node3
lap3_k10 [SH 8300-8334]: typed_decisive_bald
lap3_k10 [SH 8300-8334]: HTR-directed vopt_htr4
lap3_k10 [SH 8350-8384]: vopt_u
lap3_k10 [SH 8350-8384]: graph-aware gvopt_node3
lap3_k10 [SH 8350-8384]: typed_decisive_bald
lap3_k10 [SH 8350-8384]: HTR-directed vopt_htr4
lap3_k10_st4 [SH 8300-8334]: vopt_u
lap3_k10_st4 [SH 8300-8334]: graph-aware gvopt_node3
lap3_k10_st4 [SH 8300-8334]: typed_decisive_bald
lap3_k10_st4 [SH 8300-8334]: HTR-directed vopt_htr4
−0.005
0.000
0.005
0.010
0.015
0.020
ΔAUC over random selection (95% bootstrap CI)
−0.01
0.00
0.01
0.02
0.03
Δaccuracy over random selection (95% bootstrap CI)
split A
split B
hollow = pre-registered but NOT confirmed (or descriptive)
Source: tables/selection.csv (pp_selection.py); Holm-corrected pre-registered verdicts in tables/verdicts.csv. Same 168 labelled groups re-split in every seed.