

Report on data analysis of Data Analysis of Experiments

Vinh Dang

4 November 2015

Summary

Summary of all findings in the data analysis:

- Analyze by games ** People send more in ID, Score and Combine Games than Simple Game. The behavior of 3 info games are similar. ** People send back more in ID, Score and Combine Games than Simple Game. ** Profit of ID, Score and Combine Games are much higher than Simple Game.
- Analyze by information showed to users ** Showing trust and showing ID let people send more than not showing
- Group effect on game position ** There is group interaction on game position, but there is no effect of game position on behavior.
- Group effect on behavior ** There is no group effect on showing trust and ID. ** The effect of showing Trust in Sender is less than in Receiver ** The effect of showing Trust and ID is significant in Profit
- Effect by group ** There is no special thing
- Predicting the behavior ** Using two trust scores (by own player and partner), we can predict well the behavior of partner
- Group interaction on predicting power ** There is Group interaction on predicting power
- Comparing data ** The Simple Game is consistency with Giangiacomo ** Dubois's data is not useful, there is no effect of treatment, but there is for group interaction.
- Behavior over time ** There is no evidence to say that behavior decrease over time.
- Questionnaire analysis ** There is no consistency between questionnaire and real data.

Data Preparation

All data have been collected by running experiments from zTree and zLeaf 3.4.7.

There are 5 experiments so far, and both data files (XLS) and questionnaire files (SBJ) have been put in the directory called “all_data”. Through the document, the term “experiment” (5 experiments) and group (5 groups) are used interchangeably.

Here we set up the working space

```
# Read data files into R
source("ProcessData.R")
zTT <- readMultiXLS("./all_data")
SBJs <- processMultiSBJ("./all_data")

# Create my sending proportional
zTT[2]$subjects$my_send_proportional <- ifelse(zTT[2]$subjects$Type ==
  0, zTT[2]$subjects$Contribution/10, ifelse(zTT[2]$subjects$PartnerDecision >
  0, zTT[2]$subjects$Contribution/3/zTT[2]$subjects$PartnerDecision,
  -1))

# add epsilon value to avoid the case 0/0 EPSILON =
# 0.001 zTT[2]$subjects$my_send_proportional <-
# ifelse(zTT[2]$subjects$Type == 0,
# zTT[2]$subjects$Contribution/10,
# zTT[2]$subjects$Contribution/3/
# (zTT[2]$subjects$PartnerDecision + EPSILON))

zTT[2]$subjects$CurrGameProfit <- ifelse(zTT[2]$subjects$Type ==
  0, zTT[2]$subjects$PartnerDecision - zTT[2]$subjects$Contribution,
  zTT[2]$subjects$PartnerDecision * 3 - zTT[2]$subjects$Contribution)

# set some constants

# Numbers of user of a group
num_users = 6
# Number of rounds each user play to each other
average_rounds = 5
# Number of games for each group
num_games = 4
# Number of rounds for each game (should be 25)
num_rounds_per_game = (num_users - 1) * average_rounds
# Number of rounds for each experiment (should be
# 100, because we have 4 games)
num_rounds_per_exp = num_rounds_per_game * num_games
# Number of experiments (it is 5 at the time of
# writing, but can be increased if we organize more
# experiments)
num_exp = nrow(zTT[1]$globals)/num_rounds_per_exp

Type_names = c("SENDER", "RECEIVER")
SIMPLE_GAME_ORDERS = c(3, 2, 4, 1, 2)
ID_GAME_ORDERS = c(1, 4, 1, 2, 3)
SCORE_GAME_ORDERS = c(2, 1, 3, 4, 4)
COMBINE_GAME_ORDERS = c(4, 3, 2, 3, 1)
```

```

GAME_NAMES <- c("Simple GAME", "ID GAME", "Score GAME",
  "Combine GAME")

col_list <- c("red", "green", "blue", "black", "orange",
  "violet")

# first, create empty data frames to hold all the
# particular games
simple_games <- zTT[2]$subjects[0, ]
id_games <- zTT[2]$subjects[0, ]
score_games <- zTT[2]$subjects[0, ]
combine_games <- zTT[2]$subjects[0, ]

# create dataframe for each game
for (exp_id in 1:num_exp) {
  first_round_of_exp_globals = (exp_id - 1) * num_rounds_per_exp +
    1
  last_round_of_exp_globals = exp_id * num_rounds_per_exp
  globals_of_exp = zTT[1]$globals[first_round_of_exp_globals:last_round_of_exp_globals,
    ]

  first_round_of_exp_subjects = (exp_id - 1) * num_rounds_per_exp *
    num_users + 1
  last_round_of_exp_subjects = exp_id * num_rounds_per_exp *
    num_users
  subjects_of_exp = zTT[2]$subjects[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]

  SIMPLE_GAME_ORDER = globals_of_exp[1, ]$SIMPLE_GAME
  ID_GAME_ORDER = globals_of_exp[1, ]$ID_GAME
  SCORE_GAME_ORDER = globals_of_exp[1, ]$SCORE_GAME
  COMBINE_GAME_ORDER = globals_of_exp[1, ]$COMBINE_GAME

  simple_games <- rbind(simple_games, subjects_of_exp[((SIMPLE_GAME_ORDER -
    1) * num_rounds_per_game * num_users + 1):(SIMPLE_GAME_ORDER *
    num_rounds_per_game * num_users), ])
  id_games <- rbind(id_games, subjects_of_exp[((ID_GAME_ORDER -
    1) * num_rounds_per_game * num_users + 1):(ID_GAME_ORDER *
    num_rounds_per_game * num_users), ])
  score_games <- rbind(score_games, subjects_of_exp[((SCORE_GAME_ORDER -
    1) * num_rounds_per_game * num_users + 1):(SCORE_GAME_ORDER *
    num_rounds_per_game * num_users), ])
  combine_games <- rbind(combine_games, subjects_of_exp[((COMBINE_GAME_ORDER -
    1) * num_rounds_per_game * num_users + 1):(COMBINE_GAME_ORDER *
    num_rounds_per_game * num_users), ])
}

```

Data analysis

Basic analysis

We can compute some basic metrics as follow:

For this, we can see that, the total behavior for 3 games with information are similar, and much more better than simple game.

```
# calculate game metrics calculate average sending
# amount per game
print("Mean of sending amount per games")

## [1] "Mean of sending amount per games"
print(mean(simple_games$Contribution))

## [1] 2.64
print(mean(id_games$Contribution))

## [1] 6.242667
print(mean(score_games$Contribution))

## [1] 6.398667
print(mean(combine_games$Contribution))

## [1] 6.726667
print("Mean of sending amount by sender per games")

## [1] "Mean of sending amount by sender per games"
print(mean(simple_games[simple_games$Type == 0, ]$Contribution))

## [1] 3.002667
print(mean(id_games[id_games$Type == 0, ]$Contribution))

## [1] 5.304
print(mean(score_games[score_games$Type == 0, ]$Contribution))

## [1] 5.288
print(mean(combine_games[combine_games$Type == 0, ]$Contribution))

## [1] 5.453333
print(mean(simple_games[simple_games$Type == 1, ]$Contribution))

## [1] 2.277333
print(mean(id_games[id_games$Type == 1, ]$Contribution))

## [1] 7.181333
print(mean(score_games[score_games$Type == 1, ]$Contribution))

## [1] 7.509333
```

```
print(mean(combine_games[combine_games$Type == 1, ]$Contribution))
```

```
## [1] 8
```

```
# calculate average sending proportion per game  
# print ('Mean of sending proportion per game')  
# print (mean  
# (simple_games[simple_games$my_send_proportional  
# >= 0,]$my_send_proportional)) print (mean  
# (id_games[id_games$my_send_proportional >=  
# 0,]$my_send_proportional)) print (mean  
# (score_games[score_games$my_send_proportional >=  
# 0,]$my_send_proportional)) print (mean  
# (combine_games[combine_games$my_send_proportional  
# >= 0,]$my_send_proportional))
```

```
print("Average of sending amount by senders per game")
```

```
## [1] "Average of sending amount by senders per game"
```

```
print(mean(simple_games[simple_games$my_send_proportional >=  
0 & simple_games$Type == 0, ]$my_send_proportional))
```

```
## [1] 0.3002667
```

```
print(mean(id_games[id_games$my_send_proportional >=  
0 & id_games$Type == 0, ]$my_send_proportional))
```

```
## [1] 0.5304
```

```
print(mean(score_games[score_games$my_send_proportional >=  
0 & score_games$Type == 0, ]$my_send_proportional))
```

```
## [1] 0.5288
```

```
print(mean(combine_games[combine_games$my_send_proportional >=  
0 & combine_games$Type == 0, ]$my_send_proportional))
```

```
## [1] 0.5453333
```

```
print("Average of sending back by receiver per game")
```

```
## [1] "Average of sending back by receiver per game"
```

```
print(mean(simple_games[simple_games$my_send_proportional >=  
0 & simple_games$Type == 1, ]$my_send_proportional))
```

```
## [1] 0.2615905
```

```
print(mean(id_games[id_games$my_send_proportional >=  
0 & id_games$Type == 1, ]$my_send_proportional))
```

```
## [1] 0.4409586
```

```
print(mean(score_games[score_games$my_send_proportional >=  
0 & score_games$Type == 1, ]$my_send_proportional))
```

```
## [1] 0.476037
```

```
print(mean(combine_games[combine_games$my_send_proportional >=  
0 & combine_games$Type == 1, ]$my_send_proportional))
```

```

## [1] 0.4765017
print("Average profit user get in 1 round per game")

## [1] "Average profit user get in 1 round per game"
print(mean(simple_games[simple_games$Type == 0, ]$CurrGameProfit))

## [1] -0.7253333
print(mean(id_games[id_games$Type == 0, ]$CurrGameProfit))

## [1] 1.877333
print(mean(score_games[score_games$Type == 0, ]$CurrGameProfit))

## [1] 2.221333
print(mean(combine_games[combine_games$Type == 0, ]$CurrGameProfit))

## [1] 2.546667
print(mean(simple_games[simple_games$Type == 1, ]$CurrGameProfit))

## [1] 6.730667
print(mean(id_games[id_games$Type == 1, ]$CurrGameProfit))

## [1] 8.730667
print(mean(score_games[score_games$Type == 1, ]$CurrGameProfit))

## [1] 8.354667
print(mean(combine_games[combine_games$Type == 1, ]$CurrGameProfit))

## [1] 8.36
print("Response time for games")

## [1] "Response time for games"
print(mean(simple_games[simple_games$Type == 0, ]$response_time))

## [1] 9.874856
print(mean(simple_games[simple_games$Type == 1, ]$response_time))

## [1] 12.73053
print(mean(id_games[id_games$Type == 0, ]$response_time))

## [1] 11.03453
print(mean(id_games[id_games$Type == 1, ]$response_time))

## [1] 15.34007
print(mean(score_games[score_games$Type == 0, ]$response_time))

## [1] 10.90826
print(mean(score_games[score_games$Type == 1, ]$response_time))

## [1] 15.04132

```

```
print(mean(combine_games[combine_games$Type == 0, ]$response_time))
```

```
## [1] 12.35263
```

```
print(mean(combine_games[combine_games$Type == 1, ]$response_time))
```

```
## [1] 17.29802
```

Basic analysis by role

Date: Thu 15-Jun-2017

```
# calculate game metrics
for (type in 0:1) {
  print(paste("Basic game metric of:", Type_names[type +
    1]))
  # calculate average sending amount per game
  print("Mean of sending amount per games")
  print(mean(simple_games[simple_games$Type == type,
    ]$Contribution))
  print(mean(id_games[id_games$Type == type, ]$Contribution))
  print(mean(score_games[score_games$Type == type,
    ]$Contribution))
  print(mean(combine_games[combine_games$Type ==
    type, ]$Contribution))

  # calculate average sending proportion per game
  print("Mean of sending proportion per game")
  print(mean(simple_games[simple_games$Type == type &
    simple_games$my_send_proportional >= 0, ]$my_send_proportional))
  print(mean(id_games[id_games$Type == type & id_games$my_send_proportional >=
    0, ]$my_send_proportional))
  print(mean(score_games[score_games$Type == type &
    score_games$my_send_proportional >= 0, ]$my_send_proportional))
  print(mean(combine_games[combine_games$Type ==
    type & combine_games$my_send_proportional >=
    0, ]$my_send_proportional))

  # calculate by SHOW_TRUST and SHOW_ID
  print(paste("Mean of send proportion no TRUST:",
    mean(c(simple_games[simple_games$Type == type &
      simple_games$my_send_proportional >= 0,
      ]$my_send_proportional, id_games[id_games$Type ==
      type & id_games$my_send_proportional >=
      0, ]$my_send_proportional))))
  print(paste("Mean of send proportion with TRUST:",
    mean(c(score_games[score_games$Type == type &
      score_games$my_send_proportional >= 0,
      ]$my_send_proportional, combine_games[combine_games$Type ==
      type & combine_games$my_send_proportional >=
      0, ]$my_send_proportional))))

  print(paste("Mean of send proportion no ID:", mean(c(simple_games[simple_games$Type ==
    type & simple_games$my_send_proportional >=
    0, ]$my_send_proportional, score_games[score_games$Type ==
    type & score_games$my_send_proportional >=
    0, ]$my_send_proportional))))
  print(paste("Mean of send proportion with ID:",
    mean(c(id_games[id_games$Type == type & id_games$my_send_proportional >=
      0, ]$my_send_proportional, combine_games[combine_games$Type ==
      type & combine_games$my_send_proportional >=
      0, ]$my_send_proportional))))
}
```



```

print("Average profit user get in 1 round per game")
print(mean(simple_games[simple_games$Type == type,
  ]$CurrGameProfit))
print(mean(id_games[id_games$Type == type, ]$CurrGameProfit))
print(mean(score_games[score_games$Type == type,
  ]$CurrGameProfit))
print(mean(combine_games[combine_games$Type ==
  type, ]$CurrGameProfit))
}

```

```

## [1] "Basic game metric of: SENDER"
## [1] "Mean of sending amount per games"
## [1] 3.002667
## [1] 5.304
## [1] 5.288
## [1] 5.453333
## [1] "Mean of sending proportion per game"
## [1] 0.3002667
## [1] 0.5304
## [1] 0.5288
## [1] 0.5453333
## [1] "Mean of send proportion no TRUST: 0.415333333333333"
## [1] "Mean of send proportion with TRUST: 0.537066666666667"
## [1] "Mean of send proportion no ID: 0.414533333333333"
## [1] "Mean of send proportion with ID: 0.537866666666667"
## [1] "Average profit user get in 1 round per game"
## [1] -0.7253333
## [1] 1.877333
## [1] 2.221333
## [1] 2.546667
## [1] "Basic game metric of: RECEIVER"
## [1] "Mean of sending amount per games"
## [1] 2.277333
## [1] 7.181333
## [1] 7.509333
## [1] 8
## [1] "Mean of sending proportion per game"
## [1] 0.2615905
## [1] 0.4409586
## [1] 0.476037
## [1] 0.4765017
## [1] "Mean of send proportion no TRUST: 0.36495516097211"
## [1] "Mean of send proportion with TRUST: 0.476271097174619"
## [1] "Mean of send proportion no ID: 0.382636930110798"
## [1] "Mean of send proportion with ID: 0.458437927570962"
## [1] "Average profit user get in 1 round per game"
## [1] 6.730667
## [1] 8.730667
## [1] 8.354667
## [1] 8.36


```

Of course, these above metrics are very basic one. We need to calculate the group interaction on SHOW_TRUST and SHOW_ID variables (both of them are boolean values, mean in a particular game, we show trust score or identity to users or not). In order to do this, we will use 2 - way and 3 - way ANOVA in

wide format. More details at <http://www.uni-kiel.de/psychologie/rexrepos/posts/anovaSPFpqr.html>

Testing the difference of users' behavior on different partners

[1] 0.384607

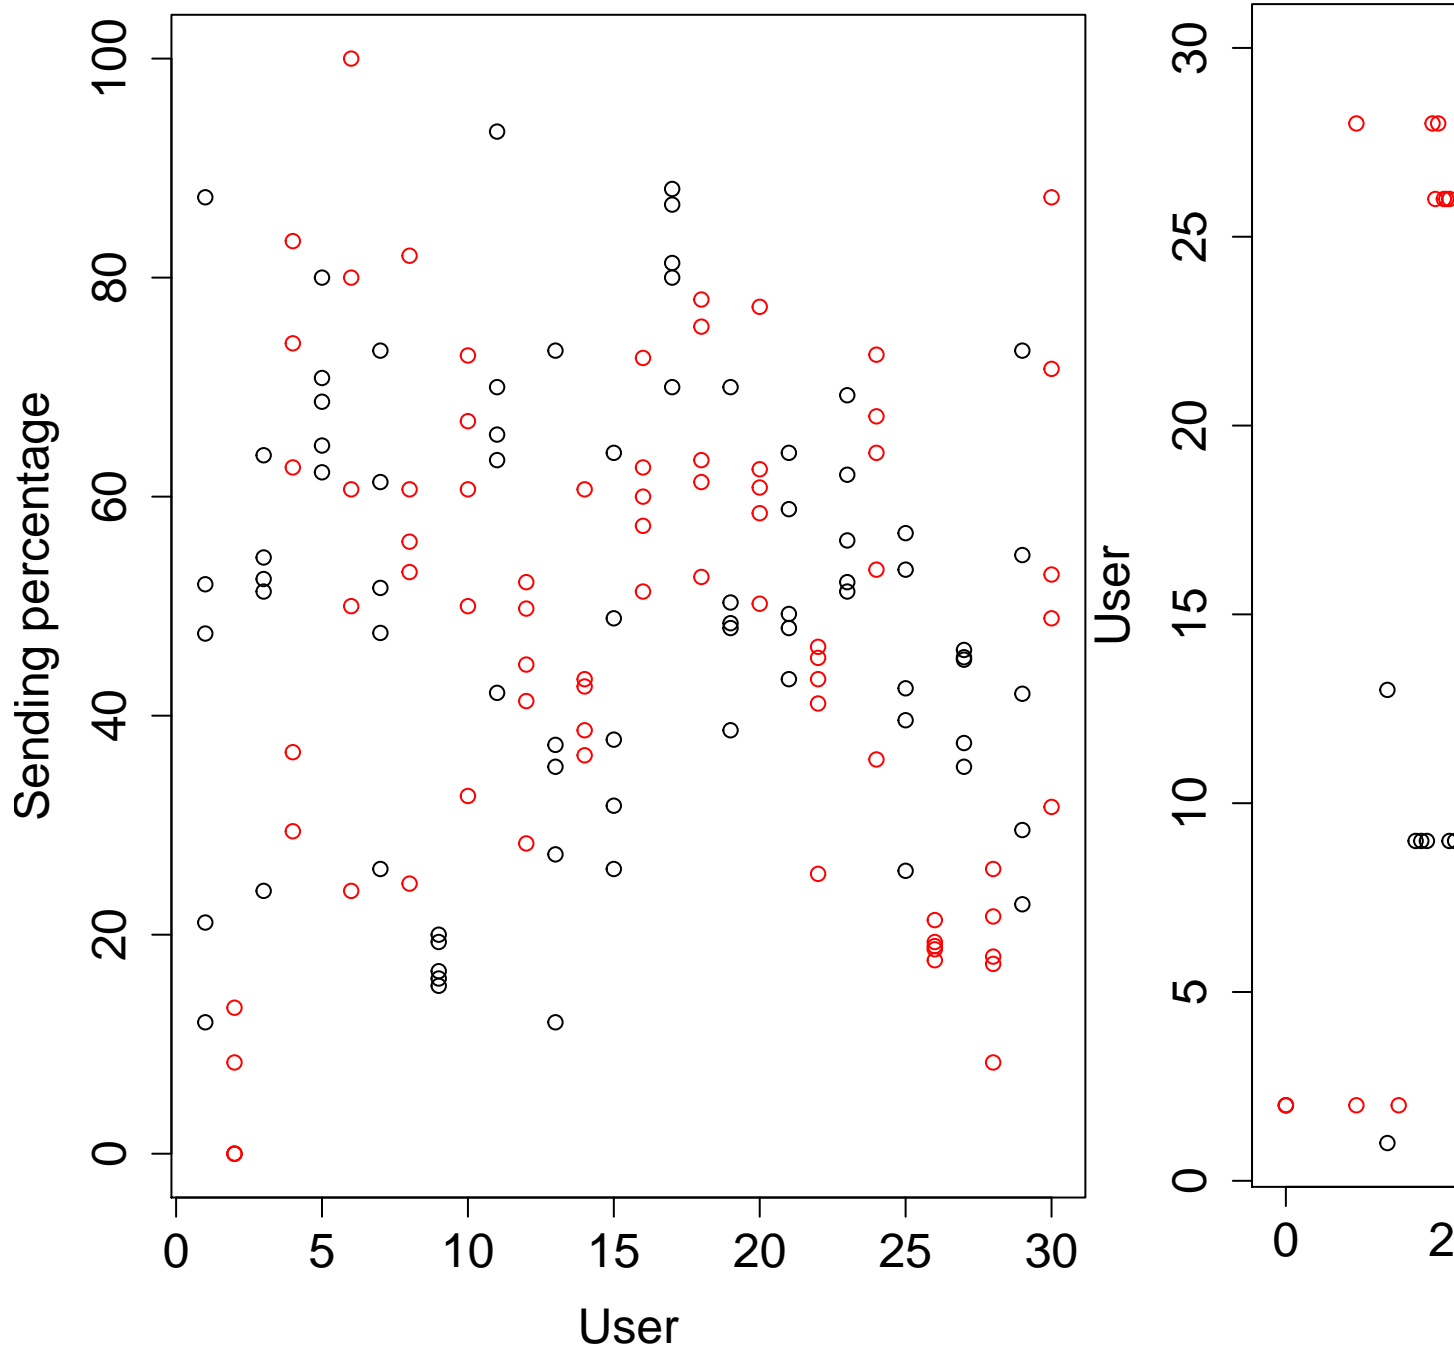

Game metrics for each person of each group


We calculate behavior for each group and see the effect of showing trust or showing ID. We can see that it is really better to show the information to users.

Temporary remove, move to effect of each group.

```

require(ggplot2)
require(reshape2)
require(scales)
c <- cbind(simple_games[simple_games$Type == 0 & simple_games$my_send_proportional >=
  0, ]$Contribution, id_games[id_games$Type == 0 &
  id_games$my_send_proportional >= 0, ]$Contribution,
  score_games[score_games$Type == 0 & score_games$my_send_proportional >=
  0, ]$Contribution, combine_games[combine_games$Type ==
  0 & combine_games$my_send_proportional >= 0,
  ]$Contribution)
c = c/10
d <- as.data.frame(c)
colnames(d) <- c("Simple Game", "Partner Identity Game",
  "Partner Information Game", "Combine Game")
# make histogram of sending amount by senders
ggplot(melt(d), aes(value, fill = variable)) + geom_histogram(position = "dodge",
  binwidth = 0.1, aes(y = ..count../sum(..count..) *
  4)) + scale_x_continuous(breaks = seq(0, 1,
  0.2), labels = percent) + xlab("Sending percentage") +
  scale_y_continuous(labels = percent) + ylab("Frequencies") +
  scale_fill_grey() + theme(text = element_text(size = 30))

```

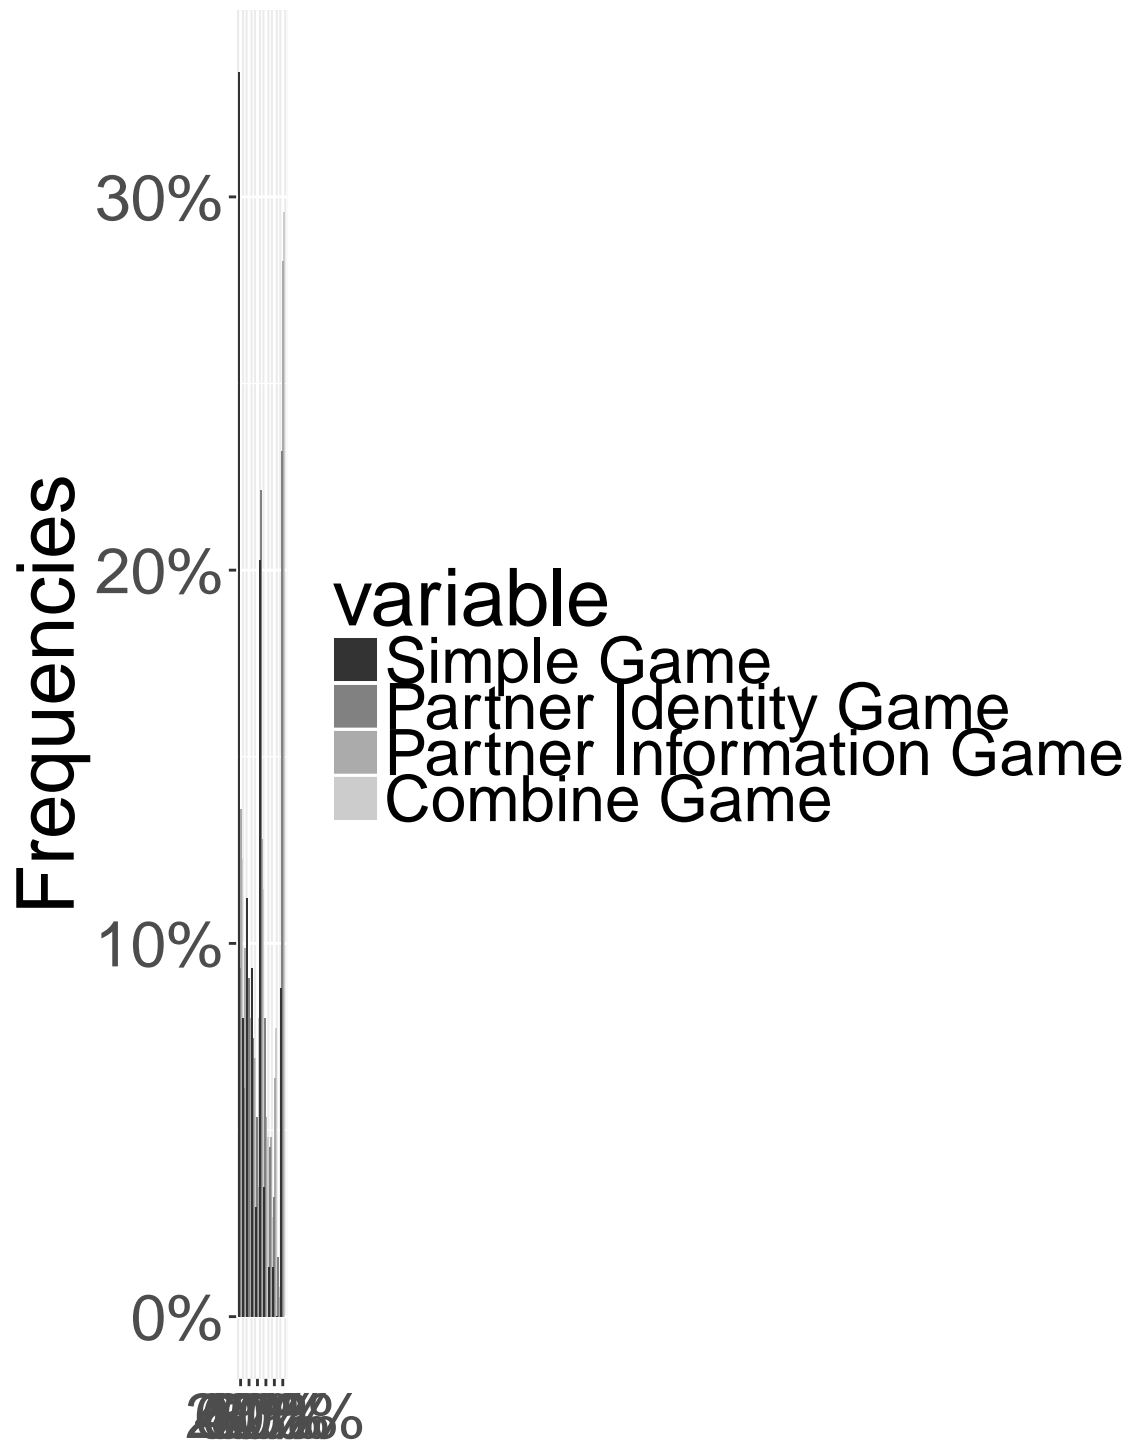


```
# For receivers
c <- cbind(simple_games[simple_games$Type == 1 & simple_games$my_send_proportional >=
0, ]$my_send_proportional, id_games[id_games$Type ==
1 & id_games$my_send_proportional >= 0, ]$my_send_proportional,
score_games[score_games$Type == 1 & score_games$my_send_proportional >=
0, ]$my_send_proportional, combine_games[combine_games$Type ==
```

```

    1 & combine_games$my_send_proportional >= 0,
  ]$my_send_proportional)
d <- as.data.frame(c)
colnames(d) <- c("Simple Game", "Partner Identity Game",
  "Partner Information Game", "Combine Game")
# make histogram of sending amount by senders
ggplot(melt(d), aes(value, fill = variable)) + geom_histogram(position = "dodge",
  binwidth = 0.1, aes(y = ..count../sum(..count..) *
    4)) + scale_x_continuous(breaks = seq(0, 1,
  0.2), labels = percent) + xlab("Sending percentage") +
  scale_y_continuous(labels = percent) + scale_fill_grey() +
  theme(text = element_text(size = 30)) + ylab("")

```

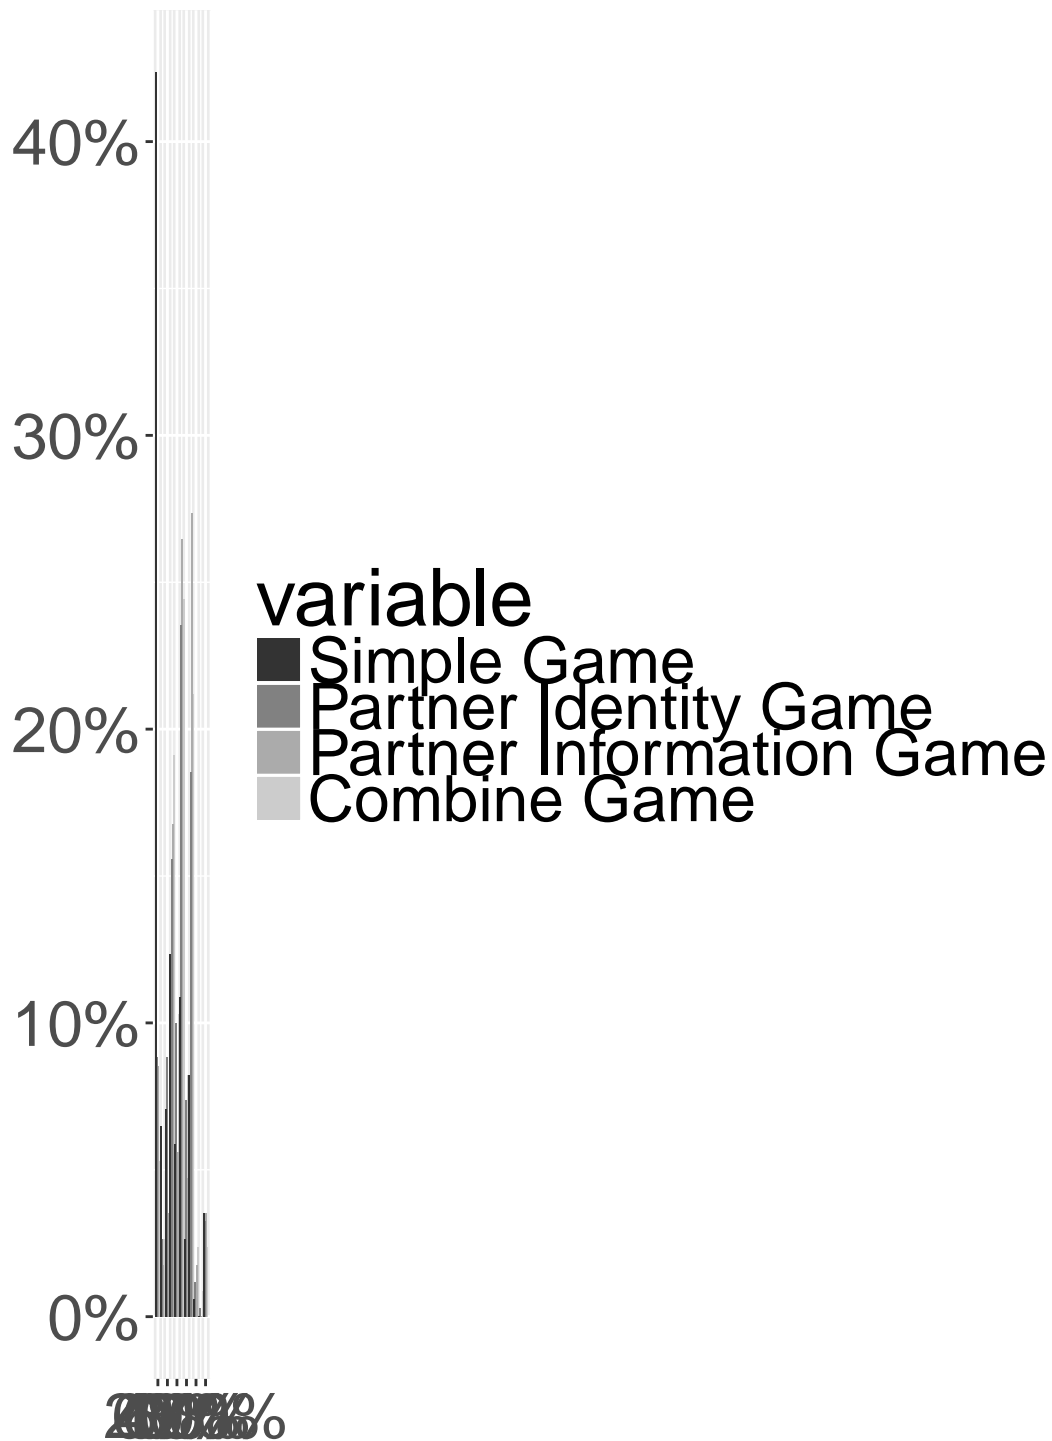

ending percentage

```
for (type in 0:1) {
  sg_senders <- simple_games[simple_games$Type ==
    type & simple_games$my_send_proportional >=
    0, ]
  sg_senders_avg <- aggregate(sg_senders$my_send_proportional,
```



```

    list(sg_senders$Date, sg_senders$Subject),
    mean)

pdg_senders <- id_games[id_games$Type == type &
  id_games$my_send_proportional >= 0, ]
pdg_senders_avg <- aggregate(pdg_senders$my_send_proportional,
  list(pdg_senders$Date, pdg_senders$Subject),
  mean)

pfg_senders <- score_games[score_games$Type ==
  type & score_games$my_send_proportional >=
  0, ]
pfg_senders_avg <- aggregate(pfg_senders$my_send_proportional,
  list(pfg_senders$Date, pfg_senders$Subject),
  mean)

cg_senders <- combine_games[combine_games$Type ==
  type & combine_games$my_send_proportional >=
  0, ]
cg_senders_avg <- aggregate(cg_senders$my_send_proportional,
  list(cg_senders$Date, cg_senders$Subject),
  mean)

perml_ks(sg_senders_avg[["x"]], pdg_senders_avg[["x"]])
perml_ks(sg_senders_avg[["x"]], pfg_senders_avg[["x"]])
perml_ks(sg_senders_avg[["x"]], cg_senders_avg[["x"]])


perml_ks(pdg_senders_avg[["x"]], pfg_senders_avg[["x"]])
perml_ks(pdg_senders_avg[["x"]], cg_senders_avg[["x"]])

perml_ks(pfg_senders_avg[["x"]], cg_senders_avg[["x"]])

c2 <- cbind(sg_senders_avg[["x"]], pdg_senders_avg[["x"]],
  pfg_senders_avg[["x"]], cg_senders_avg[["x"]])
d2 <- as.data.frame(c2)
colnames(d2) <- c("Simple Game", "Partner Identity Game",
  "Partner Information Game", "Combine Game")

r2 <- rbind(sg_senders_avg[["x"]], pdg_senders_avg[["x"]],
  pfg_senders_avg[["x"]], cg_senders_avg[["x"]])
barplot(r2, beside = TRUE)
}

```

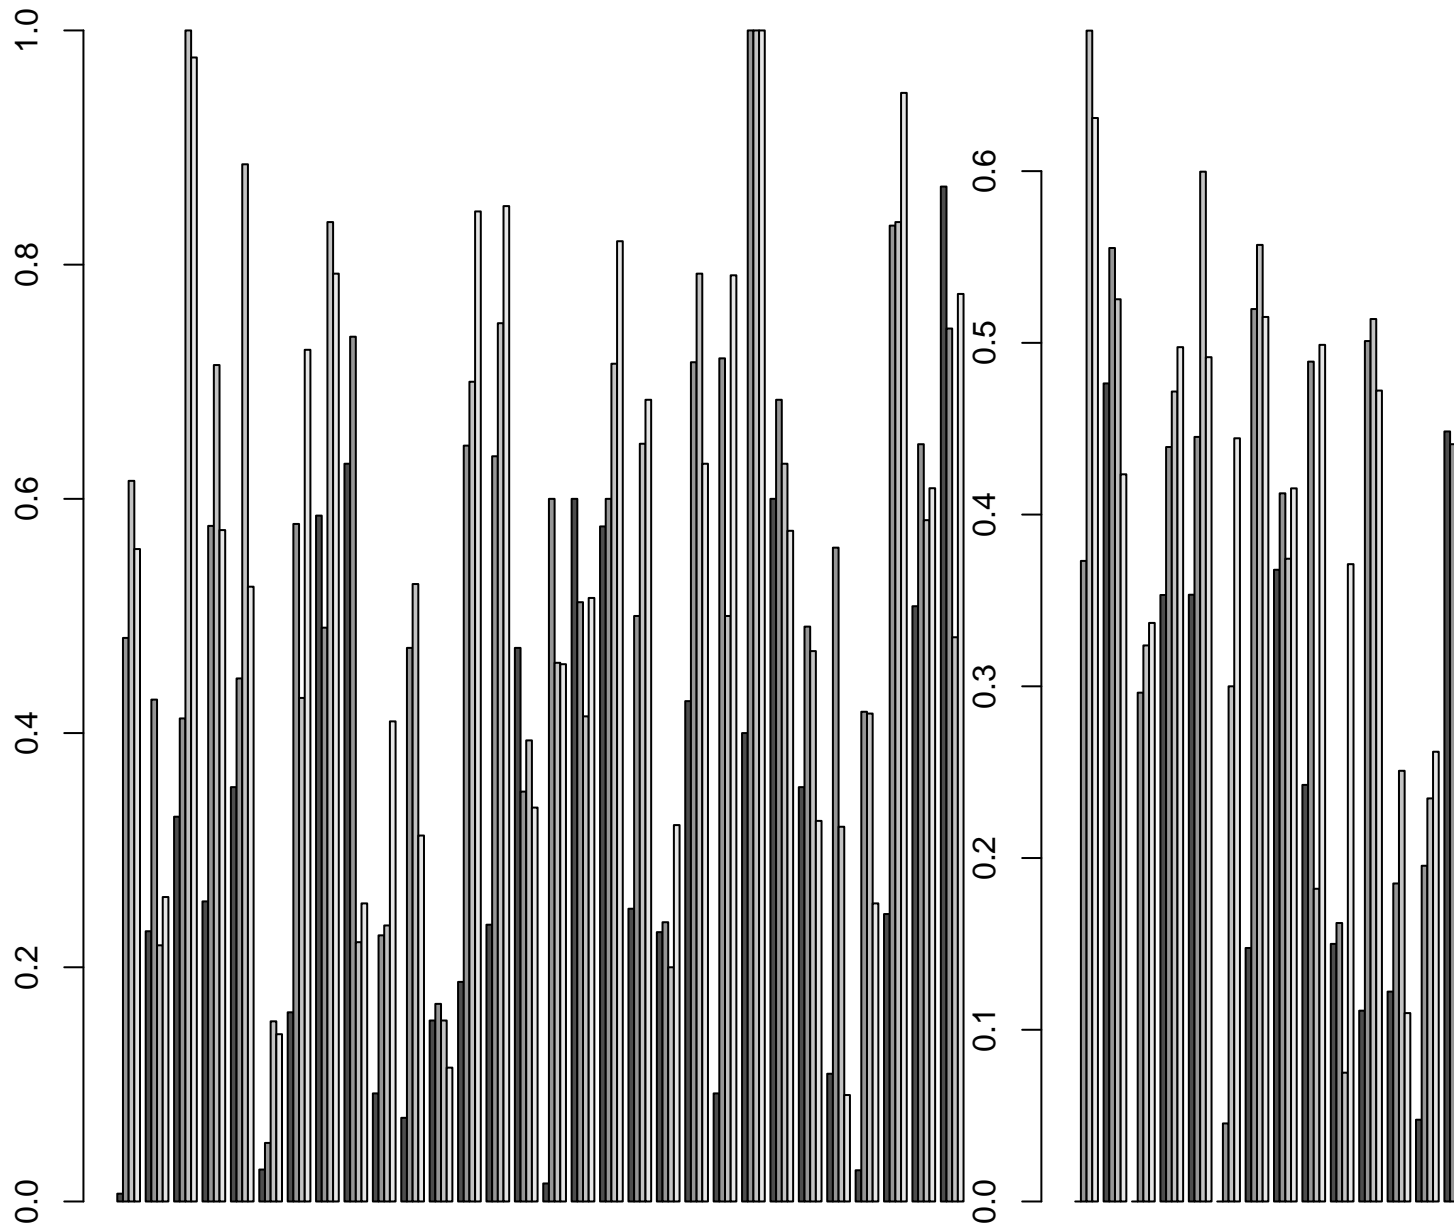

```
# plot (id, sg_senders_avg[['x']], ylim = c(0,1),
# col='red', main = 'Sending percentage of
# senders', xlab = 'Participant', ylab = 'Sending
# percentage', yaxt='n') axis(2,
# at=pretty(sg_senders_avg[['x']]), lab= paste
# (pretty(sg_senders_avg[['x']]) * 100, '%'),
# las=TRUE) lines (id, sg_senders_avg[['x']], lty =
# 2, col='red') lines (id, pdg_senders_avg[['x']],
# lty = 2, col='blue', type = 'o') lines (id,
# pfg_senders_avg[['x']], lty = 2, col='green',
# type = 'o') lines (id, cg_senders_avg[['x']], lty
# = 2, col='purple', type = 'o')
```

Compare behavior between games

```
## [1] "Compare send proportion of SENDER"
## [1] "Compare rel sending for SENDER"
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 0, ]$RelSend and df[df$SHOW_TRUST == 0 & df$SHOW_ID == 0, ]$RelSend
## t = -5.3748, df = 29, p-value = 8.953e-06
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.3161810 -0.1418793
## sample estimates:
## mean of the differences
## -0.2290301
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 0, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 0, ]$RelSend
## t = -4.5304, df = 29, p-value = 9.335e-05
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.3486259 -0.1317584
## sample estimates:
## mean of the differences
## -0.2401921
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 0, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 0, ]$RelSend
## t = -4.6239, df = 29, p-value = 7.207e-05
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.3546222 -0.1371172
## sample estimates:
## mean of the differences
## -0.2458697
##
## [1] "---"
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 1, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 1, ]$RelSend
## t = -0.28767, df = 29, p-value = 0.7756
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.09052053 0.06819656
## sample estimates:
## mean of the differences
## -0.01116199
##
```

```

##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 1, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 1, ]$RelSend
## t = -0.43957, df = 29, p-value = 0.6635
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.09519142 0.06151226
## sample estimates:
## mean of the differences
## -0.01683958
##
## [1] "---"
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 1 & df$SHOW_ID == 0, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 1, ]$RelSend
## t = -0.19889, df = 29, p-value = 0.8437
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.06406219 0.05270700
## sample estimates:
## mean of the differences
## -0.005677594
##
## [1] "Compare send proportion of RECEIVER"
## [1] "Compare rel sending for RECEIVER"
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 0, ]$RelSend and df[df$SHOW_TRUST == 0 & df$SHOW_ID == 1, ]$RelSend
## t = -5.0088, df = 29, p-value = 2.475e-05
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.22723630 -0.09546809
## sample estimates:
## mean of the differences
## -0.1613522
##
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 0, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 0, ]$RelSend
## t = -4.1251, df = 29, p-value = 0.0002846
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.24981967 -0.08420832
## sample estimates:
## mean of the differences
## -0.167014
##
##
## Paired t-test
##

```

```

## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 0, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 0, ]$RelSend
## t = -4.817, df = 29, p-value = 4.217e-05
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.2654165 -0.1072073
## sample estimates:
## mean of the differences
## -0.1863119
##
## [1] "---"
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 1, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 0, ]$RelSend
## t = -0.21363, df = 29, p-value = 0.8323
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.05986575 0.04854215
## sample estimates:
## mean of the differences
## -0.005661799
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 0 & df$SHOW_ID == 1, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 1, ]$RelSend
## t = -1.1286, df = 29, p-value = 0.2683
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.07019170 0.02027228
## sample estimates:
## mean of the differences
## -0.02495971
##
## [1] "---"
##
## Paired t-test
##
## data: df[df$SHOW_TRUST == 1 & df$SHOW_ID == 0, ]$RelSend and df[df$SHOW_TRUST == 1 & df$SHOW_ID == 1, ]$RelSend
## t = -0.92265, df = 29, p-value = 0.3638
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.06207563 0.02347981
## sample estimates:
## mean of the differences
## -0.01929791

```

Compare between games using ANOVA

Before, we compared average of sending amount and average of sending proportion between games using pairwise t-test on all possible pair games.

However, we can use ANOVA to test all four games in once. More information at <http://brownmath.com/stat/anova1>.

The code is taken from <http://www.sthda.com/english/wiki/one-way-anova-test-in-r>

```
# For sender
send_simple = simple_games[simple_games$Type == 0,
  ]$my_send_proportional
send_id = id_games[id_games$Type == 0, ]$my_send_proportional
send_score = score_games[score_games$Type == 0, ]$my_send_proportional
send_combine = combine_games[combine_games$Type ==
  0, ]$my_send_proportional
dati = c(send_simple, send_id, send_score, send_combine)
groups = factor(rep(c("simple", "id", "score", "combine"),
  each = length(send_simple)))

# test variance homogeneity
bartlett.test(dati, groups)

##
## Bartlett test of homogeneity of variances
##
## data:  dati and groups
## Bartlett's K-squared = 18.713, df = 3, p-value = 0.0003135

fligner.test(dati, groups)

##
## Fligner-Killeen test of homogeneity of variances
##
## data:  dati and groups
## Fligner-Killeen:med chi-squared = 36.256, df = 3, p-value =
## 6.61e-08

# ANOVA ANOVA answers if four means are equal or
# not
fit = lm(formula = dati ~ groups)

anova(fit)

## Analysis of Variance Table
##
## Response: dati
##          Df Sum Sq Mean Sq F value    Pr(>F)
## groups    3  15.539   5.1795  43.076 < 2.2e-16 ***
## Residuals 1496 179.882   0.1202
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

# TukeyHSD test, to answer which mean is greater
# than which mean
TukeyHSD(aov(fit))
```

```

## Tukey multiple comparisons of means
## 95% family-wise confidence level
##
## Fit: aov(formula = fit)
##
## $groups
##           diff      lwr      upr    p adj
## id-combine  -0.01493333 -0.08006388 0.05019721 0.9352161
## score-combine -0.01653333 -0.08166388 0.04859721 0.9145584
## simple-combine -0.24506667 -0.31019721 -0.17993612 0.0000000
## score-id      -0.00160000 -0.06673055 0.06353055 0.9999095
## simple-id     -0.23013333 -0.29526388 -0.16500279 0.0000000
## simple-score  -0.22853333 -0.29366388 -0.16340279 0.0000000

# Using multcomp package, little bit stronger than
# TukeyHSD test
library(multcomp)
pairwise <- glht(fit, linfct = mcp(groups = "Tukey"))
summary(pairwise)

##
## Simultaneous Tests for General Linear Hypotheses
##
## Multiple Comparisons of Means: Tukey Contrasts
##
##
## Fit: lm(formula = dati ~ groups)
##
## Linear Hypotheses:
##           Estimate Std. Error t value Pr(>|t|)
## id - combine == 0   -0.01493    0.02532  -0.590    0.935
## score - combine == 0 -0.01653    0.02532  -0.653    0.915
## simple - combine == 0 -0.24507    0.02532  -9.677 <1e-06 ***
## score - id == 0      -0.00160    0.02532  -0.063    1.000
## simple - id == 0     -0.23013    0.02532  -9.088 <1e-06 ***
## simple - score == 0  -0.22853    0.02532  -9.024 <1e-06 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## (Adjusted p values reported -- single-step method)

# Kruskal - Wallis test for non-parametric
kruskal.test(dati ~ groups)

##
## Kruskal-Wallis rank sum test
##
## data:  dati by groups
## Kruskal-Wallis chi-squared = 121.97, df = 3, p-value < 2.2e-16

# if K-W test is significant, a post-hoc test can
# be performed here we use Dunn test
# http://rcompanion.org/rcompanion/d_06.html
library(FSA)
PT = dunnTest(dati ~ groups)
PT

##           Comparison      Z      P.unadj      P.adj

```

```

## 1      combine - id 0.1421786 8.869389e-01 8.869389e-01
## 2  combine - score 0.5474346 5.840802e-01 1.000000e+00
## 3      id - score 0.4052560 6.852894e-01 1.000000e+00
## 4  combine - simple 9.2352564 2.576682e-20 1.546009e-19
## 5      id - simple 9.0930777 9.627437e-20 4.813718e-19
## 6  score - simple 8.6878218 3.694549e-18 1.477819e-17

# using Nemenyi test not suitable for groups with
# different length (Zar, J.H. 2010. Biostatistical
# Analysis, 5th ed. Pearson Prentice Hall: Upper
# Saddle River, NJ.)
library(DescTools)
nt = NemenyiTest(x = dati, g = groups, dist = "tukey")
nt

##
## Nemenyi's test of multiple comparisons for independent samples (tukey)
##
##           mean.rank.diff      pval
## id-combine          -4.445333 0.9990
## score-combine       -17.116000 0.9490
## simple-combine     -288.748000 4.9e-14 ***
## score-id           -12.670667 0.9783
## simple-id          -284.302667 2.7e-14 ***
## simple-score       -271.632000 3.6e-14 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

# For sender: net sending amount
send_simple = simple_games[simple_games$Type == 0,
  ]$Contribution
send_id = id_games[id_games$Type == 0, ]$Contribution
send_score = score_games[score_games$Type == 0, ]$Contribution
send_combine = combine_games[combine_games$Type ==
  0, ]$Contribution
dati = c(send_simple, send_id, send_score, send_combine)
groups = factor(rep(c("simple", "id", "score", "combine"),
  each = length(send_simple)))

# test variance homogeneity
bartlett.test(dati, groups)

##
## Bartlett test of homogeneity of variances
##
## data:  dati and groups
## Bartlett's K-squared = 18.713, df = 3, p-value = 0.0003135

fligner.test(dati, groups)

##
## Fligner-Killeen test of homogeneity of variances
##
## data:  dati and groups
## Fligner-Killeen:med chi-squared = 34.209, df = 3, p-value =
## 1.79e-07

```



```

# ANOVA ANOVA answers if four means are equal or
# not
fit = lm(formula = dati ~ groups)

anova(fit)

## Analysis of Variance Table
##
## Response: dati
##           Df Sum Sq Mean Sq F value    Pr(>F)
## groups      3  1553.9   517.95  43.076 < 2.2e-16 ***
## Residuals 1496  17988.2    12.02
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

# TukeyHSD test, to answer which mean is greater
# than which mean
TukeyHSD(aov(fit))

## Tukey multiple comparisons of means
## 95% family-wise confidence level
##
## Fit: aov(formula = fit)
##
## $groups
##           diff          lwr          upr      p adj
## id-combine   -0.1493333 -0.8006388  0.5019721 0.9352161
## score-combine -0.1653333 -0.8166388  0.4859721 0.9145584
## simple-combine -2.4506667 -3.1019721 -1.7993612 0.0000000
## score-id      -0.0160000 -0.6673055  0.6353055 0.9999095
## simple-id     -2.3013333 -2.9526388 -1.6500279 0.0000000
## simple-score  -2.2853333 -2.9366388 -1.6340279 0.0000000

# For receiver
receive_simple = simple_games[simple_games$Type ==
  1 & simple_games$my_send_proportional >= 0, ]$my_send_proportional
receive_id = id_games[id_games$Type == 1 & id_games$my_send_proportional >=
  0, ]$my_send_proportional
receive_score = score_games[score_games$Type == 1 &
  score_games$my_send_proportional >= 0, ]$my_send_proportional
receive_combine = combine_games[combine_games$Type ==
  1 & combine_games$my_send_proportional >= 0, ]$my_send_proportional
dati = c(receive_simple, receive_id, receive_score,
  receive_combine)
groups = factor(c(rep("simple", length(receive_simple)),
  rep("id", length(receive_id)), rep("score", length(receive_score)),
  rep("combine", length(receive_combine))))

# test variance homogeneity
bartlett.test(dati, groups)

##
## Bartlett test of homogeneity of variances
##
## data:  dati and groups

```

```
## Bartlett's K-squared = 20.316, df = 3, p-value = 0.000146
fligner.test(dati, groups)

##
## Fligner-Killeen test of homogeneity of variances
##
## data: dati and groups
## Fligner-Killeen:med chi-squared = 57.124, df = 3, p-value =
## 2.418e-12
# ANOVA ANOVA answers if four means are equal or
# not
fit = lm(formula = dati ~ groups)

anova(fit)

## Analysis of Variance Table
##
## Response: dati
##           Df Sum Sq Mean Sq F value    Pr(>F)
## groups      3  8.476  2.82527   53.889 < 2.2e-16 ***
## Residuals 1239 64.957  0.05243
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
# TukeyHSD test, to answer which mean is greater
# than which mean
TukeyHSD(aov(fit))

## Tukey multiple comparisons of means
## 95% family-wise confidence level
##
## Fit: aov(formula = fit)
##
## $groups
##           diff          lwr          upr      p adj
## id-combine -0.0355430588 -0.08109565  0.01000953 0.1857852
## score-combine -0.0004646928 -0.04656710  0.04563771 0.9999937
## simple-combine -0.2149111883 -0.26433187 -0.16549050 0.0000000
## score-id      0.0350783661 -0.01065251  0.08080924 0.1986695
## simple-id     -0.1793681295 -0.22844241 -0.13029385 0.0000000
## simple-score  -0.2144464955 -0.26403156 -0.16486143 0.0000000
# Using multcomp package, little bit stronger than
# TukeyHSD test
library(multcomp)
pairwise <- glht(fit, linfct = mcp(groups = "Tukey"))
summary(pairwise)

##
## Simultaneous Tests for General Linear Hypotheses
##
## Multiple Comparisons of Means: Tukey Contrasts
##
##
## Fit: lm(formula = dati ~ groups)
```

```
##
## Linear Hypotheses:
##               Estimate Std. Error t value Pr(>|t|)
## id - combine == 0    -0.0355431  0.0177074  -2.007    0.186
## score - combine == 0  -0.0004647  0.0179211  -0.026    1.000
## simple - combine == 0 -0.2149112  0.0192110 -11.187 <0.001 ***
## score - id == 0       0.0350784  0.0177767   1.973    0.198
## simple - id == 0      -0.1793681  0.0190763  -9.403 <0.001 ***
## simple - score == 0   -0.2144465  0.0192749 -11.126 <0.001 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## (Adjusted p values reported -- single-step method)
```

```
# Kruskal - Wallis test for non-parametric
kruskal.test(dati ~ groups)
```

```
##
## Kruskal-Wallis rank sum test
##
## data:  dati by groups
## Kruskal-Wallis chi-squared = 128.98, df = 3, p-value < 2.2e-16
```

```
# if K-W test is significant, a post-hoc test can
# be performed here we use Dunn test
# http://rcompanion.org/rcompanion/d\_06.html
```

```
library(FSA)
PT = dunnTest(dati ~ groups)
PT
```

```
##           Comparison           Z      P.unadj      P.adj
## 1 combine - id  1.7719928 7.639575e-02 1.527915e-01
## 2 combine - score -0.3485123 7.274555e-01 7.274555e-01
## 3 id - score -2.1164283 3.430840e-02 1.029252e-01
## 4 combine - simple  9.8786197 5.153790e-23 2.576895e-22
## 5 id - simple  8.3035197 1.010716e-16 4.042864e-16
## 6 score - simple 10.1699055 2.701706e-24 1.621024e-23
```

```
# For receiver for net amount
receive_simple = simple_games[simple_games$Type ==
  1 & simple_games$my_send_proportional >= 0, ]$Contribution
receive_id = id_games[id_games$Type == 1 & id_games$my_send_proportional >=
  0, ]$Contribution
receive_score = score_games[score_games$Type == 1 &
  score_games$my_send_proportional >= 0, ]$Contribution
receive_combine = combine_games[combine_games$Type ==
  1 & combine_games$my_send_proportional >= 0, ]$Contribution
dati = c(receive_simple, receive_id, receive_score,
  receive_combine)
groups = factor(c(rep("simple", length(receive_simple)),
  rep("id", length(receive_id)), rep("score", length(receive_score)),
  rep("combine", length(receive_combine))))
```

```
# test variance homogeneity
bartlett.test(dati, groups)
```

```
##
## Bartlett test of homogeneity of variances
```

```
##
## data:  dati and groups
## Bartlett's K-squared = 65.052, df = 3, p-value = 4.89e-14
fligner.test(dati, groups)

##
##  Fligner-Killeen test of homogeneity of variances
##
## data:  dati and groups
## Fligner-Killeen:med chi-squared = 64.215, df = 3, p-value =
## 7.382e-14
# ANOVA ANOVA answers if four means are equal or
# not
fit = lm(formula = dati ~ groups)

anova(fit)

## Analysis of Variance Table
##
## Response: dati
##           Df Sum Sq Mean Sq F value    Pr(>F)
## groups      3   5550  1850.11   52.442 < 2.2e-16 ***
## Residuals 1239   43711    35.28
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
# TukeyHSD test, to answer which mean is greater
# than which mean
TukeyHSD(aov(fit))

##  Tukey multiple comparisons of means
##    95% family-wise confidence level
##
## Fit: aov(formula = fit)
##
## $groups
##           diff          lwr          upr        p adj
## id-combine   -1.1979528 -2.3796191 -0.0162865 0.0454951
## score-combine -0.4271830 -1.6231118  0.7687458 0.7947613
## simple-combine -5.7025410 -6.9845484 -4.4205336 0.0000000
## score-id       0.7707698 -0.4155213  1.9570609 0.3392931
## simple-id     -4.5045882 -5.7776097 -3.2315667 0.0000000
## simple-score  -5.2753580 -6.5616295 -3.9890866 0.0000000

==> all the tests confirmed that Simple_Game < ID-game ~ score-game ~ combine-game
```

Group effect on game position

```
## [1] "ANOVA analysis with relative sending on GroupID:game_pos"
## [1] "-----*****-----"
## [1] "ANOVA 2-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##          SS num Df Error SS den Df      F      Pr(>F)
## (Intercept)      27.8796      1   2.0236      25 344.4249 3.916e-16 ***
## GroupID          2.0040      4   2.0236      25   6.1893 0.001325 **
## game_setting      0.0789      3   1.7949      75   0.1702 0.914425
## GroupID:game_setting 1.8542     12   1.7949      75   6.4565 9.721e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----"
## [1] "ANOVA analysis with absolute profit on GroupID:game_pos"
## [1] "-----*****-----"
## [1] "ANOVA 2-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##          SS num Df Error SS den Df      F      Pr(>F)
## (Intercept)     270.497      1   73.067      25 92.5503 6.962e-10 ***
## GroupID         29.167      4   73.067      25   2.4949 0.06857 .
## game_setting      3.324      3  123.981      75   0.0570 0.98126
## GroupID:game_setting 233.152     12  123.981      75  11.7534 6.777e-13 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----"
## [1] "ANOVA analysis with absolute response time on GroupID:game_pos"
## [1] "-----*****-----"
## [1] "ANOVA 2-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##          SS num Df Error SS den Df      F      Pr(>F)
## (Intercept)    14746.3      1  1127.14      25 327.0727 7.157e-16 ***
## GroupID         663.6      4  1127.14      25   3.6799 0.017274 *
## game_setting     799.8      3   625.09      75  10.0497 0.001358 **
## GroupID:game_setting 318.3     12   625.09      75   3.1829 0.001029 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----"
## [1] "ANOVA analysis with relative sending on GroupID:game_pos"
## [1] "-----*****-----"
## [1] "ANOVA 2-ways Analysis in wide format for type (with corrected error terms):  Receiver"
##
##          SS num Df Error SS den Df      F      Pr(>F)
## (Intercept)     20.1800      1   2.1185      25 238.1416 2.757e-14 ***
## GroupID          0.1004      4   2.1185      25   0.2961 0.8777
## game_setting      0.0601      3   1.1328      75   0.3243 0.8078
## GroupID:game_setting 0.7415     12   1.1328      75   4.0907 6.819e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----"
## [1] "ANOVA analysis with absolute profit on GroupID:game_pos"
## [1] "-----*****-----"
## [1] "ANOVA 2-ways Analysis in wide format for type (with corrected error terms):  Receiver"
##
##          SS num Df Error SS den Df      F      Pr(>F)
## (Intercept)     7724.6      1  343.58      25 562.076 < 2.2e-16 ***
## GroupID         676.7      4  343.58      25  12.311 1.146e-05 ***
## game_setting      65.0      3  277.93      75   1.292 0.322
## GroupID:game_setting 201.2     12  277.93      75   4.524 1.930e-05 ***
```

```
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----"
## [1] "ANOVA analysis with absolute response time on GroupID:game_pos"
## [1] "-----*****-----"
## [1] "ANOVA 2-ways Analysis in wide format for type (with corrected error terms):  Receiver"
##
```

	SS	num	Df	Error	SS	den	Df	F	Pr(>F)
(Intercept)	27203.7		1	1428.00	25	476.2559		< 2.2e-16	***
GroupID	1249.8		4	1428.00	25	5.4699		0.002640	**
game_setting	2251.1		3	724.48	75	9.5859		0.001651	**
GroupID:game_setting	939.3		12	724.48	75	8.1037		1.658e-09	***

```
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----"
```

Test the effect of groups

In the following code chunk, we will use 'Anova' function, which is the part of 'car' package.

We want to test the effect of TRUST and ID to behavior, and see is there group interaction in the data or not.

We can see that for relative sending, there is no group effect.

```
## [1] "ANOVA analysis with send proportion on GroupID:SHOW_TRUST:SHOW_ID"
## [1] "Type: SENDER"
## [1] "With GroupID"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## GroupID    4  2.004   0.5010   6.189 0.00132 **
## Residuals 25  2.024   0.0809
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST    1  0.4955   0.4955   5.173 0.0853 .
## GroupID:SHOW_TRUST  4  0.3832   0.0958   2.610 0.0597 .
## Residuals      25  0.9177   0.0367
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID      1  0.4132   0.4132  16.828 0.0148 *
## GroupID:SHOW_ID  4  0.0982   0.0246   1.263 0.3106
## Residuals      25  0.4858   0.0194
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID    1  0.3741   0.3741   8.859 0.0409 *
## GroupID:SHOW_TRUST:SHOW_ID  4  0.1689   0.0422   2.698 0.0538 .
## Residuals              25  0.3914   0.0157
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----"
## [1] "-----"
## [1] "Without GroupID"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals 29  4.028   0.1389
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  0.4955   0.4955  11.05 0.00242 **
## Residuals  29  1.3008   0.0449
```

```

## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_ID    1 0.4132  0.4132   20.52 9.36e-05 ***
## Residuals 29 0.5840  0.0201
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST:SHOW_ID 1 0.3741  0.3741   19.36 0.000134 ***
## Residuals          29 0.5603  0.0193
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----"
## [1] "-----"
## [1] "ANOVA analysis on arcsin transformation of send proportion"
## [1] "Without GroupID"
##
## Error: id
##           Df Sum Sq Mean Sq F value    Pr(>F)
## Residuals 29  7.572  0.2611
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST 1 0.9225  0.9225   10.3 0.00323 **
## Residuals 29 2.5962  0.0895
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_ID    1 0.5761  0.5761   15.45 0.000483 ***
## Residuals 29 1.0815  0.0373
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST:SHOW_ID 1 0.5119  0.5119   16.39 0.000351 ***
## Residuals          29 0.9058  0.0312
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "With GroupID"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##           SS num Df Error SS den Df      F
## (Intercept)    35.309      1   3.4882    25 253.0673
## GroupID         4.084      4   3.4882    25  7.3177
## SHOW_TRUST      0.922      1   1.5686    25  3.5906
## GroupID:SHOW_TRUST 1.028      4   1.5686    25  4.0946
## SHOW_ID         0.576      1   0.8915    25 12.1284

```



```

## GroupID:SHOW_ID          0.190      4  0.8915      25  1.3320
## SHOW_TRUST:SHOW_ID       0.512      1  0.6830      25  9.1919
## GroupID:SHOW_TRUST:SHOW_ID 0.223      4  0.6830      25  2.0383
##                               Pr(>F)
## (Intercept)              1.38e-14 ***
## GroupID                   0.0004798 ***
## SHOW_TRUST                 0.1310083
## GroupID:SHOW_TRUST         0.0109383 *
## SHOW_ID                    0.0252926 *
## GroupID:SHOW_ID            0.2856253
## SHOW_TRUST:SHOW_ID         0.0387114 *
## GroupID:SHOW_TRUST:SHOW_ID 0.1195922
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"
## [1] "ANOVA analysis with send proportion on GroupID:SHOW_TRUST:SHOW_ID"
## [1] "Type: RECEIVER"
## [1] "With GroupID"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## GroupID    4 0.1004 0.02509   0.296  0.878
## Residuals 25 2.1185 0.08474
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value  Pr(>F)
## SHOW_TRUST    1 0.2764 0.27640  74.439 0.000992 ***
## GroupID:SHOW_TRUST 4 0.0149 0.00371   0.153 0.959705
## Residuals      25 0.6053 0.02421
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value  Pr(>F)
## SHOW_ID      1 0.2448 0.24476  35.862 0.00391 **
## GroupID:SHOW_ID 4 0.0273 0.00683   0.553 0.69894
## Residuals     25 0.3088 0.01235
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID    1 0.15135 0.15135   6.966 0.0576 .
## GroupID:SHOW_TRUST:SHOW_ID 4 0.08691 0.02173   2.484 0.0695 .
## Residuals              25 0.21871 0.00875
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----"
## [1] "-----"
## [1] "Without GroupID"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals 29  2.219 0.07651

```

```

##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST  1 0.2764 0.27640    12.92 0.00119 **
## Residuals  29 0.6202 0.02139
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_ID    1 0.2448 0.24476    21.12 7.79e-05 ***
## Residuals  29 0.3361 0.01159
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST:SHOW_ID  1 0.1514 0.15135    14.36 0.000706 ***
## Residuals          29 0.3056 0.01054
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----"
## [1] "-----"
## [1] "ANOVA analysis on arcsin transformation of send proportion"
## [1] "Without GroupID"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  29  2.717 0.09369
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST  1  0.316 0.31605    12.5 0.00139 **
## Residuals  29  0.733 0.02528
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_ID    1 0.2766  0.2766    20.49 9.43e-05 ***
## Residuals  29 0.3914  0.0135
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST:SHOW_ID  1 0.1766 0.17659    14.74 0.000617 ***
## Residuals          29 0.3474 0.01198
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "With GroupID"
## [1] "-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##                                     SS num Df Error SS den Df          F

```

```

## (Intercept)                22.3170      1  2.58573    25 215.7706
## GroupID                    0.1313      4  2.58573    25  0.3175
## SHOW_TRUST                 0.3160      1  0.71785    25 83.5416
## GroupID:SHOW_TRUST         0.0151      4  0.71785    25  0.1318
## SHOW_ID                    0.2766      1  0.35903    25 34.1342
## GroupID:SHOW_ID            0.0324      4  0.35903    25  0.5643
## SHOW_TRUST:SHOW_ID         0.1766      1  0.24621    25  6.9829
## GroupID:SHOW_TRUST:SHOW_ID 0.1012      4  0.24621    25  2.5678
##                               Pr(>F)
## (Intercept)                8.41e-14 ***
## GroupID                    0.8635589
## SHOW_TRUST                 0.0007952 ***
## GroupID:SHOW_TRUST         0.9692902
## SHOW_ID                    0.0042793 **
## GroupID:SHOW_ID            0.6907771
## SHOW_TRUST:SHOW_ID         0.0574293 .
## GroupID:SHOW_TRUST:SHOW_ID 0.0628111 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"

```

Summary by information showed to users

```

##      Row.names RelSender RelReceiver ProfitSender ProfitReceiver
## 1 Without Trust 0.4153333  0.3512745      0.576      7.730667
## 2   With Trust 0.5370667  0.4762693      2.384      8.357333
## 3 Without ID 0.4145333  0.3688137      0.748      7.542667
## 4   With ID 0.5378667  0.4587301      2.212      8.545333

```

```
## Group effect on game_setting
```

Date: Sat 10-Jun-2017 Here, we create a new variable called game_setting which runs from 1 to 4 correspond to 4 games.

```
## [1] "ANOVA analysis with sending proportion on GroupID:game_setting."
## [1] "Type:  SENDER"
## [1] "-----*****-----"
## [1] "ANOVA 2-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##          SS num Df Error SS den Df          F      Pr(>F)
## (Intercept)      27.8796      1   2.0236      25 344.4249 3.916e-16 ***
## GroupID          2.0040      4   2.0236      25   6.1893 0.001325 **
## game_setting      1.2828      3   1.7949      75   7.8905 0.003584 **
## GroupID:game_setting 0.6503     12   1.7949      75   2.2644 0.016456 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----"
## [1] "ANOVA analysis with sending proportion on GroupID:game_setting."
## [1] "Type:  RECEIVER"
## [1] "-----*****-----"
## [1] "ANOVA 2-ways Analysis in wide format for type (with corrected error terms):  Receiver"
##
##          SS num Df Error SS den Df          F      Pr(>F)
## (Intercept)      20.1800      1   2.1185      25 238.1416 2.757e-14 ***
## GroupID          0.1004      4   2.1185      25   0.2961   0.8777
## game_setting      0.6725      3   1.1328      75  20.8428 4.744e-05 ***
## GroupID:game_setting 0.1291     12   1.1328      75   0.7121   0.7351
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----"
```

Analyze the effect on each group

We want to see effect of TRUST and ID on each group (above is for all groups). Because of the less power, we cannot expect the same significant level as whole data, but the effect are similar between groups.

Because there is only group interaction on Profit of GroupID:SHOW_TRUST:SHOW_ID, so we only analyze the Profit of each group.

```
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group:  1  for type:  SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  14.18   2.835
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  19.00  18.998   3.995  0.102
## Residuals   5   23.78   4.756
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID     1   5.396   5.396   2.555  0.171
## Residuals   5  10.562   2.112
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1   6.917   6.917   6.37  0.0529 .
## Residuals           5   5.429   1.086
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##           Without Trust With Trust
## 1 Without ID    -0.6150072   2.238112
## 2   With ID     1.4070166   2.112747
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group:  2  for type:  SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  28.47   5.694
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  1.6473   1.6473  11.62  0.0191 *
## Residuals   5  0.7085   0.1417
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID     1  32.95  32.95  15.38  0.0112 *
## Residuals   5  10.71   2.14
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
```

```

## SHOW_TRUST:SHOW_ID  1 13.236  13.236   11.38 0.0198 *
## Residuals           5  5.816   1.163
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##           Without Trust With Trust
## 1 Without ID      -0.7637529   1.245500
## 2   With ID       3.0649558   2.103641
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group:  3  for type:  SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  17.37   3.473
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value  Pr(>F)
## SHOW_TRUST  1  54.97   54.97   33.86 0.00212 **
## Residuals   5   8.12    1.62
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value  Pr(>F)
## SHOW_ID    1  27.465   27.465   33.87 0.00212 **
## Residuals   5   4.055    0.811
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1  16.55   16.550   6.452 0.0519 .
## Residuals           5  12.82   2.565
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
##           Without Trust With Trust
## 1 Without ID      -1.526897   3.160656
## 2   With ID       2.273431   3.639355
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group:  4  for type:  SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5   6.738   1.348
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  14.886   14.886   11.74 0.0187 *
## Residuals   5   6.341    1.268
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value  Pr(>F)
## SHOW_ID    1   8.245    8.245   18.64 0.00759 **
## Residuals   5   2.212    0.442
## ---

```

```

## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1  4.641    4.641    6.111 0.0564 .
## Residuals          5  3.797    0.759
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##           Without Trust With Trust
## 1 Without ID      0.3579004    2.812525
## 2   With ID      2.4096348    3.105261
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group:  5  for type:  SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  6.317    1.263
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  24.16   24.158   11.52 0.0194 *
## Residuals   5  10.48    2.096
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID    1   1.11    1.110    0.341  0.585
## Residuals  5  16.27    3.254
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1  5.310    5.310    9.228 0.0288 *
## Residuals          5  2.877    0.575
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##           Without Trust With Trust
## 1 Without ID     -0.9380342    2.009236
## 2   With ID      0.4327228    1.498575
## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group:  1  for type:  SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  58.13   11.63
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  0.287    0.2872    0.139  0.724
## Residuals   5 10.300    2.0601
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID    1  11.50   11.502    3.364  0.126
## Residuals  5  17.09    3.419
##

```

```

## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID 1  54.05   54.05   15.29 0.0113 *
## Residuals          5  17.67    3.53
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group: 2 for type: SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  642.8   128.6
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  145.3   145.28   9.336 0.0282 *
## Residuals   5   77.8    15.56
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID     1 114.10   114.10   21.25 0.00579 **
## Residuals   5  26.84    5.37
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID 1  19.77   19.77   0.965 0.371
## Residuals          5 102.38   20.48
## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group: 3 for type: SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5   40.6    8.121
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1   4.039   4.039   1.544 0.269
## Residuals   5 13.082   2.616
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID     1  27.33   27.329   10.38 0.0234 *
## Residuals   5  13.17    2.634
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID 1 13.021   13.021   11.6 0.0191 *
## Residuals          5   5.615    1.123
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```



```

## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group: 4 for type: SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  259.2   51.83
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1   57.18   57.18   3.354  0.127
## Residuals   5   85.24   17.05
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID     1    0.02    0.015   0.001  0.973
## Residuals   5   60.78   12.156
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1  36.62   36.62   3.308  0.129
## Residuals           5  55.35   11.07
## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group: 5 for type: SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  126.5    25.3
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  167.4  167.37  18.15 0.00801 **
## Residuals   5   46.1    9.22
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID     1 296.23  296.23  24.84 0.00416 **
## Residuals   5  59.64   11.93
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1 171.35  171.3   25.18 0.00404 **
## Residuals           5  34.02    6.8
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group: 1 for type: RECEIVER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5   46.6    9.32
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)

```

```

## SHOW_TRUST 1 1.09 1.092 0.123 0.74
## Residuals 5 44.36 8.872
##
## Error: id:SHOW_ID
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID 1 10.33 10.332 2.119 0.205
## Residuals 5 24.38 4.876
##
## Error: id:SHOW_TRUST:SHOW_ID
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID 1 97.34 97.34 30.93 0.00258 **
## Residuals 5 15.73 3.15
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## Without Trust With Trust
## 1 Without ID 2.754401 7.20873
## 2 With ID 8.094452 4.49323
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group: 2 for type: RECEIVER"
##
## Error: id
## Df Sum Sq Mean Sq F value Pr(>F)
## Residuals 5 36.06 7.212
##
## Error: id:SHOW_TRUST
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 2.793 2.793 1.045 0.354
## Residuals 5 13.363 2.673
##
## Error: id:SHOW_ID
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID 1 7.637 7.637 1.791 0.238
## Residuals 5 21.316 4.263
##
## Error: id:SHOW_TRUST:SHOW_ID
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID 1 0.5754 0.5754 1.199 0.323
## Residuals 5 2.3990 0.4798
## Without Trust With Trust
## 1 Without ID 4.763095 5.755056
## 2 With ID 6.200974 6.573557
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group: 3 for type: RECEIVER"
##
## Error: id
## Df Sum Sq Mean Sq F value Pr(>F)
## Residuals 5 210.2 42.05
##
## Error: id:SHOW_TRUST
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 92.87 92.87 50.59 0.000852 ***
## Residuals 5 9.18 1.84
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID

```

```

##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID    1  6.542    6.542    1.319  0.303
## Residuals   5 24.793    4.959
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1  1.546    1.546    0.315  0.599
## Residuals           5 24.529    4.906
##           Without Trust With Trust
## 1 Without ID        9.349393   13.79120
## 2   With ID       10.901195   14.32778
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group:  4  for type:  RECEIVER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals   5  12.01    2.401
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1   0.01    0.010    0.003  0.96
## Residuals   5  18.36    3.672
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID    1  7.496    7.496    6.631 0.0497 *
## Residuals   5  5.652    1.130
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1  11.44   11.444    4.092  0.099 .
## Residuals           5  13.98    2.797
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##           Without Trust With Trust
## 1 Without ID        7.751158    9.090500
## 2   With ID       10.250000    8.827165
## [1] "Analyze Profit of SHOW_TRUST and SHOW_ID interaction on Group:  5  for type:  RECEIVER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals   5  38.67    7.734
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  15.72   15.719    2.044  0.212
## Residuals   5  38.46    7.692
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID    1   0.018    0.0182    0.017  0.901
## Residuals   5   5.314    1.0628
##

```

```

## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID 1 10.75 10.749 3.335 0.127
## Residuals      5 16.12 3.223
##           Without Trust With Trust
## 1 Without ID      9.034127 6.077068
## 2 With ID         7.750722 7.470557
## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group: 1 for type: RECEIVER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals 5 47.49 9.498
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 3.589 3.589 1.68 0.252
## Residuals 5 10.679 2.136
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID 1 45.46 45.46 5.661 0.0632 .
## Residuals 5 40.15 8.03
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID 1 152.80 152.80 14.53 0.0125 *
## Residuals      5 52.59 10.52
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group: 2 for type: RECEIVER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals 5 777.3 155.5
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 731.2 731.2 55.27 0.000694 ***
## Residuals 5 66.2 13.2
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID 1 77.27 77.27 12.17 0.0175 *
## Residuals 5 31.75 6.35
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID 1 324.6 324.6 64.47 0.000485 ***

```

```

## Residuals          5    25.2    5.0
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group:  3  for type:  RECEIVER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  67.43   13.49
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  4.191    4.191   2.488  0.176
## Residuals   5  8.421    1.684
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value  Pr(>F)
## SHOW_ID     1  81.37   81.37   17.68 0.00845 **
## Residuals   5  23.02    4.60
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST:SHOW_ID  1  50.31   50.31   55.88 0.000677 ***
## Residuals          5   4.50    0.90
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group:  4  for type:  RECEIVER"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  380.9   76.19
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST  1 295.82  295.82   83.05 0.000266 ***
## Residuals   5  17.81    3.56
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID     1   0.21    0.21   0.005  0.947
## Residuals   5 211.87   42.37
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1  113.7  113.71   4.913 0.0775 .
## Residuals          5  115.7   23.14
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze response time of SHOW_TRUST and SHOW_ID interaction on Group:  5  for type:  RECEIVER"
##
## Error: id

```

```

##           Df Sum Sq Mean Sq F value Pr(>F)
## Residuals  5  154.8   30.96
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST  1 262.90  262.90   80.91 0.000283 ***
## Residuals   5   16.25    3.25
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_ID     1  529.2   529.2   70.55 0.000392 ***
## Residuals   5   37.5    7.5
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST:SHOW_ID  1  517.9   517.9   41.17 0.00136 **
## Residuals           5   62.9   12.6
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

Test the regression of sending behavior on different pieces of information

In the above section, we consider all games in a same kind as a whole. In this section, we want to see how each person behave in different kinds of situation.

First, we define four empty data frames for 4 kinds of game.

The new variable 'peak_end_trust' is used for calculate "peak end effect", which basically said that the feeling about a repeated event is average of maximum feeling so far and the last feeling the subject have with this event.

Then again we run through the whole data and load the game to corresponding dataframes.

After that, we applied the analysis on each individual game.

```
## [1] "Linear regression of relative sending on trust value of Simple Game for type:  SENDER"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value, data = df_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.16900 -0.03798 -0.02209  0.04528  0.18161
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.2611     0.0614  -4.253 0.000226 ***
## trust_value     0.2562     0.1554   1.649 0.110772
## my_trust_value  1.4889     0.1163  12.801 5.57e-13 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08502 on 27 degrees of freedom
## Multiple R-squared:  0.8644, Adjusted R-squared:  0.8543
## F-statistic: 86.03 on 2 and 27 DF,  p-value: 1.936e-12
##
## [1] "Linear regression of relative sending on trust value of ID Game for type:  SENDER"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value, data = df_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.17997 -0.08236  0.01791  0.04621  0.24022
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.3679     0.1688  -2.179  0.0382 *
## trust_value     0.5488     0.3173   1.730  0.0951 .
## my_trust_value  1.4517     0.1559   9.311 6.41e-10 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1014 on 27 degrees of freedom
## Multiple R-squared:  0.7634, Adjusted R-squared:  0.7459
## F-statistic: 43.57 on 2 and 27 DF,  p-value: 3.533e-09
```

```
##
## [1] "Linear regression of relative sending on trust value of Score Game for type:  SENDER"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value, data = df_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.210241 -0.056944  0.009976  0.061286  0.128565
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.6727     0.0893  -7.533 4.20e-08 ***
## trust_value     1.3192     0.2320   5.686 4.85e-06 ***
## my_trust_value  1.3565     0.1843   7.360 6.45e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08596 on 27 degrees of freedom
## Multiple R-squared:  0.8879, Adjusted R-squared:  0.8796
## F-statistic: 106.9 on 2 and 27 DF,  p-value: 1.481e-13
##
## [1] "Linear regression of relative sending on trust value of Combine Game for type:  SENDER"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value, data = df_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.150939 -0.044539  0.002393  0.038702  0.198586
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.6266     0.0851  -7.364 6.39e-08 ***
## trust_value     1.0693     0.2279   4.692 6.96e-05 ***
## my_trust_value  1.4954     0.1795   8.332 6.10e-09 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08923 on 27 degrees of freedom
## Multiple R-squared:  0.8966, Adjusted R-squared:  0.889
## F-statistic: 117.1 on 2 and 27 DF,  p-value: 4.938e-14
##
## [1] "Linear regression of relative sending on trust value of Simple Game for type:  RECEIVER"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value, data = df_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.21929 -0.10059  0.00804  0.06272  0.39919
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
```



```

## (Intercept)      0.2112      0.1187    1.780    0.0864 .
## trust_value     -0.8357      0.3103   -2.693    0.0120 *
## my_trust_value    1.0568      0.1676    6.304 9.54e-07 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1354 on 27 degrees of freedom
## Multiple R-squared:  0.6397, Adjusted R-squared:  0.613
## F-statistic: 23.97 on 2 and 27 DF,  p-value: 1.036e-06
##
## [1] "-----"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value + AbsPartnerSend,
##     data = df_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.20487 -0.09520 -0.00004  0.07722  0.38307
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.11234    0.15590   0.721   0.478
## trust_value   -0.23317    0.68953  -0.338   0.738
## my_trust_value  1.11924    0.17951   6.235 1.35e-06 ***
## AbsPartnerSend -0.03873    0.03957  -0.979   0.337
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1355 on 26 degrees of freedom
## Multiple R-squared:  0.6525, Adjusted R-squared:  0.6124
## F-statistic: 16.27 on 3 and 26 DF,  p-value: 3.714e-06
##
## [1] "-----"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + AbsPartnerSend, data = df_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.19912 -0.10103 -0.00098  0.07989  0.38361
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.06621    0.07424   0.892  0.38036
## my_trust_value  1.13920    0.16673   6.833 2.44e-07 ***
## AbsPartnerSend -0.05067    0.01752  -2.892  0.00748 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1333 on 27 degrees of freedom
## Multiple R-squared:  0.6509, Adjusted R-squared:  0.6251
## F-statistic: 25.18 on 2 and 27 DF,  p-value: 6.748e-07
##

```

```

## [1] "Linear regression of relative sending on trust value of ID Game for type: RECEIVER"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value, data = df_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.20288 -0.05319 -0.01134  0.06952  0.21452
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.078318   0.157743  -0.496   0.624
## trust_value   -0.002079   0.323062  -0.006   0.995
## my_trust_value  1.145081   0.138444   8.271 7.04e-09 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.09207 on 27 degrees of freedom
## Multiple R-squared:  0.717, Adjusted R-squared:  0.6961
## F-statistic: 34.21 on 2 and 27 DF, p-value: 3.969e-08
##
## [1] "-----"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value + AbsPartnerSend,
##     data = df_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.17328 -0.05515 -0.01478  0.04954  0.20256
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.19742   0.16151  -1.222   0.2325
## trust_value    0.52466   0.40635   1.291   0.2080
## my_trust_value  1.29730   0.15239   8.513 5.41e-09 ***
## AbsPartnerSend -0.03517   0.01778  -1.978   0.0586 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08747 on 26 degrees of freedom
## Multiple R-squared:  0.754, Adjusted R-squared:  0.7257
## F-statistic: 26.57 on 3 and 26 DF, p-value: 4.433e-08
##
## [1] "-----"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + AbsPartnerSend, data = df_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.18040 -0.06471 -0.01187  0.05895  0.20211
##
## Coefficients:

```

```

##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.01343    0.07695  -0.175    0.863
## my_trust_value 1.23312    0.14582   8.456 4.55e-09 ***
## AbsPartnerSend -0.02012    0.01359  -1.480    0.150
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08855 on 27 degrees of freedom
## Multiple R-squared:  0.7383, Adjusted R-squared:  0.7189
## F-statistic: 38.08 on 2 and 27 DF,  p-value: 1.384e-08
##
## [1] "Linear regression of relative sending on trust value of Score Game for type: RECEIVER"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value, data = df_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.280109 -0.051707  0.002227  0.056455  0.201905
##
## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.2574    0.1374   1.873   0.0720 .
## trust_value    -0.7084    0.3553  -1.994   0.0564 .
## my_trust_value  1.1133    0.1968   5.656 5.26e-06 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1149 on 27 degrees of freedom
## Multiple R-squared:  0.5491, Adjusted R-squared:  0.5157
## F-statistic: 16.44 on 2 and 27 DF,  p-value: 2.137e-05
##
## [1] "-----"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value + AbsPartnerSend,
##     data = df_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.251584 -0.060449 -0.008884  0.054348  0.239598
##
## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.01454    0.20506   0.071   0.944
## trust_value    -0.07442    0.53315  -0.140   0.890
## my_trust_value  1.49678    0.31135   4.807 5.59e-05 ***
## AbsPartnerSend -0.03995    0.02555  -1.564   0.130
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1119 on 26 degrees of freedom
## Multiple R-squared:  0.5879, Adjusted R-squared:  0.5403
## F-statistic: 12.36 on 3 and 26 DF,  p-value: 3.252e-05

```

```

##
## [1] "-----"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + AbsPartnerSend, data = df_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.250120 -0.061284 -0.008514  0.055041  0.240287
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.01182    0.07835   -0.151   0.8812
## my_trust_value  1.51418    0.28009   5.406 1.02e-05 ***
## AbsPartnerSend -0.04267    0.01629  -2.619   0.0143 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1099 on 27 degrees of freedom
## Multiple R-squared:  0.5876, Adjusted R-squared:  0.557
## F-statistic: 19.23 on 2 and 27 DF,  p-value: 6.415e-06
##
## [1] "Linear regression of relative sending on trust value of Combine Game for type: RECEIVER"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value, data = df_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.16794 -0.05460 -0.02329  0.07147  0.17540
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.40295    0.09903   4.069 0.000369 ***
## trust_value   -0.70284    0.28055  -2.505 0.018572 *
## my_trust_value  0.82204    0.16628   4.944 3.54e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.09873 on 27 degrees of freedom
## Multiple R-squared:  0.4815, Adjusted R-squared:  0.4431
## F-statistic: 12.54 on 2 and 27 DF,  p-value: 0.000141
##
## [1] "-----"
##
## Call:
## lm(formula = RelSend ~ trust_value + my_trust_value + AbsPartnerSend,
##     data = df_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.18671 -0.06514 -0.01169  0.07493  0.15791
##
## Coefficients:

```

```

##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.30593    0.18356   1.667 0.107599
## trust_value   -0.37417    0.59335  -0.631 0.533803
## my_trust_value  0.91062    0.21910   4.156 0.000311 ***
## AbsPartnerSend -0.01687    0.02674  -0.631 0.533744
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.09985 on 26 degrees of freedom
## Multiple R-squared:  0.4893, Adjusted R-squared:  0.4304
## F-statistic: 8.303 on 3 and 26 DF,  p-value: 0.0004876
##
## [1] "-----"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + AbsPartnerSend, data = df_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.204412 -0.063405  0.007548  0.073628  0.155424
##
## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.19722    0.06236   3.162 0.00384 **
## my_trust_value  0.95641    0.20441   4.679 7.22e-05 ***
## AbsPartnerSend -0.03168    0.01265  -2.505 0.01857 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.09873 on 27 degrees of freedom
## Multiple R-squared:  0.4815, Adjusted R-squared:  0.4431
## F-statistic: 12.54 on 2 and 27 DF,  p-value: 0.000141

```

Group effect analysis with group and round number as between variables

Date: 2-Jun-2017

```
## [1] "Analyze SENDER"
##
## Error: id
##
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 1.40 1.395 0.395 0.544
## SHOW_ID 1 0.50 0.505 0.143 0.713
## round_number 4 5.75 1.437 0.407 0.800
## SHOW_TRUST:SHOW_ID 1 0.10 0.101 0.029 0.869
## SHOW_TRUST:round_number 4 1.47 0.368 0.104 0.978
## SHOW_ID:round_number 4 0.76 0.190 0.054 0.994
## SHOW_TRUST:SHOW_ID:round_number 4 7.52 1.879 0.532 0.716
## Residuals 10 35.33 3.533
##
## Error: SHOW_ID
## Df Sum Sq Mean Sq
## SHOW_TRUST 1 5.361 5.361
##
## Error: round_number
## Df Sum Sq Mean Sq
## SHOW_TRUST 1 0.3649 0.3649
## round_number 3 0.5964 0.1988
##
## Error: id:SHOW_ID
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 0.359 0.3590 1.324 0.268
## SHOW_TRUST:SHOW_ID 1 0.052 0.0523 0.193 0.667
## SHOW_TRUST:round_number 4 0.727 0.1817 0.670 0.623
## SHOW_ID:round_number 4 0.217 0.0542 0.200 0.935
## SHOW_TRUST:SHOW_ID:round_number 4 1.903 0.4757 1.754 0.191
## Residuals 15 4.068 0.2712
##
## Error: id:round_number
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 0.080 0.0803 0.808 0.3708
## SHOW_TRUST:SHOW_ID 1 0.440 0.4400 4.430 0.0378 *
## SHOW_TRUST:round_number 4 0.264 0.0660 0.665 0.6180
## SHOW_ID:round_number 4 0.670 0.1675 1.687 0.1588
## SHOW_TRUST:SHOW_ID:round_number 4 0.101 0.0253 0.254 0.9064
## Residuals 102 10.129 0.0993
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: SHOW_ID:round_number
## Df Sum Sq Mean Sq
## SHOW_TRUST 1 0.0886 0.0886
## SHOW_TRUST:SHOW_ID 1 0.0275 0.0275
## SHOW_TRUST:round_number 2 0.6357 0.3178
##
## Error: id:GroupID:SHOW_TRUST
## Df Sum Sq Mean Sq F value Pr(>F)
```

```

## SHOW_TRUST          1  5.841    5.841    9.329 0.00626 **
## SHOW_TRUST:SHOW_ID   1  0.004    0.004    0.006 0.93990
## SHOW_TRUST:round_number 4  2.283    0.571    0.911 0.47634
## SHOW_TRUST:SHOW_ID:round_number 4  0.217    0.054    0.087 0.98562
## Residuals          20 12.523    0.626
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID:round_number
##
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1  0.003  0.00322    0.055  0.815
## SHOW_TRUST:round_number  4  0.205  0.05126    0.876  0.481
## SHOW_TRUST:SHOW_ID:round_number 4  0.073  0.01824    0.311  0.870
## Residuals             107  6.264  0.05854
##
## Error: id:GroupID:SHOW_TRUST:SHOW_ID
##
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1  4.094   4.094 16.809 0.000512 ***
## SHOW_TRUST:round_number  4  0.296   0.074   0.304 0.871920
## SHOW_TRUST:SHOW_ID:round_number 4  0.917   0.229   0.942 0.459361
## Residuals             21  5.115   0.244
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:GroupID:SHOW_TRUST:round_number
##
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:round_number  4  1.227  0.30663   4.384 0.00249 **
## SHOW_TRUST:SHOW_ID:round_number 4  0.127  0.03171   0.453 0.76968
## Residuals             112  7.833  0.06994
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:GroupID:SHOW_TRUST:SHOW_ID:round_number
##
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID:round_number 4  0.731  0.18265   1.846  0.126
## Residuals             101  9.993  0.09894
##
## Error: Within
##
## Df Sum Sq Mean Sq F value Pr(>F)
## Residuals 915  58.76  0.06422
## [1] "Analyze RECEIVER"
##
## Error: id
##
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST          1  6.192   6.192 12.341 0.0056 **
## SHOW_ID              1  0.058   0.058   0.116 0.7402
## round_number         4  2.178   0.545   1.085 0.4144
## SHOW_TRUST:SHOW_ID    1  0.731   0.731   1.457 0.2552
## SHOW_TRUST:round_number 4  0.813   0.203   0.405 0.8012
## SHOW_ID:round_number  4  2.950   0.738   1.470 0.2824
## SHOW_TRUST:SHOW_ID:round_number 4  3.935   0.984   1.961 0.1768
## Residuals          10  5.018   0.502
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

```

##
## Error: SHOW_ID
##           Df Sum Sq Mean Sq
## SHOW_TRUST 1  1.885    1.885
##
## Error: round_number
##           Df Sum Sq Mean Sq
## SHOW_TRUST  1 0.00122 0.00122
## round_number 3 0.19468 0.06489
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1 0.0852 0.08516   0.602  0.450
## SHOW_TRUST:SHOW_ID  1 0.0001 0.00010   0.001  0.979
## SHOW_TRUST:round_number  4 0.3215 0.08037   0.568  0.690
## SHOW_ID:round_number  4 0.3699 0.09247   0.654  0.633
## SHOW_TRUST:SHOW_ID:round_number  4 0.1621 0.04054   0.287  0.882
## Residuals      15 2.1211 0.14140
##
## Error: id:round_number
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1  0.246 0.24590   7.499 0.00729 **
## SHOW_TRUST:SHOW_ID  1  0.189 0.18875   5.756 0.01825 *
## SHOW_TRUST:round_number  4  0.310 0.07760   2.367 0.05769 .
## SHOW_ID:round_number  4  0.174 0.04362   1.330 0.26385
## SHOW_TRUST:SHOW_ID:round_number  4  0.143 0.03569   1.088 0.36638
## Residuals      102 3.345 0.03279
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: SHOW_ID:round_number
##           Df Sum Sq Mean Sq
## SHOW_TRUST  1 0.12037 0.12037
## SHOW_TRUST:SHOW_ID  1 0.00391 0.00391
## SHOW_TRUST:round_number  2 0.00040 0.00020
##
## Error: id:GroupID:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1 2.4551 2.4551 24.107 8.46e-05 ***
## SHOW_TRUST:SHOW_ID  1 0.0456 0.0456  0.448  0.5109
## SHOW_TRUST:round_number  4 1.2937 0.3234  3.176  0.0357 *
## SHOW_TRUST:SHOW_ID:round_number  4 0.5540 0.1385  1.360  0.2830
## Residuals      20 2.0368 0.1018
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID:round_number
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1  0.036 0.03598  0.893  0.347
## SHOW_TRUST:round_number  4  0.053 0.01333  0.331  0.857
## SHOW_TRUST:SHOW_ID:round_number  4  0.050 0.01257  0.312  0.869
## Residuals      106 4.272 0.04030
##
## Error: id:GroupID:SHOW_TRUST:SHOW_ID

```



```

##                                Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID            1 1.6608  1.6608  22.142 0.00012 ***
## SHOW_TRUST:round_number       4 0.7022  0.1756   2.340 0.08830 .
## SHOW_TRUST:SHOW_ID:round_number 4 0.1656  0.0414   0.552 0.69969
## Residuals                     21 1.5751  0.0750
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:GroupID:SHOW_TRUST:round_number
##                                Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:round_number       4 0.033 0.00837   0.202 0.937
## SHOW_TRUST:SHOW_ID:round_number 4 0.140 0.03500   0.846 0.499
## Residuals                     105 4.345 0.04138
##
## Error: id:GroupID:SHOW_TRUST:SHOW_ID:round_number
##                                Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID:round_number 4 0.173 0.04325   1.253 0.296
## Residuals                      80 2.763 0.03453
##
## Error: Within
##                                Df Sum Sq Mean Sq F value Pr(>F)
## Residuals 687 19.53 0.02843

```

Group effect analysis with group and round number as between variables

However, we keep only first 2 rounds in each roles

Date: 12-Jun-2017

```
## [1] "Analyze SENDER"
##
## Error: id
##
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 0.005 0.005 0.002 0.961
## SHOW_ID 1 3.572 3.572 1.722 0.219
## round_number 4 3.311 0.828 0.399 0.805
## SHOW_TRUST:SHOW_ID 1 1.080 1.080 0.521 0.487
## SHOW_TRUST:round_number 4 2.718 0.679 0.328 0.853
## SHOW_ID:round_number 4 3.974 0.994 0.479 0.751
## SHOW_TRUST:SHOW_ID:round_number 4 2.990 0.748 0.360 0.831
## Residuals 10 20.744 2.074
##
## Error: SHOW_ID
## Df Sum Sq Mean Sq
## SHOW_TRUST 1 3.298 3.298
##
## Error: round_number
## Df Sum Sq Mean Sq
## SHOW_TRUST 1 0.0496 0.0496
## round_number 3 0.9846 0.3282
##
## Error: id:SHOW_ID
##
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 0.047 0.0471 0.195 0.665
## SHOW_TRUST:SHOW_ID 1 0.062 0.0620 0.256 0.620
## SHOW_TRUST:round_number 4 0.169 0.0423 0.175 0.948
## SHOW_ID:round_number 4 0.239 0.0598 0.247 0.907
## SHOW_TRUST:SHOW_ID:round_number 4 1.500 0.3750 1.550 0.239
## Residuals 15 3.630 0.2420
##
## Error: id:round_number
##
## Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST 1 0.156 0.1559 1.582 0.2115
## SHOW_TRUST:SHOW_ID 1 0.401 0.4009 4.069 0.0464 *
## SHOW_TRUST:round_number 4 0.788 0.1971 2.000 0.1005
## SHOW_ID:round_number 4 0.541 0.1352 1.373 0.2491
## SHOW_TRUST:SHOW_ID:round_number 4 0.326 0.0815 0.828 0.5108
## Residuals 97 9.557 0.0985
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: SHOW_ID:round_number
## Df Sum Sq Mean Sq
## SHOW_TRUST 1 0.0398 0.03975
## SHOW_TRUST:SHOW_ID 1 0.2562 0.25618
## SHOW_TRUST:round_number 2 0.3463 0.17316
##
## Error: id:GroupID:SHOW_TRUST
```

```

##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST      1  2.389   2.3892   5.825 0.0255 *
## SHOW_TRUST:SHOW_ID      1  0.241   0.2412   0.588 0.4522
## SHOW_TRUST:round_number      4  1.049   0.2622   0.639 0.6406
## SHOW_TRUST:SHOW_ID:round_number      4  2.202   0.5505   1.342 0.2890
## Residuals      20  8.203   0.4101
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID:round_number
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1  0.275   0.27540   4.702 0.0326 *
## SHOW_TRUST:round_number      4  0.507   0.12668   2.163 0.0789 .
## SHOW_TRUST:SHOW_ID:round_number      4  0.266   0.06650   1.135 0.3445
## Residuals      97  5.681   0.05857
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:GroupID:SHOW_TRUST:SHOW_ID
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1  1.877   1.8767   6.640 0.0176 *
## SHOW_TRUST:round_number      4  0.072   0.0179   0.063 0.9920
## SHOW_TRUST:SHOW_ID:round_number      4  0.232   0.0580   0.205 0.9326
## Residuals      21  5.935   0.2826
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:GroupID:SHOW_TRUST:round_number
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:round_number      4  0.666   0.16657   2.081 0.0891 .
## SHOW_TRUST:SHOW_ID:round_number      4  0.319   0.07983   0.997 0.4129
## Residuals      97  7.764   0.08005
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:GroupID:SHOW_TRUST:SHOW_ID:round_number
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID:round_number      4  0.609   0.15237   1.821 0.135
## Residuals      66  5.524   0.08369
##
## Error: Within
##              Df Sum Sq Mean Sq F value Pr(>F)
## Residuals 540  29.27  0.0542
## [1] "Analyze RECEIVER"
##
## Error: id
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST      1  4.313   4.313  15.379 0.00286 **
## SHOW_ID          1  0.169   0.169   0.602 0.45588
## round_number      4  1.707   0.427   1.522 0.26840
## SHOW_TRUST:SHOW_ID      1  1.135   1.135   4.045 0.07203 .
## SHOW_TRUST:round_number      4  2.172   0.543   1.936 0.18086
## SHOW_ID:round_number      4  1.166   0.291   1.039 0.43404
## SHOW_TRUST:SHOW_ID:round_number      4  2.866   0.716   2.555 0.10440

```

```

## Residuals                10  2.805   0.280
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: SHOW_ID
##           Df Sum Sq Mean Sq
## SHOW_TRUST 1  1.595   1.595
##
## Error: round_number
##           Df Sum Sq Mean Sq
## SHOW_TRUST  1 0.0038 0.00377
## round_number 3 0.3988 0.13294
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST  1 0.0750 0.07504   0.830  0.377
## SHOW_TRUST:SHOW_ID  1 0.0263 0.02626   0.290  0.598
## SHOW_TRUST:round_number  4 0.4343 0.10859   1.201  0.351
## SHOW_ID:round_number  4 0.3721 0.09301   1.029  0.424
## SHOW_TRUST:SHOW_ID:round_number  4 0.4084 0.10209   1.129  0.380
## Residuals        15 1.3564 0.09043
##
## Error: id:round_number
##           Df Sum Sq Mean Sq F value  Pr(>F)
## SHOW_TRUST  1  0.103  0.1034   2.434 0.12183
## SHOW_TRUST:SHOW_ID  1  0.422  0.4218  9.930 0.00213 **
## SHOW_TRUST:round_number  4  0.227  0.0567  1.334 0.26233
## SHOW_ID:round_number  4  0.078  0.0194  0.457 0.76709
## SHOW_TRUST:SHOW_ID:round_number  4  0.088  0.0219  0.516 0.72376
## Residuals        102 4.333  0.0425
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: SHOW_ID:round_number
##           Df Sum Sq Mean Sq
## SHOW_TRUST  1 0.05270 0.05270
## SHOW_TRUST:SHOW_ID  1 0.00013 0.00013
## SHOW_TRUST:round_number  2 0.03535 0.01768
##
## Error: id:GroupID:SHOW_TRUST
##           Df Sum Sq Mean Sq F value  Pr(>F)
## SHOW_TRUST  1 1.9292  1.9292 18.362 0.000361 ***
## SHOW_TRUST:SHOW_ID  1 0.0562  0.0562  0.535 0.472847
## SHOW_TRUST:round_number  4 0.3494  0.0874  0.831 0.520943
## SHOW_TRUST:SHOW_ID:round_number  4 0.5875  0.1469  1.398 0.270664
## Residuals        20 2.1013  0.1051
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID:round_number
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID  1  0.040 0.03987   1.062  0.305
## SHOW_TRUST:round_number  4  0.054 0.01345   0.358  0.838
## SHOW_TRUST:SHOW_ID:round_number  4  0.099 0.02466   0.657  0.623

```

```

## Residuals          91  3.416 0.03753
##
## Error: id:GroupID:SHOW_TRUST:SHOW_ID
##               Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST:SHOW_ID      1  1.2704   1.2704   15.718 0.000707 ***
## SHOW_TRUST:round_number  4  0.1561   0.0390    0.483 0.747990
## SHOW_TRUST:SHOW_ID:round_number  4  0.1240   0.0310    0.384 0.817785
## Residuals             21  1.6973   0.0808
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:GroupID:SHOW_TRUST:round_number
##               Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST:round_number  4  0.074 0.01862    0.397  0.81
## SHOW_TRUST:SHOW_ID:round_number  4  0.335 0.08368    1.783  0.14
## Residuals             84  3.941 0.04692
##
## Error: id:GroupID:SHOW_TRUST:SHOW_ID:round_number
##               Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST:SHOW_ID:round_number  3  0.0982 0.03272    1.408  0.254
## Residuals             42  0.9762 0.02324
##
## Error: Within
##               Df Sum Sq Mean Sq F value    Pr(>F)
## Residuals      440  13.72 0.03119

```

Group effect analysis for each round

Now, we create five datasets for five rounds to analyze ANOVA. We expected that the same effect will appear in 5 analysis.

Date: 12-Jun-2017

```
## [1] "Analyze SENDER"
## [1] "Round number: 1"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##              SS num Df Error SS den Df      F
## (Intercept)      34.992    1   5.7358    25 152.5149
## GroupID           1.777    4   5.7358    25   1.9365
## SHOW_TRUST        0.481    1   1.2942    25   3.7789
## GroupID:SHOW_TRUST 0.510    4   1.2942    25   2.4606
## SHOW_ID           0.108    1   1.3642    25   3.2522
## GroupID:SHOW_ID    0.133    4   1.3642    25   0.6086
## SHOW_TRUST:SHOW_ID 0.012    1   1.1025    25   0.3189
## GroupID:SHOW_TRUST:SHOW_ID 0.151    4   1.1025    25   0.8532
##
##              Pr(>F)
## (Intercept)      3.871e-12 ***
## GroupID           0.13556
## SHOW_TRUST        0.12382
## GroupID:SHOW_TRUST 0.07147 .
## SHOW_ID           0.14566
## GroupID:SHOW_ID    0.66021
## SHOW_TRUST:SHOW_ID 0.60241
## GroupID:SHOW_TRUST:SHOW_ID 0.50527
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----*****-----"
## [1] "Analyze SENDER"
## [1] "Round number: 2"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##              SS num Df Error SS den Df      F
## (Intercept)      20.7936    1   2.891    20 143.8506
## GroupID           0.8954    4   2.891    20   1.5486
## SHOW_TRUST        0.4900    1   1.273    20   2.9385
## GroupID:SHOW_TRUST 0.6670    4   1.273    20   2.6198
## SHOW_ID           0.1444    1   1.067    20   2.2336
## GroupID:SHOW_ID    0.2586    4   1.067    20   1.2118
## SHOW_TRUST:SHOW_ID 0.2304    1   2.561    20   6.2019
## GroupID:SHOW_TRUST:SHOW_ID 0.1486    4   2.561    20   0.2901
##
##              Pr(>F)
## (Intercept)      1.372e-10 ***
## GroupID           0.22655
## SHOW_TRUST        0.16164
## GroupID:SHOW_TRUST 0.06569 .
## SHOW_ID           0.20935
## GroupID:SHOW_ID    0.33687
## SHOW_TRUST:SHOW_ID 0.06746 .
## GroupID:SHOW_TRUST:SHOW_ID 0.88091
## ---
```

```

## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----"
## [1] "Analyze SENDER"
## [1] "Round number: 3"
## [1] "-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##              SS num Df Error SS den Df      F
## (Intercept)    19.2080      1   2.0463    15 140.8039
## GroupID         2.0907      4   2.0463    15   3.8316
## SHOW_TRUST       0.1620      1   1.4688    15   4.4922
## GroupID:SHOW_TRUST 0.1442      4   1.4688    15   0.3683
## SHOW_ID          0.5445      1   1.7537    15   2.5422
## GroupID:SHOW_ID   0.8568      4   1.7537    15   1.8320
## SHOW_TRUST:SHOW_ID 0.5445      1   1.2563    15   6.3268
## GroupID:SHOW_TRUST:SHOW_ID 0.3443      4   1.2563    15   1.0276
##
##              Pr(>F)
## (Intercept)    5.039e-09 ***
## GroupID         0.02440 *
## SHOW_TRUST       0.10140
## GroupID:SHOW_TRUST 0.82748
## SHOW_ID          0.18607
## GroupID:SHOW_ID   0.17522
## SHOW_TRUST:SHOW_ID 0.06568 .
## GroupID:SHOW_TRUST:SHOW_ID 0.42493
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----"
## [1] "Analyze SENDER"
## [1] "Round number: 4"
## [1] "-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##              SS num Df Error SS den Df      F
## (Intercept)    28.8120      1   2.9925    25 240.7018
## GroupID         2.9305      4   2.9925    25   6.1205
## SHOW_TRUST       0.6750      1   2.9558    25   4.0652
## GroupID:SHOW_TRUST 0.6642      4   2.9558    25   1.4044
## SHOW_ID          1.5413      1   2.9142    25  32.5347
## GroupID:SHOW_ID   0.1895      4   2.9142    25   0.4064
## SHOW_TRUST:SHOW_ID 0.2083      1   2.4642    25   2.3641
## GroupID:SHOW_TRUST:SHOW_ID 0.3525      4   2.4642    25   0.8941
##
##              Pr(>F)
## (Intercept)    2.442e-14 ***
## GroupID         0.001413 **
## SHOW_TRUST       0.113984
## GroupID:SHOW_TRUST 0.261388
## SHOW_ID          0.004670 **
## GroupID:SHOW_ID   0.802224
## SHOW_TRUST:SHOW_ID 0.198977
## GroupID:SHOW_TRUST:SHOW_ID 0.482125
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----"
## [1] "Analyze SENDER"
## [1] "Round number: 5"

```

```

## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##          SS num Df Error SS den Df      F
## (Intercept)      31.0083      1  2.7842      25 278.4346
## GroupID          1.3675      4  2.7842      25  3.0698
## SHOW_TRUST       1.5413      1  2.2825      25  6.4480
## GroupID:SHOW_TRUST 0.9562      4  2.2825      25  2.6182
## SHOW_ID          0.2613      1  1.4392      25  0.9960
## GroupID:SHOW_ID    1.0495      4  1.4392      25  4.5578
## SHOW_TRUST:SHOW_ID 1.1603      1  3.9675      25 10.9941
## GroupID:SHOW_TRUST:SHOW_ID 0.4222      4  3.9675      25  0.6650
##
##          Pr(>F)
## (Intercept)      4.616e-15 ***
## GroupID          0.034670 *
## SHOW_TRUST       0.064030 .
## GroupID:SHOW_TRUST 0.059125 .
## SHOW_ID          0.374755
## GroupID:SHOW_ID    0.006671 **
## SHOW_TRUST:SHOW_ID 0.029496 *
## GroupID:SHOW_TRUST:SHOW_ID 0.622180
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----*****-----"
## [1] "Analyze RECEIVER"
## [1] "Round number: 1"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Receiver"
##
##          SS num Df Error SS den Df      F
## (Intercept)      17.2622      1  3.4351      23 115.5822
## GroupID          0.0725      4  3.4351      23  0.1214
## SHOW_TRUST       0.4794      1  1.0621      23 12.7083
## GroupID:SHOW_TRUST 0.1509      4  1.0621      23  0.8168
## SHOW_ID          0.3258      1  1.0368      23  7.1514
## GroupID:SHOW_ID    0.1823      4  1.0368      23  1.0107
## SHOW_TRUST:SHOW_ID 0.1880      1  0.6186      23 14.9404
## GroupID:SHOW_TRUST:SHOW_ID 0.0503      4  0.6186      23  0.4680
##
##          Pr(>F)
## (Intercept)      1.917e-10 ***
## GroupID          0.97342
## SHOW_TRUST       0.02348 *
## GroupID:SHOW_TRUST 0.52757
## SHOW_ID          0.05556 .
## GroupID:SHOW_ID    0.42237
## SHOW_TRUST:SHOW_ID 0.01807 *
## GroupID:SHOW_TRUST:SHOW_ID 0.75861
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----*****-----"
## [1] "Analyze RECEIVER"
## [1] "Round number: 2"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Receiver"
##
##          SS num Df Error SS den Df      F
## (Intercept)      15.6922      1  1.82293      21 180.7727

```



```

## GroupID                0.0491      4  1.82293      21  0.1415
## SHOW_TRUST              0.0456      1  0.94308      21  3.2313
## GroupID:SHOW_TRUST      0.0564      4  0.94308      21  0.3142
## SHOW_ID                 0.4462      1  0.54586      21 13.8672
## GroupID:SHOW_ID         0.1287      4  0.54586      21  1.2379
## SHOW_TRUST:SHOW_ID      0.7592      1  1.06676      21 11.9861
## GroupID:SHOW_TRUST:SHOW_ID 0.2534      4  1.06676      21  1.2470
##                          Pr(>F)
## (Intercept)            8.702e-12 ***
## GroupID                 0.96479
## SHOW_TRUST              0.14665
## GroupID:SHOW_TRUST      0.86525
## SHOW_ID                 0.02041 *
## GroupID:SHOW_ID         0.32523
## SHOW_TRUST:SHOW_ID      0.02577 *
## GroupID:SHOW_TRUST:SHOW_ID 0.32177
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----"
## [1] "Analyze RECEIVER"
## [1] "Round number: 3"
## [1] "-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##                          SS num Df Error SS den Df      F
## (Intercept)            10.7198      1  0.66965      11 176.0886
## GroupID                 0.0822      3  0.66965      11  0.4502
## SHOW_TRUST              0.3284      1  0.23443      11 11.5022
## GroupID:SHOW_TRUST      0.0857      3  0.23443      11  1.3397
## SHOW_ID                 0.1271      1  0.38617      11 15.1525
## GroupID:SHOW_ID         0.0252      3  0.38617      11  0.2389
## SHOW_TRUST:SHOW_ID      0.3367      1  0.38919      11 10.2395
## GroupID:SHOW_TRUST:SHOW_ID 0.0986      3  0.38919      11  0.9293
##                          Pr(>F)
## (Intercept)            4.11e-08 ***
## GroupID                 0.72225
## SHOW_TRUST              0.04273 *
## GroupID:SHOW_TRUST      0.31159
## SHOW_ID                 0.03007 *
## GroupID:SHOW_ID         0.86744
## SHOW_TRUST:SHOW_ID      0.04934 *
## GroupID:SHOW_TRUST:SHOW_ID 0.45897
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----"
## [1] "Analyze RECEIVER"
## [1] "Round number: 4"
## [1] "-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##                          SS num Df Error SS den Df      F
## (Intercept)            15.6759      1  2.38555      19 124.8524
## GroupID                 0.1339      4  2.38555      19  0.2665
## SHOW_TRUST              0.2743      1  0.33782      19 85.6685
## GroupID:SHOW_TRUST      0.0128      4  0.33782      19  0.1801
## SHOW_ID                 0.1545      1  0.88764      19  7.9625

```

```

## GroupID:SHOW_ID          0.0776      4  0.88764      19  0.4154
## SHOW_TRUST:SHOW_ID       0.1778      1  0.50976      19  8.6846
## GroupID:SHOW_TRUST:SHOW_ID 0.0819      4  0.50976      19  0.7632
##                               Pr(>F)
## (Intercept)              8.56e-10 ***
## GroupID                  0.8958083
## SHOW_TRUST               0.0007576 ***
## GroupID:SHOW_TRUST       0.9458922
## SHOW_ID                  0.0477414 *
## GroupID:SHOW_ID          0.7954137
## SHOW_TRUST:SHOW_ID       0.0420959 *
## GroupID:SHOW_TRUST:SHOW_ID 0.5621206
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"
## [1] "Analyze RECEIVER"
## [1] "Round number: 5"
## [1] "-----*-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##                               SS num Df Error SS den Df      F
## (Intercept)              13.3054      1  1.03342      16 206.0029
## GroupID                  0.2484      4  1.03342      16  0.9613
## SHOW_TRUST               0.0567      1  0.95196      16  3.6191
## GroupID:SHOW_TRUST       0.0627      4  0.95196      16  0.2633
## SHOW_ID                  0.1427      1  1.08276      16  3.5968
## GroupID:SHOW_ID          0.1587      4  1.08276      16  0.5863
## SHOW_TRUST:SHOW_ID       0.0155      1  0.80206      16  0.2174
## GroupID:SHOW_TRUST:SHOW_ID 0.2859      4  0.80206      16  1.4260
##                               Pr(>F)
## (Intercept)              1.478e-10 ***
## GroupID                  0.4553
## SHOW_TRUST               0.1299
## GroupID:SHOW_TRUST       0.8972
## SHOW_ID                  0.1308
## GroupID:SHOW_ID          0.6772
## SHOW_TRUST:SHOW_ID       0.6653
## GroupID:SHOW_TRUST:SHOW_ID 0.2706
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"

```

Test against group effect on each round

Repeat the previous analysis but for all 12 rounds and without group id

Date: Tue 13-Jun-2017

Date: 14-Jun-2017 I added the function `anove_random_subject(df)` so we can run ANOVA with corrected error term

```
## [1] "Analyze SENDER"
## [1] "Round number: 1"
## Anova Table (Type III tests)
##
## Response: score
##           Sum Sq Df F value    Pr(>F)
## (Intercept)  1.1302  1 15.9298 0.0001368 ***
## SHOW_TRUST   0.1215  1  1.7125 0.1941088
## SHOW_ID      0.0042  1  0.0587 0.8090891
## id           5.7084 29  2.7744 0.0001375 ***
## SHOW_TRUST:SHOW_ID 0.0141  1  0.1985 0.6570421
## Residuals    6.1726 87
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Mean of all games this round: 0.535833333333333"
## [1] "Length of each vector"
## [1] 30
## [1] 30
## [1] 30
## [1] 30
## [1] "Analyze SENDER"
## [1] "Round number: 2"
## Anova Table (Type III tests)
##
## Response: score
##           Sum Sq Df F value    Pr(>F)
## (Intercept)  1.2445  1 15.6539 0.0001548 ***
## SHOW_TRUST   0.2407  1  3.0273 0.0854091 .
## SHOW_ID      0.1307  1  1.6436 0.2032319
## id           5.7130 29  2.4780 0.0006359 ***
## SHOW_TRUST:SHOW_ID 0.0480  1  0.6038 0.4392440
## Residuals    6.9163 87
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Mean of all games this round: 0.49"
## [1] "Length of each vector"
## [1] 30
## [1] 30
## [1] 30
## [1] 30
## [1] "Analyze SENDER"
## [1] "Round number: 3"
## Anova Table (Type III tests)
##
## Response: score
##           Sum Sq Df F value    Pr(>F)
```

```

## (Intercept)          0.2868  1  3.3086 0.072360 .
## SHOW_TRUST           0.4682  1  5.4010 0.022456 *
## SHOW_ID              0.2535  1  2.9245 0.090808 .
## id                   5.3537 29  2.1298 0.003786 **
## SHOW_TRUST:SHOW_ID  0.1401  1  1.6161 0.207028
## Residuals           7.5412 87
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.408333333333333"
## [1] "Mean with trust: 0.516666666666667"
## [1] "Mean of all games this round: 0.4625"
## [1] "Length of each vector"
## [1] 30
## [1] 30
## [1] 30
## [1] 30
## [1] "Analyze SENDER"
## [1] "Round number: 4"
## Anova Table (Type III tests)
##
## Response: score
##              Sum Sq Df F value    Pr(>F)
## (Intercept)    0.1383  1  1.5158 0.221568
## SHOW_TRUST      0.6827  1  7.4839 0.007545 **
## SHOW_ID         0.5607  1  6.1464 0.015096 *
## id              5.0587 29  1.9123 0.011230 *
## SHOW_TRUST:SHOW_ID 0.2803  1  3.0732 0.083115 .
## Residuals      7.9360 87
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.43"
## [1] "Mean with trust: 0.546666666666667"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.44"
## [1] "Mean with nickname: 0.536666666666667"
## [1] "Mean of all games this round: 0.488333333333333"
## [1] "Length of each vector"
## [1] 30
## [1] 30
## [1] 30
## [1] 30
## [1] "Analyze SENDER"
## [1] "Round number: 5"
## Anova Table (Type III tests)
##
## Response: score
##              Sum Sq Df F value    Pr(>F)
## (Intercept)    0.1051  1  1.0906 0.299230
## SHOW_TRUST      0.4507  1  4.6769 0.033315 *
## SHOW_ID         1.0140  1 10.5230 0.001673 **
## id              6.1620 29  2.2051 0.002583 **
## SHOW_TRUST:SHOW_ID 0.4563  1  4.7357 0.032253 *

```

```

## Residuals          8.3833 87
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.47"
## [1] "Mean with trust: 0.52"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.426666666666667"
## [1] "Mean with nickname: 0.563333333333333"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.34"
## [1] "Mean id 0.6"
## [1] "Mean score 0.513333333333333"
## [1] "Mean combine 0.526666666666667"
## [1] "Mean of all games this round: 0.495"
## [1] "Length of each vector"
## [1] 30
## [1] 30
## [1] 30
## [1] 30
## [1] "Analyze SENDER"
## [1] "Round number: 6"
## Anova Table (Type III tests)
##
## Response: score
##              Sum Sq Df F value    Pr(>F)
## (Intercept)    0.0591  1  0.6005 0.440495
## SHOW_TRUST      0.4002  1  4.0649 0.046867 *
## SHOW_ID        0.7707  1  7.8285 0.006331 **
## id             5.6738 29  1.9874 0.007743 **
## SHOW_TRUST:SHOW_ID 0.2168  1  2.2018 0.141466
## Residuals      8.5646 87
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.423333333333333"
## [1] "Mean with trust: 0.501666666666667"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.391666666666667"
## [1] "Mean with nickname: 0.533333333333333"
## [1] "Mean of all games this round: 0.4625"
## [1] "Length of each vector"
## [1] 30
## [1] 30
## [1] 30
## [1] 30
## [1] "Analyze SENDER"
## [1] "Round number: 7"
## Anova Table (Type III tests)
##
## Response: score
##              Sum Sq Df F value    Pr(>F)
## (Intercept)    0.3841  1  3.8425 0.0531683 .
## SHOW_TRUST      1.5360  1 15.3665 0.0001761 ***

```

```

## SHOW_ID          1.7682  1 17.6891 6.295e-05 ***
## id               5.7937 29  1.9987 0.0073203 **
## SHOW_TRUST:SHOW_ID 0.8003  1  8.0067 0.0057857 **
## Residuals        8.6963 87
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.418333333333333"
## [1] "Mean with trust: 0.575"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.406666666666667"
## [1] "Mean with nickname: 0.586666666666667"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.246666666666667"
## [1] "Mean id 0.59"
## [1] "Mean score 0.566666666666667"
## [1] "Mean combine 0.583333333333333"
## [1] "Mean of all games this round: 0.496666666666667"
## [1] "Length of each vector"
## [1] 30
## [1] 30
## [1] 30
## [1] 30
## [1] "Analyze SENDER"
## [1] "Round number: 8"
## Anova Table (Type III tests)
##
## Response: score
##              Sum Sq Df F value    Pr(>F)
## (Intercept)  0.0496  1  0.5125 0.4761049
## SHOW_TRUST    1.0082  1 10.4187 0.0017942 **
## SHOW_ID       1.5852  1 16.3810 0.0001167 ***
## id           6.0613 29  2.1599 0.0035704 **
## SHOW_TRUST:SHOW_ID 0.6816  1  7.0439 0.0095508 **
## Residuals    7.9352 82
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.410344827586207"
## [1] "Mean with trust: 0.535087719298246"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.37719298245614"
## [1] "Mean with nickname: 0.56551724137931"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.231034482758621"
## [1] "Mean id 0.589655172413793"
## [1] "Mean score 0.528571428571429"
## [1] "Mean combine 0.541379310344828"
## [1] "Mean of all games this round: 0.472173913043478"
## [1] "Length of each vector"
## [1] 29
## [1] 29
## [1] 28
## [1] 29

```

```

## [1] "Analyze SENDER"
## [1] "Round number: 9"
## Anova Table (Type III tests)
##
## Response: score
##
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.0894  1  0.7949 0.375242
## SHOW_TRUST      1.1014  1  9.7940 0.002425 **
## SHOW_ID         0.4838  1  4.3020 0.041205 *
## id              6.3387 29  1.9436 0.010311 *
## SHOW_TRUST:SHOW_ID 0.3801  1  3.3801 0.069608 .
## Residuals      9.2217 82
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.372413793103448"
## [1] "Mean with trust: 0.531578947368421"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.408771929824561"
## [1] "Mean with nickname: 0.493103448275862"
## [1] "Mean of all games this round: 0.451304347826087"
## [1] "Length of each vector"
## [1] 29
## [1] 29
## [1] 28
## [1] 29
## [1] "Analyze SENDER"
## [1] "Round number: 10"
## Anova Table (Type III tests)
##
## Response: score
##
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.0724  1  0.6453 0.424106
## SHOW_TRUST      0.6784  1  6.0467 0.016037 *
## SHOW_ID         1.2701  1 11.3205 0.001168 **
## id              6.5414 29  2.0105 0.007447 **
## SHOW_TRUST:SHOW_ID 0.2523  1  2.2490 0.137541
## Residuals      9.1998 82
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.41551724137931"
## [1] "Mean with trust: 0.557894736842105"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.380701754385965"
## [1] "Mean with nickname: 0.589655172413793"
## [1] "Mean of all games this round: 0.486086956521739"
## [1] "Length of each vector"
## [1] 29
## [1] 29
## [1] 28
## [1] 29
## [1] "Analyze SENDER"
## [1] "Round number: 11"

```


```

## Anova Table (Type III tests)
##
## Response: score
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.2819  1  2.8701 0.0948839 .
## SHOW_TRUST      1.2015  1 12.2317 0.0008392 ***
## SHOW_ID         0.5429  1  5.5269 0.0216770 *
## id              5.6864 29  1.9963 0.0104071 *
## SHOW_TRUST:SHOW_ID 0.4454  1  4.5341 0.0369032 *
## Residuals      6.5811 67
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.348"
## [1] "Mean with trust: 0.542"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.395918367346939"
## [1] "Mean with nickname: 0.492156862745098"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.224"
## [1] "Mean id 0.472"
## [1] "Mean score 0.575"
## [1] "Mean combine 0.511538461538461"
## [1] "Mean of all games this round: 0.445"
## [1] "Length of each vector"
## [1] 25
## [1] 25
## [1] 24
## [1] 26
## [1] "Analyze SENDER"
## [1] "Round number: 12"
## Anova Table (Type III tests)
##
## Response: score
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.0905  1  1.8149  0.186116
## SHOW_TRUST      0.4918  1  9.8664  0.003305 **
## SHOW_ID         0.9992  1 20.0476 6.993e-05 ***
## id              5.7014 29  3.9444 5.715e-05 ***
## SHOW_TRUST:SHOW_ID 0.2505  1  5.0256  0.031057 *
## Residuals      1.8442 37
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.438888888888889"
## [1] "Mean with trust: 0.529411764705882"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.34"
## [1] "Mean with nickname: 0.625714285714286"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.238888888888889"
## [1] "Mean id 0.638888888888889"
## [1] "Mean score 0.447058823529412"
## [1] "Mean combine 0.611764705882353"

```



```
## [1] "Mean of all games this round: 0.482857142857143"
## [1] "Length of each vector"
## [1] 18
## [1] 18
## [1] 17
## [1] 17
## [1] "-----"
## [1] "TYPE:  SENDER"
```

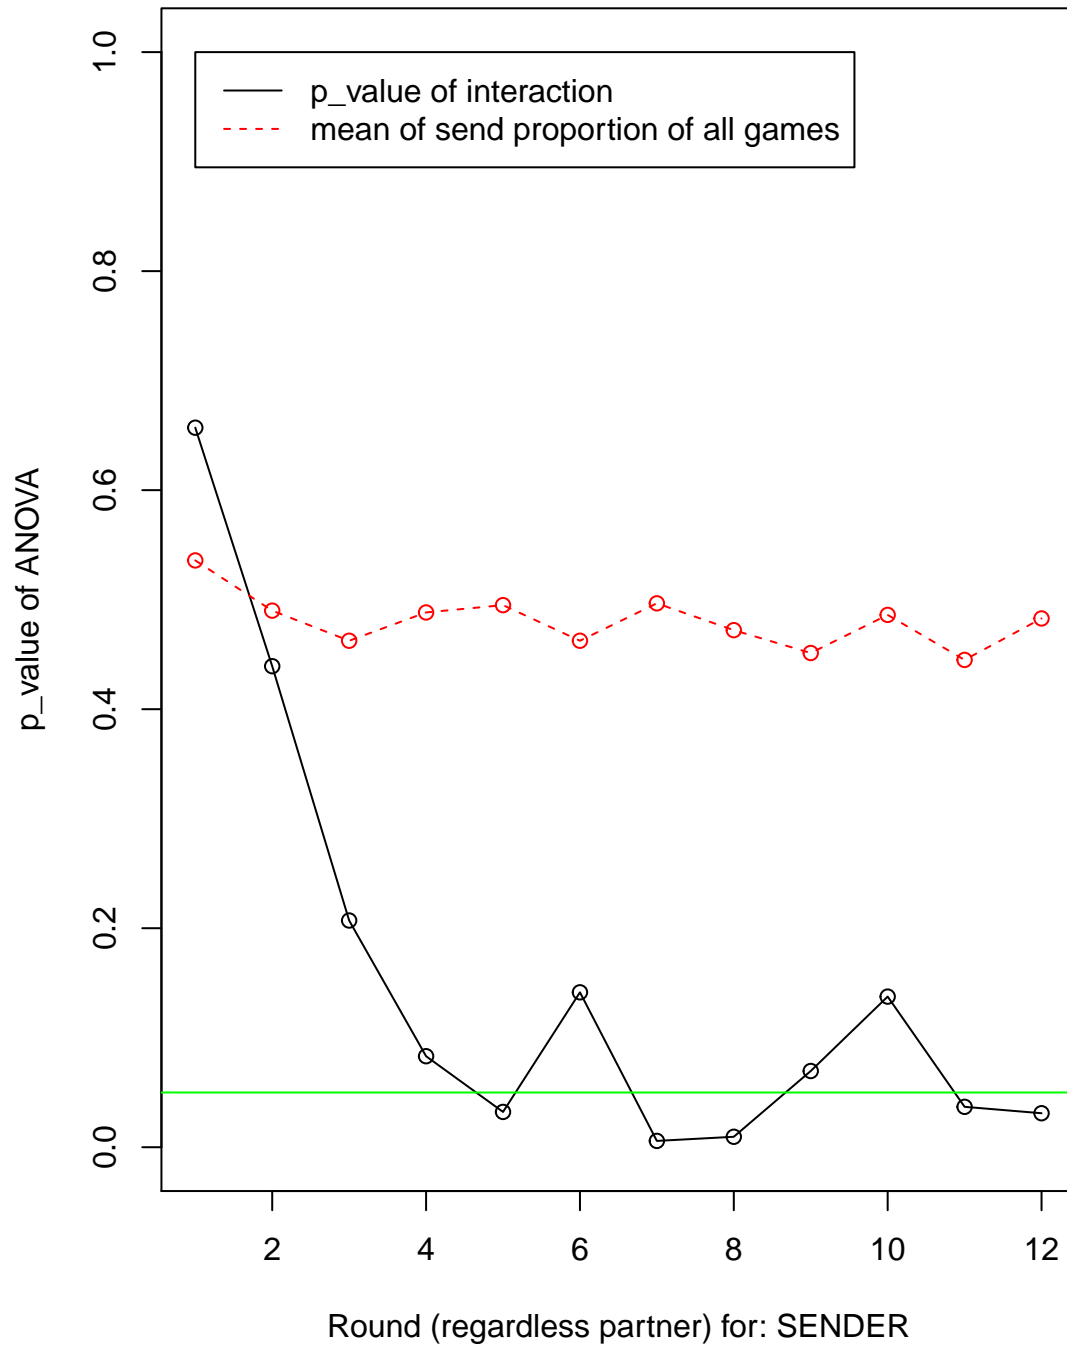

```
## [1] "Analyze RECEIVER"
## [1] "Round number: 1"
## Anova Table (Type III tests)
```

```

##
## Response: score
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.20358  1  5.5877  0.02064 *
## SHOW_TRUST      0.13457  1  3.6935  0.05837 .
## SHOW_ID         0.09614  1  2.6389  0.10842
## id              3.12770 29  2.9603 8.406e-05 ***
## SHOW_TRUST:SHOW_ID 0.02688  1  0.7377  0.39308
## Residuals      2.76892 76
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Mean of all games this round: 0.4295458958303"
## [1] "Length of each vector"
## [1] 26
## [1] 28
## [1] 27
## [1] 28
## [1] "Analyze RECEIVER"
## [1] "Round number: 2"
## Anova Table (Type III tests)
##
## Response: score
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.45260  1 11.2884 0.0012288 **
## SHOW_TRUST      0.68777  1 17.1540 8.946e-05 ***
## SHOW_ID         0.51637  1 12.8789 0.0005899 ***
## id              2.02717 29  1.7435 0.0287615 *
## SHOW_TRUST:SHOW_ID 0.29902  1  7.4579 0.0078688 **
## Residuals      3.00706 75
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.356074673055805"
## [1] "Mean with trust: 0.48540404040404"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.373185941043084"
## [1] "Mean with nickname: 0.462424894628284"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.231642512077295"
## [1] "Mean id 0.45147266313933"
## [1] "Mean score 0.498397435897436"
## [1] "Mean combine 0.473754789272031"
## [1] "Mean of all games this round: 0.421936850872036"
## [1] "Length of each vector"
## [1] 23
## [1] 30
## [1] 26
## [1] 29
## [1] "Analyze RECEIVER"
## [1] "Round number: 3"
## Anova Table (Type III tests)
##
## Response: score
##           Sum Sq Df F value    Pr(>F)

```

```

## (Intercept)          0.0638  1  1.2174 0.273396
## SHOW_TRUST           0.5067  1  9.6717 0.002645 **
## SHOW_ID              0.6661  1 12.7142 0.000636 ***
## id                   3.2181 29  2.1182 0.005030 **
## SHOW_TRUST:SHOW_ID  0.3350  1  6.3952 0.013544 *
## Residuals           3.9291 75
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.3684561245882"
## [1] "Mean with trust: 0.443181818181818"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.343194070080863"
## [1] "Mean with nickname: 0.467525252525253"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.223238095238095"
## [1] "Mean id 0.498115079365079"
## [1] "Mean score 0.450297619047619"
## [1] "Mean combine 0.435802469135802"
## [1] "Mean of all games this round: 0.40651087595532"
## [1] "Length of each vector"
## [1] 25
## [1] 28
## [1] 28
## [1] 27
## [1] "Analyze RECEIVER"
## [1] "Round number: 4"
## Anova Table (Type III tests)
##
## Response: score
##              Sum Sq Df F value    Pr(>F)
## (Intercept)  0.35548  1  8.9165 0.0038759 **
## SHOW_TRUST   0.33863  1  8.4939 0.0047632 **
## SHOW_ID      0.23236  1  5.8284 0.0183496 *
## id           2.88708 29  2.4971 0.0009286 ***
## SHOW_TRUST:SHOW_ID 0.07530  1  1.8886 0.1736772
## Residuals    2.83058 71
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.355646494708995"
## [1] "Mean with trust: 0.480952380952381"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.37983789260385"
## [1] "Mean with nickname: 0.458806739069897"
## [1] "Mean of all games this round: 0.423118894993895"
## [1] "Length of each vector"
## [1] 20
## [1] 28
## [1] 27
## [1] 29
## [1] "Analyze RECEIVER"
## [1] "Round number: 5"
## Anova Table (Type III tests)

```

```

##
## Response: score
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.5005  1 12.5195 0.0007626 ***
## SHOW_TRUST      0.1330  1  3.3275 0.0728752 .
## SHOW_ID         0.2834  1  7.0877 0.0098379 **
## id              3.2169 29  2.7747 0.0003645 ***
## SHOW_TRUST:SHOW_ID 0.0922  1  2.3052 0.1339407
## Residuals      2.5186 63
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.377310405643739"
## [1] "Mean with nickname: 0.448832866479925"
## [1] "Mean of all games this round: 0.415306712962963"
## [1] "Length of each vector"
## [1] 21
## [1] 27
## [1] 24
## [1] 24
## [1] "Analyze RECEIVER"
## [1] "Round number: 6"
## Anova Table (Type III tests)
##
## Response: score
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.20398  1  6.2895 0.0147344 *
## SHOW_TRUST      0.02463  1  0.7595 0.3867863
## SHOW_ID         0.19409  1  5.9847 0.0172335 *
## id              2.78973 29  2.9662 0.0001581 ***
## SHOW_TRUST:SHOW_ID 0.00001  1  0.0002 0.9874919
## Residuals      2.04319 63
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.366056910569106"
## [1] "Mean with nickname: 0.507361712361712"
## [1] "Mean of all games this round: 0.44701278659612"
## [1] "Length of each vector"
## [1] 18
## [1] 29
## [1] 23
## [1] 26
## [1] "Analyze RECEIVER"
## [1] "Round number: 7"
## Anova Table (Type III tests)
##
## Response: score
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.01909  1  0.4538 0.503001
## SHOW_TRUST      0.78458  1 18.6555 5.657e-05 ***
## SHOW_ID         1.10821  1 26.3507 2.955e-06 ***
## id              1.70033 29  1.3941 0.135741
## SHOW_TRUST:SHOW_ID 0.46311  1 11.0115 0.001508 **

```

```

## Residuals          2.64955 63
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.334844209288654"
## [1] "Mean with trust: 0.45629474011827"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.326925025329281"
## [1] "Mean with nickname: 0.468847856602959"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.175661375661376"
## [1] "Mean id 0.474129188712522"
## [1] "Mean score 0.449099511599512"
## [1] "Mean combine 0.463777777777778"
## [1] "Mean of all games this round: 0.399364803791887"
## [1] "Length of each vector"
## [1] 21
## [1] 24
## [1] 26
## [1] 25
## [1] "Analyze RECEIVER"
## [1] "Round number: 8"
## Anova Table (Type III tests)
##
## Response: score
##              Sum Sq Df F value    Pr(>F)
## (Intercept)    0.07906  1  2.7057    0.10514
## SHOW_TRUST      0.73593  1 25.1842 4.801e-06 ***
## SHOW_ID         0.69912  1 23.9246 7.647e-06 ***
## id              1.31498 27  1.6667   0.05049 .
## SHOW_TRUST:SHOW_ID 0.54178  1 18.5403 6.138e-05 ***
## Residuals      1.78253 61
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.358292181069959"
## [1] "Mean with trust: 0.466523134076326"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.359259259259259"
## [1] "Mean with nickname: 0.453558949785365"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.188888888888889"
## [1] "Mean id 0.471227709190672"
## [1] "Mean score 0.505291005291005"
## [1] "Mean combine 0.435210622710623"
## [1] "Mean of all games this round: 0.413584080975385"
## [1] "Length of each vector"
## [1] 18
## [1] 27
## [1] 21
## [1] 26
## [1] "Analyze RECEIVER"
## [1] "Round number: 9"
## Anova Table (Type III tests)

```

```


##
## Response: score
##              Sum Sq Df F value    Pr(>F)
## (Intercept)    0.37230  1   9.9450 0.002573 **
## SHOW_TRUST      0.31236  1   8.3438 0.005462 **
## SHOW_ID         0.48486  1  12.9515 0.000670 ***
## id              2.43105 29   2.2392 0.004686 **
## SHOW_TRUST:SHOW_ID 0.11607  1   3.1004 0.083636 .
## Residuals      2.13388 57
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.365130023640662"
## [1] "Mean with trust: 0.507890365448505"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.376303854875283"
## [1] "Mean with nickname: 0.483242394179894"
## [1] "Mean of all games this round: 0.433337742504409"
## [1] "Length of each vector"
## [1] 20
## [1] 27
## [1] 22
## [1] 21
## [1] "Analyze RECEIVER"
## [1] "Round number: 10"
## Anova Table (Type III tests)
##
## Response: score
##              Sum Sq Df F value    Pr(>F)
## (Intercept)    0.47142  1  15.3192 0.0002524 ***
## SHOW_TRUST      0.58890  1  19.1369 5.472e-05 ***
## SHOW_ID         0.21277  1   6.9141 0.0110673 *
## id              1.96321 28   2.2784 0.0045478 **
## SHOW_TRUST:SHOW_ID 0.13163  1   4.2773 0.0433397 *
## Residuals      1.69252 55
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.338472222222222"
## [1] "Mean with trust: 0.496225937183384"
## [1] "SHOW ID significant"
## [1] "Mean no nickname: 0.418462301587302"
## [1] "Mean with nickname: 0.428149273893955"
## [1] "SHOW_TRUST*SHOW_ID significant"
## [1] "Mean simple 0.270261437908497"
## [1] "Mean id 0.388888888888889"
## [1] "Mean score 0.528002070393375"
## [1] "Mean combine 0.46577380952381"
## [1] "Mean of all games this round: 0.42369549352308"
## [1] "Length of each vector"
## [1] 17
## [1] 23
## [1] 23
## [1] 24

```

```

## [1] "Analyze RECEIVER"
## [1] "Round number: 11"
## Anova Table (Type III tests)
##
## Response: score
##
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    0.16715  1  4.0557 0.050458 .
## SHOW_TRUST      0.30568  1  7.4169 0.009372 **
## SHOW_ID         0.06416  1  1.5568 0.219041
## id              2.24642 29  1.8795 0.030301 *
## SHOW_TRUST:SHOW_ID 0.05438  1  1.3195 0.257188
## Residuals      1.73100 42
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "SHOW TRUST significant"
## [1] "Mean no trust: 0.320138888888889"
## [1] "Mean with trust: 0.46702657807309"
## [1] "Mean of all games this round: 0.404354497354497"
## [1] "Length of each vector"
## [1] 12
## [1] 20
## [1] 23
## [1] 20
## [1] "Analyze RECEIVER"
## [1] "Round number: 12"
## Anova Table (Type III tests)
##
## Response: score
##
##           Sum Sq Df F value    Pr(>F)
## (Intercept)    1.12578  1 27.6618 1.021e-05 ***
## SHOW_TRUST      0.01109  1  0.2725  0.60538
## SHOW_ID         0.04150  1  1.0197  0.32040
## id              2.28733 29  1.9380  0.03668 *
## SHOW_TRUST:SHOW_ID 0.01953  1  0.4798  0.49369
## Residuals      1.26164 31
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Mean of all games this round: 0.449175347222222"
## [1] "Length of each vector"
## [1] 9
## [1] 18
## [1] 17
## [1] 20
## [1] "-----"
## [1] "TYPE:  RECEIVER"

```

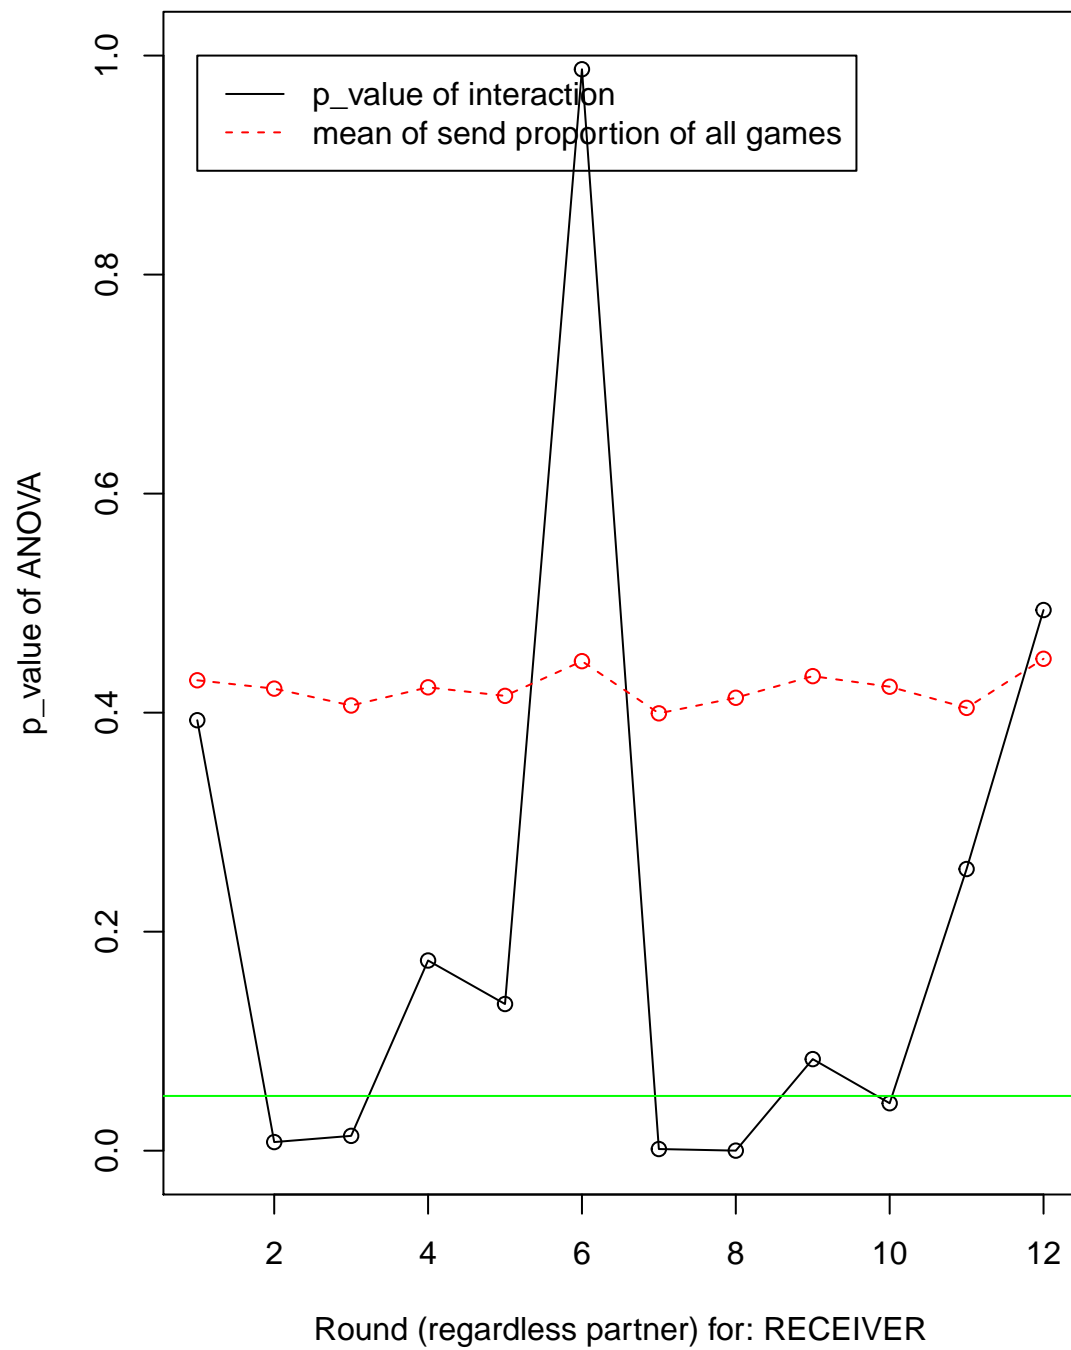

ANOVA on each round to check the group effect

Date: 14-Jun-2017 It is only available for SENDER because for RECEIVER the data is imbalanced (due to zero transaction removal)

```
## [1] "Analyze SENDER"
## [1] "Round number: 1"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## GroupID    4  2.421  0.6051   4.601 0.00637 **
## Residuals  25  3.288  0.1315
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST    1  0.1401  0.14008   1.270  0.323
## GroupID:SHOW_TRUST  4  0.4412  0.11029   1.861  0.149
## Residuals      25  1.4812  0.05925
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID      1  0.0008  0.00075   0.009  0.930
## GroupID:SHOW_ID  4  0.3472  0.08679   0.925  0.465
## Residuals     25  2.3446  0.09378
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID    1  0.0141  0.01408   0.167  0.704
## GroupID:SHOW_TRUST:SHOW_ID  4  0.3372  0.08429   1.726  0.176
## Residuals             25  1.2212  0.04885
## [1] "Analyze SENDER"
## [1] "Round number: 2"
##
## Error: id
##           Df Sum Sq Mean Sq F value Pr(>F)
## GroupID    4  1.419  0.3547   2.065  0.116
## Residuals  25  4.294  0.1718
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST    1  0.2253  0.22533   0.785  0.4258
## GroupID:SHOW_TRUST  4  1.1488  0.28721   3.536  0.0203 *
## Residuals      25  2.0308  0.08123
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID      1  0.0853  0.08533   2.022  0.228
## GroupID:SHOW_ID  4  0.1688  0.04221   0.713  0.591
## Residuals     25  1.4808  0.05923
##
```

```

## Error: id:SHOW_TRUST:SHOW_ID
##               Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1 0.0480 0.04800   0.219 0.66407
## GroupID:SHOW_TRUST:SHOW_ID 4 0.8762 0.21904   4.523 0.00692 **
## Residuals              25 1.2108 0.04843
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze SENDER"
## [1] "Round number: 3"
##
## Error: id
##               Df Sum Sq Mean Sq F value Pr(>F)
## GroupID      4 2.553 0.6381   5.695 0.00212 **
## Residuals 25 2.801 0.1120
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST
##               Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST      1 0.3521 0.3521   5.469 0.0795 .
## GroupID:SHOW_TRUST 4 0.2575 0.0644   0.755 0.5645
## Residuals      25 2.1329 0.0853
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_ID
##               Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID          1 0.1141 0.11408   1.924 0.238
## GroupID:SHOW_ID  4 0.2372 0.05929   0.572 0.685
## Residuals       25 2.5912 0.10365
##
## Error: id:SHOW_TRUST:SHOW_ID
##               Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1 0.1401 0.14008   1.336 0.312
## GroupID:SHOW_TRUST:SHOW_ID 4 0.4195 0.10488   1.378 0.270
## Residuals              25 1.9029 0.07612
## [1] "Analyze SENDER"
## [1] "Round number: 4"
##
## Error: id
##               Df Sum Sq Mean Sq F value Pr(>F)
## GroupID      4 1.333 0.3332   2.236 0.0939 .
## Residuals 25 3.726 0.1490
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST
##               Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST      1 0.4083 0.4083   3.197 0.148
## GroupID:SHOW_TRUST 4 0.5108 0.1277   1.327 0.287
## Residuals      25 2.4058 0.0962
##
## Error: id:SHOW_ID
##               Df Sum Sq Mean Sq F value Pr(>F)

```

```

## SHOW_ID          1 0.2803 0.28033   5.327 0.0822 .
## GroupID:SHOW_ID  4 0.2105 0.05263   0.964 0.4443
## Residuals        25 1.3642 0.05457
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1 0.2803 0.28033   1.128 0.3480
## GroupID:SHOW_TRUST:SHOW_ID 4 0.9938 0.24846   2.534 0.0654 .
## Residuals              25 2.4508 0.09803
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze SENDER"
## [1] "Round number: 5"
##
## Error: id
##              Df Sum Sq Mean Sq F value Pr(>F)
## GroupID      4  1.274   0.3184   1.628 0.198
## Residuals    25  4.888   0.1955
##
## Error: id:SHOW_TRUST
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST      1  0.075 0.07500   0.984 0.377
## GroupID:SHOW_TRUST 4  0.305 0.07625   0.533 0.713
## Residuals       25  3.575 0.14300
##
## Error: id:SHOW_ID
##              Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_ID          1 0.5603   0.5603 480.286 2.57e-05 ***
## GroupID:SHOW_ID  4 0.0047   0.0012   0.016   0.999
## Residuals       25 1.8500   0.0740
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1 0.4563   0.4563   2.354 0.1997
## GroupID:SHOW_TRUST:SHOW_ID 4 0.7753   0.1938   2.587 0.0614 .
## Residuals              25 1.8733   0.0749
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze SENDER"
## [1] "Round number: 6"
##
## Error: id
##              Df Sum Sq Mean Sq F value Pr(>F)
## GroupID      4  2.152   0.5379   3.818 0.0148 *
## Residuals    25  3.522   0.1409
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST
##              Df Sum Sq Mean Sq F value Pr(>F)

```

```

## SHOW_TRUST          1  0.184  0.1841   1.211  0.333
## GroupID:SHOW_TRUST  4  0.608  0.1520   1.180  0.344
## Residuals          25  3.220  0.1288
##
## Error: id:SHOW_ID
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID        1  0.6021   0.6021   8.865 0.0408 *
## GroupID:SHOW_ID  4  0.2717   0.0679   0.739 0.5745
## Residuals      25  2.2988   0.0920
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1  0.2167   0.21675   7.306 0.0539 .
## GroupID:SHOW_TRUST:SHOW_ID  4  0.1187   0.02967   0.362 0.8330
## Residuals              25  2.0471   0.08188
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "Analyze SENDER"
## [1] "Round number: 7"
##
## Error: id
##              Df Sum Sq Mean Sq F value Pr(>F)
## GroupID      4  2.039   0.5097   3.393 0.0239 *
## Residuals  25  3.755   0.1502
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST      1  0.736   0.7363   3.519 0.134
## GroupID:SHOW_TRUST  4  0.837   0.2093   1.639 0.196
## Residuals      25  3.192   0.1277
##
## Error: id:SHOW_ID
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_ID        1  0.9720   0.9720   5.879 0.0724 .
## GroupID:SHOW_ID  4  0.6613   0.1653   2.005 0.1246
## Residuals      25  2.0617   0.0825
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Error: id:SHOW_TRUST:SHOW_ID
##              Df Sum Sq Mean Sq F value Pr(>F)
## SHOW_TRUST:SHOW_ID      1  0.8003   0.8003  18.868 0.0122 *
## GroupID:SHOW_TRUST:SHOW_ID  4  0.1697   0.0424   0.597 0.6679
## Residuals              25  1.7750   0.0710
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

Group effect analysis in each game

Date: Tue 6-Jun-2017

First we do send_proportion ~ subject id, then run residual of the first regression ~ round_number

```
## [1] "Analyze SENDER"
## [1] "Analyze game, Simple GAME"
##
## Call:
## lm(formula = l1.res ~ df$round_number)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.46272 -0.24091 -0.04615  0.18430  0.83133
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.12918    0.03602   3.586  0.00038 ***
## df$round_number -0.04306    0.01086  -3.965  8.81e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2974 on 373 degrees of freedom
## Multiple R-squared:  0.04044,    Adjusted R-squared:  0.03787
## F-statistic: 15.72 on 1 and 373 DF,  p-value: 8.805e-05
##
## [1] "Analyze game, ID GAME"
##
## Call:
## lm(formula = l1.res ~ df$round_number)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.6706 -0.2561 -0.0061  0.3071  0.6065
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.022628    0.038921  -0.581    0.561
## df$round_number  0.007543    0.011735   0.643    0.521
##
## Residual standard error: 0.3214 on 373 degrees of freedom
## Multiple R-squared:  0.001106,    Adjusted R-squared:  -0.001572
## F-statistic: 0.4131 on 1 and 373 DF,  p-value: 0.5208
##
## [1] "Analyze game, Score GAME"
##
## Call:
## lm(formula = l1.res ~ df$round_number)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.57804 -0.35558 -0.01663  0.43305  0.52034
##
## Coefficients:
```

```

##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.04606    0.04517  -1.020   0.309
## df$round_number 0.01535    0.01362   1.127   0.260
##
## Residual standard error: 0.373 on 373 degrees of freedom
## Multiple R-squared:  0.003395, Adjusted R-squared:  0.0007232
## F-statistic: 1.271 on 1 and 373 DF, p-value: 0.2604
##
## [1] "Analyze game, Combine GAME"
##
## Call:
## lm(formula = l1.res ~ df$round_number)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.60766 -0.33112 -0.02903  0.41046  0.51530
##
## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.024253    0.044652  -0.543   0.587
## df$round_number 0.008084    0.013463   0.600   0.549
##
## Residual standard error: 0.3687 on 373 degrees of freedom
## Multiple R-squared:  0.0009657, Adjusted R-squared:  -0.001713
## F-statistic: 0.3606 on 1 and 373 DF, p-value: 0.5486
##
## [1] "Analyze RECEIVER"
## [1] "Analyze game, Simple GAME"
##
## Call:
## lm(formula = l1.res ~ df$round_number)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.28653 -0.25376 -0.04821  0.19500  0.74580
##
## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.004784    0.037261  -0.128   0.898
## df$round_number 0.001689    0.011760   0.144   0.886
##
## Residual standard error: 0.2642 on 248 degrees of freedom
## Multiple R-squared:  8.322e-05, Adjusted R-squared:  -0.003949
## F-statistic: 0.02064 on 1 and 248 DF, p-value: 0.8859
##
## [1] "Analyze game, ID GAME"
##
## Call:
## lm(formula = l1.res ~ df$round_number)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.5142 -0.1211  0.0015  0.1679  0.5889
##

```

```

## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.047840   0.027736   1.725   0.0855 .
## df$round_number -0.016266   0.008491  -1.916   0.0563 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2225 on 338 degrees of freedom
## Multiple R-squared:  0.01074,    Adjusted R-squared:  0.007814
## F-statistic:  3.67 on 1 and 338 DF,  p-value: 0.05625
##
## [1] "Analyze game, Score GAME"
##
## Call:
## lm(formula = l1.res ~ df$round_number)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.50159 -0.12783  0.01245  0.17541  0.54978
##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.0009071  0.0285047   0.032   0.975
## df$round_number -0.0003058  0.0086444  -0.035   0.972
##
## Residual standard error: 0.2242 on 322 degrees of freedom
## Multiple R-squared:  3.887e-06,    Adjusted R-squared:  -0.003102
## F-statistic: 0.001252 on 1 and 322 DF,  p-value: 0.9718
##
## [1] "Analyze game, Combine GAME"
##
## Call:
## lm(formula = l1.res ~ df$round_number)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.51884 -0.11673  0.01007  0.14838  0.54884
##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.0016123  0.0254422   0.063   0.950
## df$round_number -0.0005468  0.0077672  -0.070   0.944
##
## Residual standard error: 0.2011 on 327 degrees of freedom
## Multiple R-squared:  1.516e-05,    Adjusted R-squared:  -0.003043
## F-statistic: 0.004957 on 1 and 327 DF,  p-value: 0.9439

```

Regression of sending behavior on subjectID and round number

We test the regression power of predicting future sending proportion

```
## [1] "SIMPLE GAME with SENDER"
##
## Call:
## lm(formula = sends ~ as.factor(subject_ids) + my_trusts + partner_trusts +
##     round_numbers)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.44819 -0.10150 -0.02409  0.08454  0.94420
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.095631   0.073194   1.307 0.192495
## as.factor(subject_ids)2    0.029950   0.090957   0.329 0.742203
## as.factor(subject_ids)3    0.051086   0.085188   0.600 0.549221
## as.factor(subject_ids)4    0.011751   0.087447   0.134 0.893201
## as.factor(subject_ids)5    0.301155   0.100205   3.005 0.002905 **
## as.factor(subject_ids)6    0.115640   0.090773   1.274 0.203788
## as.factor(subject_ids)7    0.195979   0.090284   2.171 0.030836 *
## as.factor(subject_ids)8    0.109343   0.087777   1.246 0.213968
## as.factor(subject_ids)9    0.155162   0.090275   1.719 0.086817 .
## as.factor(subject_ids)10   0.543333   0.099774   5.446 1.17e-07 ***
## as.factor(subject_ids)11   0.116320   0.085343   1.363 0.174041
## as.factor(subject_ids)12  -0.001585   0.084294  -0.019 0.985008
## as.factor(subject_ids)13   0.164364   0.109645   1.499 0.135039
## as.factor(subject_ids)14   0.481565   0.092244   5.221 3.59e-07 ***
## as.factor(subject_ids)15   0.139155   0.083246   1.672 0.095771 .
## as.factor(subject_ids)16   0.495706   0.091631   5.410 1.40e-07 ***
## as.factor(subject_ids)17   0.301464   0.095316   3.163 0.001743 **
## as.factor(subject_ids)18   0.183104   0.092484   1.980 0.048747 *
## as.factor(subject_ids)19   0.208272   0.083550   2.493 0.013281 *
## as.factor(subject_ids)20   0.570032   0.100735   5.659 3.93e-08 ***
## as.factor(subject_ids)21   0.229096   0.088370   2.592 0.010054 *
## as.factor(subject_ids)22   0.174490   0.087404   1.996 0.046910 *
## as.factor(subject_ids)23   0.566533   0.101357   5.589 5.62e-08 ***
## as.factor(subject_ids)24   0.482778   0.096620   4.997 1.06e-06 ***
## as.factor(subject_ids)25   0.258038   0.089371   2.887 0.004204 **
## as.factor(subject_ids)26   0.075442   0.087243   0.865 0.387960
## as.factor(subject_ids)27   0.429862   0.093196   4.612 6.18e-06 ***
## as.factor(subject_ids)28   0.199092   0.092538   2.151 0.032337 *
## as.factor(subject_ids)29   0.322164   0.089833   3.586 0.000399 ***
## as.factor(subject_ids)30   0.767234   0.099953   7.676 3.10e-13 ***
## my_trusts          0.076441   0.081664   0.936 0.350095
## partner_trusts     0.069082   0.058462   1.182 0.238396
## round_numbers     -0.033655   0.010636  -3.164 0.001735 **
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2017 on 267 degrees of freedom
## Multiple R-squared:  0.56, Adjusted R-squared:  0.5072
```



```

## F-statistic: 10.62 on 32 and 267 DF, p-value: < 2.2e-16
##
## [1] "SIMPLE GAME with RECEIVER"
##
## Call:
## lm(formula = sends ~ as.factor(subject_ids) + my_trusts + partner_trusts +
##     round_numbers)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -1.42127 -0.30664  0.03052  0.34521  1.54038
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -1.02193     0.21184  -4.824 2.37e-06 ***
## as.factor(subject_ids)2    0.30592     0.24029   1.273 0.204090
## as.factor(subject_ids)3    0.39634     0.26108   1.518 0.130176
## as.factor(subject_ids)4    0.06529     0.24728   0.264 0.791961
## as.factor(subject_ids)5   -0.12598     0.25820  -0.488 0.626013
## as.factor(subject_ids)6    0.48897     0.24164   2.024 0.044009 *
## as.factor(subject_ids)7    0.72483     0.25965   2.792 0.005624 **
## as.factor(subject_ids)8    0.41803     0.24802   1.685 0.093071 .
## as.factor(subject_ids)9    0.50569     0.24164   2.093 0.037318 *
## as.factor(subject_ids)10   0.47306     0.25579   1.849 0.065503 .
## as.factor(subject_ids)11   0.47120     0.25124   1.876 0.061811 .
## as.factor(subject_ids)12   0.76768     0.25079   3.061 0.002431 **
## as.factor(subject_ids)13   0.29483     0.22785   1.294 0.196806
## as.factor(subject_ids)14   0.24482     0.27040   0.905 0.366086
## as.factor(subject_ids)15   0.40293     0.26951   1.495 0.136079
## as.factor(subject_ids)16   0.28442     0.29739   0.956 0.339736
## as.factor(subject_ids)17   0.33519     0.25028   1.339 0.181635
## as.factor(subject_ids)18   0.30855     0.23806   1.296 0.196063
## as.factor(subject_ids)19   0.76776     0.27355   2.807 0.005374 **
## as.factor(subject_ids)20   0.61759     0.24463   2.525 0.012164 *
## as.factor(subject_ids)21   0.92524     0.25790   3.588 0.000397 ***
## as.factor(subject_ids)22   0.51435     0.26473   1.943 0.053073 .
## as.factor(subject_ids)23   0.78137     0.25362   3.081 0.002280 **
## as.factor(subject_ids)24   0.69753     0.24908   2.800 0.005476 **
## as.factor(subject_ids)25   0.61225     0.26436   2.316 0.021317 *
## as.factor(subject_ids)26   0.67841     0.24577   2.760 0.006173 **
## as.factor(subject_ids)27   0.63911     0.25136   2.543 0.011567 *
## as.factor(subject_ids)28   0.40888     0.23788   1.719 0.086805 .
## as.factor(subject_ids)29   0.67539     0.25513   2.647 0.008598 **
## as.factor(subject_ids)30   0.70961     0.28678   2.474 0.013969 *
## my_trusts          0.66908     0.19610   3.412 0.000745 ***
## partner_trusts      1.04953     0.14843   7.071 1.35e-11 ***
## round_numbers     -0.04083     0.02711  -1.506 0.133131
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.516 on 267 degrees of freedom
## Multiple R-squared:  0.4153, Adjusted R-squared:  0.3452
## F-statistic: 5.925 on 32 and 267 DF, p-value: < 2.2e-16

```

```

## [1] "ID GAME with  SENDER"
##
## Call:
## lm(formula = sends ~ as.factor(subject_ids) + my_trusts + partner_trusts +
##     round_numbers)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.8537 -0.1226 -0.0003  0.1386  0.7152
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.18866    0.08800   2.144 0.032946 *
## as.factor(subject_ids)2 -0.25020    0.12152  -2.059 0.040482 *
## as.factor(subject_ids)3  0.06575    0.10754   0.611 0.541427
## as.factor(subject_ids)4  0.12906    0.10253   1.259 0.209195
## as.factor(subject_ids)5  0.24535    0.11641   2.108 0.035997 *
## as.factor(subject_ids)6  0.02802    0.11186   0.250 0.802420
## as.factor(subject_ids)7  0.05410    0.13440   0.403 0.687621
## as.factor(subject_ids)8  0.05745    0.10622   0.541 0.589032
## as.factor(subject_ids)9 -0.17318    0.10287  -1.683 0.093455 .
## as.factor(subject_ids)10  0.02059    0.09917   0.208 0.835655
## as.factor(subject_ids)11  0.12844    0.11294   1.137 0.256481
## as.factor(subject_ids)12 -0.04771    0.11481  -0.416 0.678101
## as.factor(subject_ids)13  0.03726    0.10120   0.368 0.713028
## as.factor(subject_ids)14  0.04870    0.11527   0.422 0.673034
## as.factor(subject_ids)15  0.22365    0.10734   2.084 0.038156 *
## as.factor(subject_ids)16  0.04604    0.10345   0.445 0.656610
## as.factor(subject_ids)17  0.41700    0.11862   3.515 0.000516 ***
## as.factor(subject_ids)18  0.45466    0.11233   4.048 6.78e-05 ***
## as.factor(subject_ids)19  0.07740    0.10490   0.738 0.461219
## as.factor(subject_ids)20  0.20043    0.10879   1.842 0.066520 .
## as.factor(subject_ids)21  0.19458    0.11080   1.756 0.080230 .
## as.factor(subject_ids)22  0.06247    0.11478   0.544 0.586747
## as.factor(subject_ids)23  0.19416    0.10531   1.844 0.066344 .
## as.factor(subject_ids)24  0.19273    0.10506   1.834 0.067697 .
## as.factor(subject_ids)25 -0.07426    0.10336  -0.718 0.473130
## as.factor(subject_ids)26 -0.06606    0.11277  -0.586 0.558499
## as.factor(subject_ids)27 -0.11862    0.10289  -1.153 0.249993
## as.factor(subject_ids)28 -0.09967    0.10877  -0.916 0.360319
## as.factor(subject_ids)29  0.06943    0.11485   0.605 0.546024
## as.factor(subject_ids)30  0.18283    0.11410   1.602 0.110271
## my_trusts          0.49327    0.10041   4.913 1.57e-06 ***
## partner_trusts      0.49049    0.07745   6.333 1.01e-09 ***
## round_numbers      -0.04462    0.01455  -3.067 0.002384 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2551 on 267 degrees of freedom
## Multiple R-squared:  0.5034, Adjusted R-squared:  0.4439
## F-statistic: 8.458 on 32 and 267 DF,  p-value: < 2.2e-16
##
## [1] "ID GAME with  RECEIVER"
##

```

```
## Call:
## lm(formula = sends ~ as.factor(subject_ids) + my_trusts + partner_trusts +
##     round_numbers)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -1.49373 -0.11072  0.04535  0.20213  1.11041
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.03875     0.19130   0.203  0.83963
## as.factor(subject_ids)2 -0.27187     0.21530  -1.263  0.20778
## as.factor(subject_ids)3 -0.06407     0.21335  -0.300  0.76419
## as.factor(subject_ids)4 -0.09552     0.22147  -0.431  0.66659
## as.factor(subject_ids)5 -0.27676     0.21128  -1.310  0.19135
## as.factor(subject_ids)6 -0.12213     0.20986  -0.582  0.56110
## as.factor(subject_ids)7  0.33493     0.19723   1.698  0.09065 .
## as.factor(subject_ids)8  0.28752     0.21646   1.328  0.18522
## as.factor(subject_ids)9  0.19444     0.23311   0.834  0.40496
## as.factor(subject_ids)10 0.44571     0.23975   1.859  0.06412 .
## as.factor(subject_ids)11 0.22837     0.21000   1.087  0.27782
## as.factor(subject_ids)12 0.08997     0.20435   0.440  0.66008
## as.factor(subject_ids)13 0.19268     0.22887   0.842  0.40060
## as.factor(subject_ids)14 0.16560     0.20493   0.808  0.41975
## as.factor(subject_ids)15 -0.13683     0.21115  -0.648  0.51754
## as.factor(subject_ids)16 0.32190     0.22391   1.438  0.15171
## as.factor(subject_ids)17 0.09681     0.21388   0.453  0.65119
## as.factor(subject_ids)18 0.39201     0.20771   1.887  0.06020 .
## as.factor(subject_ids)19 0.24288     0.21636   1.123  0.26263
## as.factor(subject_ids)20 0.19568     0.21489   0.911  0.36332
## as.factor(subject_ids)21 0.23341     0.20823   1.121  0.26333
## as.factor(subject_ids)22 0.13149     0.20445   0.643  0.52069
## as.factor(subject_ids)23 0.20384     0.21804   0.935  0.35068
## as.factor(subject_ids)24 0.32206     0.21618   1.490  0.13746
## as.factor(subject_ids)25 -0.24092     0.22134  -1.088  0.27738
## as.factor(subject_ids)26 -0.01231     0.21216  -0.058  0.95377
## as.factor(subject_ids)27 0.05652     0.22319   0.253  0.80028
## as.factor(subject_ids)28 -0.07579     0.21571  -0.351  0.72559
## as.factor(subject_ids)29 0.15100     0.20413   0.740  0.46012
## as.factor(subject_ids)30 0.18590     0.20806   0.893  0.37241
## my_trusts          0.52388     0.18343   2.856  0.00463 **
## partner_trusts      0.68946     0.12555   5.492 9.27e-08 ***
## round_numbers      -0.11197     0.02469  -4.534 8.73e-06 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.4269 on 267 degrees of freedom
## Multiple R-squared:  0.348, Adjusted R-squared:  0.2698
## F-statistic: 4.453 on 32 and 267 DF, p-value: 3.719e-12
## [1] "SCORE GAME with SENDER"
##
## Call:
## lm(formula = sends ~ as.factor(subject_ids) + my_trusts + partner_trusts +
```

```

## round_numbers)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.6213 -0.1095  0.0022  0.1224  0.9764
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.01266    0.07931  -0.160  0.873273
## as.factor(subject_ids)2 -0.23262    0.09337  -2.491  0.013334 *
## as.factor(subject_ids)3 -0.05136    0.09200  -0.558  0.577138
## as.factor(subject_ids)4 -0.23275    0.09597  -2.425  0.015958 *
## as.factor(subject_ids)5  0.21251    0.08718   2.438  0.015435 *
## as.factor(subject_ids)6 -0.22646    0.09018  -2.511  0.012627 *
## as.factor(subject_ids)7 -0.20870    0.08567  -2.436  0.015502 *
## as.factor(subject_ids)8 -0.04438    0.09573  -0.464  0.643343
## as.factor(subject_ids)9 -0.34158    0.09268  -3.686  0.000276 ***
## as.factor(subject_ids)10 -0.06511    0.08594  -0.758  0.449290
## as.factor(subject_ids)11  0.17227    0.09636   1.788  0.074951 .
## as.factor(subject_ids)12 -0.07208    0.09208  -0.783  0.434464
## as.factor(subject_ids)13  0.19998    0.08653   2.311  0.021581 *
## as.factor(subject_ids)14  0.16434    0.09338   1.760  0.079578 .
## as.factor(subject_ids)15  0.06170    0.08604   0.717  0.473943
## as.factor(subject_ids)16  0.14031    0.08946   1.568  0.117986
## as.factor(subject_ids)17  0.17492    0.09638   1.815  0.070660 .
## as.factor(subject_ids)18  0.19105    0.09206   2.075  0.038916 *
## as.factor(subject_ids)19  0.06895    0.11056   0.624  0.533363
## as.factor(subject_ids)20 -0.14028    0.09177  -1.529  0.127536
## as.factor(subject_ids)21  0.13560    0.08371   1.620  0.106432
## as.factor(subject_ids)22  0.13373    0.08243   1.622  0.105914
## as.factor(subject_ids)23  0.06903    0.09232   0.748  0.455281
## as.factor(subject_ids)24  0.06794    0.09515   0.714  0.475832
## as.factor(subject_ids)25  0.11207    0.11073   1.012  0.312431
## as.factor(subject_ids)26 -0.19448    0.09095  -2.138  0.033402 *
## as.factor(subject_ids)27 -0.15020    0.08457  -1.776  0.076871 .
## as.factor(subject_ids)28 -0.24872    0.08603  -2.891  0.004156 **
## as.factor(subject_ids)29 -0.07043    0.09230  -0.763  0.446102
## as.factor(subject_ids)30  0.01818    0.09586   0.190  0.849743
## my_trusts      0.07962    0.07354   1.083  0.279878
## partner_trusts 1.02318    0.06216  16.461 < 2e-16 ***
## round_numbers  0.01595    0.01109   1.438  0.151662
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2043 on 267 degrees of freedom
## Multiple R-squared:  0.7458, Adjusted R-squared:  0.7153
## F-statistic: 24.48 on 32 and 267 DF, p-value: < 2.2e-16
##
## [1] "SCORE GAME with RECEIVER"
##
## Call:
## lm(formula = sends ~ as.factor(subject_ids) + my_trusts + partner_trusts +
##     round_numbers)
##

```

```

## Residuals:
##      Min       1Q   Median       3Q      Max
## -1.52743 -0.15453  0.05119  0.24646  1.19539
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.017278   0.188336  -0.092  0.926974
## as.factor(subject_ids)2 -0.789159   0.216418  -3.646  0.000320 ***
## as.factor(subject_ids)3 -0.213550   0.206360  -1.035  0.301680
## as.factor(subject_ids)4 -0.247437   0.202797  -1.220  0.223496
## as.factor(subject_ids)5 -0.234469   0.216391  -1.084  0.279545
## as.factor(subject_ids)6 -0.671299   0.222630  -3.015  0.002814 **
## as.factor(subject_ids)7 -0.227873   0.235318  -0.968  0.333739
## as.factor(subject_ids)8  0.130399   0.202885   0.643  0.520953
## as.factor(subject_ids)9 -0.055036   0.219833  -0.250  0.802507
## as.factor(subject_ids)10 0.079731   0.223045   0.357  0.721026
## as.factor(subject_ids)11 -0.003325   0.202638  -0.016  0.986919
## as.factor(subject_ids)12 0.176456   0.209631   0.842  0.400682
## as.factor(subject_ids)13 -0.276699   0.223407  -1.239  0.216603
## as.factor(subject_ids)14 -0.117150   0.206224  -0.568  0.570462
## as.factor(subject_ids)15 -0.198460   0.223943  -0.886  0.376304
## as.factor(subject_ids)16 0.121538   0.211571   0.574  0.566142
## as.factor(subject_ids)17 -0.128686   0.204872  -0.628  0.530454
## as.factor(subject_ids)18 -0.117172   0.206680  -0.567  0.571241
## as.factor(subject_ids)19 -0.044654   0.194342  -0.230  0.818447
## as.factor(subject_ids)20 -0.276578   0.224015  -1.235  0.218049
## as.factor(subject_ids)21 -0.017967   0.231657  -0.078  0.938239
## as.factor(subject_ids)22 0.078809   0.241644   0.326  0.744576
## as.factor(subject_ids)23 -0.145894   0.206890  -0.705  0.481316
## as.factor(subject_ids)24 0.001947   0.202800   0.010  0.992349
## as.factor(subject_ids)25 0.099958   0.193304   0.517  0.605513
## as.factor(subject_ids)26 -0.883194   0.226761  -3.895  0.000124 ***
## as.factor(subject_ids)27 -0.442123   0.232513  -1.901  0.058314 .
## as.factor(subject_ids)28 -0.730742   0.250204  -2.921  0.003792 **
## as.factor(subject_ids)29 -0.294889   0.207373  -1.422  0.156186
## as.factor(subject_ids)30 -0.279031   0.202379  -1.379  0.169124
## my_trusts       0.760906   0.168931   4.504  9.97e-06 ***
## partner_trusts  0.290496   0.142151   2.044  0.041976 *
## round_numbers   -0.010289   0.024780  -0.415  0.678322
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.458 on 267 degrees of freedom
## Multiple R-squared:  0.4405, Adjusted R-squared:  0.3735
## F-statistic:  6.57 on 32 and 267 DF,  p-value: < 2.2e-16

## [1] "COMBINE GAME with SENDER"
##
## Call:
## lm(formula = sends ~ as.factor(subject_ids) + my_trusts + partner_trusts +
##     round_numbers)
##
## Residuals:
##      Min       1Q   Median       3Q      Max

```

```

## -0.67728 -0.11400 0.00588 0.10843 0.92274
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.069774   0.106775   0.653   0.5140
## as.factor(subject_ids)2 -0.304711   0.117775  -2.587   0.0102 *
## as.factor(subject_ids)3 -0.164314   0.113828  -1.444   0.1500
## as.factor(subject_ids)4 -0.002060   0.112682  -0.018   0.9854
## as.factor(subject_ids)5  0.024473   0.121249   0.202   0.8402
## as.factor(subject_ids)6 -0.111419   0.124535  -0.895   0.3718
## as.factor(subject_ids)7 -0.207214   0.116109  -1.785   0.0755 .
## as.factor(subject_ids)8  0.118001   0.121868   0.968   0.3338
## as.factor(subject_ids)9 -0.238743   0.118654  -2.012   0.0452 *
## as.factor(subject_ids)10 0.012295   0.118748   0.104   0.9176
## as.factor(subject_ids)11 0.073878   0.125825   0.587   0.5576
## as.factor(subject_ids)12 -0.159330   0.120599  -1.321   0.1876
## as.factor(subject_ids)13 0.230069   0.119475   1.926   0.0552 .
## as.factor(subject_ids)14 0.152321   0.120662   1.262   0.2079
## as.factor(subject_ids)15 0.199192   0.122421   1.627   0.1049
## as.factor(subject_ids)16 -0.005169   0.126614  -0.041   0.9675
## as.factor(subject_ids)17 0.252633   0.119999   2.105   0.0362 *
## as.factor(subject_ids)18 0.156076   0.120444   1.296   0.1961
## as.factor(subject_ids)19 -0.035566   0.115674  -0.307   0.7587
## as.factor(subject_ids)20 -0.245708   0.121213  -2.027   0.0436 *
## as.factor(subject_ids)21 0.200783   0.116790   1.719   0.0867 .
## as.factor(subject_ids)22 0.123132   0.119317   1.032   0.3030
## as.factor(subject_ids)23 0.046890   0.123690   0.379   0.7049
## as.factor(subject_ids)24 0.052480   0.121402   0.432   0.6659
## as.factor(subject_ids)25 0.111539   0.113852   0.980   0.3281
## as.factor(subject_ids)26 -0.136684   0.124332  -1.099   0.2726
## as.factor(subject_ids)27 -0.173349   0.118476  -1.463   0.1446
## as.factor(subject_ids)28 -0.126613   0.115717  -1.094   0.2749
## as.factor(subject_ids)29 -0.122831   0.123601  -0.994   0.3212
## as.factor(subject_ids)30 0.212356   0.122222   1.737   0.0835 .
## my_trusts          0.413093   0.087380   4.728 3.68e-06 ***
## partner_trusts      0.733572   0.066999  10.949 < 2e-16 ***
## round_numbers      -0.012912   0.011734  -1.100   0.2721
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2159 on 267 degrees of freedom
## Multiple R-squared:  0.7155, Adjusted R-squared:  0.6814
## F-statistic: 20.98 on 32 and 267 DF, p-value: < 2.2e-16
##
## [1] "COMBINE GAME with RECEIVER"
##
## Call:
## lm(formula = sends ~ as.factor(subject_ids) + my_trusts + partner_trusts +
##     round_numbers)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -1.43873 -0.12033  0.02294  0.20087  1.70184
##

```

```

## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.197554   0.151220  -1.306 0.192540
## as.factor(subject_ids)2 -0.690598   0.185597  -3.721 0.000242 ***
## as.factor(subject_ids)3 -0.156138   0.192564  -0.811 0.418181
## as.factor(subject_ids)4 -0.263992   0.199086  -1.326 0.185966
## as.factor(subject_ids)5  0.124720   0.162386   0.768 0.443136
## as.factor(subject_ids)6 -0.249088   0.177627  -1.402 0.161985
## as.factor(subject_ids)7  0.324625   0.186983   1.736 0.083697 .
## as.factor(subject_ids)8  0.349449   0.161985   2.157 0.031875 *
## as.factor(subject_ids)9 -0.178636   0.198474  -0.900 0.368906
## as.factor(subject_ids)10 0.369866   0.165913   2.229 0.026628 *
## as.factor(subject_ids)11 0.168146   0.158013   1.064 0.288231
## as.factor(subject_ids)12 0.233112   0.166212   1.402 0.161929
## as.factor(subject_ids)13 -0.069137   0.172324  -0.401 0.688590
## as.factor(subject_ids)14 0.049845   0.167079   0.298 0.765681
## as.factor(subject_ids)15 -0.154056   0.163724  -0.941 0.347582
## as.factor(subject_ids)16 0.157366   0.159050   0.989 0.323358
## as.factor(subject_ids)17 0.195773   0.172322   1.136 0.256940
## as.factor(subject_ids)18 0.008483   0.172665   0.049 0.960852
## as.factor(subject_ids)19 0.225238   0.177848   1.266 0.206451
## as.factor(subject_ids)20 0.017480   0.165985   0.105 0.916210
## as.factor(subject_ids)21 -0.160388   0.177828  -0.902 0.367908
## as.factor(subject_ids)22 -0.115233   0.170409  -0.676 0.499489
## as.factor(subject_ids)23 -0.146699   0.158935  -0.923 0.356835
## as.factor(subject_ids)24 0.164351   0.162229   1.013 0.311938
## as.factor(subject_ids)25 0.441125   0.187955   2.347 0.019658 *
## as.factor(subject_ids)26 0.243746   0.162703   1.498 0.135287
## as.factor(subject_ids)27 0.306916   0.168848   1.818 0.070229 .
## as.factor(subject_ids)28 0.121514   0.183329   0.663 0.508019
## as.factor(subject_ids)29 0.199026   0.165466   1.203 0.230109
## as.factor(subject_ids)30 0.233026   0.161592   1.442 0.150457
## my_trusts        0.797014   0.171133   4.657 5.06e-06 ***
## partner_trusts    0.666376   0.133857   4.978 1.15e-06 ***
## round_numbers    -0.073437   0.022223  -3.305 0.001081 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.4056 on 267 degrees of freedom
## Multiple R-squared:  0.5048, Adjusted R-squared:  0.4455
## F-statistic: 8.506 on 32 and 267 DF, p-value: < 2.2e-16

```

Predict average send proportion

We applied linear regression on reputation score to see if the reputation score should be used instead of trust score.

Reputation score = average of previous send proportion

Dependent measure: average send proportion by user (eliminate case 0 for receiver)

```
## [1] "Linear regression of relative sending on reputation value of Simple Game for type:  SENDER"
##
## Call:
## lm(formula = RelSend ~ partner_reputation, data = x_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.31256 -0.15027 -0.06576  0.15732  0.58946
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.2270     0.1179   1.925  0.0644 .
## partner_reputation 0.2169     0.3145   0.689  0.4962
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2248 on 28 degrees of freedom
## Multiple R-squared:  0.01669,    Adjusted R-squared:  -0.01843
## F-statistic: 0.4753 on 1 and 28 DF,  p-value: 0.4962
##
##
## Call:
## lm(formula = RelSend ~ trust_value, data = x_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.34154 -0.14484 -0.07111  0.12648  0.57513
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.1620     0.1351   1.199  0.241
## trust_value     0.4427     0.4039   1.096  0.282
##
## Residual standard error: 0.222 on 28 degrees of freedom
## Multiple R-squared:  0.04115,    Adjusted R-squared:  0.006903
## F-statistic: 1.202 on 1 and 28 DF,  p-value: 0.2823
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = x_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.16900 -0.03798 -0.02209  0.04528  0.18161
##
## Coefficients:
```



```

##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.2611     0.0614  -4.253 0.000226 ***
## my_trust_value  1.4889     0.1163  12.801 5.57e-13 ***
## trust_value     0.2562     0.1554   1.649 0.110772
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08502 on 27 degrees of freedom
## Multiple R-squared:  0.8644, Adjusted R-squared:  0.8543
## F-statistic: 86.03 on 2 and 27 DF,  p-value: 1.936e-12
##
## Call:
## lm(formula = RelSend ~ my_trust_value * trust_value, data = x_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.17234 -0.04094 -0.01668  0.04963  0.18601
##
## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.3067     0.1438  -2.133 0.042496 *
## my_trust_value  1.6318     0.4227   3.860 0.000672 ***
## trust_value     0.4005     0.4393   0.912 0.370256
## my_trust_value:trust_value -0.4468     1.2688  -0.352 0.727575
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08644 on 26 degrees of freedom
## Multiple R-squared:  0.865, Adjusted R-squared:  0.8494
## F-statistic: 55.54 on 3 and 26 DF,  p-value: 1.934e-11
##
## [1] "Linear regression of relative sending on reputation value of ID Game for type:  SENDER"
##
## Call:
## lm(formula = RelSend ~ partner_reputation, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39814 -0.11283  0.01703  0.12325  0.47122
##
## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)     0.8585     0.2884   2.977 0.00595 **
## partner_reputation -0.6779     0.5945  -1.140 0.26380
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2002 on 28 degrees of freedom
## Multiple R-squared:  0.04438, Adjusted R-squared:  0.01025
## F-statistic: 1.3 on 1 and 28 DF,  p-value: 0.2638
##
## Call:

```

```

## lm(formula = RelSend ~ trust_value, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.50049 -0.09113 -0.00225  0.11572  0.46573
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.4376     0.2921   1.498   0.145
## trust_value    0.2076     0.6351   0.327   0.746
##
## Residual standard error: 0.2044 on 28 degrees of freedom
## Multiple R-squared:  0.0038, Adjusted R-squared:  -0.03178
## F-statistic: 0.1068 on 1 and 28 DF,  p-value: 0.7462
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.17997 -0.08236  0.01791  0.04621  0.24022
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.3679     0.1688  -2.179   0.0382 *
## my_trust_value  1.4517     0.1559   9.311 6.41e-10 ***
## trust_value     0.5488     0.3173   1.730   0.0951 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1014 on 27 degrees of freedom
## Multiple R-squared:  0.7634, Adjusted R-squared:  0.7459
## F-statistic: 43.57 on 2 and 27 DF,  p-value: 3.533e-09
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value * trust_value, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.17352 -0.07100  0.01394  0.05352  0.23447
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.0001726  0.5356202   0.000   1.000
## my_trust_value  0.6192925  1.1591418   0.534   0.598
## trust_value    -0.2322279  1.1241335  -0.207   0.838
## my_trust_value:trust_value  1.7740167  2.4476382   0.725   0.475
##
## Residual standard error: 0.1023 on 26 degrees of freedom
## Multiple R-squared:  0.7681, Adjusted R-squared:  0.7414
## F-statistic: 28.71 on 3 and 26 DF,  p-value: 2.076e-08
##

```

```

## [1] "Linear regression of relative sending on reputation value of Score Game for type:  SENDER"
##
## Call:
## lm(formula = RelSend ~ partner_reputation, data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.30583 -0.17594  0.03028  0.15260  0.37992
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.3036     0.1894  -1.604    0.12
## partner_reputation  1.6838     0.3699   4.551 9.44e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1911 on 28 degrees of freedom
## Multiple R-squared:  0.4252, Adjusted R-squared:  0.4047
## F-statistic: 20.72 on 1 and 28 DF,  p-value: 9.444e-05
##
## Call:
## lm(formula = RelSend ~ trust_value, data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.33749 -0.08762  0.00963  0.07132  0.29044
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.5458     0.1492  -3.659  0.00104 **
## trust_value   2.3443     0.3159   7.421 4.41e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1464 on 28 degrees of freedom
## Multiple R-squared:  0.663, Adjusted R-squared:  0.6509
## F-statistic: 55.07 on 1 and 28 DF,  p-value: 4.409e-08
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.210241 -0.056944  0.009976  0.061286  0.128565
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.6727     0.0893  -7.533 4.20e-08 ***
## my_trust_value  1.3565     0.1843   7.360 6.45e-08 ***
## trust_value    1.3192     0.2320   5.686 4.85e-06 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

```

##
## Residual standard error: 0.08596 on 27 degrees of freedom
## Multiple R-squared:  0.8879, Adjusted R-squared:  0.8796
## F-statistic: 106.9 on 2 and 27 DF,  p-value: 1.481e-13
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value * trust_value, data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.20494 -0.06274  0.01232  0.07127  0.13125
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      -0.1992     0.4480  -0.445   0.660
## my_trust_value       0.3970     0.9083   0.437   0.666
## trust_value        0.1731     1.0874   0.159   0.875
## my_trust_value:trust_value  2.2904     2.1235   1.079   0.291
##
## Residual standard error: 0.0857 on 26 degrees of freedom
## Multiple R-squared:  0.8927, Adjusted R-squared:  0.8803
## F-statistic: 72.09 on 3 and 26 DF,  p-value: 9.938e-13
##
## [1] "Linear regression of relative sending on reputation value of Combine Game for type:  SENDER"
##
## Call:
## lm(formula = RelSend ~ partner_reputation, data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.46936 -0.11485  0.05174  0.11353  0.37949
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)     -0.1091     0.1787  -0.610  0.546465
## partner_reputation  1.2939     0.3421   3.782 0.000751 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2217 on 28 degrees of freedom
## Multiple R-squared:  0.3382, Adjusted R-squared:  0.3145
## F-statistic: 14.31 on 1 and 28 DF,  p-value: 0.0007506
##
##
## Call:
## lm(formula = RelSend ~ trust_value, data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.31228 -0.10108  0.02139  0.08095  0.31587
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)

```

```

## (Intercept)  -0.5072      0.1557  -3.259  0.00293 **
## trust_value   2.2682      0.3279   6.918  1.61e-07 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1656 on 28 degrees of freedom
## Multiple R-squared:  0.6309, Adjusted R-squared:  0.6177
## F-statistic: 47.86 on 1 and 28 DF,  p-value: 1.609e-07
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.150939 -0.044539  0.002393  0.038702  0.198586
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.6266     0.0851  -7.364 6.39e-08 ***
## my_trust_value  1.4954     0.1795   8.332 6.10e-09 ***
## trust_value    1.0693     0.2279   4.692 6.96e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08923 on 27 degrees of freedom
## Multiple R-squared:  0.8966, Adjusted R-squared:  0.889
## F-statistic: 117.1 on 2 and 27 DF,  p-value: 4.938e-14
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value * trust_value, data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.151630 -0.044313  0.002645  0.038603  0.198590
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.61887     0.36917  -1.676  0.1056
## my_trust_value  1.47851     0.80055   1.847  0.0762 .
## trust_value    1.05164     0.84718   1.241  0.2256
## my_trust_value:trust_value  0.03711     1.71567   0.022  0.9829
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.09093 on 26 degrees of freedom
## Multiple R-squared:  0.8966, Adjusted R-squared:  0.8847
## F-statistic: 75.19 on 3 and 26 DF,  p-value: 6.11e-13
##
## [1] "Linear regression of relative sending on reputation value of Simple Game for type: RECEIVER"
##
## Call:
## lm(formula = RelSend ~ partner_reputation + AbsPartnerSend, data = x_simple)

```

```

##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.37176 -0.19524  0.08411  0.14323  0.36052
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.453862   0.121613   3.732 0.000895 ***
## partner_reputation -0.604274   0.355180  -1.701 0.100373
## AbsPartnerSend    0.008199   0.035662   0.230 0.819895
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2088 on 27 degrees of freedom
## Multiple R-squared:  0.1432, Adjusted R-squared:  0.07969
## F-statistic: 2.256 on 2 and 27 DF,  p-value: 0.1242
##
##
## Call:
## lm(formula = RelSend ~ trust_value + AbsPartnerSend, data = x_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.34903 -0.19594  0.07342  0.14794  0.44628
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.523596   0.185719   2.819  0.0089 **
## trust_value   -0.514145   0.726536  -0.708  0.4852
## AbsPartnerSend -0.009607   0.042992  -0.223  0.8249
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2177 on 27 degrees of freedom
## Multiple R-squared:  0.06858, Adjusted R-squared: -0.0004137
## F-statistic: 0.994 on 2 and 27 DF,  p-value: 0.3832
##
##
## Call:
## lm(formula = RelSend ~ partner_reputation, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39814 -0.11283  0.01703  0.12325  0.47122
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.8585     0.2884   2.977  0.00595 **
## partner_reputation -0.6779     0.5945  -1.140  0.26380
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2002 on 28 degrees of freedom
## Multiple R-squared:  0.04438, Adjusted R-squared:  0.01025

```

```

## F-statistic: 1.3 on 1 and 28 DF, p-value: 0.2638
##
##
## Call:
## lm(formula = RelSend ~ trust_value, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.50049 -0.09113 -0.00225  0.11572  0.46573
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.4376     0.2921   1.498   0.145
## trust_value    0.2076     0.6351   0.327   0.746
##
## Residual standard error: 0.2044 on 28 degrees of freedom
## Multiple R-squared:  0.0038, Adjusted R-squared:  -0.03178
## F-statistic: 0.1068 on 1 and 28 DF, p-value: 0.7462
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = x_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.21443 -0.10224 -0.01646  0.06848  0.35236
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.02870     0.14768   0.194   0.8474
## my_trust_value 1.16611     0.19427   6.003 2.45e-06 ***
## trust_value    0.34388     0.50019   0.687   0.4979
## AbsPartnerSend -0.06616     0.02989  -2.214   0.0358 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1436 on 26 degrees of freedom
## Multiple R-squared:  0.6096, Adjusted R-squared:  0.5646
## F-statistic: 13.53 on 3 and 26 DF, p-value: 1.635e-05
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value * trust_value + AbsPartnerSend,
##     data = x_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.20978 -0.09957 -0.01604  0.06769  0.34949
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.23059     0.32245   0.715   0.4812
## my_trust_value 0.61017     0.81132   0.752   0.4590

```

```

## trust_value          -0.15113    0.86398  -0.175    0.8626
## AbsPartnerSend       -0.07244    0.03146  -2.302    0.0299 *
## my_trust_value:trust_value  1.57115    2.22484    0.706    0.4866
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.145 on 25 degrees of freedom
## Multiple R-squared:  0.6172, Adjusted R-squared:  0.556
## F-statistic: 10.08 on 4 and 25 DF,  p-value: 5.333e-05
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value * AbsPartnerSend,
##     data = x_simple)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.23442 -0.09935 -0.02176  0.06026  0.35152
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.20138    0.28817   0.699   0.491
## my_trust_value      1.14946    0.19764   5.816 4.59e-06 ***
## trust_value       -0.09227    0.80188  -0.115   0.909
## AbsPartnerSend    -0.12062    0.08341  -1.446   0.161
## trust_value:AbsPartnerSend  0.13394    0.19125   0.700   0.490
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1451 on 25 degrees of freedom
## Multiple R-squared:  0.6171, Adjusted R-squared:  0.5558
## F-statistic: 10.07 on 4 and 25 DF,  p-value: 5.354e-05
##
## [1] "Linear regression of relative sending on reputation value of ID Game for type: RECEIVER"
##
## Call:
## lm(formula = RelSend ~ partner_reputation + AbsPartnerSend, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.302374 -0.043764  0.008998  0.097875  0.268158
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.72945    0.21031   3.469  0.00177 **
## partner_reputation -1.18326    0.43471  -2.722  0.01122 *
## AbsPartnerSend     0.04918    0.02107   2.334  0.02728 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1481 on 27 degrees of freedom
## Multiple R-squared:  0.2674, Adjusted R-squared:  0.2131
## F-statistic: 4.927 on 2 and 27 DF,  p-value: 0.01499
##

```



```
##
## Call:
## lm(formula = RelSend ~ trust_value + AbsPartnerSend, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.43273 -0.04024  0.01837  0.10838  0.30483
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.37500    0.31262   1.200   0.241
## trust_value   -0.33829    0.82675  -0.409   0.686
## AbsPartnerSend  0.03830    0.02829   1.354   0.187
##
## Residual standard error: 0.1667 on 27 degrees of freedom
## Multiple R-squared:  0.0721, Adjusted R-squared:  0.003362
## F-statistic: 1.049 on 2 and 27 DF,  p-value: 0.3642
##
## Call:
## lm(formula = RelSend ~ partner_reputation, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.37533 -0.08738  0.02347  0.10267  0.21351
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.8636    0.2178   3.966 0.000461 ***
## partner_reputation -0.8671    0.4447  -1.950 0.061260 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1595 on 28 degrees of freedom
## Multiple R-squared:  0.1196, Adjusted R-squared:  0.08812
## F-statistic: 3.802 on 1 and 28 DF,  p-value: 0.06126
##
## Call:
## lm(formula = RelSend ~ trust_value, data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.40252 -0.04564  0.02169  0.09927  0.24913
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.2864    0.3102   0.923   0.364
## trust_value    0.3385    0.6683   0.507   0.616
##
## Residual standard error: 0.1692 on 28 degrees of freedom
## Multiple R-squared:  0.009082, Adjusted R-squared: -0.02631
## F-statistic: 0.2566 on 1 and 28 DF,  p-value: 0.6164
##
```

```
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.18551 -0.04782 -0.01754  0.05094  0.15162
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.19837    0.17042   -1.164   0.2550
## my_trust_value  1.34544    0.15056    8.936 2.09e-09 ***
## trust_value     0.41643    0.42598    0.978   0.3373
## AbsPartnerSend -0.02995    0.01620   -1.849   0.0759 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.0842 on 26 degrees of freedom
## Multiple R-squared:  0.7721, Adjusted R-squared:  0.7458
## F-statistic: 29.36 on 3 and 26 DF,  p-value: 1.662e-08
##
## Call:
## lm(formula = RelSend ~ my_trust_value * trust_value + AbsPartnerSend,
##     data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.18436 -0.04703 -0.01628  0.05104  0.15096
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.13445    0.81368   -0.165   0.8701
## my_trust_value  1.21001    1.69123    0.715   0.4810
## trust_value     0.27542    1.80663    0.152   0.8801
## AbsPartnerSend -0.02980    0.01661   -1.794   0.0849 .
## my_trust_value:trust_value 0.29397    3.65595    0.080   0.9366
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08586 on 25 degrees of freedom
## Multiple R-squared:  0.7722, Adjusted R-squared:  0.7357
## F-statistic: 21.18 on 4 and 25 DF,  p-value: 9.949e-08
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value * AbsPartnerSend,
##     data = x_id)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.16846 -0.05353 -0.02209  0.04269  0.16113
##
```

```

## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.85623    0.79992  -1.070   0.295
## my_trust_value    1.34970    0.15149   8.909 3.12e-09 ***
## trust_value      1.88700    1.79837   1.049   0.304
## AbsPartnerSend    0.08146    0.13331   0.611   0.547
## trust_value:AbsPartnerSend -0.24639    0.29264  -0.842   0.408
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.08468 on 25 degrees of freedom
## Multiple R-squared:  0.7784, Adjusted R-squared:  0.7429
## F-statistic: 21.95 on 4 and 25 DF,  p-value: 7.089e-08
##
## [1] "Linear regression of relative sending on reputation value of Score Game for type: RECEIVER"
##
## Call:
## lm(formula = RelSend ~ partner_reputation + AbsPartnerSend, data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.34184 -0.13069  0.05236  0.12165  0.25796
##
## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)     0.34709    0.17872   1.942  0.0626 .
## partner_reputation -0.08515    0.57195  -0.149  0.8828
## AbsPartnerSend    0.02400    0.03097   0.775  0.4450
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1673 on 27 degrees of freedom
## Multiple R-squared:  0.04365, Adjusted R-squared:  -0.0272
## F-statistic: 0.6161 on 2 and 27 DF,  p-value: 0.5475
##
##
## Call:
## lm(formula = RelSend ~ trust_value + AbsPartnerSend, data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.35077 -0.12598  0.05133  0.11685  0.25945
##
## Coefficients:
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)     0.39687    0.29198   1.359   0.185
## trust_value     -0.24252    0.92792  -0.261   0.796
## AbsPartnerSend  0.02704    0.03169   0.853   0.401
##
## Residual standard error: 0.1672 on 27 degrees of freedom
## Multiple R-squared:  0.04528, Adjusted R-squared:  -0.02544
## F-statistic: 0.6402 on 2 and 27 DF,  p-value: 0.535
##
##

```

```

## Call:
## lm(formula = RelSend ~ partner_reputation, data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.35961 -0.10870  0.03691  0.10367  0.23140
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.3129     0.1720   1.82  0.0795 .
## partner_reputation  0.2708     0.3384   0.80  0.4302
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1661 on 28 degrees of freedom
## Multiple R-squared:  0.02237,    Adjusted R-squared:  -0.01255
## F-statistic: 0.6406 on 1 and 28 DF,  p-value: 0.4302
##
## Call:
## lm(formula = RelSend ~ trust_value, data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.34394 -0.11517  0.03451  0.10619  0.23415
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.2654     0.2468   1.075  0.291
## trust_value     0.4013     0.5372   0.747  0.461
##
## Residual standard error: 0.1664 on 28 degrees of freedom
## Multiple R-squared:  0.01954,    Adjusted R-squared:  -0.01547
## F-statistic: 0.5581 on 1 and 28 DF,  p-value: 0.4612
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##      data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.229257 -0.063228 -0.004027  0.079191  0.242774
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.03859     0.23987  -0.161  0.873
## my_trust_value  1.36838     0.29637   4.617 9.23e-05 ***
## trust_value     0.16777     0.70654   0.237  0.814
## AbsPartnerSend -0.04135     0.02815  -1.469  0.154
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1263 on 26 degrees of freedom

```

```

## Multiple R-squared:  0.4754, Adjusted R-squared:  0.4149
## F-statistic: 7.854 on 3 and 26 DF,  p-value: 0.0006825
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value * trust_value + AbsPartnerSend,
##     data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.230539 -0.062344 -0.000996  0.077298  0.242200
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      -0.14730     0.92269  -0.160   0.874
## my_trust_value      1.58985     1.83749   0.865   0.395
## trust_value        0.40239     2.05084   0.196   0.846
## AbsPartnerSend     -0.04038     0.02977  -1.357   0.187
## my_trust_value:trust_value -0.49772     4.07337  -0.122   0.904
##
## Residual standard error: 0.1288 on 25 degrees of freedom
## Multiple R-squared:  0.4757, Adjusted R-squared:  0.3918
## F-statistic: 5.671 on 4 and 25 DF,  p-value: 0.002169
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value * AbsPartnerSend,
##     data = x_score)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.226162 -0.068384 -0.003159  0.085713  0.225942
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.17530     0.61979   0.283 0.779629
## my_trust_value      1.34463     0.30796   4.366 0.000193 ***
## trust_value     -0.26171     1.35099  -0.194 0.847963
## AbsPartnerSend    -0.08226     0.11269  -0.730 0.472169
## trust_value:AbsPartnerSend  0.08494     0.22627   0.375 0.710533
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1284 on 25 degrees of freedom
## Multiple R-squared:  0.4783, Adjusted R-squared:  0.3949
## F-statistic: 5.731 on 4 and 25 DF,  p-value: 0.002047
##
## [1] "Linear regression of relative sending on reputation value of Combine Game for type: RECEIVER"
##
## Call:
## lm(formula = RelSend ~ partner_reputation + AbsPartnerSend, data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max

```

```

## -0.34857 -0.05498 0.03026 0.08956 0.16660
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.47119    0.11387   4.138 0.000307 ***
## partner_reputation -0.49286    0.35095  -1.404 0.171617
## AbsPartnerSend    0.04069    0.01968   2.067 0.048413 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1271 on 27 degrees of freedom
## Multiple R-squared:  0.1406, Adjusted R-squared:  0.07693
## F-statistic: 2.208 on 2 and 27 DF,  p-value: 0.1293
##
##
## Call:
## lm(formula = RelSend ~ trust_value + AbsPartnerSend, data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.24407 -0.06934  0.03619  0.09140  0.16324
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.65790    0.13200   4.984 3.18e-05 ***
## trust_value   -1.16340    0.42613  -2.730 0.01101 *
## AbsPartnerSend  0.05814    0.01814   3.204 0.00346 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1166 on 27 degrees of freedom
## Multiple R-squared:  0.2773, Adjusted R-squared:  0.2238
## F-statistic: 5.181 on 2 and 27 DF,  p-value: 0.01247
##
##
## Call:
## lm(formula = RelSend ~ partner_reputation, data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.35311 -0.07692  0.01698  0.09730  0.19076
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.4264    0.1181   3.609 0.00119 **
## partner_reputation  0.0812    0.2268   0.358 0.72301
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1343 on 28 degrees of freedom
## Multiple R-squared:  0.004557, Adjusted R-squared: -0.03099
## F-statistic: 0.1282 on 1 and 28 DF,  p-value: 0.723
##
##

```

```

## Call:
## lm(formula = RelSend ~ trust_value, data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.35403 -0.07972  0.02453  0.09777  0.20684
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.5050     0.1420   3.557 0.00136 **
## trust_value  -0.0797     0.2990  -0.267 0.79179
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1345 on 28 degrees of freedom
## Multiple R-squared:  0.00253, Adjusted R-squared:  -0.03309
## F-statistic: 0.07103 on 1 and 28 DF, p-value: 0.7918
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.177927 -0.064764 -0.005558  0.069571  0.136813
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.36764     0.12970   2.835 0.008761 **
## my_trust_value 0.81176     0.20674   3.927 0.000566 ***
## trust_value   -0.77274     0.35815  -2.158 0.040378 *
## AbsPartnerSend 0.01111     0.01892   0.587 0.562176
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.09411 on 26 degrees of freedom
## Multiple R-squared:  0.5463, Adjusted R-squared:  0.494
## F-statistic: 10.44 on 3 and 26 DF, p-value: 0.0001097
##
## Call:
## lm(formula = RelSend ~ my_trust_value * trust_value + AbsPartnerSend,
##     data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.168807 -0.055154 -0.008942  0.070568  0.140371
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.09397     0.37592   0.250  0.8047
## my_trust_value 1.41810     0.80822   1.755  0.0916 .
## trust_value   -0.21055     0.80901  -0.260  0.7968

```

```

## AbsPartnerSend          0.01766    0.02085    0.847    0.4050
## my_trust_value:trust_value -1.39998    1.80304   -0.776    0.4448
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.09484 on 25 degrees of freedom
## Multiple R-squared:  0.557, Adjusted R-squared:  0.4861
## F-statistic: 7.859 on 4 and 25 DF,  p-value: 0.0003026
##
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value * AbsPartnerSend,
##     data = x_combine)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.150980 -0.056143 -0.003256  0.067562  0.158908
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.03463    0.30006  -0.115  0.909036
## my_trust_value     0.78054    0.20327   3.840  0.000746 ***
## trust_value       0.06905    0.66820   0.103  0.918517
## AbsPartnerSend    0.09102    0.05710   1.594  0.123497
## trust_value:AbsPartnerSend -0.15567    0.10523  -1.479  0.151556
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.09203 on 25 degrees of freedom
## Multiple R-squared:  0.5829, Adjusted R-squared:  0.5161
## F-statistic: 8.733 on 4 and 25 DF,  p-value: 0.0001486

```


Analyze by individual trial rather than average value

Trust score over time & Chi-square on frequency of sending proportion by game

Date: Tue 13-Jun-2017 Test the amount sent based on trust value and amount received (if any) using individual but not average sending proportion

Update on Thu 15-Jun-2017

```
## [1] "Number of sending 0.0 as: SENDER"
## [1] "Simple GAME : 125"
## [1] "ID GAME : 35"
## [1] "Score GAME : 51"
## [1] "Combine GAME : 46"
##      [,1] [,2]
## [1,]  125   35
## [2,]   51   46
##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data:  x
## X-squared = 17.097, df = 1, p-value = 3.552e-05
##
## [1] "Update on Fri 16-Jun-2017: due to the fact that chisq is tested on dependent data, we switch to
##
## Call:
## glm(formula = send0 ~ id + show_trust + show_id + show_trust *
##      show_id, family = binomial(link = "logit"), data = df0)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -1.91483  -0.50119  -0.27774  -0.00006   2.99506
##
## Coefficients:
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)      1.1044    0.3347   3.300 0.000967 ***
## id2              0.4031    0.4354   0.926 0.354592
## id3              0.4257    0.4292   0.992 0.321271
## id4             -0.1118    0.4299  -0.260 0.794760
## id5            -19.5544  1497.9611  -0.013 0.989585
## id6              0.5546    0.4326   1.282 0.199773
## id7            -19.6124  1426.1469  -0.014 0.989028
## id8             -1.6119    0.5165  -3.121 0.001805 **
## id9             -2.7597    0.6861  -4.022 5.77e-05 ***
## id10            -19.4238  1388.8783  -0.014 0.988842
## id11            -1.2844    0.4936  -2.602 0.009262 **
## id12            -0.4643    0.4467  -1.039 0.298642
## id13            -1.9560    0.5782  -3.383 0.000717 ***
## id14            -19.6631  1462.2417  -0.013 0.989271
## id15            -1.5183    0.4882  -3.110 0.001870 **
## id16            -19.6983  1375.1862  -0.014 0.988571
## id17            -1.8178    0.5556  -3.272 0.001068 **
## id18            -1.7196    0.5314  -3.236 0.001212 **
## id19            -19.6880  1413.6113  -0.014 0.988888
```

```

## id20          -1.4782      0.5140   -2.876 0.004029 **
## id21          -1.7811      0.5279   -3.374 0.000742 ***
## id22          -2.9423      0.6844   -4.299 1.72e-05 ***
## id23          -2.7430      0.6900   -3.975 7.03e-05 ***
## id24          -2.7747      0.6881   -4.033 5.52e-05 ***
## id25          -1.4878      0.5010   -2.970 0.002979 **
## id26          -0.8010      0.4620   -1.734 0.082921 .
## id27          -2.4484      0.6215   -3.939 8.17e-05 ***
## id28          -1.5870      0.5084   -3.122 0.001797 **
## id29          -3.9809      1.0687   -3.725 0.000195 ***
## id30          -2.3293      0.5833   -3.993 6.52e-05 ***
## show_trustTRUE -1.5973      0.2225   -7.179 7.00e-13 ***
## show_idTRUE    -2.0778      0.2432   -8.545 < 2e-16 ***
## show_trustTRUE:show_idTRUE 1.9308      0.3444    5.607 2.06e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
##      Null deviance: 1373.98  on 1499  degrees of freedom
## Residual deviance:  948.81  on 1467  degrees of freedom
## AIC: 1014.8
##
## Number of Fisher Scoring iterations: 18
##
## [1] "Number of sending >= 0.7 as: SENDER"
## [1] "Simple GAME : 43"
## [1] "ID GAME : 122"
## [1] "Score GAME : 150"
## [1] "Combine GAME : 153"
##      [,1] [,2]
## [1,]    43  122
## [2,]   150  153
##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data:  x
## X-squared = 23.272, df = 1, p-value = 1.406e-06
##
## Call:
## glm(formula = send0 ~ id + show_trust + show_id + show_trust *
##      show_id, family = binomial(link = "logit"), data = df0)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -2.0191  -0.7610  -0.2520   0.7852   2.8753
##
## Coefficients:
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)  -2.258311   0.362857  -6.224 4.86e-10 ***
## id2          -18.079802  891.677004  -0.020 0.983823
## id3           -1.217914   0.507627  -2.399 0.016430 *
## id4           -0.331651   0.446304  -0.743 0.457417

```

```

## id5          0.548933  0.449915  1.220 0.222434
## id6          -0.651512  0.468633 -1.390 0.164456
## id7          -3.538364  1.062376 -3.331 0.000867 ***
## id8          -0.511836  0.471367 -1.086 0.277543
## id9          -18.051472 860.609705 -0.021 0.983265
## id10         -0.695839  0.456520 -1.524 0.127453
## id11          0.200273  0.454803  0.440 0.659682
## id12         -2.215646  0.681793 -3.250 0.001155 **
## id13          1.047545  0.442442  2.368 0.017902 *
## id14          0.437663  0.449163  0.974 0.329860
## id15          0.971500  0.444160  2.187 0.028723 *
## id16          0.737913  0.437184  1.688 0.091435 .
## id17          2.858233  0.570336  5.011 5.40e-07 ***
## id18          1.708687  0.473074  3.612 0.000304 ***
## id19         -0.430074  0.465164 -0.925 0.355192
## id20         -0.297149  0.454549 -0.654 0.513290
## id21          0.469347  0.435643  1.077 0.281317
## id22         -0.345751  0.446782 -0.774 0.439008
## id23          0.197791  0.453142  0.436 0.662482
## id24         -0.136805  0.451486 -0.303 0.761882
## id25          0.005801  0.445380  0.013 0.989608
## id26         -3.398044  1.062926 -3.197 0.001389 **
## id27         -2.385478  0.678597 -3.515 0.000439 ***
## id28         -18.131249 847.559999 -0.021 0.982933
## id29         -1.852532  0.619610 -2.990 0.002791 **
## id30          1.927629  0.478470  4.029 5.61e-05 ***
## show_trustTRUE 2.222856  0.228875  9.712 < 2e-16 ***
## show_idTRUE    1.679140  0.226713  7.406 1.30e-13 ***
## show_trustTRUE:show_idTRUE -1.672422  0.290725 -5.753 8.79e-09 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
##    Null deviance: 1862.1  on 1499  degrees of freedom
## Residual deviance: 1290.0  on 1467  degrees of freedom
## AIC: 1356
##
## Number of Fisher Scoring iterations: 17
##
## [1] "Number of sending 1.0 (maximum) as: SENDER"
## [1] "Simple GAME : 33"
## [1] "ID GAME : 87"
## [1] "Score GAME : 106"
## [1] "Combine GAME : 111"
##      [,1] [,2]
## [1,]   43  122
## [2,]  150  153
##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data:  x
## X-squared = 23.272, df = 1, p-value = 1.406e-06
##

```


```

## [1] "Update on Fri 16-Jun-2017: due to the fact that chisq is tested on dependent data, we switch to
##
## Call:
## glm(formula = send0 ~ id + show_trust + show_id + show_trust *
##      show_id, family = binomial(link = "logit"), data = df0)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -1.77978  -0.65598  -0.27193  -0.00006   2.85961
##
## Coefficients:
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)      -2.2944     0.3811  -6.021 1.74e-09 ***
## id2             -17.7692    910.1097  -0.020 0.984423
## id3              -0.8833     0.5127  -1.723 0.084922 .
## id4              -0.3144     0.4648  -0.676 0.498848
## id5               0.6561     0.4536   1.446 0.148087
## id6              -0.4338     0.4808  -0.902 0.366952
## id7              -3.1822     1.0651  -2.988 0.002811 **
## id8              -1.0846     0.5521  -1.964 0.049475 *
## id9             -17.7463    876.8153  -0.020 0.983852
## id10             -1.7774     0.6178  -2.877 0.004016 **
## id11              0.3003     0.4623   0.650 0.515943
## id12             -3.0311     1.0655  -2.845 0.004445 **
## id13              1.2654     0.4441   2.849 0.004381 **
## id14              0.6371     0.4528   1.407 0.159432
## id15             -0.9847     0.5291  -1.861 0.062759 .
## id16              0.4910     0.4434   1.108 0.268065
## id17              3.0542     0.5681   5.376 7.63e-08 ***
## id18              1.7373     0.4639   3.745 0.000181 ***
## id19             -2.3335     0.7976  -2.926 0.003436 **
## id20             -0.8300     0.5130  -1.618 0.105676
## id21              0.2632     0.4448   0.592 0.554029
## id22             -0.6706     0.4869  -1.377 0.168448
## id23             -0.4076     0.4930  -0.827 0.408321
## id24             -0.7886     0.5130  -1.537 0.124202
## id25             -0.5543     0.4896  -1.132 0.257635
## id26             -17.6960    906.5893  -0.020 0.984427
## id27             -17.7592    876.7687  -0.020 0.983840
## id28             -17.8109    862.6768  -0.021 0.983528
## id29             -1.8343     0.6867  -2.671 0.007559 **
## id30              0.8242     0.4500   1.831 0.067034 .
## show_trustTRUE      1.8481     0.2520   7.333 2.26e-13 ***
## show_idTRUE         1.4218     0.2537   5.604 2.10e-08 ***
## show_trustTRUE:show_idTRUE -1.3587     0.3208  -4.236 2.28e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
##      Null deviance: 1598.3  on 1499  degrees of freedom
## Residual deviance: 1094.4  on 1467  degrees of freedom
## AIC: 1160.4
##

```

Number of Fisher Scoring iterations: 17

SENDER

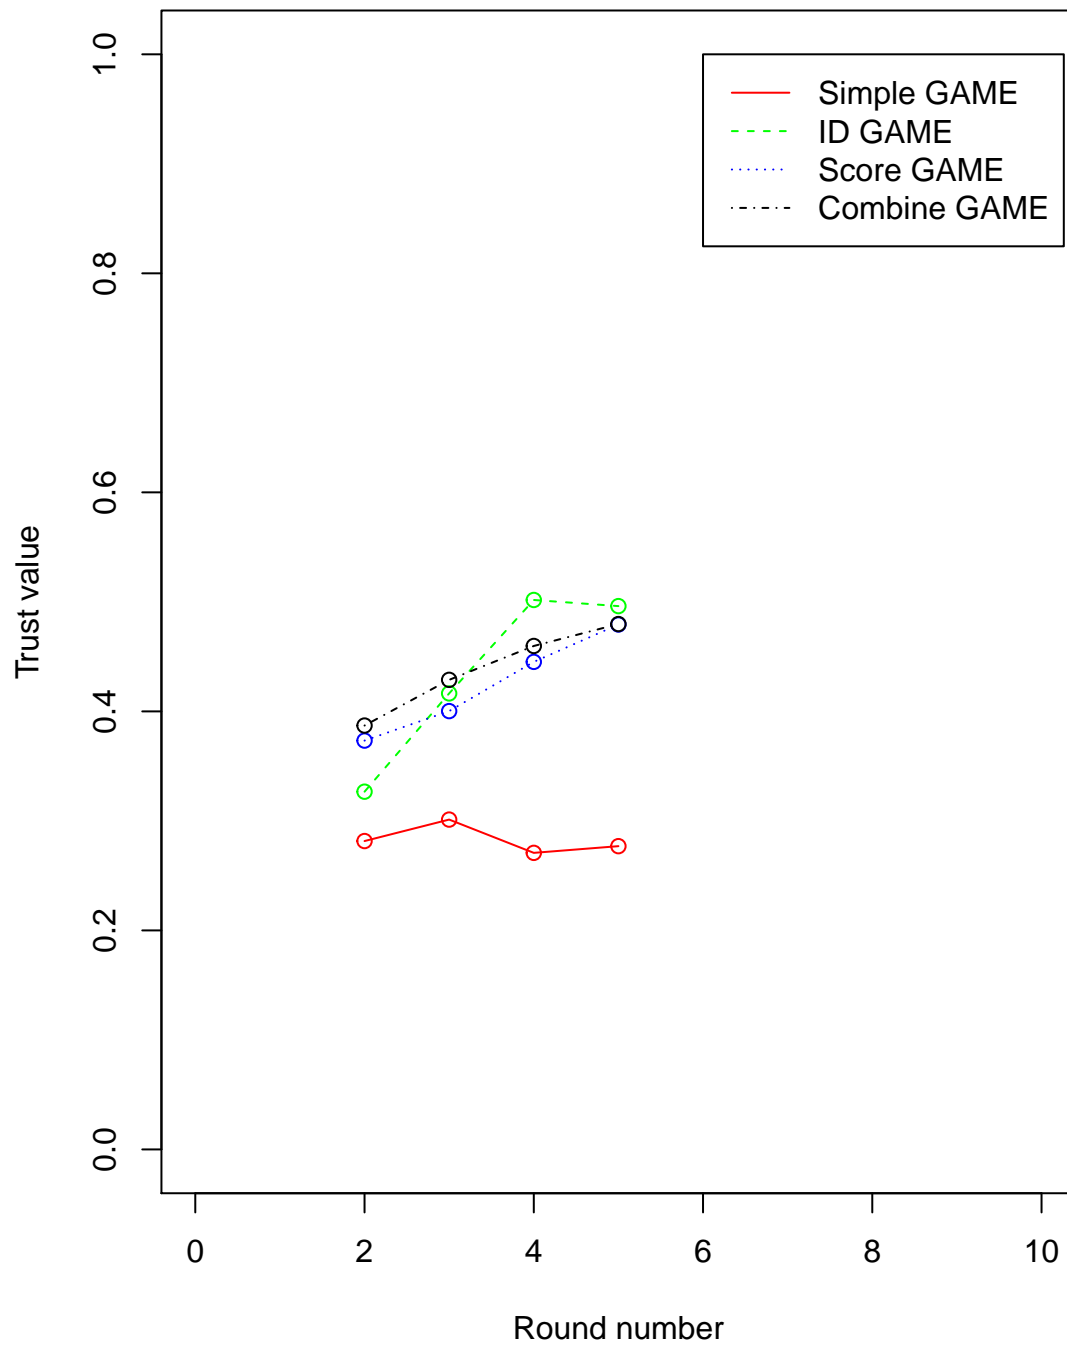

```
## [1] "Regression of resid trust score on round after elimiate subject effect of game: Simple GAME SENDER"
##
## Call:
## lm(formula = resid ~ rounds, data = ldf)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
```

```

## -0.43284 -0.09055 0.00045 0.07011 0.49822
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept) 0.040044 0.027253 1.469 0.143
## rounds      -0.011441 0.007417 -1.543 0.124
##
## Residual standard error: 0.1436 on 298 degrees of freedom
## Multiple R-squared: 0.007921, Adjusted R-squared: 0.004592
## F-statistic: 2.379 on 1 and 298 DF, p-value: 0.124
##
## [1] "Regression of resid trust score on round after elimiate subject effect of game: ID GAME SENDER"
##
## Call:
## lm(formula = resid ~ rounds, data = ldf)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.47395 -0.06351 0.00843 0.08878 0.45922
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept) -0.177745 0.028348 -6.270 1.26e-09 ***
## rounds       0.050784 0.007715 6.582 2.09e-10 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1494 on 298 degrees of freedom
## Multiple R-squared: 0.1269, Adjusted R-squared: 0.124
## F-statistic: 43.33 on 1 and 298 DF, p-value: 2.086e-10
##
## [1] "Regression of resid trust score on round after elimiate subject effect of game: Score GAME SEND"
##
## Call:
## lm(formula = resid ~ rounds, data = ldf)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.4783 -0.1162 0.0161 0.1264 0.5313
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept) -0.121773 0.031788 -3.831 0.000156 ***
## rounds       0.034792 0.008652 4.021 7.33e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1675 on 298 degrees of freedom
## Multiple R-squared: 0.05148, Adjusted R-squared: 0.04829
## F-statistic: 16.17 on 1 and 298 DF, p-value: 7.334e-05
##
## [1] "Regression of resid trust score on round after elimiate subject effect of game: Combine GAME SE"
##
## Call:

```

```

## lm(formula = resid ~ rounds, data = ldf)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.40674 -0.10245  0.00660  0.08397  0.59546
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept) -0.103163   0.028193  -3.659 0.000299 ***
## rounds       0.029475   0.007673   3.841 0.000150 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1486 on 298 degrees of freedom
## Multiple R-squared:  0.04718,    Adjusted R-squared:  0.04398
## F-statistic: 14.76 on 1 and 298 DF,  p-value: 0.0001495
##
## [1] "Number of sending 0.0 as: RECEIVER"
## [1] "Simple GAME : 92"
## [1] "ID GAME : 29"
## [1] "Score GAME : 27"
## [1] "Combine GAME : 15"
##      [,1] [,2]
## [1,]   92  29
## [2,]   27  15
##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data:  x
## X-squared = 1.6278, df = 1, p-value = 0.202
##
## [1] "Update on Fri 16-Jun-2017: due to the fact that chisq is tested on dependent data, we switch to
##
## Call:
## glm(formula = send0 ~ id + show_trust + show_id + show_trust *
##      show_id, family = binomial(link = "logit"), data = df0)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -2.1590  -0.4299  -0.1998  -0.0001   3.4203
##
## Coefficients:
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)   4.940e-01  5.687e-01   0.869 0.385018
## id2           2.667e+00  7.263e-01   3.672 0.000241 ***
## id3          -5.299e-01  7.647e-01  -0.693 0.488372
## id4          -1.734e+00  1.191e+00  -1.456 0.145401
## id5          -1.767e+01  1.911e+03  -0.009 0.992620
## id6           1.734e+00  6.893e-01   2.516 0.011857 *
## id7          -1.846e+01  1.498e+03  -0.012 0.990168
## id8          -5.256e-01  7.292e-01  -0.721 0.471009
## id9          -1.572e+00  8.474e-01  -1.855 0.063610 .
## id10         -1.851e+01  1.565e+03  -0.012 0.990563
## id11         1.788e-03  6.863e-01   0.003 0.997922

```

```

## id12          3.948e-01  6.623e-01  0.596 0.551050
## id13          4.184e-01  6.708e-01  0.624 0.532841
## id14        -1.830e+01  1.416e+03 -0.013 0.989686
## id15          5.393e-01  6.696e-01  0.805 0.420574
## id16        -1.805e+01  1.532e+03 -0.012 0.990601
## id17        -8.340e-01  7.312e-01 -1.141 0.254059
## id18          1.401e-01  6.718e-01  0.209 0.834764
## id19        -2.818e+00  1.171e+00 -2.406 0.016118 *
## id20        -5.108e-01  7.073e-01 -0.722 0.470159
## id21        -2.478e+00  9.315e-01 -2.661 0.007795 **
## id22        -1.213e+00  7.959e-01 -1.524 0.127404
## id23        -3.116e+00  1.169e+00 -2.665 0.007687 **
## id24        -2.361e+00  9.315e-01 -2.534 0.011273 *
## id25        -2.206e+00  9.336e-01 -2.363 0.018140 *
## id26        -1.646e+00  8.484e-01 -1.941 0.052312 .
## id27        -1.174e+00  7.619e-01 -1.541 0.123260
## id28          1.621e+00  6.660e-01  2.434 0.014940 *
## id29        -1.368e+00  7.887e-01 -1.734 0.082935 .
## id30        -2.105e+00  9.358e-01 -2.249 0.024504 *
## show_trustTRUE        -2.314e+00  2.923e-01 -7.915 2.47e-15 ***
## show_idTRUE          -2.621e+00  3.026e-01 -8.662 < 2e-16 ***
## show_trustTRUE:show_idTRUE  1.711e+00  4.648e-01  3.680 0.000233 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
##    Null deviance: 965.90  on 1242  degrees of freedom
## Residual deviance: 606.19  on 1210  degrees of freedom
## AIC: 672.19
##
## Number of Fisher Scoring iterations: 18
##
## [1] "Number of sending >= 0.7 as: RECEIVER"
## [1] "Simple GAME : 9"
## [1] "ID GAME : 17"
## [1] "Score GAME : 20"
## [1] "Combine GAME : 19"
##      [,1] [,2]
## [1,]    9  17
## [2,]   20  19
##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data:  x
## X-squared = 1.144, df = 1, p-value = 0.2848
##
## Call:
## glm(formula = send0 ~ id + show_trust + show_id + show_trust *
##      show_id, family = binomial(link = "logit"), data = df0)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max

```



```

## -1.09078 -0.29758 -0.18472 -0.00005 2.84264
##
## Coefficients:
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)    -2.675e+00  7.128e-01  -3.753 0.000175 ***
## id2            -6.523e-01  1.194e+00  -0.546 0.584833
## id3            -1.818e+01  2.950e+03  -0.006 0.995083
## id4            -1.824e+01  3.472e+03  -0.005 0.995809
## id5            -1.821e+01  3.289e+03  -0.006 0.995584
## id6             1.776e+00  7.351e-01   2.417 0.015666 *
## id7            -1.281e+00  1.183e+00  -1.083 0.278629
## id8            -3.048e-01  8.502e-01  -0.359 0.719929
## id9            -1.816e+01  2.871e+03  -0.006 0.994952
## id10           1.989e+00  6.923e-01   2.873 0.004070 **
## id11           5.524e-03  8.004e-01   0.007 0.994493
## id12           2.514e-01  7.690e-01   0.327 0.743765
## id13           -1.813e+01  2.699e+03  -0.007 0.994639
## id14           -7.471e-01  9.434e-01  -0.792 0.428409
## id15           -1.816e+01  2.669e+03  -0.007 0.994570
## id16           1.465e+00  6.949e-01   2.109 0.034971 *
## id17           -1.450e+00  1.179e+00  -1.230 0.218678
## id18           -1.428e+00  1.180e+00  -1.211 0.225970
## id19           -1.819e+01  2.582e+03  -0.007 0.994379
## id20           -1.348e+00  1.181e+00  -1.142 0.253623
## id21           -2.136e-01  8.552e-01  -0.250 0.802743
## id22           -1.259e+00  1.182e+00  -1.065 0.286887
## id23           -1.815e+01  2.554e+03  -0.007 0.994331
## id24           -1.815e+01  2.528e+03  -0.007 0.994272
## id25           -1.388e+00  1.181e+00  -1.175 0.239939
## id26           -1.811e+01  2.733e+03  -0.007 0.994713
## id27           -1.812e+01  2.700e+03  -0.007 0.994646
## id28           -1.809e+01  2.911e+03  -0.006 0.995041
## id29           -1.815e+01  2.582e+03  -0.007 0.994390
## id30           -6.796e-01  9.440e-01  -0.720 0.471595
## show_trustTRUE    4.789e-01  4.541e-01   1.055 0.291555
## show_idTRUE       2.274e-01  4.616e-01   0.493 0.622325
## show_trustTRUE:show_idTRUE -4.469e-01  5.903e-01  -0.757 0.448976
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
##    Null deviance: 510.16  on 1242  degrees of freedom
## Residual deviance: 356.86  on 1210  degrees of freedom
## AIC: 422.86
##
## Number of Fisher Scoring iterations: 19
##
## [1] "Number of sending 1.0 (maximum) as: RECEIVER"
## [1] "Simple GAME : 7"
## [1] "ID GAME : 11"
## [1] "Score GAME : 11"
## [1] "Combine GAME : 7"
##      [,1] [,2]

```


```

## [1,]    9   17
## [2,]   20   19
##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data:  x
## X-squared = 1.144, df = 1, p-value = 0.2848
##
## [1] "Update on Fri 16-Jun-2017: due to the fact that chisq is tested on dependent data, we switch to
##
## Call:
## glm(formula = send0 ~ id + show_trust + show_id + show_trust *
##      show_id, family = binomial(link = "logit"), data = df0)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -1.00659  -0.22756  -0.00003  -0.00003   2.93714
##
## Coefficients:
##
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)    -2.219e+00  7.418e-01  -2.991  0.00278 **
## id2            -8.368e-01  1.198e+00  -0.698  0.48505
## id3            -1.931e+01  4.860e+03  -0.004  0.99683
## id4            -1.934e+01  5.718e+03  -0.003  0.99730
## id5            -1.921e+01  5.402e+03  -0.004  0.99716
## id6             1.693e+00  7.382e-01   2.293  0.02184 *
## id7            -1.421e+00  1.187e+00  -1.197  0.23121
## id8            -7.998e-01  9.448e-01  -0.847  0.39726
## id9            -1.929e+01  4.728e+03  -0.004  0.99674
## id10           1.172e+00  7.201e-01   1.628  0.10356
## id11           -1.532e+00  1.181e+00  -1.297  0.19446
## id12           1.587e-01  7.721e-01   0.206  0.83713
## id13           -1.925e+01  4.442e+03  -0.004  0.99654
## id14           -8.409e-01  9.458e-01  -0.889  0.37394
## id15           -1.923e+01  4.389e+03  -0.004  0.99650
## id16           -1.921e+01  4.490e+03  -0.004  0.99659
## id17           -1.927e+01  4.205e+03  -0.005  0.99634
## id18           -1.553e+00  1.182e+00  -1.314  0.18897
## id19           -1.929e+01  4.251e+03  -0.005  0.99638
## id20           -1.925e+01  4.342e+03  -0.004  0.99646
## id21           -8.095e-01  9.529e-01  -0.849  0.39562
## id22           -1.927e+01  4.552e+03  -0.004  0.99662
## id23           -1.927e+01  4.206e+03  -0.005  0.99634
## id24           -1.925e+01  4.160e+03  -0.005  0.99631
## id25           -1.930e+01  4.393e+03  -0.004  0.99649
## id26           -1.919e+01  4.493e+03  -0.004  0.99659
## id27           -1.921e+01  4.440e+03  -0.004  0.99655
## id28           -1.922e+01  4.789e+03  -0.004  0.99680
## id29           -1.926e+01  4.249e+03  -0.005  0.99638
## id30           -1.924e+01  4.294e+03  -0.004  0.99642
## show_trustTRUE    1.100e-01  5.432e-01   0.203  0.83948
## show_idTRUE       2.586e-03  5.415e-01   0.005  0.99619
## show_trustTRUE:show_idTRUE -6.616e-01  7.575e-01  -0.873  0.38244
## ---

```

```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
##      Null deviance: 325.95  on 1242  degrees of freedom
## Residual deviance: 212.54  on 1210  degrees of freedom
## AIC: 278.54
##
## Number of Fisher Scoring iterations: 20
```

RECEIVER

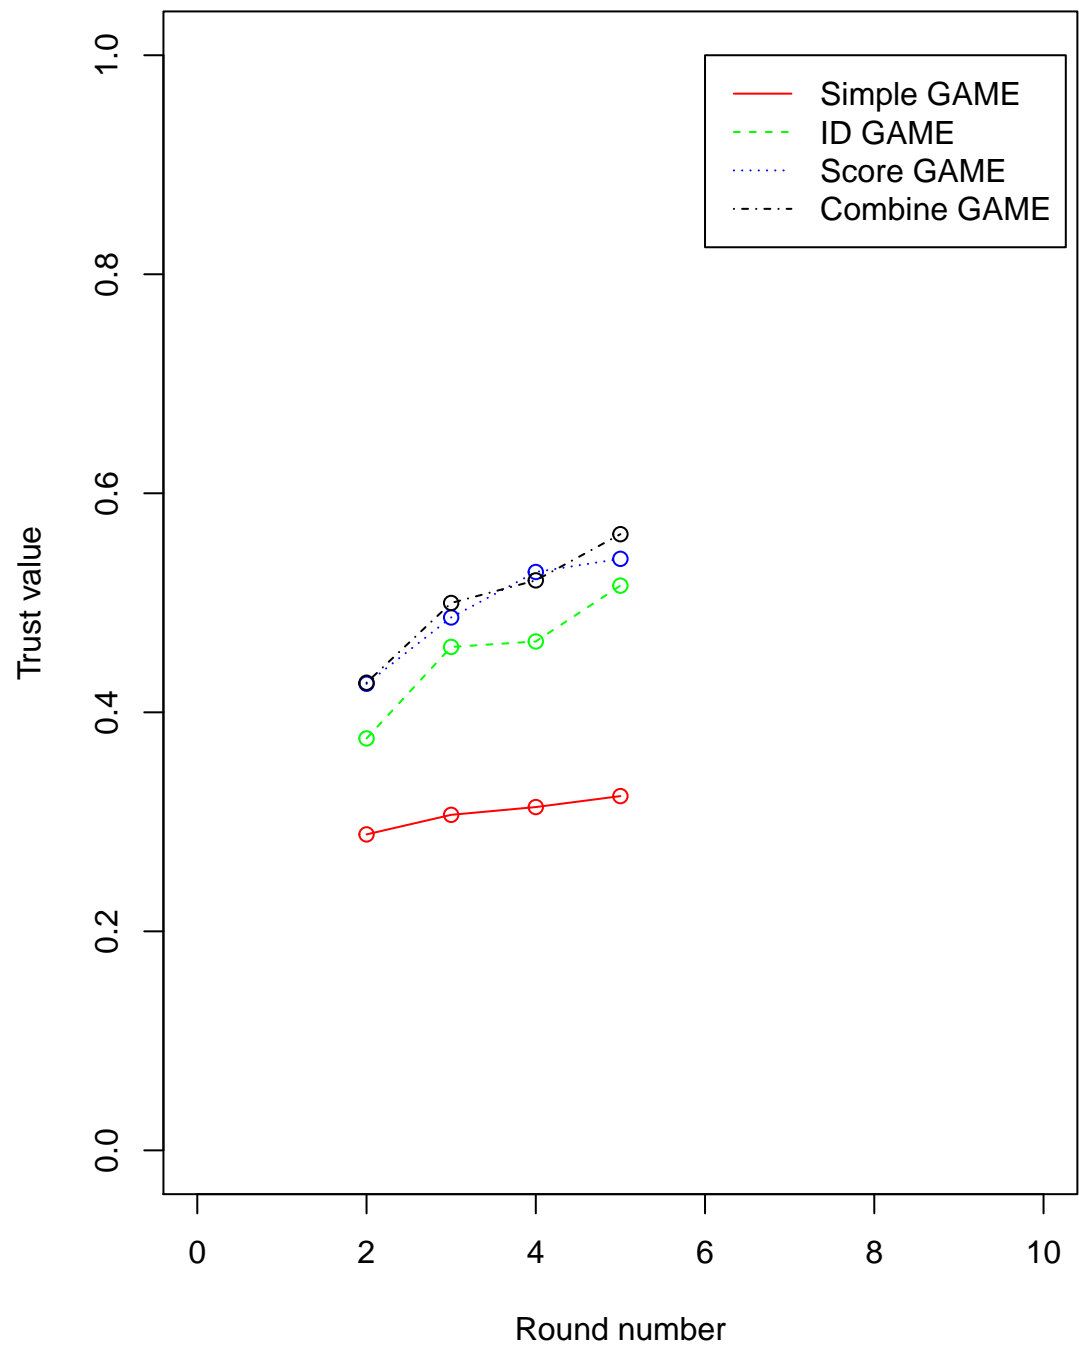

```
## [1] "Regression of resid trust score on round after elimiate subject effect of game: Simple GAME REC
##
## Call:
## lm(formula = resid ~ rounds, data = ldf)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39246 -0.07447  0.00322  0.07018  0.55105
```

```

##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept) -0.026730   0.034596  -0.773   0.441
## rounds      0.007837   0.009634   0.813   0.417
##
## Residual standard error: 0.1492 on 188 degrees of freedom
## Multiple R-squared:  0.003508, Adjusted R-squared:  -0.001793
## F-statistic: 0.6618 on 1 and 188 DF, p-value: 0.417
##
## [1] "Regression of resid trust score on round after elimiate subject effect of game: ID GAME RECEIVED"
##
## Call:
## lm(formula = resid ~ rounds, data = ldf)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.44929 -0.06160 -0.00610  0.05829  0.33700
##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept) -0.152876   0.025569  -5.979 7.23e-09 ***
## rounds      0.044032   0.007007   6.284 1.35e-09 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1285 on 265 degrees of freedom
## Multiple R-squared:  0.1297, Adjusted R-squared:  0.1264
## F-statistic: 39.49 on 1 and 265 DF, p-value: 1.35e-09
##
## [1] "Regression of resid trust score on round after elimiate subject effect of game: Score GAME RECEIVED"
##
## Call:
## lm(formula = resid ~ rounds, data = ldf)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.44424 -0.08353  0.00415  0.09482  0.38899
##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept) -0.156932   0.031965  -4.91 1.65e-06 ***
## rounds      0.044485   0.008638   5.15 5.28e-07 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1533 on 250 degrees of freedom
## Multiple R-squared:  0.09592, Adjusted R-squared:  0.0923
## F-statistic: 26.52 on 1 and 250 DF, p-value: 5.28e-07
##
## [1] "Regression of resid trust score on round after elimiate subject effect of game: Combine GAME RECEIVED"
##
## Call:
## lm(formula = resid ~ rounds, data = ldf)

```

```
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.49744 -0.06710  0.01748  0.08119  0.53212
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept) -0.14789    0.02695  -5.488 9.76e-08 ***
## rounds      0.04244    0.00736   5.767 2.32e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.133 on 256 degrees of freedom
## Multiple R-squared:  0.115, Adjusted R-squared:  0.1115
## F-statistic: 33.26 on 1 and 256 DF, p-value: 2.317e-08
```


Send proportion overtime (plot)

Date: Wed 21-Jun-2017

We plot the send proportion by role over time in each game to see how people send more or less by time in each game

For each partner (5 rounds in total)

```
## [1] "Type: SENDER"
```

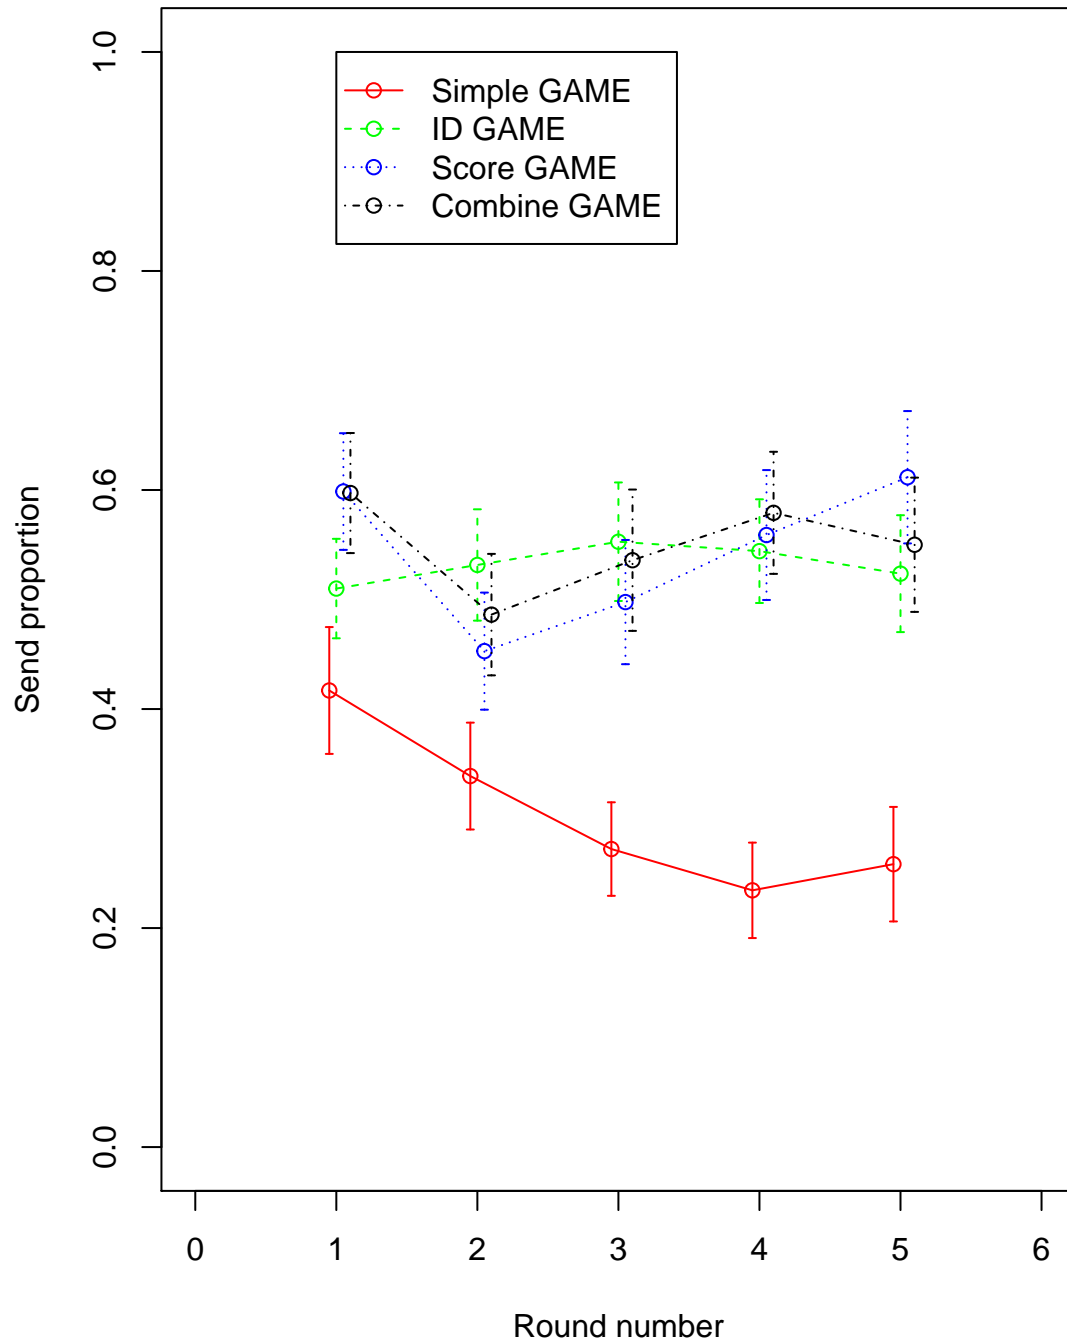

```
## [1] "Regression to see change over time of send proportion on game: Simple GAME"
##
```


```

## Call:
## lm(formula = resid ~ round_number, data = change_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.46107 -0.18031 -0.03776  0.15608  0.90052
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.12794    0.04678   2.735  0.00701 **
## round_number  -0.04255    0.01406  -3.027  0.00292 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.243 on 145 degrees of freedom
## Multiple R-squared:  0.05945,    Adjusted R-squared:  0.05296
## F-statistic: 9.164 on 1 and 145 DF,  p-value: 0.002921
##
## [1] "Regression to see change over time of send proportion on game: ID GAME"
##
## Call:
## lm(formula = resid ~ round_number, data = change_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.49985 -0.21938 -0.00208  0.16245  0.50605
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.012316    0.051506  -0.239   0.811
## round_number   0.004086    0.015433   0.265   0.792
##
## Residual standard error: 0.2664 on 143 degrees of freedom
## Multiple R-squared:  0.00049,    Adjusted R-squared:  -0.0065
## F-statistic: 0.07011 on 1 and 143 DF,  p-value: 0.7916
##
## [1] "Regression to see change over time of send proportion on game: Score GAME"
##
## Call:
## lm(formula = resid ~ round_number, data = change_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.55966 -0.25913 -0.02011  0.25477  0.52596
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.03904    0.05930  -0.658   0.511
## round_number   0.01298    0.01781   0.729   0.467
##
## Residual standard error: 0.3079 on 144 degrees of freedom
## Multiple R-squared:  0.003678,    Adjusted R-squared:  -0.003241
## F-statistic: 0.5316 on 1 and 144 DF,  p-value: 0.4671
##

```



```
## [1] "Regression to see change over time of send proportion on game: Combine GAME"
##
## Call:
## lm(formula = resid ~ round_number, data = change_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.59826 -0.26289  0.01504  0.26334  0.53095
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.001933   0.060012   0.032   0.974
## round_number -0.000643   0.018033  -0.036   0.972
##
## Residual standard error: 0.3118 on 145 degrees of freedom
## Multiple R-squared:  8.769e-06, Adjusted R-squared:  -0.006888
## F-statistic: 0.001271 on 1 and 145 DF, p-value: 0.9716
##
##
##
##
## [1] "Type: RECEIVER"
```

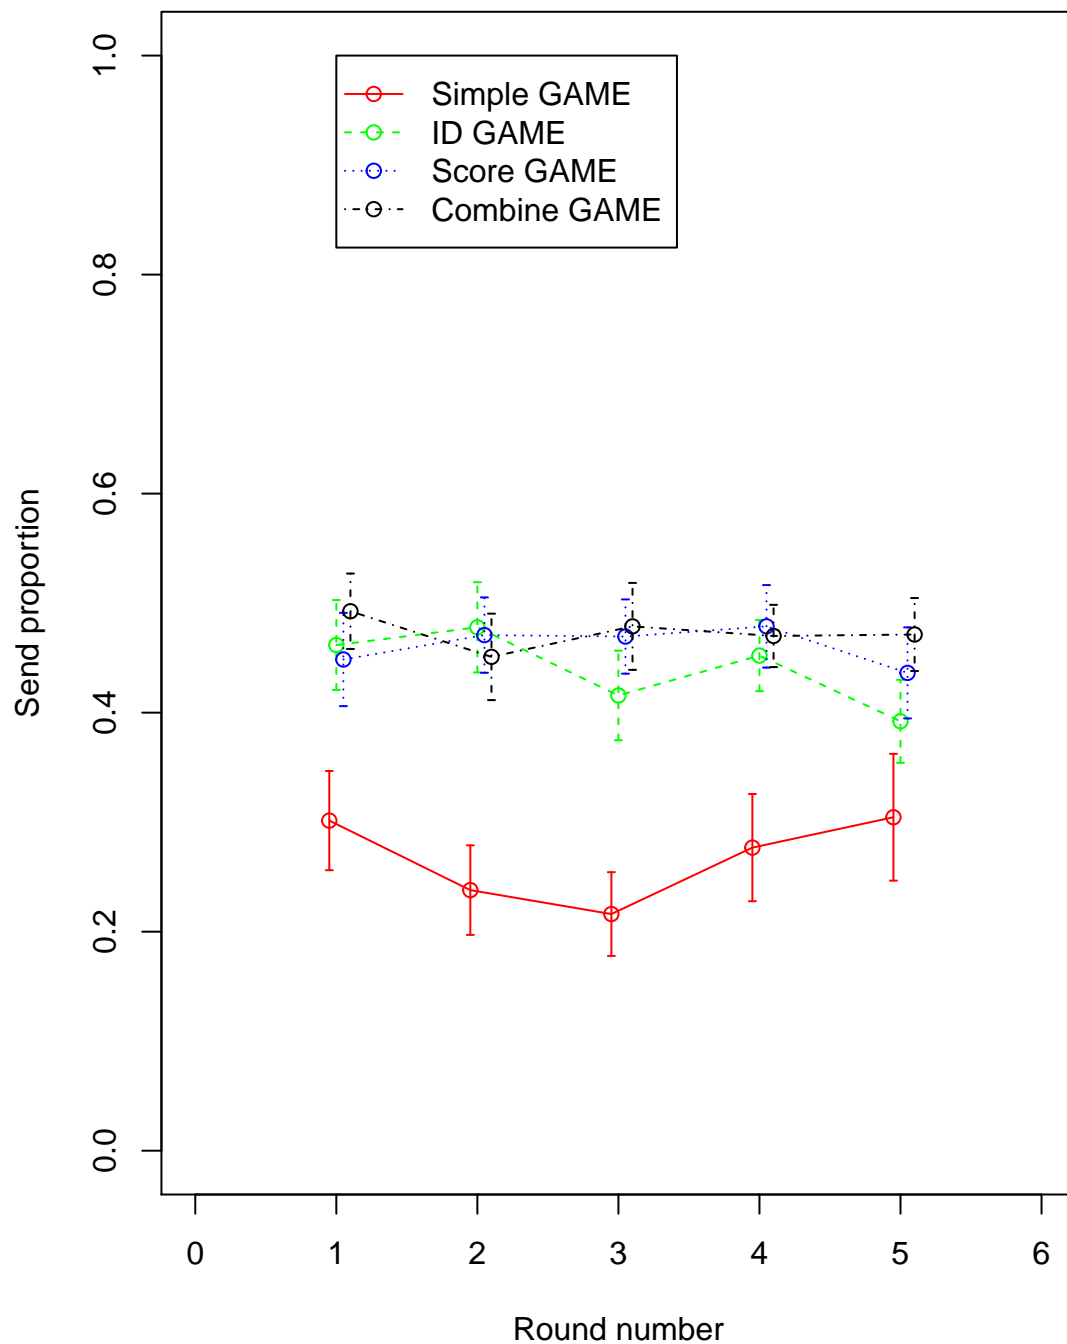

```
## [1] "Regression to see change over time of send proportion on game: Simple GAME"
##
## Call:
## lm(formula = resid ~ round_number, data = change_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.33215 -0.20087 -0.02625  0.16390  0.77900
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
```

```


## (Intercept)  -0.010980   0.047443  -0.231   0.817
## round_number  0.003707   0.014410   0.257   0.797
##
## Residual standard error: 0.2371 on 129 degrees of freedom
## Multiple R-squared:  0.0005128, Adjusted R-squared:  -0.007235
## F-statistic: 0.06618 on 1 and 129 DF,  p-value: 0.7974
##
## [1] "Regression to see change over time of send proportion on game: ID GAME"
##
## Call:
## lm(formula = resid ~ round_number, data = change_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.50354 -0.11963  0.03321  0.14295  0.53082
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.04832    0.03988   1.211   0.228
## round_number -0.01622    0.01207  -1.343   0.181
##
## Residual standard error: 0.2074 on 143 degrees of freedom
## Multiple R-squared:  0.01246, Adjusted R-squared:  0.005553
## F-statistic: 1.804 on 1 and 143 DF,  p-value: 0.1814
##
## [1] "Regression to see change over time of send proportion on game: Score GAME"
##
## Call:
## lm(formula = resid ~ round_number, data = change_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.4907 -0.1285  0.0293  0.1472  0.3810
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.005585    0.039192   0.143   0.887
## round_number -0.001871    0.011809  -0.158   0.874
##
## Residual standard error: 0.2018 on 137 degrees of freedom
## Multiple R-squared:  0.0001831, Adjusted R-squared:  -0.007115
## F-statistic: 0.02509 on 1 and 137 DF,  p-value: 0.8744
##
## [1] "Regression to see change over time of send proportion on game: Combine GAME"
##
## Call:
## lm(formula = resid ~ round_number, data = change_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.49991 -0.10225  0.00816  0.11516  0.50210
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)

```

```
## (Intercept)  0.005919  0.035701  0.166  0.869
## round_number -0.002006  0.010895 -0.184  0.854
##
## Residual standard error: 0.1845 on 139 degrees of freedom
## Multiple R-squared:  0.0002439, Adjusted R-squared:  -0.006949
## F-statistic: 0.03391 on 1 and 139 DF,  p-value: 0.8542
```

For all 25 rounds (so no distinguish between partners)

```
## [1] "Type: SENDER"
```

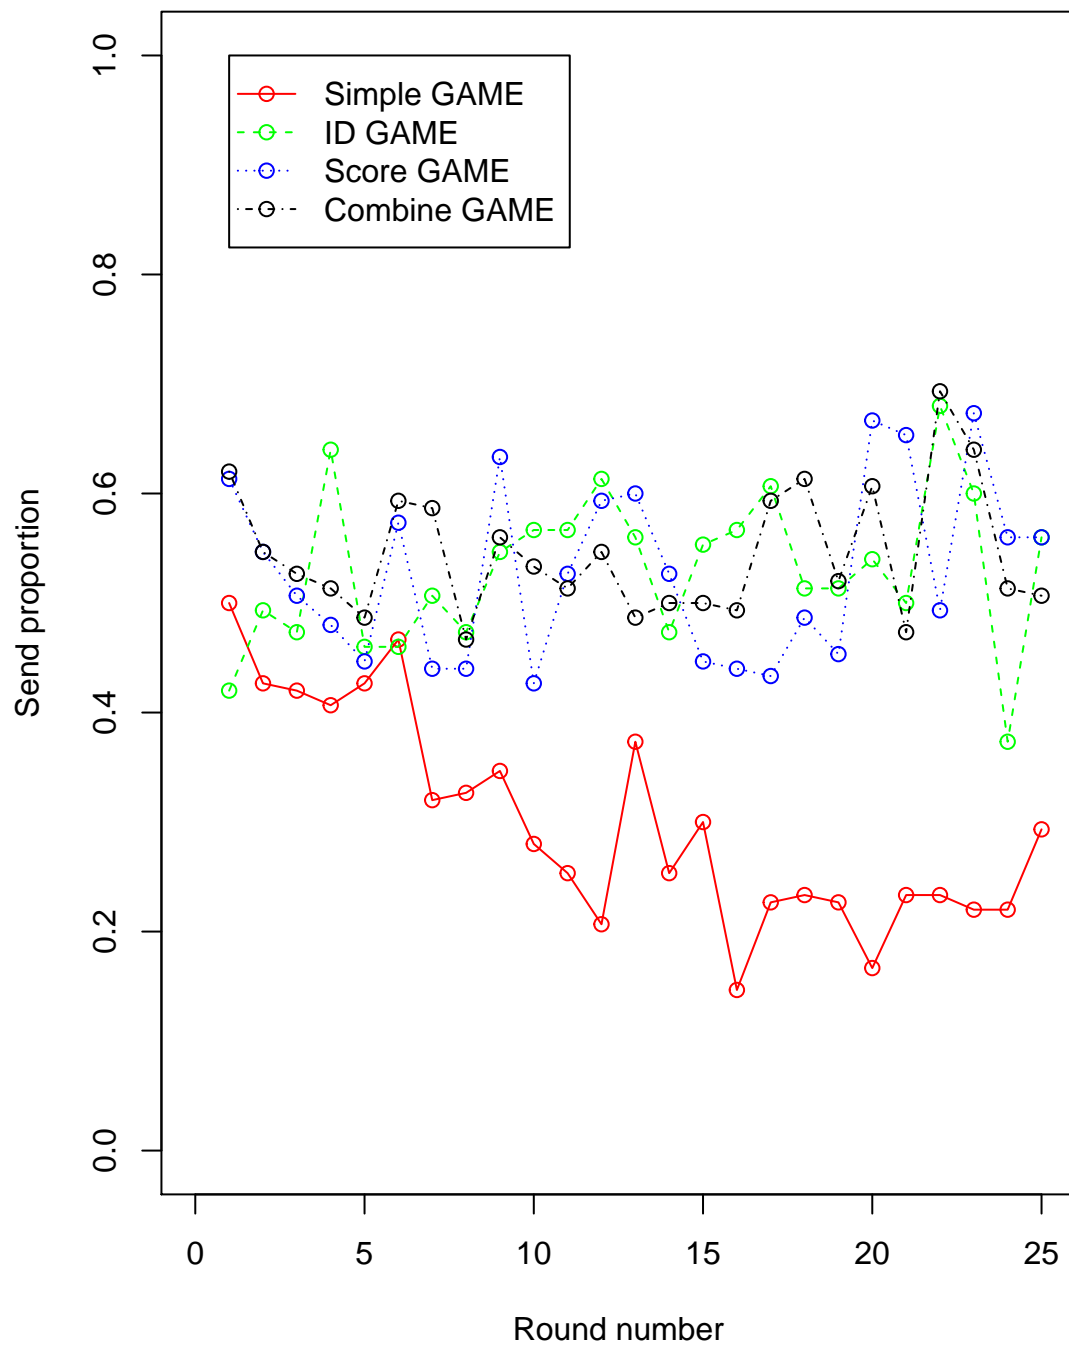


```
##
```

```
##
```

```
##
```

```
## [1] "Type: RECEIVER"
```

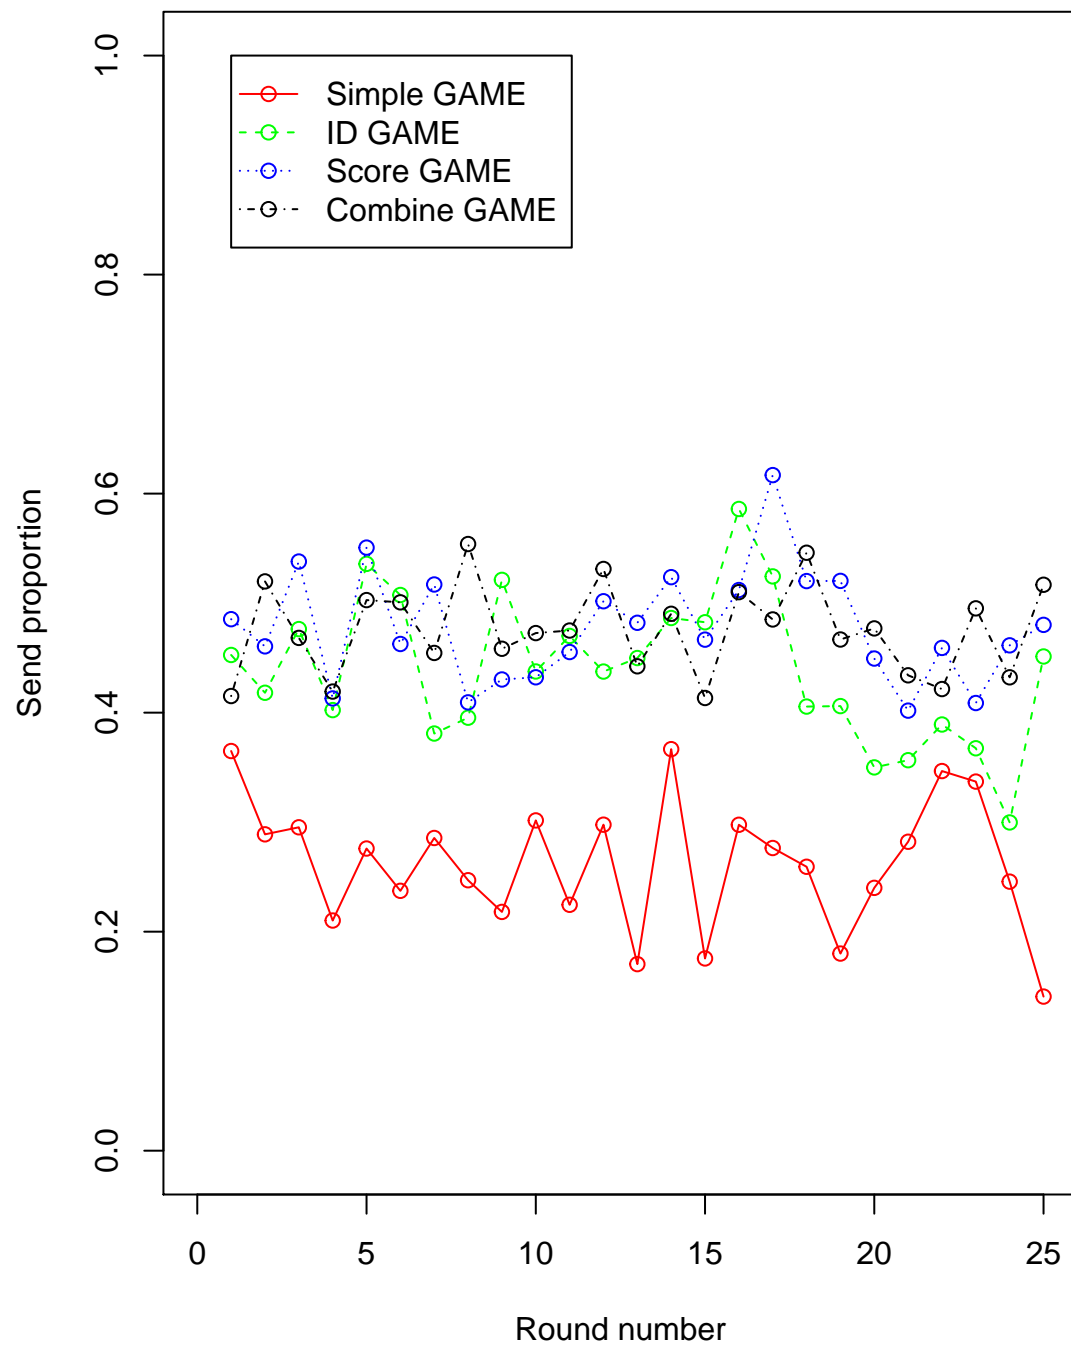

Study the scatter in round 5 in each game

Date: Fri 23-Jun-2017

We realized that the prediction model with reputation is better than the model with trust in Receiver, Round 5, Score Game.

My hypothesis is in Score Game, people act more constantly, therefore reputation is good.

I will check the scatter of each game, Receiver, Round 5 to see.


We checked the difference between send proportion in round 4 and round 5 for each pair of users to see in which game users change their behavior with same partner in last 2 rounds most. In this analysis there is only for 1 role.

```
## [1] "Type: RECEIVER"
## [1] "Process game: Simple GAME"
## [1] "Study the different in send proportion between last 2 rounds of same sender-receiver pairs"
## [1] 109
## [1] "Average diff: -0.116440949468472"
## [1] "Type: RECEIVER"
## [1] "Process game: ID GAME"
## [1] "Study the different in send proportion between last 2 rounds of same sender-receiver pairs"
## [1] 140
## [1] "Average diff: -0.0122297808012094"
## [1] "Type: RECEIVER"
## [1] "Process game: Score GAME"
## [1] "Study the different in send proportion between last 2 rounds of same sender-receiver pairs"
## [1] 138
## [1] "Average diff: 0.00615175216624492"
## [1] "Type: RECEIVER"
## [1] "Process game: Combine GAME"
## [1] "Study the different in send proportion between last 2 rounds of same sender-receiver pairs"
## [1] 136
## [1] "Average diff: -0.00451388888888889"
```

We plot the average send proportion of each user to each partner in each game

```
## [1] "Process game: Simple GAME"
## [1] "Mean of variance: 0.0544683290166449"
```


Simple GAME

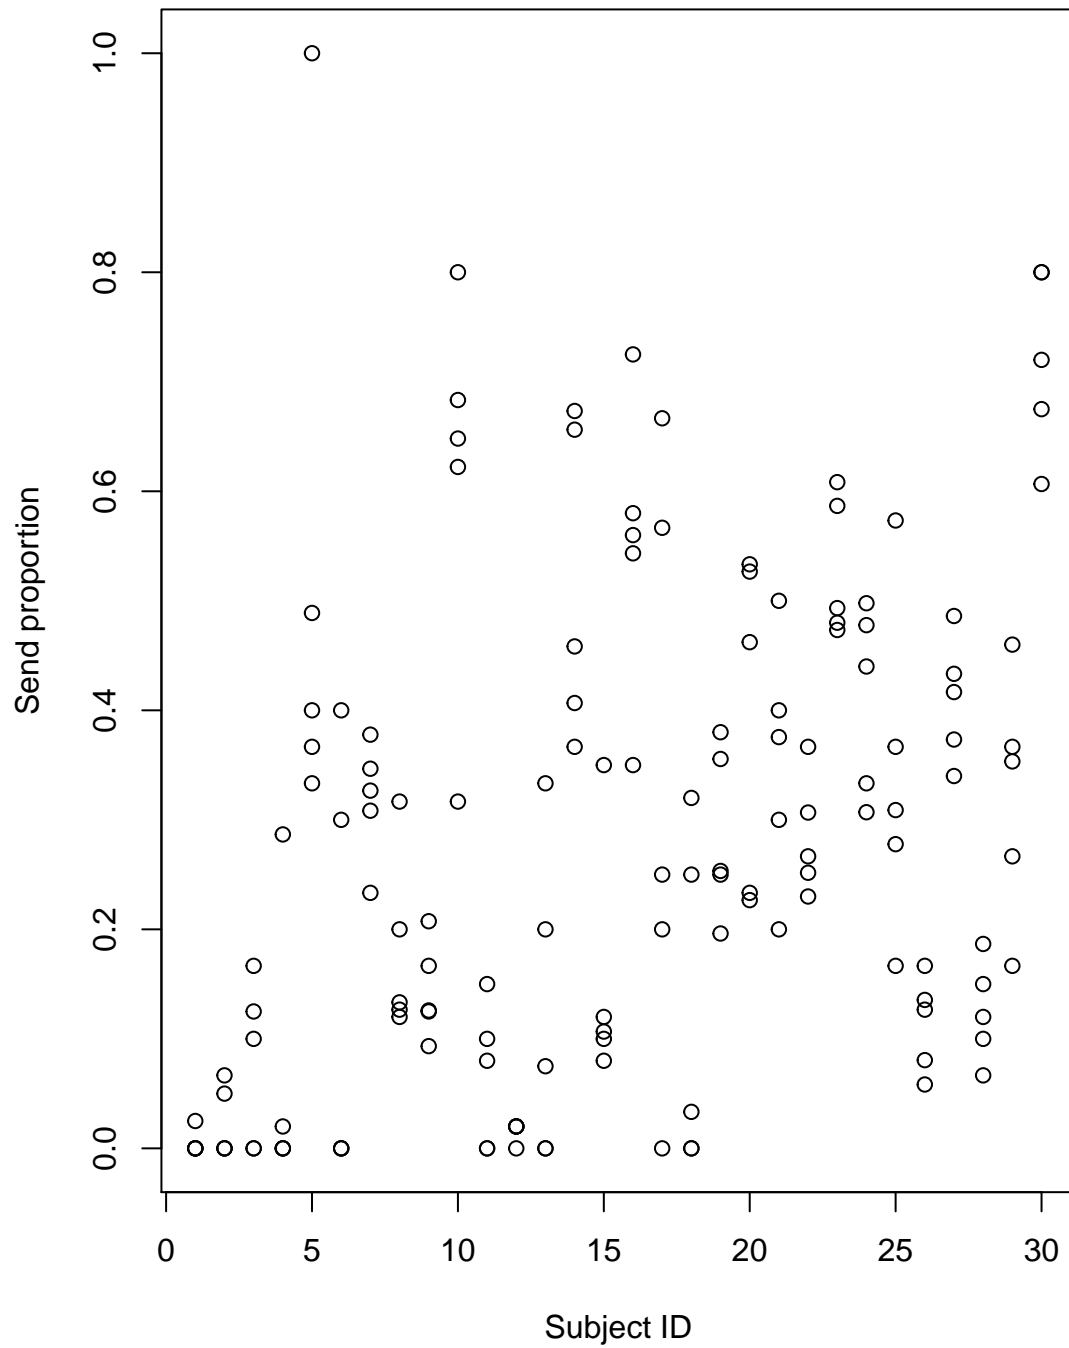

```
## [1] "Process game: ID GAME"
```


```
## [1] "Mean of variance: 0.0557557880627063"
```


ID GAME

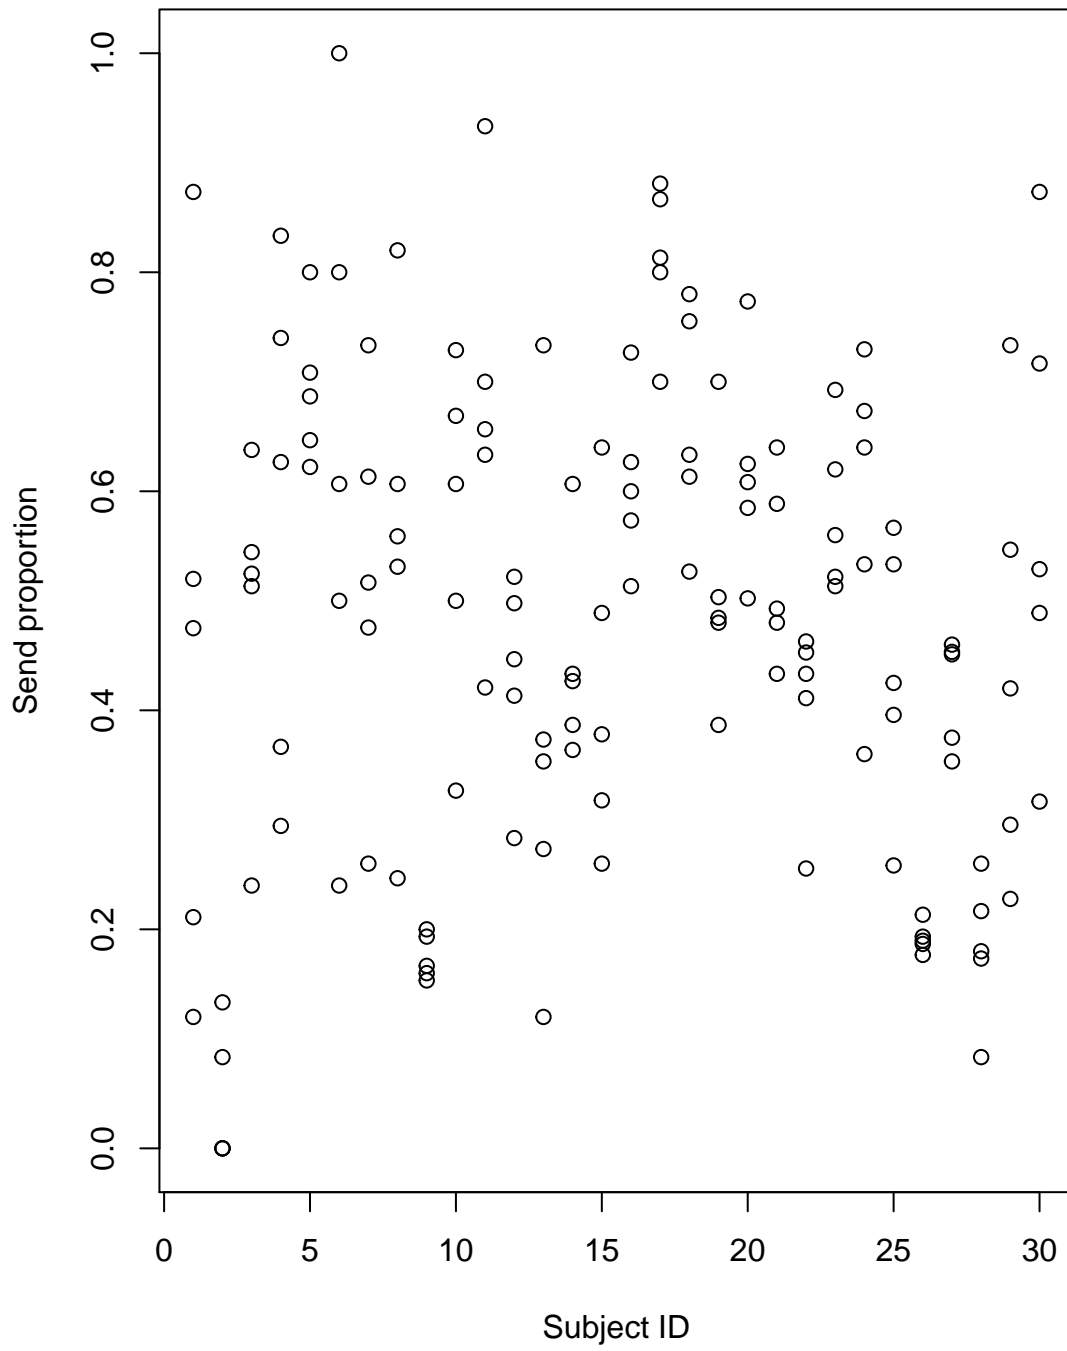


```
## [1] "Process game: Score GAME"  
## [1] "Mean of variance: 0.0678390821436043"
```

Score GAME

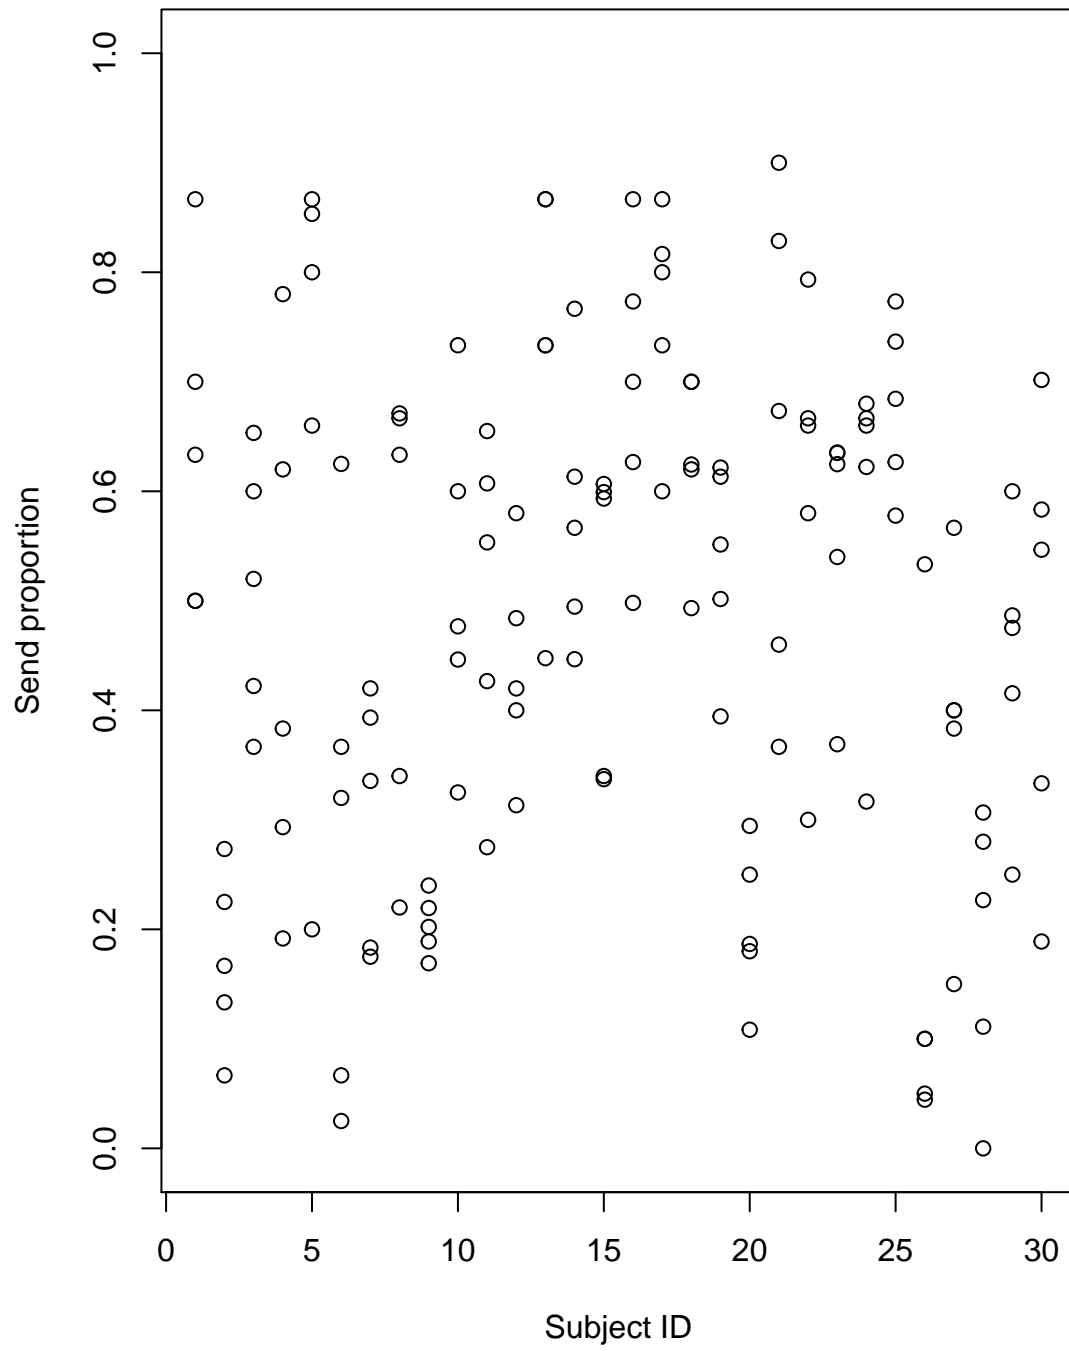

```
## [1] "Process game: Combine GAME"  
## [1] "Mean of variance: 0.0584155037424393"
```

Combine GAME

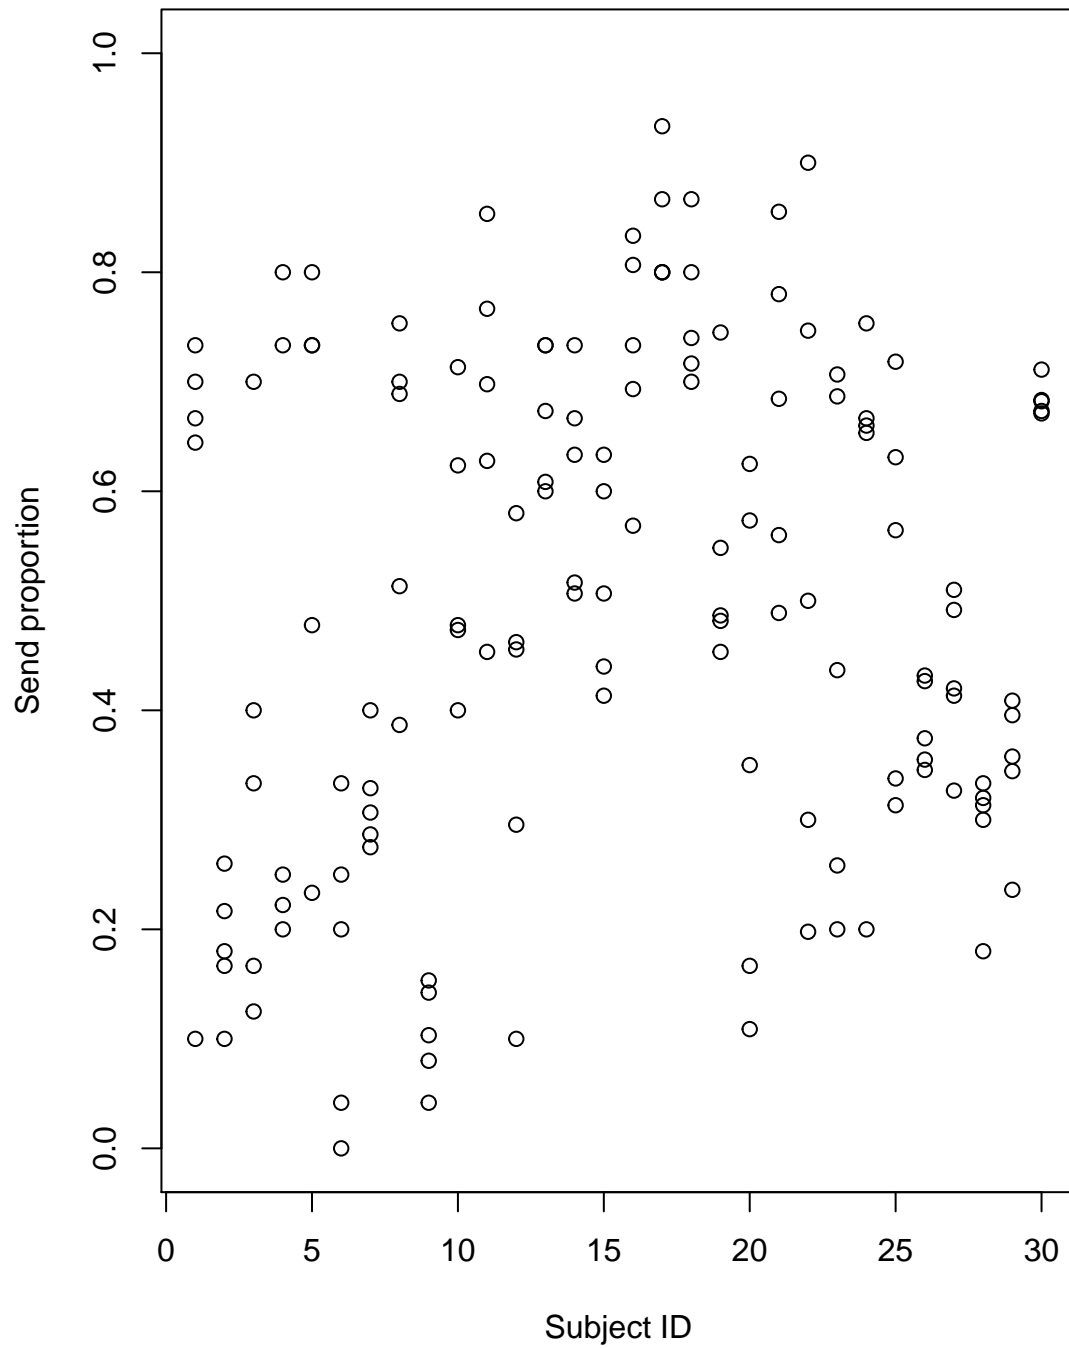


Scatter plot by role

Repeat the above analysis, but separate role

```
## [1] "Type: SENDER"
```


```
## [1] "Process game: Simple GAME"
```

Simple GAME : SENDER

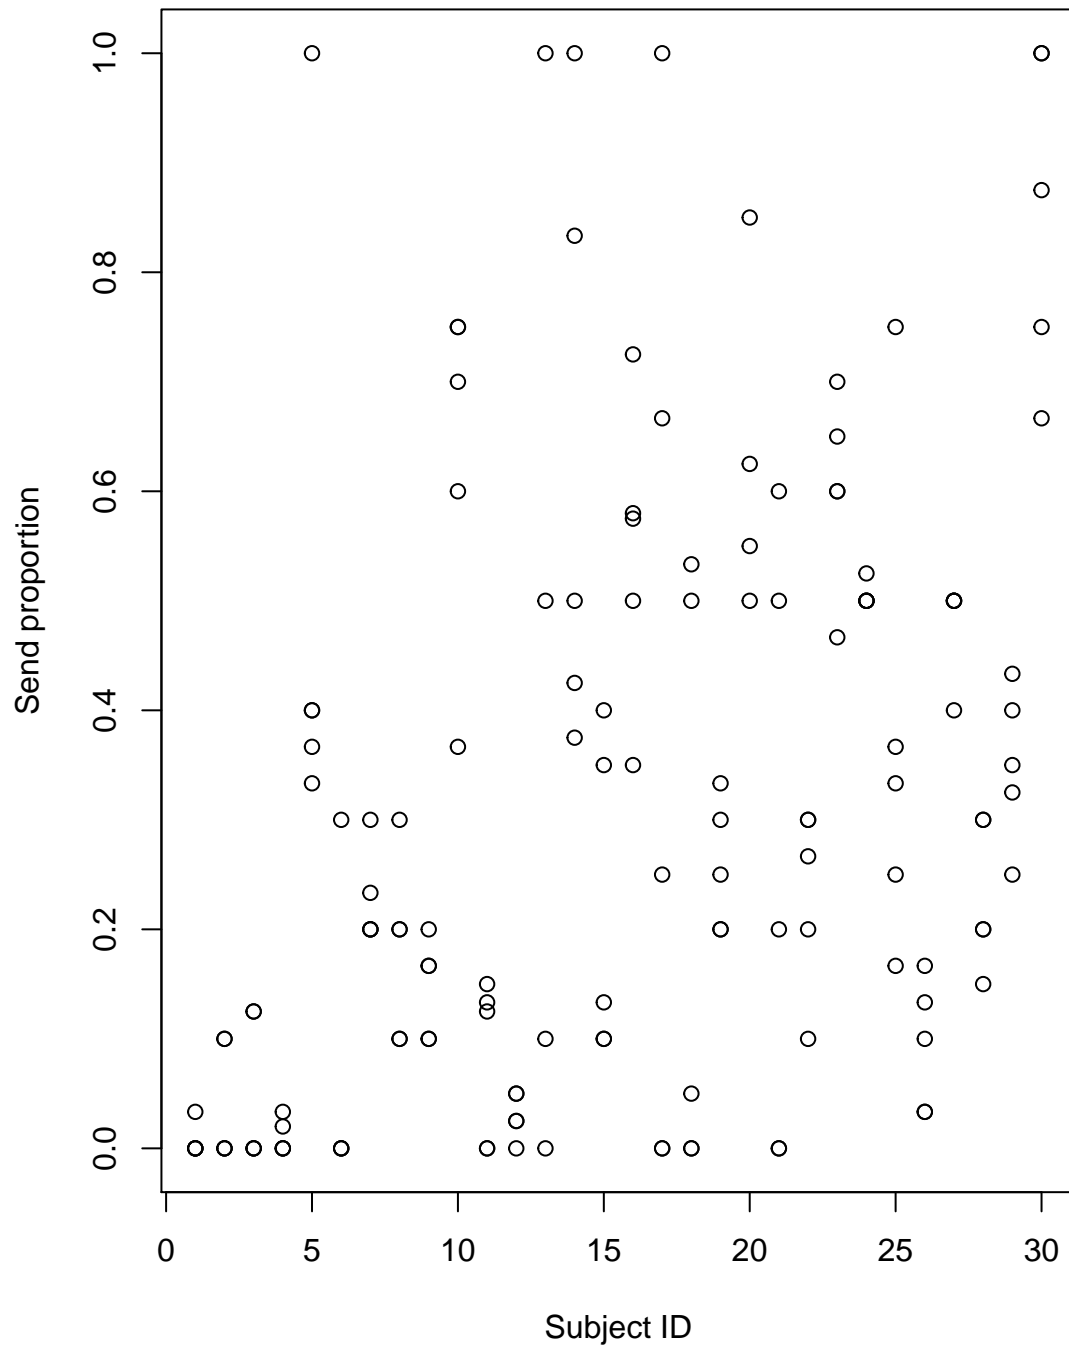


```
## [1] "Type: SENDER"  
## [1] "Process game: ID GAME"
```

ID GAME : SENDER

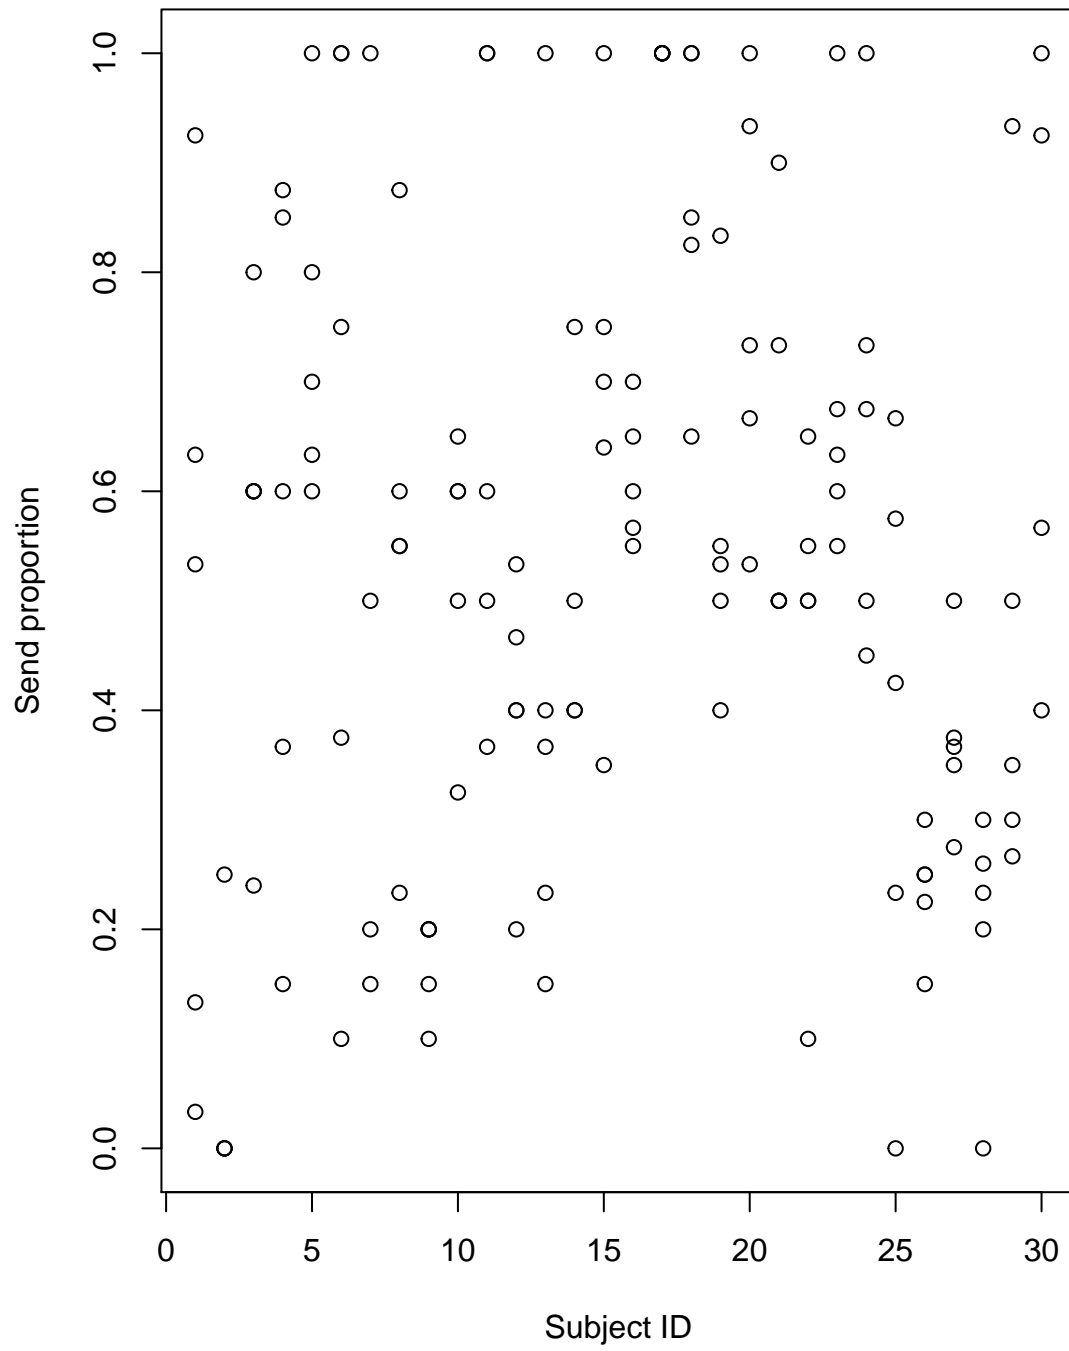


```
## [1] "Type: SENDER"  
## [1] "Process game: Score GAME"
```

Score GAME : SENDER

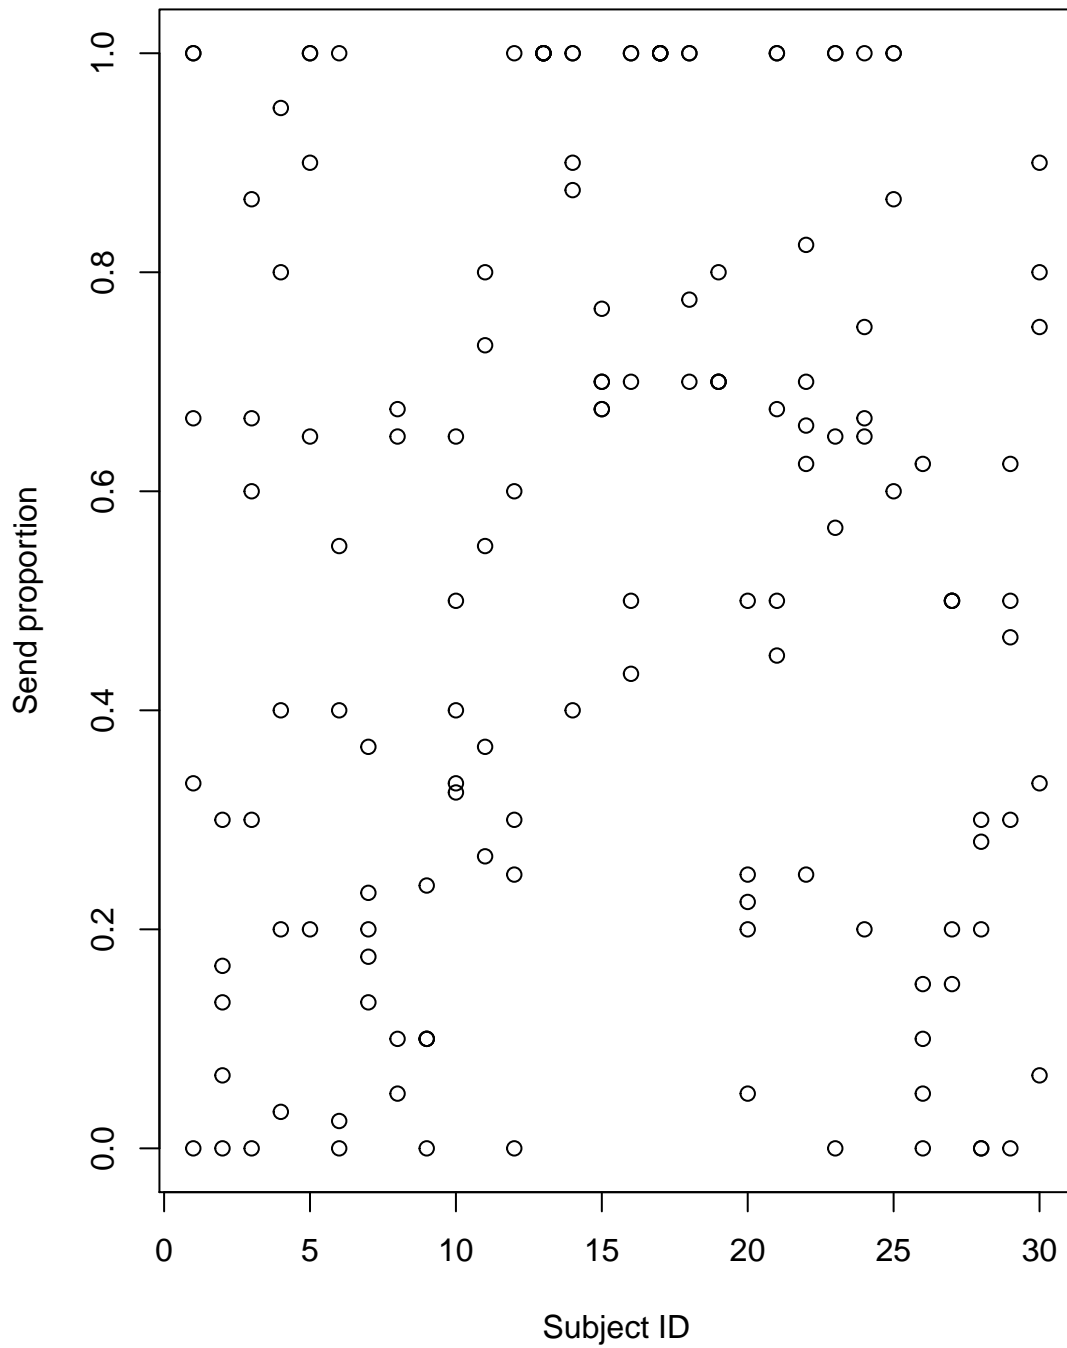


```
## [1] "Type: SENDER"  
## [1] "Process game: Combine GAME"
```

Combine GAME : SENDER

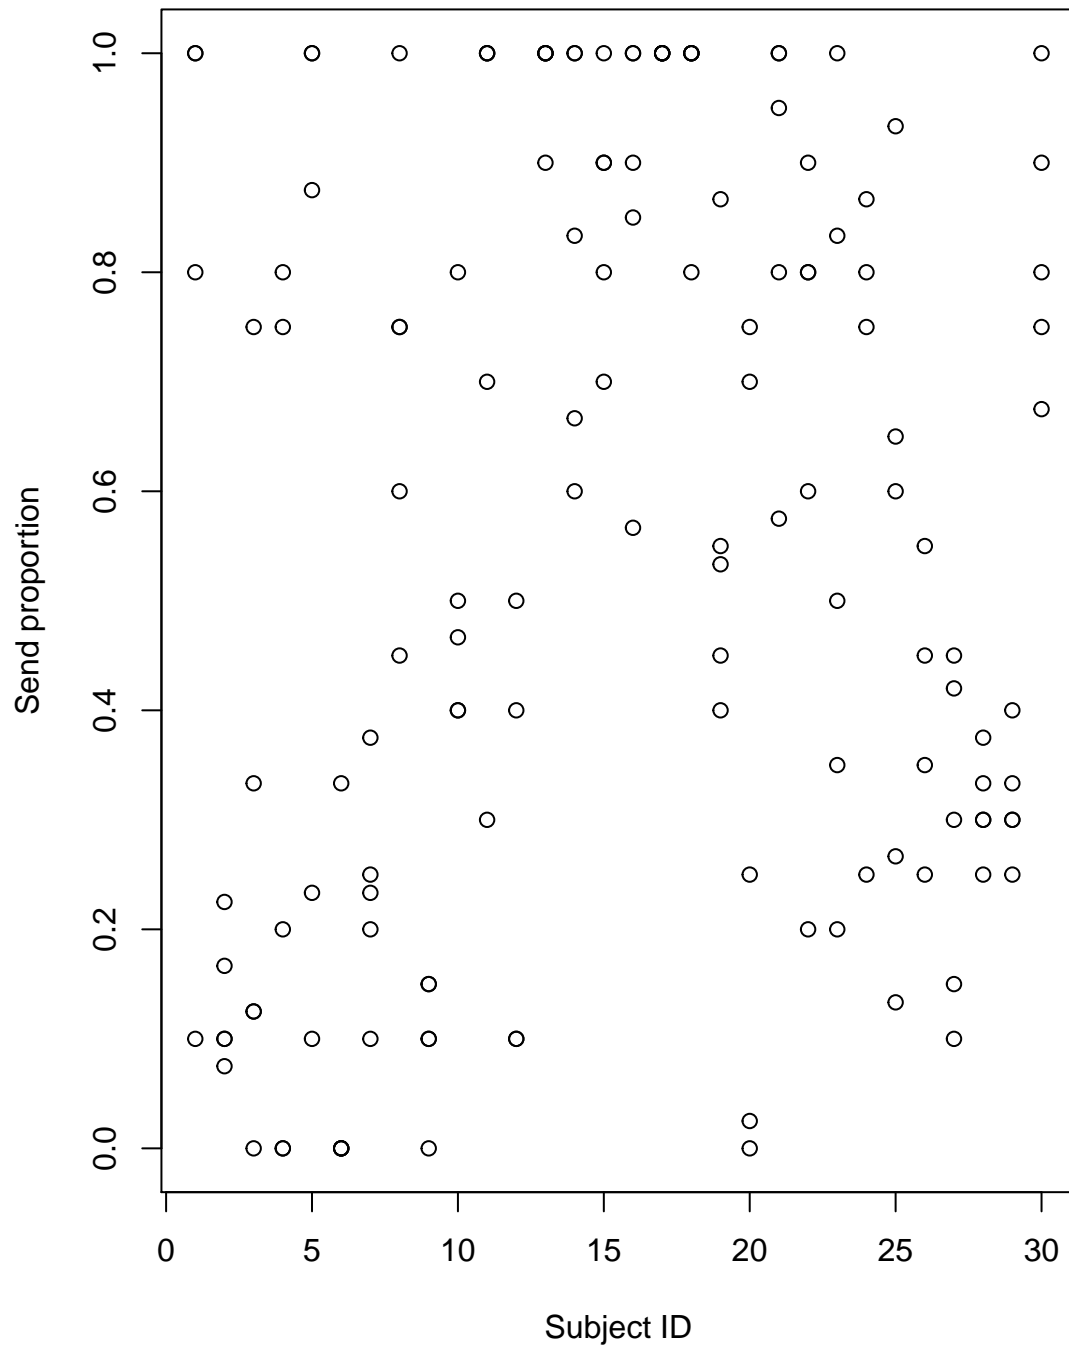

```
## [1] "Type: RECEIVER"  
## [1] "Process game: Simple GAME"
```

Simple GAME : RECEIVER

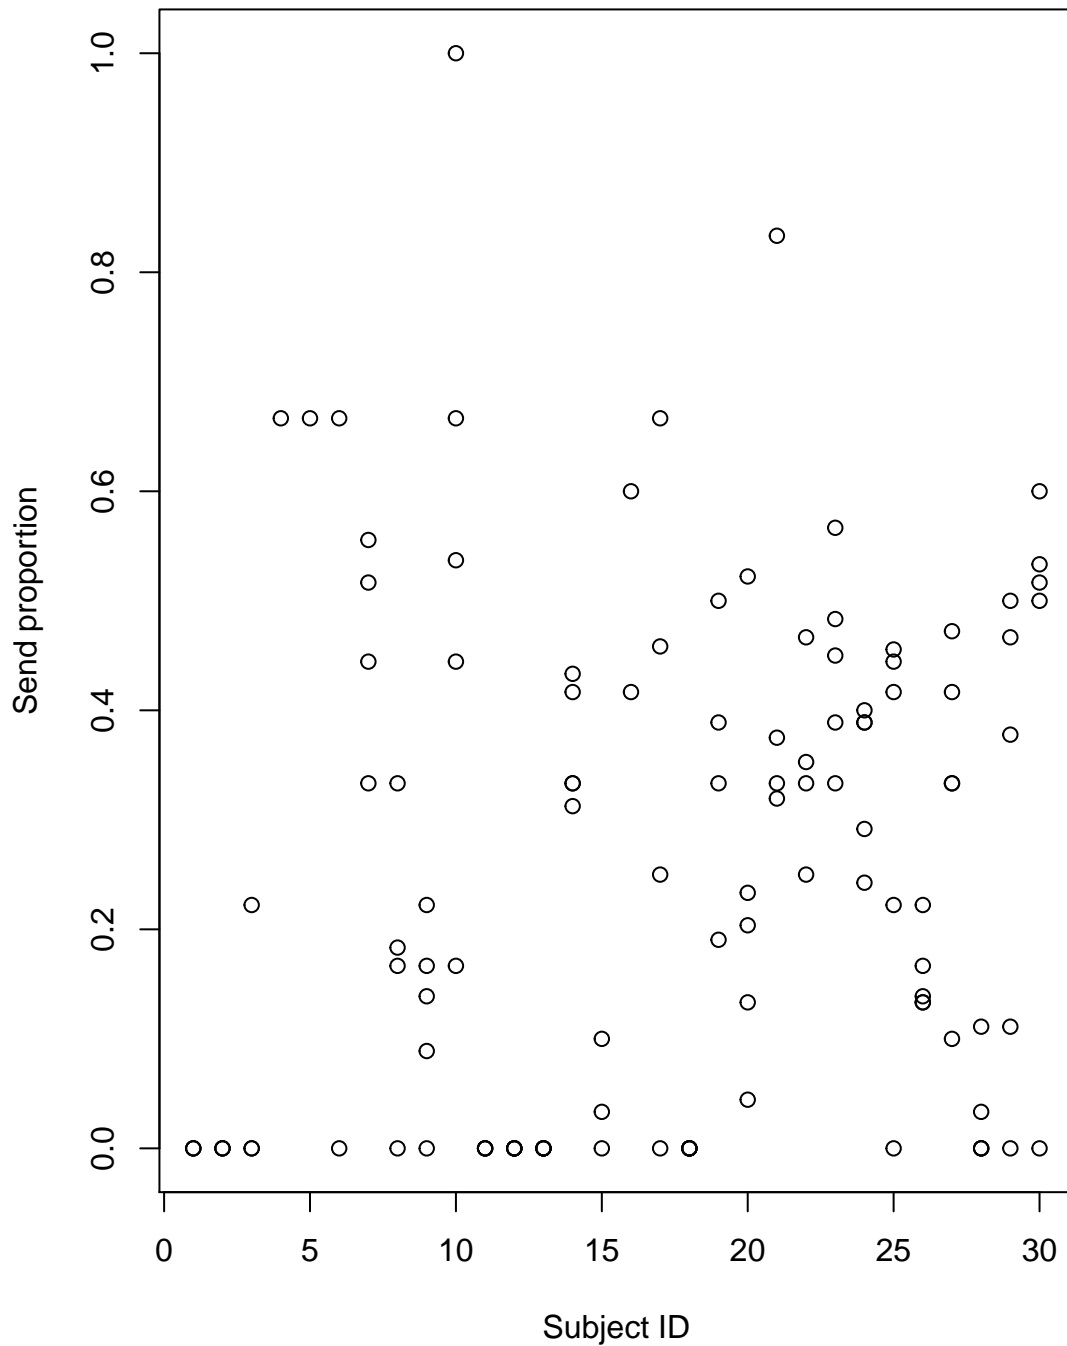

```
## [1] "Predict for all"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
```



```

## -0.54126 -0.15689 -0.02225 0.11238 0.59819
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.20925    0.10370   2.018 0.050529 .
## my_trust_value 0.60448    0.14352   4.212 0.000145 ***
## trust_value    0.02639    0.19407   0.136 0.892545
## AbsPartnerSend -0.02978    0.01360  -2.189 0.034674 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2294 on 39 degrees of freedom
## Multiple R-squared:  0.3545, Adjusted R-squared:  0.3049
## F-statistic: 7.141 on 3 and 39 DF,  p-value: 0.0006181
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39940 -0.16731 -0.02913  0.08791  0.76431
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.21319    0.11767   1.812 0.07772 .
## my_reputation    0.64313    0.20215   3.181 0.00287 **
## partner_reputation 0.04569    0.23475   0.195 0.84668
## AbsPartnerSend   -0.03053    0.01591  -1.919 0.06228 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.246 on 39 degrees of freedom
## Multiple R-squared:  0.2574, Adjusted R-squared:  0.2002
## F-statistic: 4.505 on 3 and 39 DF,  p-value: 0.008299
##
## [1] "Predict for high variance"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% high_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.52612 -0.08921  0.01021  0.08827  0.43683
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.41808    0.18747   2.230 0.0374 *
## my_trust_value 0.28951    0.25304   1.144 0.2661
## trust_value    0.13132    0.28549   0.460 0.6505
## AbsPartnerSend -0.04668    0.02263  -2.063 0.0523 .
## ---

```

```

## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2504 on 20 degrees of freedom
## Multiple R-squared:  0.306, Adjusted R-squared:  0.2019
## F-statistic: 2.939 on 3 and 20 DF,  p-value: 0.05811
##
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% high_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.48036 -0.09064 -0.01105  0.09595  0.51236
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.62266    0.21116   2.949  0.00794 **
## my_reputation  -0.05250    0.34492  -0.152  0.88054
## partner_reputation 0.08110    0.32327   0.251  0.80446
## AbsPartnerSend  -0.05468    0.02199  -2.487  0.02183 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.26 on 20 degrees of freedom
## Multiple R-squared:  0.2521, Adjusted R-squared:  0.1399
## F-statistic: 2.247 on 3 and 20 DF,  p-value: 0.1142
##
## [1] "Predict for low variance"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% low_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.32186 -0.11190 -0.05971  0.11720  0.45941
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.17770    0.14667   1.212  0.2444
## my_trust_value  0.76367    0.31604   2.416  0.0289 *
## trust_value    -0.01601    0.28257  -0.057  0.9556
## AbsPartnerSend -0.03444    0.02276  -1.513  0.1511
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2048 on 15 degrees of freedom
## Multiple R-squared:  0.2838, Adjusted R-squared:  0.1405
## F-statistic: 1.981 on 3 and 15 DF,  p-value: 0.1602
##
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,


```

```

##      data = df_round5[df_round5$id %in% low_ids, ])
##
## Residuals:
##      Min        1Q    Median        3Q        Max
## -0.18247 -0.09065 -0.03060  0.06438  0.56337
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.07727    0.12051   0.641  0.53106
## my_reputation      1.07496    0.32971   3.260  0.00527 **
## partner_reputation -0.02187    0.28926  -0.076  0.94074
## AbsPartnerSend    -0.01739    0.01994  -0.872  0.39697
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.185 on 15 degrees of freedom
## Multiple R-squared:  0.4151, Adjusted R-squared:  0.2982
## F-statistic: 3.549 on 3 and 15 DF,  p-value: 0.04029
##
## [1] "Type: RECEIVER"
## [1] "Process game: ID GAME"

```

ID GAME : RECEIVER

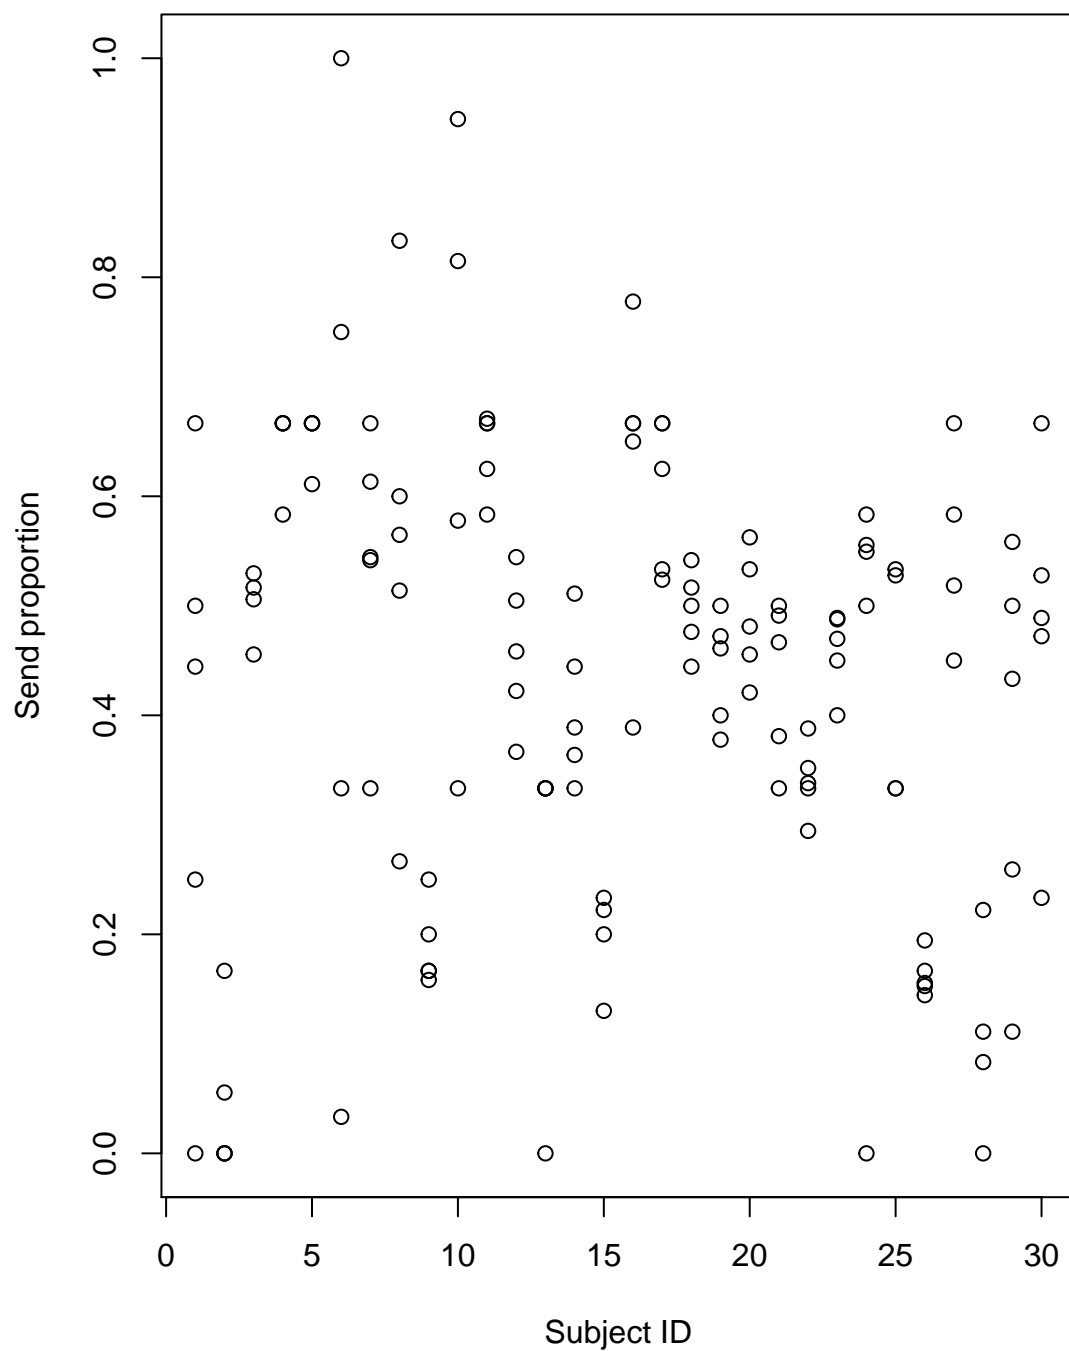

```
## [1] "Predict for all"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
```

```

## -0.65230 -0.11333 0.00869 0.12302 0.39030
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.043623   0.086883  -0.502 0.617415
## my_trust_value 0.516399   0.145025   3.561 0.000724 ***
## trust_value    0.310884   0.148202   2.098 0.040082 *
## AbsPartnerSend 0.000722   0.011660   0.062 0.950829
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1912 on 61 degrees of freedom
## Multiple R-squared:  0.3271, Adjusted R-squared:  0.294
## F-statistic: 9.882 on 3 and 61 DF,  p-value: 2.109e-05
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.54795 -0.09945  0.02290  0.11985  0.35872
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.169940   0.112857  -1.506 0.137279
## my_reputation  0.697597   0.171295   4.072 0.000136 ***
## partner_reputation 0.299760   0.165724   1.809 0.075413 .
## AbsPartnerSend  0.011116   0.009389   1.184 0.241019
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1875 on 61 degrees of freedom
## Multiple R-squared:  0.3527, Adjusted R-squared:  0.3209
## F-statistic: 11.08 on 3 and 61 DF,  p-value: 6.665e-06
##
## [1] "Predict for high variance"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% high_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.61511 -0.18238  0.00846  0.19028  0.39699
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.018681   0.138078   0.135   0.893
## my_trust_value 0.394073   0.259576   1.518   0.140
## trust_value    0.242763   0.239119   1.015   0.318
## AbsPartnerSend 0.006634   0.020343   0.326   0.747
##

```


```

## Residual standard error: 0.2451 on 29 degrees of freedom
## Multiple R-squared:  0.219, Adjusted R-squared:  0.1382
## F-statistic: 2.711 on 3 and 29 DF,  p-value: 0.06325
##
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% high_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.56258 -0.14281  0.07975  0.14242  0.38163
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.11507    0.20000   -0.575   0.5695
## my_reputation    0.55399    0.31949    1.734   0.0935 .
## partner_reputation 0.23652    0.26742    0.884   0.3837
## AbsPartnerSend   0.01967    0.01543    1.275   0.2123
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2433 on 29 degrees of freedom
## Multiple R-squared:  0.2304, Adjusted R-squared:  0.1508
## F-statistic: 2.894 on 3 and 29 DF,  p-value: 0.05214
##
## [1] "Predict for low variance"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% low_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.287949 -0.034873  0.007982  0.069634  0.244171
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.155479    0.103028   -1.509   0.1425
## my_trust_value  0.665259    0.141280    4.709 6.15e-05 ***
## trust_value    0.429610    0.169379    2.536   0.0171 *
## AbsPartnerSend -0.005371    0.011723   -0.458   0.6504
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1267 on 28 degrees of freedom
## Multiple R-squared:  0.5618, Adjusted R-squared:  0.5148
## F-statistic: 11.96 on 3 and 28 DF,  p-value: 3.21e-05
##
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% low_ids, ])
##

```

```
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.23434 -0.03853  0.01936  0.04795  0.23402
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.243277   0.117949  -2.063   0.0485 *
## my_reputation    0.901233   0.151608   5.944 2.13e-06 ***
## partner_reputation 0.413595   0.188122   2.199   0.0363 *
## AbsPartnerSend  -0.003434   0.009376  -0.366   0.7169
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1144 on 28 degrees of freedom
## Multiple R-squared:  0.643, Adjusted R-squared:  0.6047
## F-statistic: 16.81 on 3 and 28 DF, p-value: 1.933e-06
##
## [1] "Type: RECEIVER"
## [1] "Process game: Score GAME"
```

Score GAME : RECEIVER

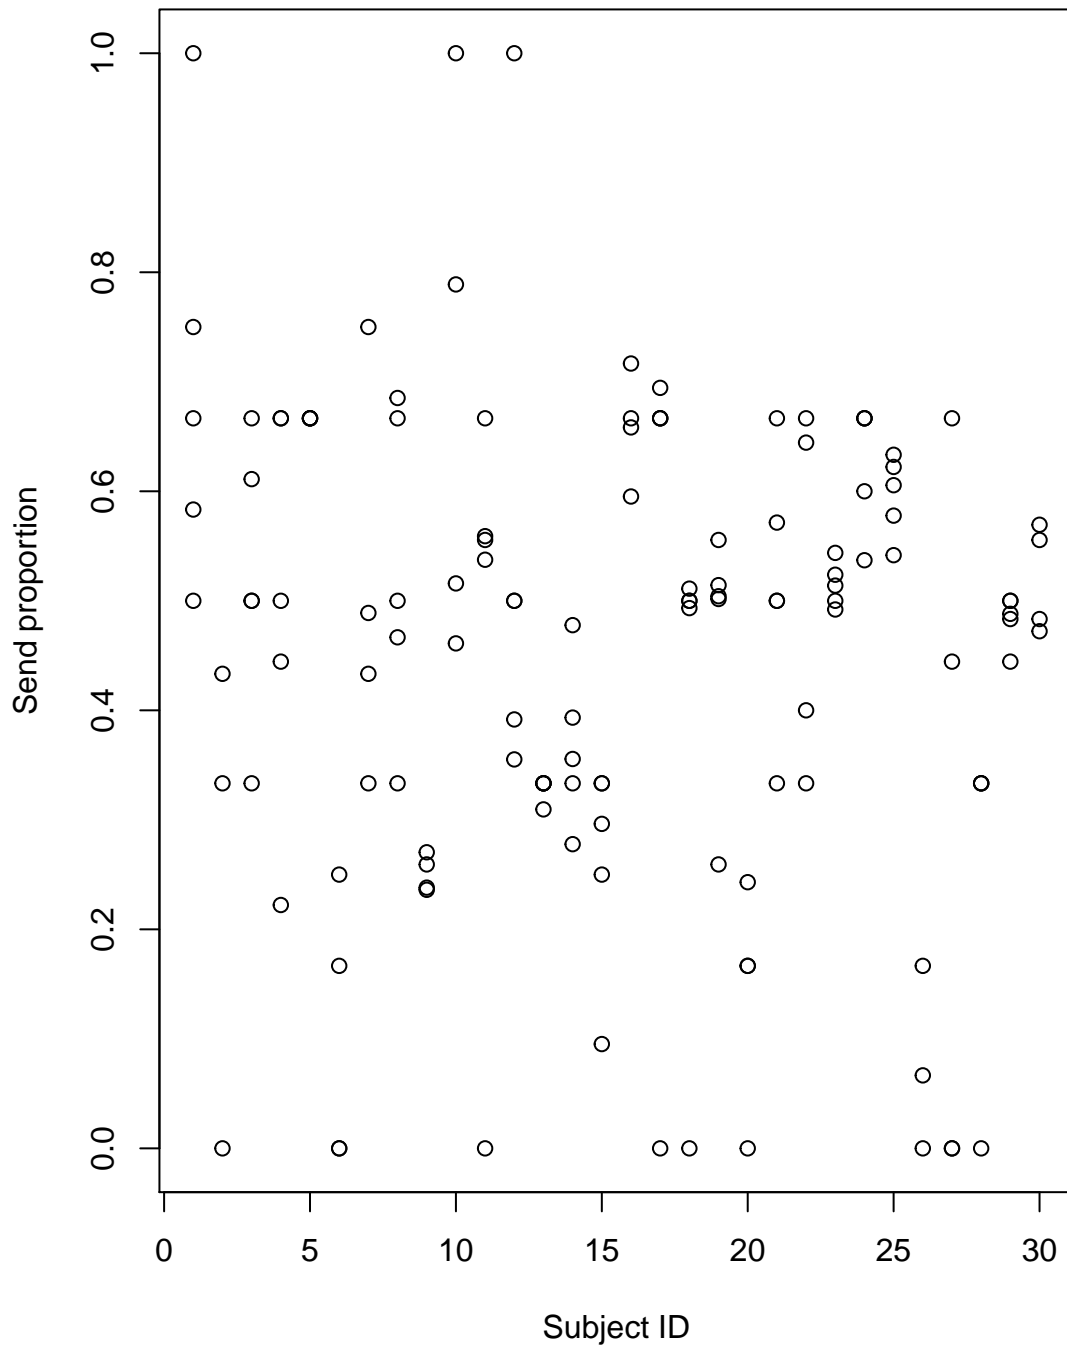

```
## [1] "Predict for all"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
```



```

## -0.50197 -0.12545 0.05064 0.12321 0.68157
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.25329    0.07662   3.306 0.00159 **
## my_trust_value 0.54690    0.17864   3.061 0.00327 **
## trust_value    0.12540    0.16970   0.739 0.46276
## AbsPartnerSend -0.02191    0.01249  -1.754 0.08446 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2101 on 61 degrees of freedom
## Multiple R-squared:  0.1684, Adjusted R-squared:  0.1275
## F-statistic: 4.118 on 3 and 61 DF,  p-value: 0.01002
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.54585 -0.08162  0.03231  0.10883  0.36171
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.112557    0.105389   1.068  0.290
## my_reputation    0.856227    0.163603   5.234 2.16e-06 ***
## partner_reputation -0.007419    0.203732  -0.036  0.971
## AbsPartnerSend   -0.012624    0.011162  -1.131  0.262
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1872 on 61 degrees of freedom
## Multiple R-squared:  0.3401, Adjusted R-squared:  0.3077
## F-statistic: 10.48 on 3 and 61 DF,  p-value: 1.18e-05
##
## [1] "Predict for high variance"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% high_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.52215 -0.05717  0.02593  0.11593  0.55103
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.411162    0.117385   3.503 0.00175 **
## my_trust_value 0.392417    0.294380   1.333 0.19454
## trust_value   -0.009924    0.313900  -0.032 0.97503
## AbsPartnerSend -0.020659    0.020563  -1.005 0.32468
## ---

```

```

## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2356 on 25 degrees of freedom
## Multiple R-squared:  0.07517,    Adjusted R-squared:  -0.03581
## F-statistic: 0.6773 on 3 and 25 DF,  p-value: 0.5741
##
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% high_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.44624 -0.04210  0.01662  0.11032  0.27939
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.08853    0.17088   0.518 0.608935
## my_reputation    1.02976    0.27253   3.779 0.000873 ***
## partner_reputation 0.01881    0.33047   0.057 0.955059
## AbsPartnerSend  -0.02076    0.01738  -1.195 0.243427
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1942 on 25 degrees of freedom
## Multiple R-squared:  0.3717, Adjusted R-squared:  0.2963
## F-statistic:  4.93 on 3 and 25 DF,  p-value: 0.007956
##
## [1] "Predict for low variance"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% low_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39385 -0.10277  0.02091  0.12426  0.35766
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.05477    0.10000   0.548  0.5877
## my_trust_value  0.76680    0.22376   3.427  0.0017 **
## trust_value     0.23460    0.19592   1.197  0.2399
## AbsPartnerSend -0.02051    0.01674  -1.225  0.2294
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1827 on 32 degrees of freedom
## Multiple R-squared:  0.3714, Adjusted R-squared:  0.3125
## F-statistic: 6.303 on 3 and 32 DF,  p-value: 0.001752
##
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,


```

```

##      data = df_round5[df_round5$id %in% low_ids, ])
##
## Residuals:
##      Min        1Q      Median        3Q        Max
## -0.53713 -0.06696  0.02734  0.11547  0.28502
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.124848   0.136761   0.913  0.36813
## my_reputation    0.652042   0.214037   3.046  0.00461 **
## partner_reputation -0.164882   0.277749  -0.594  0.55693
## AbsPartnerSend    0.007618   0.016729   0.455  0.65192
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1835 on 32 degrees of freedom
## Multiple R-squared:  0.3664, Adjusted R-squared:  0.307
## F-statistic: 6.168 on 3 and 32 DF,  p-value: 0.001978
##
## [1] "Type: RECEIVER"
## [1] "Process game: Combine GAME"

```

Combine GAME : RECEIVER

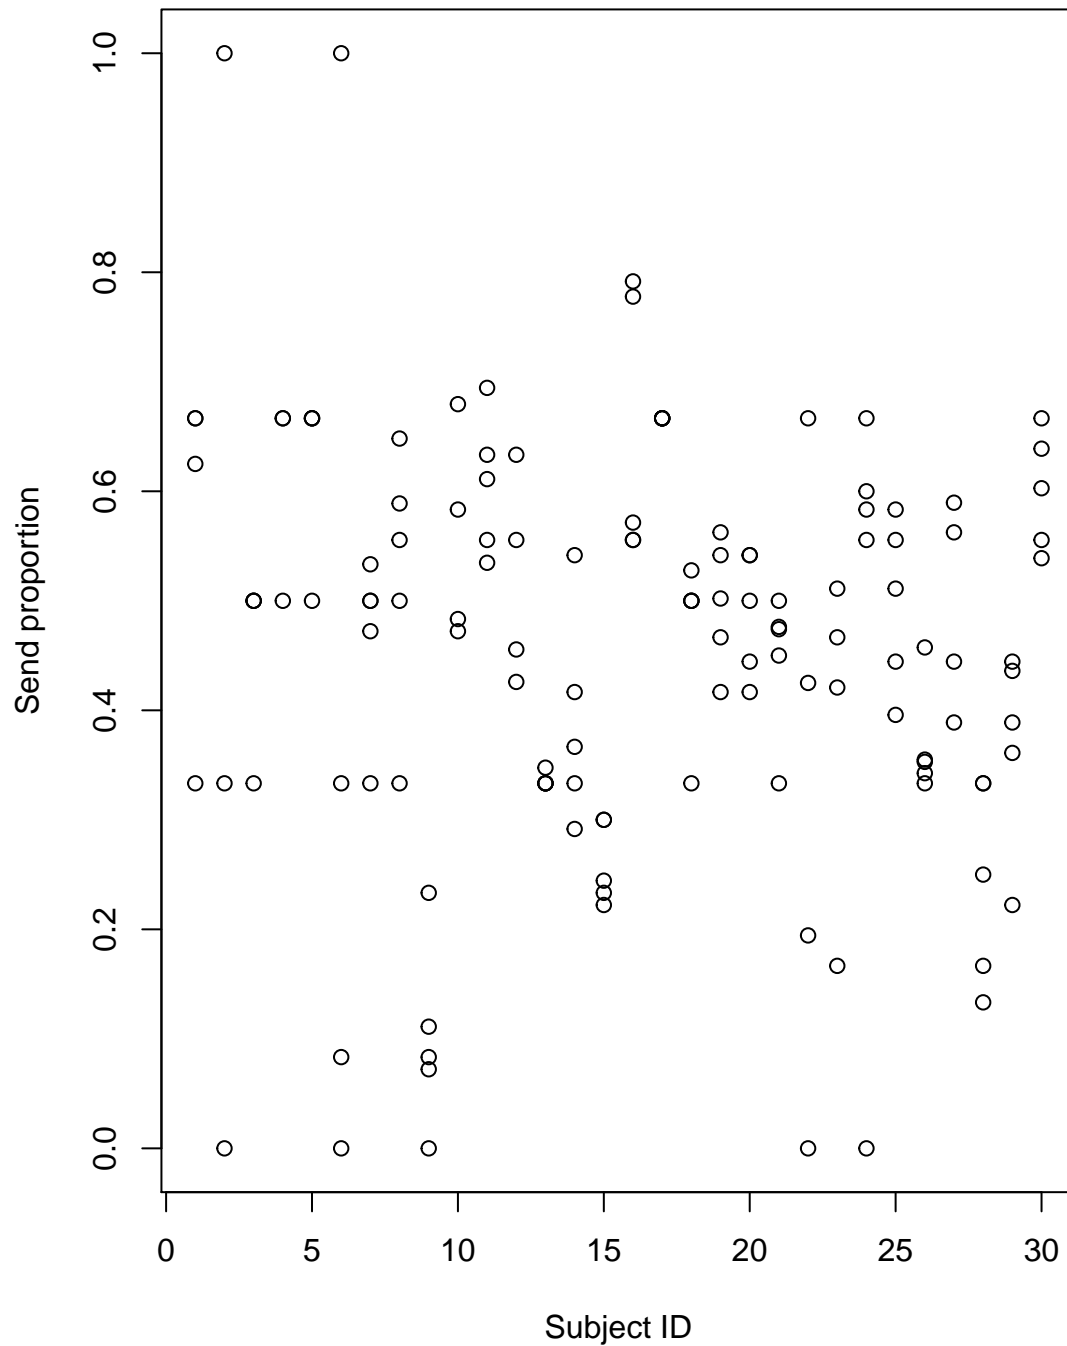

```
## [1] "Predict for all"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
```

```
## -0.46308 -0.06064 0.02373 0.09706 0.44402
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.26227    0.07918   3.312 0.00157 **
## my_trust_value 0.17520    0.15991   1.096 0.27762
## trust_value    0.25558    0.16663   1.534 0.13032
## AbsPartnerSend -0.00172    0.01083  -0.159 0.87436
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1874 on 60 degrees of freedom
## Multiple R-squared:  0.1348, Adjusted R-squared:  0.09151
## F-statistic: 3.115 on 3 and 60 DF,  p-value: 0.0327
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39838 -0.08191  0.01893  0.09835  0.65466
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.34155    0.10610   3.219 0.00208 **
## my_reputation    0.16981    0.17828   0.953 0.34465
## partner_reputation -0.11365    0.16975  -0.670 0.50574
## AbsPartnerSend    0.01667    0.01064   1.566 0.12250
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1916 on 60 degrees of freedom
## Multiple R-squared:  0.09546, Adjusted R-squared:  0.05023
## F-statistic: 2.111 on 3 and 60 DF,  p-value: 0.1083
##
## [1] "Predict without subject ID 2 and 6 because they sent back outlier (1.0)"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5[df_round5$id != 2 & df_round5$id != 6, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.46433 -0.06167  0.01089  0.09646  0.44468
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.312221    0.082383   3.790 0.000356 ***
## my_trust_value 0.118118    0.160004   0.738 0.463307
## trust_value    0.227471    0.164221   1.385 0.171223
## AbsPartnerSend -0.001303    0.010631  -0.123 0.902861
## ---
```

```

## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1839 on 59 degrees of freedom
## Multiple R-squared:  0.0913, Adjusted R-squared:  0.0451
## F-statistic: 1.976 on 3 and 59 DF,  p-value: 0.1274
##
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5[df_round5$id != 2 & df_round5$id != 6, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.42932 -0.07110  0.00742  0.10440  0.59678
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.37713    0.10575   3.566 0.000726 ***
## my_reputation    0.09767    0.17901   0.546 0.587390
## partner_reputation -0.03353    0.17189  -0.195 0.846021
## AbsPartnerSend    0.01194    0.01074   1.113 0.270412
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1878 on 59 degrees of freedom
## Multiple R-squared:  0.05197, Adjusted R-squared:  0.003768
## F-statistic: 1.078 on 3 and 59 DF,  p-value: 0.3654
##
## [1] "Predict for high variance"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% high_ids, ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.40324 -0.09064 -0.00018  0.08536  0.45997
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.156717    0.100258   1.563  0.1282
## my_trust_value  0.201086    0.209119   0.962  0.3437
## trust_value     0.407635    0.202173   2.016  0.0525 .
## AbsPartnerSend  0.001049    0.013308   0.079  0.9377
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1981 on 31 degrees of freedom
## Multiple R-squared:  0.304, Adjusted R-squared:  0.2367
## F-statistic: 4.514 on 3 and 31 DF,  p-value: 0.009707
##
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,

```

```

##      data = df_round5[df_round5$id %in% high_ids, ])
##
## Residuals:
##      Min        1Q      Median        3Q        Max
## -0.43428 -0.10658  0.03046  0.09012  0.64327
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.15568    0.16901   0.921   0.364
## my_reputation      0.41978    0.32692   1.284   0.209
## partner_reputation 0.04147    0.21959   0.189   0.851
## AbsPartnerSend     0.01460    0.01438   1.015   0.318
##
## Residual standard error: 0.213 on 31 degrees of freedom
## Multiple R-squared:  0.1955, Adjusted R-squared:  0.1176
## F-statistic: 2.511 on 3 and 31 DF,  p-value: 0.07691
##
## [1] "Predict for low variance"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% low_ids, ])
##
## Residuals:
##      Min        1Q      Median        3Q        Max
## -0.33793 -0.13260  0.01024  0.09455  0.36946
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.54138    0.13922   3.889 0.000659 ***
## my_trust_value    0.01472    0.25469   0.058 0.954372
## trust_value      -0.31038    0.32024  -0.969 0.341723
## AbsPartnerSend    0.01513    0.02087   0.725 0.475217
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1625 on 25 degrees of freedom
## Multiple R-squared:  0.03758, Adjusted R-squared: -0.07791
## F-statistic: 0.3254 on 3 and 25 DF,  p-value: 0.807
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = df_round5[df_round5$id %in% low_ids, ])
##
## Residuals:
##      Min        1Q      Median        3Q        Max
## -0.35836 -0.10879  0.00588  0.08855  0.39067
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.517980    0.137597   3.764 0.000905 ***
## my_reputation      0.006183    0.201104   0.031 0.975716
## partner_reputation -0.312876    0.360608  -0.868 0.393847

```

```
## AbsPartnerSend      0.018254  0.022884  0.798 0.432565
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.163 on 25 degrees of freedom
## Multiple R-squared:  0.03147,    Adjusted R-squared:  -0.08476
## F-statistic: 0.2708 on 3 and 25 DF,  p-value: 0.8459
```


Compare the variance between game

Date: Mon 26-Jun-2017

When we divided the data to high variance and low variance users, only Receiver - Score Game is strange. In other cases, trust is a better predictive model in high variance section while reputation is a better one in low variance part.

In this analysis, I use F-test to compare variance between game.

```
## [1] "Type: SENDER"
## [1] "Compare variance between Simple GAME and ID GAME"
##
## Paired Pitman-Morgan test
##
## data: x and y
## t = 0.83107, df = 28, p-value = 0.413
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
## 0.6420267 2.9113395
## sample estimates:
## variance of x variance of y
## 0.002738839 0.002003288
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data: c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 2.9287, df = 1, p-value =
## 0.08702
##
## [1] "Compare variance between Simple GAME and Score GAME"
##
## Paired Pitman-Morgan test
##
## data: x and y
## t = -0.60299, df = 28, p-value = 0.5514
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
## 0.3916442 1.6562068
## sample estimates:
## variance of x variance of y
## 0.002738839 0.003400661
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data: c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 6.1048, df = 1, p-value =
## 0.01348
##
## [1] "Compare variance between Simple GAME and Combine GAME"
##
```

```

## Paired Pitman-Morgan test
##
## data:  x and y
## t = -0.36514, df = 28, p-value = 0.7177
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
##  0.4146883 1.8382744
## sample estimates:
## variance of x variance of y
##  0.002738839  0.003136898
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data:  c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 3.0297, df = 1, p-value =
## 0.08176
##
## [1] "Compare variance between ID GAME and Score GAME"
##
## Paired Pitman-Morgan test
##
## data:  x and y
## t = -1.5063, df = 28, p-value = 0.1432
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
##  0.288798 1.201617
## sample estimates:
## variance of x variance of y
##  0.002003288  0.003400661
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data:  c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 2.6447, df = 1, p-value = 0.1039
##
## [1] "Compare variance between ID GAME and Combine GAME"
##
## Paired Pitman-Morgan test
##
## data:  x and y
## t = -1.2237, df = 28, p-value = 0.2313
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
##  0.3047045 1.3384661
## sample estimates:
## variance of x variance of y
##  0.002003288  0.003136898
##
## [1] "Fligner test"
##

```

```

## Fligner-Killeen test of homogeneity of variances
##
## data:  c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 0.32087, df = 1, p-value =
## 0.5711
##
## [1] "Compare variance between Score GAME and Combine GAME"
##
## Paired Pitman-Morgan test
##
## data:  x and y
## t = 0.25741, df = 28, p-value = 0.7987
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
## 0.5761832 2.0396955
## sample estimates:
## variance of x variance of y
## 0.003400661 0.003136898
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data:  c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 0.74129, df = 1, p-value =
## 0.3892
##
## [1] "Type: RECEIVER"
## [1] "Compare variance between Simple GAME and ID GAME"
##
## Paired Pitman-Morgan test
##
## data:  x and y
## t = 1.6984, df = 28, p-value = 0.1005
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
## 0.9239474 2.3625315
## sample estimates:
## variance of x variance of y
## 0.002031541 0.001375033
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data:  c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 2.127, df = 1, p-value = 0.1447
##
## [1] "Compare variance between Simple GAME and Score GAME"
##
## Paired Pitman-Morgan test
##
## data:  x and y
## t = 2.3142, df = 28, p-value = 0.02821

```

```

## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
## 1.097255 4.970607
## sample estimates:
## variance of x variance of y
## 0.0020315414 0.0008698957
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data: c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 1.286, df = 1, p-value = 0.2568
##
## [1] "Compare variance between Simple GAME and Combine GAME"
##
## Paired Pitman-Morgan test
##
## data: x and y
## t = -1.5742, df = 28, p-value = 0.1267
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
## 0.2864602 1.1718621
## sample estimates:
## variance of x variance of y
## 0.002031541 0.003506350
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data: c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 4.2269, df = 1, p-value =
## 0.03979
##
## [1] "Compare variance between ID GAME and Score GAME"
##
## Paired Pitman-Morgan test
##
## data: x and y
## t = 1.2242, df = 28, p-value = 0.2311
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
## 0.7430843 3.3624363
## sample estimates:
## variance of x variance of y
## 0.0013750334 0.0008698957
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data: c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 2.7666, df = 1, p-value =

```

```

## 0.09625
##
## [1] "Compare variance between ID GAME and Combine GAME"
##
## Paired Pitman-Morgan test
##
## data: x and y
## t = -2.9448, df = 28, p-value = 0.006437
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
## 0.2020815 0.7610085
## sample estimates:
## variance of x variance of y
## 0.001375033 0.003506350
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data: c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 0.083423, df = 1, p-value =
## 0.7727
##
## [1] "Compare variance between Score GAME and Combine GAME"
##
## Paired Pitman-Morgan test
##
## data: x and y
## t = -3.9997, df = 28, p-value = 0.0004205
## alternative hypothesis: true ratio of variances is not equal to 1
## 95 percent confidence interval:
## 0.1165998 0.5278688
## sample estimates:
## variance of x variance of y
## 0.0008698957 0.0035063499
##
## [1] "Fligner test"
##
## Fligner-Killeen test of homogeneity of variances
##
## data: c(x1, x2) by c(rep(k, 30), rep(j, 30))
## Fligner-Killeen:med chi-squared = 4.6297, df = 1, p-value =
## 0.03142

```

Predict send proportion based on trust scores

For round 4

```
## [1] "Analyze:  SENDER for game: Simple GAME"
## [1] "For Round 4 only"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.59849 -0.12791 -0.01971  0.09755  0.65111
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.01114    0.04786   0.233   0.817
## my_trust_value  0.76885    0.11905   6.459 1.08e-08 ***
## trust_value     0.07137    0.10653   0.670   0.505
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.213 on 72 degrees of freedom
## Multiple R-squared:  0.3764, Adjusted R-squared:  0.3591
## F-statistic: 21.73 on 2 and 72 DF,  p-value: 4.14e-08
##
## [1] "----"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_trust_value *
##      trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.59603 -0.12865 -0.02094  0.09767  0.65245
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.01347    0.05955   0.226 0.821666
## my_trust_value  0.75879    0.19300   3.931 0.000194 ***
## trust_value     0.06224    0.17415   0.357 0.721863
## my_trust_value:trust_value 0.03674    0.55205   0.067 0.947132
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2145 on 71 degrees of freedom
## Multiple R-squared:  0.3764, Adjusted R-squared:  0.3501
## F-statistic: 14.29 on 3 and 71 DF,  p-value: 2.229e-07
##
## [1] "Do prediction for reputation score"
##
## Call:
```

```

## lm(formula = RelSend ~ my_reputation + partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.58343 -0.12423  0.00174  0.10357  0.63364
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.02766    0.05266  -0.525   0.601
## my_reputation    0.76809    0.11429   6.720 3.61e-09 ***
## partner_reputation 0.11503    0.11422   1.007   0.317
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2096 on 72 degrees of freedom
## Multiple R-squared:  0.396, Adjusted R-squared:  0.3792
## F-statistic: 23.6 on 2 and 72 DF, p-value: 1.312e-08
##
## [1] "Analyze: SENDER for game: ID GAME"
## [1] "For Round 4 only"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.86686 -0.16379  0.00271  0.15841  0.65772
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.1740    0.1105  -1.575  0.11954
## my_trust_value  1.0327    0.1780   5.800 1.64e-07 ***
## trust_value     0.5027    0.1552   3.239  0.00181 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2855 on 72 degrees of freedom
## Multiple R-squared:  0.4108, Adjusted R-squared:  0.3945
## F-statistic: 25.1 on 2 and 72 DF, p-value: 5.353e-09
##
## [1] "----"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_trust_value *
##      trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.86974 -0.14495 -0.00519  0.16381  0.66643
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)

```

```

## (Intercept)                -0.0002784  0.2171496  -0.001    0.999
## my_trust_value              0.6677039  0.4310650   1.549    0.126
## trust_value                 0.1464771  0.4133732   0.354    0.724
## my_trust_value:trust_value  0.7336017  0.7890012   0.930    0.356
##
## Residual standard error: 0.2857 on 71 degrees of freedom
## Multiple R-squared:  0.4179, Adjusted R-squared:  0.3933
## F-statistic: 16.99 on 3 and 71 DF,  p-value: 2.031e-08
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.86988 -0.15974 -0.00514  0.23126  0.52629
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.1949     0.1657  -1.176  0.243446
## my_reputation     0.8720     0.2294   3.802  0.000298 ***
## partner_reputation 0.6742     0.2079   3.243  0.001796 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.3248 on 72 degrees of freedom
## Multiple R-squared:  0.2374, Adjusted R-squared:  0.2162
## F-statistic: 11.2 on 2 and 72 DF,  p-value: 5.799e-05
##
## [1] "Analyze:  SENDER for game: Score GAME"
## [1] "For Round 4 only"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.58193 -0.12420  0.00129  0.15537  0.51453
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.16248     0.06565  -2.475  0.015680 *
## my_trust_value  0.57993     0.14905   3.891  0.000221 ***
## trust_value     0.98511     0.14121   6.976 1.22e-09 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2262 on 72 degrees of freedom
## Multiple R-squared:  0.6715, Adjusted R-squared:  0.6624
## F-statistic: 73.59 on 2 and 72 DF,  p-value: < 2.2e-16
##
## [1] "----"

```



```

## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_trust_value *
##     trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.54935 -0.09530 -0.03496  0.13666  0.57106
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.01414    0.10530  -0.134   0.8935
## my_trust_value     0.15094    0.28162   0.536   0.5937
## trust_value       0.56244    0.27462   2.048   0.0443 *
## my_trust_value:trust_value  1.01086    0.56627   1.785   0.0785 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2229 on 71 degrees of freedom
## Multiple R-squared:  0.6856, Adjusted R-squared:  0.6723
## F-statistic: 51.62 on 3 and 71 DF,  p-value: < 2.2e-16
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.53063 -0.13504 -0.01091  0.14276  0.61451
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.6505    0.1057  -6.151 3.88e-08 ***
## my_reputation     1.1211    0.1449   7.734 4.80e-11 ***
## partner_reputation  1.3598    0.1665   8.165 7.53e-12 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2296 on 72 degrees of freedom
## Multiple R-squared:  0.6615, Adjusted R-squared:  0.6521
## F-statistic: 70.35 on 2 and 72 DF,  p-value: < 2.2e-16
##
## [1] "Analyze:  SENDER for game: Combine GAME"
## [1] "For Round 4 only"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.87254 -0.08651  0.00372  0.12458  0.38082

```

```

##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.16252    0.06111   -2.660  0.00963 **
## my_trust_value  1.00804    0.13850    7.279 3.38e-10 ***
## trust_value     0.57545    0.13062    4.406 3.60e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2128 on 72 degrees of freedom
## Multiple R-squared:  0.7088, Adjusted R-squared:  0.7007
## F-statistic: 87.63 on 2 and 72 DF,  p-value: < 2.2e-16
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_trust_value *
##     trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.88426 -0.09111 -0.00046  0.11536  0.46829
##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.06232    0.08976   -0.694   0.4898
## my_trust_value    0.69097    0.25057    2.758   0.0074 **
## trust_value      0.26803    0.24097    1.112   0.2698
## my_trust_value:trust_value  0.76558    0.50615    1.513   0.1348
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.211 on 71 degrees of freedom
## Multiple R-squared:  0.7179, Adjusted R-squared:  0.706
## F-statistic: 60.23 on 3 and 71 DF,  p-value: < 2.2e-16
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.87033 -0.14623  0.01596  0.22737  0.67797
##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.3393    0.1259   -2.695 0.008749 **
## my_reputation    1.0647    0.1903    5.595 3.75e-07 ***
## partner_reputation  0.7624    0.1892    4.030 0.000137 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##

```

```

## Residual standard error: 0.2936 on 72 degrees of freedom
## Multiple R-squared:  0.4458, Adjusted R-squared:  0.4304
## F-statistic: 28.96 on 2 and 72 DF,  p-value: 5.913e-10
##
## [1] "Analyze: RECEIVER for game: Simple GAME"
## [1] "For Round 4 only"
## [1] "Some basic information"
## [1] "My trust"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.0000  0.1250  0.3000  0.3135  0.4775  0.8300
## [1] "Partner trust"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.0000  0.1750  0.3800  0.3435  0.4725  0.7600
## [1] "Partner Send"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 1.000  2.000  4.500  3.891  5.000 10.000
## [1] "Send back proportion"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.0000  0.0000  0.3333  0.2880  0.5000  1.0000
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.60803 -0.15613 -0.02662  0.09026  0.86974
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.150097   0.099994   1.501  0.14082
## my_trust_value 0.570860   0.167323   3.412  0.00144 **
## trust_value    0.004643   0.247295   0.019  0.98511
## AbsPartnerSend -0.010963   0.020523  -0.534  0.59603
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2655 on 42 degrees of freedom
## Multiple R-squared:  0.2321, Adjusted R-squared:  0.1772
## F-statistic: 4.231 on 3 and 42 DF,  p-value: 0.0106
##
## [1] "----"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend +
##     trust_value * my_trust_value * AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.68979 -0.16470  0.01316  0.09107  0.76746
##
## Coefficients:

```

```

##                                Estimate Std. Error t value
## (Intercept)                   -0.11039    0.24557  -0.450
## my_trust_value                 1.16575    0.69680   1.673
## trust_value                   0.86618    0.71271   1.215
## AbsPartnerSend                0.04081    0.06042   0.676
## my_trust_value:trust_value    -2.04493    2.06184  -0.992
## trust_value:AbsPartnerSend   -0.14275    0.12755  -1.119
## my_trust_value:AbsPartnerSend -0.08983    0.17569  -0.511
## my_trust_value:trust_value:AbsPartnerSend 0.28116    0.42286   0.665
##                                Pr(>|t|)
## (Intercept)                   0.656
## my_trust_value                 0.103
## trust_value                   0.232
## AbsPartnerSend                0.503
## my_trust_value:trust_value    0.328
## trust_value:AbsPartnerSend   0.270
## my_trust_value:AbsPartnerSend 0.612
## my_trust_value:trust_value:AbsPartnerSend 0.510
##
## Residual standard error: 0.273 on 38 degrees of freedom
## Multiple R-squared:  0.2652, Adjusted R-squared:  0.1299
## F-statistic:  1.96 on 7 and 38 DF,  p-value: 0.08676
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.69085 -0.13630 -0.02378  0.08879  0.89605
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.11480    0.11549   0.994 0.325905
## my_reputation    0.67658    0.18243   3.709 0.000605 ***
## partner_reputation 0.00961    0.23825   0.040 0.968016
## AbsPartnerSend  -0.01380    0.01933  -0.714 0.479058
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2594 on 42 degrees of freedom
## Multiple R-squared:  0.267, Adjusted R-squared:  0.2147
## F-statistic:  5.1 on 3 and 42 DF,  p-value: 0.004231
##
## [1] "Analyze: RECEIVER for game: ID GAME"
## [1] "For Round 4 only"
## [1] "Some basic information"
## [1] "My trust"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.0000 0.3500 0.4900 0.4647 0.6075 0.8300
## [1] "Partner trust"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.

```

```

## 0.0000 0.4400 0.5300 0.5203 0.6675 0.7700
## [1] "Partner Send"
##      Min. 1st Qu.  Median      Mean 3rd Qu.    Max.
##      1.00   5.00   6.00   6.47  10.00  10.00
## [1] "Send back proportion"
##      Min. 1st Qu.  Median      Mean 3rd Qu.    Max.
## 0.0000 0.3333 0.4556 0.4334 0.6000 1.0000
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.45053 -0.08365  0.00301  0.06871  0.39571
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   0.070547   0.072713   0.970   0.336
## my_trust_value 0.731810   0.101552   7.206 9.44e-10 ***
## trust_value    0.207143   0.147743   1.402   0.166
## AbsPartnerSend -0.013138   0.008131  -1.616   0.111
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1603 on 62 degrees of freedom
## Multiple R-squared:  0.4741, Adjusted R-squared:  0.4486
## F-statistic: 18.63 on 3 and 62 DF,  p-value: 9.925e-09
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend +
##     trust_value * my_trust_value * AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.44043 -0.07333  0.00580  0.07396  0.41110
##
## Coefficients:
##              Estimate Std. Error t value
## (Intercept)   0.15085   0.26345   0.573
## my_trust_value 0.67343   0.48137   1.399
## trust_value    0.12634   0.60306   0.209
## AbsPartnerSend 0.01905   0.05834   0.327
## my_trust_value:trust_value -0.12526   1.17133  -0.107
## trust_value:AbsPartnerSend -0.06644   0.10574  -0.628
## my_trust_value:AbsPartnerSend -0.09308   0.10615  -0.877
## my_trust_value:trust_value:AbsPartnerSend 0.18961   0.19167   0.989
##              Pr(>|t|)
## (Intercept)   0.569
## my_trust_value 0.167

```

```

## trust_value                                0.835
## AbsPartnerSend                             0.745
## my_trust_value:trust_value                  0.915
## trust_value:AbsPartnerSend                 0.532
## my_trust_value:AbsPartnerSend              0.384
## my_trust_value:trust_value:AbsPartnerSend  0.327
##
## Residual standard error: 0.1606 on 58 degrees of freedom
## Multiple R-squared:  0.506, Adjusted R-squared:  0.4464
## F-statistic: 8.486 on 7 and 58 DF,  p-value: 4.094e-07
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.55072 -0.07743 -0.00756  0.07326  0.49940
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.025745   0.100711  -0.256   0.799
## my_reputation    0.832886   0.122497   6.799 4.78e-09 ***
## partner_reputation 0.148755   0.162021   0.918   0.362
## AbsPartnerSend  -0.003519   0.007657  -0.460   0.647
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1646 on 62 degrees of freedom
## Multiple R-squared:  0.4456, Adjusted R-squared:  0.4188
## F-statistic: 16.61 on 3 and 62 DF,  p-value: 4.942e-08
##
## [1] "Analyze: RECEIVER for game: Score GAME"
## [1] "For Round 4 only"
## [1] "Some basic information"
## [1] "My trust"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.0800  0.4475  0.5400  0.5281  0.6825  0.8200
## [1] "Partner trust"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.0600  0.3250  0.4900  0.4759  0.6325  0.8200
## [1] "Partner Send"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 1.000   3.750   7.500   6.578  10.000  10.000
## [1] "Send back proportion"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
## 0.0000  0.3333  0.5000  0.4810  0.6667  1.0000
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = cur_df)

```

```

##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.53272 -0.09502  0.04667  0.13471  0.35902
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.34219    0.07960   4.299 6.4e-05 ***
## my_trust_value 0.36048    0.18218   1.979  0.0524 .
## trust_value    0.28536    0.17490   1.632  0.1080
## AbsPartnerSend -0.02848    0.01201  -2.372  0.0209 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2087 on 60 degrees of freedom
## Multiple R-squared:  0.1205, Adjusted R-squared:  0.0765
## F-statistic: 2.74 on 3 and 60 DF, p-value: 0.05112
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend +
##      trust_value * my_trust_value * AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.51233 -0.08881  0.03613  0.13559  0.33968
##
## Coefficients:
##              Estimate Std. Error t value
## (Intercept)    0.380577    0.236664   1.608
## my_trust_value 0.250949    0.622446   0.403
## trust_value   -0.103563    0.630950  -0.164
## AbsPartnerSend -0.026088    0.085307  -0.306
## my_trust_value:trust_value 0.921024    1.649624   0.558
## trust_value:AbsPartnerSend 0.051282    0.156147   0.328
## my_trust_value:AbsPartnerSend -0.007497    0.148056  -0.051
## my_trust_value:trust_value:AbsPartnerSend -0.098200    0.278718  -0.352
##              Pr(>|t|)
## (Intercept)    0.113
## my_trust_value 0.688
## trust_value    0.870
## AbsPartnerSend 0.761
## my_trust_value:trust_value 0.579
## trust_value:AbsPartnerSend 0.744
## my_trust_value:AbsPartnerSend 0.960
## my_trust_value:trust_value:AbsPartnerSend 0.726
##
## Residual standard error: 0.2142 on 56 degrees of freedom
## Multiple R-squared:  0.1359, Adjusted R-squared:  0.02791
## F-statistic: 1.258 on 7 and 56 DF, p-value: 0.2876
##
## [1] "Do prediction for reputation score"

```

```
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.55865 -0.09005  0.03933  0.11312  0.47403
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.26027    0.13948   1.866  0.0669 .
## my_reputation    0.54504    0.23287   2.341  0.0226 *
## partner_reputation 0.04458    0.20141   0.221  0.8256
## AbsPartnerSend  -0.01380    0.01201  -1.149  0.2550
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2124 on 60 degrees of freedom
## Multiple R-squared:  0.0898, Adjusted R-squared:  0.04429
## F-statistic: 1.973 on 3 and 60 DF,  p-value: 0.1276
##
## [1] "Analyze: RECEIVER for game: Combine GAME"
## [1] "For Round 4 only"
## [1] "Some basic information"
## [1] "My trust"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      0.0000  0.3975  0.5700  0.5205  0.6900  0.8400
## [1] "Partner trust"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      0.0000  0.3700  0.5300  0.5028  0.6900  0.8300
## [1] "Partner Send"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.000   4.000   7.500   6.734  10.000  10.000
## [1] "Send back proportion"
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      0.0000  0.3333  0.5000  0.4687  0.5667  0.8333
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.48505 -0.06356  0.01163  0.11079  0.33703
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.292801    0.062343   4.697 1.58e-05 ***
## my_trust_value  0.214227    0.121980   1.756  0.0841 .
## trust_value     0.079786    0.158485   0.503  0.6165
## AbsPartnerSend 0.003612    0.010998   0.328  0.7437
## ---
```



```

## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1618 on 60 degrees of freedom
## Multiple R-squared:  0.1468, Adjusted R-squared:  0.1041
## F-statistic: 3.441 on 3 and 60 DF,  p-value: 0.02226
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend +
##     trust_value * my_trust_value * AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39160 -0.07045  0.03566  0.09009  0.30086
##
## Coefficients:
##                                Estimate Std. Error t value
## (Intercept)                   0.02782    0.17820   0.156
## my_trust_value                 1.10162    0.44220   2.491
## trust_value                   0.51610    0.44928   1.149
## AbsPartnerSend               0.16286    0.06629   2.457
## my_trust_value:trust_value    -1.87339    1.19044  -1.574
## trust_value:AbsPartnerSend   -0.26712    0.10452  -2.556
## my_trust_value:AbsPartnerSend -0.35241    0.10791  -3.266
## my_trust_value:trust_value:AbsPartnerSend 0.63009    0.19044   3.309
##                                Pr(>|t|)
## (Intercept)                   0.87651
## my_trust_value                 0.01572 *
## trust_value                   0.25554
## AbsPartnerSend               0.01715 *
## my_trust_value:trust_value    0.12119
## trust_value:AbsPartnerSend   0.01334 *
## my_trust_value:AbsPartnerSend 0.00187 **
## my_trust_value:trust_value:AbsPartnerSend 0.00164 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.141 on 56 degrees of freedom
## Multiple R-squared:  0.3953, Adjusted R-squared:  0.3198
## F-statistic: 5.231 on 7 and 56 DF,  p-value: 0.0001243
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39025 -0.08295  0.00725  0.10132  0.28657
##
## Coefficients:

```

```
##               Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.247484   0.068795   3.597 0.000651 ***
## my_reputation      0.505072   0.111843   4.516 3.01e-05 ***
## partner_reputation -0.204009   0.118754  -1.718 0.090971 .
## AbsPartnerSend      0.009656   0.007414   1.302 0.197766
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1379 on 60 degrees of freedom
## Multiple R-squared:  0.3807, Adjusted R-squared:  0.3497
## F-statistic: 12.29 on 3 and 60 DF,  p-value: 2.265e-06
```

For round 5

```
## [1] "Analyze:  SENDER for game: Simple GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.43058 -0.13220 -0.04039  0.09035  0.92726
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.02009    0.05509   0.365   0.716
## my_trust_value  0.68063    0.13982   4.868 6.46e-06 ***
## trust_value     0.14323    0.12364   1.158   0.251
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2528 on 72 degrees of freedom
## Multiple R-squared:  0.2798, Adjusted R-squared:  0.2598
## F-statistic: 13.99 on 2 and 72 DF,  p-value: 7.387e-06
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_trust_value *
##      trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.48104 -0.12369 -0.06517  0.07445  0.91236
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.06792    0.06726   1.010   0.3160
## my_trust_value  0.48882    0.20908   2.338   0.0222 *
## trust_value    -0.07448    0.21560  -0.345   0.7308
## my_trust_value:trust_value  0.76377    0.62073   1.230   0.2226
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2519 on 71 degrees of freedom
## Multiple R-squared:  0.2948, Adjusted R-squared:  0.265
## F-statistic: 9.895 on 3 and 71 DF,  p-value: 1.567e-05
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation, data = cur_df)
```

```

##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.40205 -0.12855 -0.03722  0.14329  0.89337
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.04469    0.05822  -0.768    0.445
## my_reputation    0.92909    0.13251   7.011 1.05e-09 ***
## partner_reputation 0.06062    0.12894   0.470    0.640
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2289 on 72 degrees of freedom
## Multiple R-squared:  0.4094, Adjusted R-squared:  0.393
## F-statistic: 24.96 on 2 and 72 DF,  p-value: 5.837e-09
##
## [1] "Analyze:  SENDER for game: ID GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.89131 -0.13633 -0.01232  0.14730  0.51832
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.21318    0.08331  -2.559    0.0126 *
## my_trust_value  0.88327    0.12382   7.133 6.27e-10 ***
## trust_value     0.61394    0.13525   4.539 2.21e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.238 on 72 degrees of freedom
## Multiple R-squared:  0.5647, Adjusted R-squared:  0.5527
## F-statistic: 46.71 on 2 and 72 DF,  p-value: 9.88e-14
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_trust_value *
##      trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.87897 -0.14131 -0.00046  0.15399  0.51541
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)

```

```

## (Intercept)                -0.2698      0.1459  -1.849 0.068556 .
## my_trust_value              1.0040      0.2835   3.541 0.000709 ***
## trust_value                 0.7378      0.2946   2.504 0.014571 *
## my_trust_value:trust_value -0.2508      0.5294  -0.474 0.637095
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2393 on 71 degrees of freedom
## Multiple R-squared:  0.5661, Adjusted R-squared:  0.5478
## F-statistic: 30.88 on 3 and 71 DF,  p-value: 6.914e-13
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.85250 -0.12923  0.00958  0.24245  0.51167
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    -0.2288     0.1597  -1.433  0.15619
## my_reputation     0.9166     0.2029   4.517 2.4e-05 ***
## partner_reputation 0.6192     0.2225   2.782  0.00689 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.3094 on 72 degrees of freedom
## Multiple R-squared:  0.2644, Adjusted R-squared:  0.244
## F-statistic: 12.94 on 2 and 72 DF,  p-value: 1.583e-05
##
## [1] "Analyze:  SENDER for game: Score GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.57213 -0.09832  0.00610  0.13075  0.43901
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.13423     0.06509  -2.062  0.04281 *
## my_trust_value  0.45418     0.14225   3.193  0.00209 **
## trust_value     1.03021     0.13952   7.384 2.15e-10 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2251 on 72 degrees of freedom
## Multiple R-squared:  0.6782, Adjusted R-squared:  0.6693

```

```

## F-statistic: 75.89 on 2 and 72 DF,  p-value: < 2.2e-16
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_trust_value *
##     trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.57288 -0.09939 -0.00469  0.12981  0.45558
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.06678    0.09850  -0.678  0.49998
## my_trust_value    0.25458    0.26089   0.976  0.33248
## trust_value     0.83113    0.25893   3.210  0.00199 **
## my_trust_value:trust_value  0.46780    0.51231   0.913  0.36426
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2254 on 71 degrees of freedom
## Multiple R-squared:  0.682, Adjusted R-squared:  0.6685
## F-statistic: 50.75 on 3 and 71 DF,  p-value: < 2.2e-16
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.64217 -0.13099  0.02855  0.16331  0.48085
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.5308    0.1153  -4.604 1.74e-05 ***
## my_reputation    1.3662    0.1713   7.975 1.70e-11 ***
## partner_reputation  0.9182    0.1710   5.368 9.28e-07 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2535 on 72 degrees of freedom
## Multiple R-squared:  0.5919, Adjusted R-squared:  0.5805
## F-statistic: 52.21 on 2 and 72 DF,  p-value: 9.734e-15
##
## [1] "Analyze:  SENDER for game: Combine GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value, data = cur_df)

```

```

##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.80088 -0.10479 -0.00457  0.11034  0.98410
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.18645    0.06448  -2.892 0.005064 **
## my_trust_value  1.01760    0.14321   7.105 7.06e-10 ***
## trust_value     0.51611    0.14673   3.517 0.000759 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.215 on 72 degrees of freedom
## Multiple R-squared:  0.7035, Adjusted R-squared:  0.6953
## F-statistic: 85.43 on 2 and 72 DF,  p-value: < 2.2e-16
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_trust_value *
##      trust_value, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.71371 -0.11897 -0.00348  0.10695  0.81382
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.07908    0.09768   0.810 0.420878
## my_trust_value     0.10539    0.29631   0.356 0.723145
## trust_value     -0.09391    0.22360  -0.420 0.675764
## my_trust_value:trust_value  1.72779    0.50107   3.448 0.000953 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2004 on 71 degrees of freedom
## Multiple R-squared:  0.7461, Adjusted R-squared:  0.7353
## F-statistic: 69.53 on 3 and 71 DF,  p-value: < 2.2e-16
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.8454 -0.1397  0.0163  0.1573  0.7665
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.4296    0.1227  -3.501 0.000799 ***
## my_reputation  1.1137    0.1760   6.329 1.86e-08 ***

```

```

## partner_reputation    0.8616      0.1918    4.493 2.62e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2772 on 72 degrees of freedom
## Multiple R-squared:  0.5073, Adjusted R-squared:  0.4936
## F-statistic: 37.07 on 2 and 72 DF,  p-value: 8.55e-12
##
## [1] "Analyze: RECEIVER for game: Simple GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.54126 -0.15689 -0.02225  0.11238  0.59819
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.20925    0.10370   2.018 0.050529 .
## my_trust_value  0.60448    0.14352   4.212 0.000145 ***
## trust_value     0.02639    0.19407   0.136 0.892545
## AbsPartnerSend -0.02978    0.01360  -2.189 0.034674 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2294 on 39 degrees of freedom
## Multiple R-squared:  0.3545, Adjusted R-squared:  0.3049
## F-statistic: 7.141 on 3 and 39 DF,  p-value: 0.0006181
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend +
##     trust_value * my_trust_value * AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.59845 -0.13437 -0.06025  0.10946  0.62374
##
## Coefficients:
##
##              Estimate Std. Error t value
## (Intercept)    0.1023514  0.2211866   0.463
## my_trust_value  1.0171628  0.7050988   1.443
## trust_value    -0.0210858  0.5264123  -0.040
## AbsPartnerSend  0.0046850  0.0542191   0.086
## my_trust_value:trust_value  0.2965804  1.7738167   0.167
## trust_value:AbsPartnerSend -0.0002276  0.1255376  -0.002
## my_trust_value:AbsPartnerSend -0.1731509  0.2653007  -0.653

```



```

## my_trust_value:trust_value:AbsPartnerSend  0.0923030  0.5756762  0.160
##                                     Pr(>|t|)
## (Intercept)                        0.646
## my_trust_value                      0.158
## trust_value                        0.968
## AbsPartnerSend                     0.932
## my_trust_value:trust_value          0.868
## trust_value:AbsPartnerSend         0.999
## my_trust_value:AbsPartnerSend       0.518
## my_trust_value:trust_value:AbsPartnerSend  0.874
##
## Residual standard error: 0.2318 on 35 degrees of freedom
## Multiple R-squared:  0.4084, Adjusted R-squared:  0.2901
## F-statistic: 3.452 on 7 and 35 DF,  p-value: 0.006499
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39940 -0.16731 -0.02913  0.08791  0.76431
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.21319    0.11767   1.812  0.07772 .
## my_reputation    0.64313    0.20215   3.181  0.00287 **
## partner_reputation 0.04569    0.23475   0.195  0.84668
## AbsPartnerSend  -0.03053    0.01591  -1.919  0.06228 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.246 on 39 degrees of freedom
## Multiple R-squared:  0.2574, Adjusted R-squared:  0.2002
## F-statistic: 4.505 on 3 and 39 DF,  p-value: 0.008299
##
## [1] "Analyze: RECEIVER for game: ID GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.65230 -0.11333  0.00869  0.12302  0.39030
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  -0.043623    0.086883  -0.502 0.617415

```

```

## my_trust_value 0.516399 0.145025 3.561 0.000724 ***
## trust_value 0.310884 0.148202 2.098 0.040082 *
## AbsPartnerSend 0.000722 0.011660 0.062 0.950829
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1912 on 61 degrees of freedom
## Multiple R-squared: 0.3271, Adjusted R-squared: 0.294
## F-statistic: 9.882 on 3 and 61 DF, p-value: 2.109e-05
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend +
## trust_value * my_trust_value * AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.47660 -0.13503  0.03228  0.14145  0.47003
##
## Coefficients:
##
##              Estimate Std. Error t value
## (Intercept)      0.18836    0.32558   0.579
## my_trust_value    -0.16011    0.69003  -0.232
## trust_value       0.09071    0.58257   0.156
## AbsPartnerSend   -0.15116    0.10032  -1.507
## my_trust_value:trust_value  0.96450    1.24308   0.776
## trust_value:AbsPartnerSend  0.20204    0.14238   1.419
## my_trust_value:AbsPartnerSend 0.31872    0.17798   1.791
## my_trust_value:trust_value:AbsPartnerSend -0.45565    0.26039  -1.750
##
##              Pr(>|t|)
## (Intercept)      0.5652
## my_trust_value    0.8173
## trust_value       0.8768
## AbsPartnerSend   0.1374
## my_trust_value:trust_value  0.4410
## trust_value:AbsPartnerSend  0.1613
## my_trust_value:AbsPartnerSend 0.0786 .
## my_trust_value:trust_value:AbsPartnerSend 0.0855 .
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1883 on 57 degrees of freedom
## Multiple R-squared: 0.3899, Adjusted R-squared: 0.315
## F-statistic: 5.204 on 7 and 57 DF, p-value: 0.0001256
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
## data = cur_df)
##
## Residuals:

```

```

##      Min      1Q   Median      3Q      Max
## -0.54795 -0.09945  0.02290  0.11985  0.35872
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.169940   0.112857  -1.506 0.137279
## my_reputation    0.697597   0.171295   4.072 0.000136 ***
## partner_reputation 0.299760   0.165724   1.809 0.075413 .
## AbsPartnerSend    0.011116   0.009389   1.184 0.241019
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1875 on 61 degrees of freedom
## Multiple R-squared:  0.3527, Adjusted R-squared:  0.3209
## F-statistic: 11.08 on 3 and 61 DF,  p-value: 6.665e-06
##
## [1] "Analyze: RECEIVER for game: Score GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
## [1] "Model without interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min      1Q   Median      3Q      Max
## -0.50197 -0.12545  0.05064  0.12321  0.68157
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.25329   0.07662   3.306 0.00159 **
## my_trust_value  0.54690   0.17864   3.061 0.00327 **
## trust_value     0.12540   0.16970   0.739 0.46276
## AbsPartnerSend -0.02191   0.01249  -1.754 0.08446 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2101 on 61 degrees of freedom
## Multiple R-squared:  0.1684, Adjusted R-squared:  0.1275
## F-statistic: 4.118 on 3 and 61 DF,  p-value: 0.01002
##
## [1] "----"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend +
##     trust_value * my_trust_value * AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min      1Q   Median      3Q      Max
## -0.49021 -0.08772  0.03491  0.11515  0.55529
##
## Coefficients:

```

```

##                                Estimate Std. Error t value
## (Intercept)                   0.443107   0.173726   2.551
## my_trust_value                 0.517241   0.554247   0.933
## trust_value                   -0.805904   0.595677  -1.353
## AbsPartnerSend                -0.052753   0.069427  -0.760
## my_trust_value:trust_value     0.997402   1.365262   0.731
## trust_value:AbsPartnerSend     0.120729   0.132910   0.908
## my_trust_value:AbsPartnerSend  -0.008325   0.106956  -0.078
## my_trust_value:trust_value:AbsPartnerSend -0.093775   0.210023  -0.446
##                                Pr(>|t|)
## (Intercept)                   0.0135 *
## my_trust_value                 0.3546
## trust_value                   0.1814
## AbsPartnerSend                0.4505
## my_trust_value:trust_value     0.4680
## trust_value:AbsPartnerSend     0.3675
## my_trust_value:AbsPartnerSend  0.9382
## my_trust_value:trust_value:AbsPartnerSend 0.6569
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2092 on 57 degrees of freedom
## Multiple R-squared:  0.2298, Adjusted R-squared:  0.1352
## F-statistic: 2.429 on 7 and 57 DF,  p-value: 0.02998
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.54585 -0.08162  0.03231  0.10883  0.36171
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.112557   0.105389   1.068   0.290
## my_reputation    0.856227   0.163603   5.234 2.16e-06 ***
## partner_reputation -0.007419   0.203732  -0.036   0.971
## AbsPartnerSend   -0.012624   0.011162  -1.131   0.262
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1872 on 61 degrees of freedom
## Multiple R-squared:  0.3401, Adjusted R-squared:  0.3077
## F-statistic: 10.48 on 3 and 61 DF,  p-value: 1.18e-05
##
## [1] "Analyze: RECEIVER for game: Combine GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
## [1] "Model without interaction"
##
## Call:

```

```

## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.46308 -0.06064  0.02373  0.09706  0.44402
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.26227    0.07918   3.312  0.00157 **
## my_trust_value  0.17520    0.15991   1.096  0.27762
## trust_value     0.25558    0.16663   1.534  0.13032
## AbsPartnerSend -0.00172    0.01083  -0.159  0.87436
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1874 on 60 degrees of freedom
## Multiple R-squared:  0.1348, Adjusted R-squared:  0.09151
## F-statistic: 3.115 on 3 and 60 DF,  p-value: 0.0327
##
## [1] "---"
## [1] "Model with interaction"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + AbsPartnerSend +
##     trust_value * my_trust_value * AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.50005 -0.06088  0.01906  0.09921  0.42109
##
## Coefficients:
##              Estimate Std. Error t value
## (Intercept)    -0.25460    0.26895  -0.947
## my_trust_value    1.00828    0.56048   1.799
## trust_value      1.59475    0.97903   1.629
## AbsPartnerSend    0.11037    0.03889   2.838
## my_trust_value:trust_value -1.91761    1.95141  -0.983
## trust_value:AbsPartnerSend -0.26109    0.11558  -2.259
## my_trust_value:AbsPartnerSend -0.19419    0.08355  -2.324
## my_trust_value:trust_value:AbsPartnerSend  0.40644    0.22112   1.838
##              Pr(>|t|)
## (Intercept)    0.34789
## my_trust_value  0.07742 .
## trust_value    0.10895
## AbsPartnerSend  0.00631 **
## my_trust_value:trust_value  0.32999
## trust_value:AbsPartnerSend  0.02779 *
## my_trust_value:AbsPartnerSend  0.02376 *
## my_trust_value:trust_value:AbsPartnerSend  0.07135 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1775 on 56 degrees of freedom

```

```

## Multiple R-squared:  0.2752, Adjusted R-squared:  0.1846
## F-statistic: 3.037 on 7 and 56 DF,  p-value: 0.008857
##
## [1] "Do prediction for reputation score"
##
## Call:
## lm(formula = RelSend ~ my_reputation + partner_reputation + AbsPartnerSend,
##     data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.39838 -0.08191  0.01893  0.09835  0.65466
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)      0.34155    0.10610   3.219  0.00208 **
## my_reputation      0.16981    0.17828   0.953  0.34465
## partner_reputation -0.11365    0.16975  -0.670  0.50574
## AbsPartnerSend     0.01667    0.01064   1.566  0.12250
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1916 on 60 degrees of freedom
## Multiple R-squared:  0.09546,    Adjusted R-squared:  0.05023
## F-statistic: 2.111 on 3 and 60 DF,  p-value: 0.1083

```

Compare the effect of nick-name and trust score

Date: Tue 20-Jun-2017

We take the send proportion of sender and receiver for each pair in ID game and Score game, then compare them with a paired t-test to see if they are different. If they are not, we could claim that there is no difference on the effect of nick-name and score.

```
## [1] "Compare ID Game and Score Game for SENDER"
##
## Paired t-test
##
## data: comp_df$send_id_game and comp_df$send_score_game
## t = -0.17493, df = 266, p-value = 0.8613
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.05967224 0.04993441
## sample estimates:
## mean of the differences
## -0.004868914
##
## [1] "Compare ID Game and Score Game for RECEIVER"
##
## Paired t-test
##
## data: comp_df$send_id_game and comp_df$send_score_game
## t = -0.45824, df = 219, p-value = 0.6472
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.04394464 0.02736455
## sample estimates:
## mean of the differences
## -0.008290043
```

Predict send proportion with reputation score

Round 4

```
## [1] "Analyze:  SENDER for game: Simple GAME"
## [1] "For Round 4 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_reputation +
##     partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.47693 -0.10585 -0.01405  0.11573  0.57942
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.03665    0.05195  -0.706   0.4828
## my_trust_value    0.38690    0.18555   2.085   0.0407 *
## trust_value      0.05439    0.18287   0.297   0.7670
## my_reputation    0.47336    0.18082   2.618   0.0108 *
## partner_reputation 0.04275    0.19988   0.214   0.8313
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2061 on 70 degrees of freedom
## Multiple R-squared:  0.4325, Adjusted R-squared:  0.4
## F-statistic: 13.34 on 4 and 70 DF,  p-value: 3.958e-08
##
## Start:  AIC=-232.1
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq    RSS    AIC
## - partner_reputation  1  0.001942 2.9746 -234.05
## - trust_value         1  0.003757 2.9764 -234.01
## <none>                 2.9727 -232.10
## - my_trust_value      1  0.184650 3.1573 -229.58
## - my_reputation       1  0.291040 3.2637 -227.10
##
## Step:  AIC=-234.05
## RelSend ~ my_trust_value + trust_value + my_reputation
##
##              Df Sum of Sq    RSS    AIC
## - trust_value      1  0.029934 3.0045 -235.30
## <none>              2.9746 -234.05
## - my_trust_value   1  0.185400 3.1600 -231.52
## - my_reputation    1  0.291821 3.2664 -229.03
##
## Step:  AIC=-235.3
## RelSend ~ my_trust_value + my_reputation
##
##              Df Sum of Sq    RSS    AIC
## <none>          3.0045 -235.30
```



```

## - my_trust_value 1 0.20384 3.2084 -232.38
## - my_reputation 1 0.28225 3.2868 -230.57
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
## Final Model:
## RelSend ~ my_trust_value + my_reputation
##
##
##              Step Df      Deviance Resid. Df Resid. Dev      AIC
## 1                                70 2.972660 -232.1023
## 2 - partner_reputation 1 0.001942287      71 2.974603 -234.0533
## 3      - trust_value 1 0.029934052      72 3.004537 -235.3024
## [1] "Analyze: SENDER for game: ID GAME"
## [1] "For Round 4 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_reputation +
##     partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.88176 -0.15258  0.00209  0.16753  0.64156
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.19224    0.14767  -1.302 0.197257
## my_trust_value    0.98217    0.25208   3.896 0.000221 ***
## trust_value      0.52710    0.26139   2.017 0.047584 *
## my_reputation    0.08199    0.28555   0.287 0.774862
## partner_reputation -0.02004    0.31006  -0.065 0.948657
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2893 on 70 degrees of freedom
## Multiple R-squared:  0.4116, Adjusted R-squared:  0.378
## F-statistic: 12.24 on 4 and 70 DF, p-value: 1.336e-07
##
## Start: AIC=-181.2
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq    RSS    AIC
## - partner_reputation 1 0.00035 5.8604 -183.20
## - my_reputation      1 0.00690 5.8669 -183.11
## <none>                  5.8600 -181.20
## - trust_value        1 0.34041 6.2004 -178.97
## - my_trust_value     1 1.27086 7.1309 -168.48
##
## Step: AIC=-183.2
## RelSend ~ my_trust_value + trust_value + my_reputation

```

```

##
##              Df Sum of Sq   RSS   AIC
## - my_reputation  1   0.00744 5.8678 -185.10
## <none>                      5.8604 -183.20
## - trust_value     1   0.84570 6.7061 -175.09
## - my_trust_value  1   1.27800 7.1384 -170.40
##
## Step:  AIC=-185.1
## RelSend ~ my_trust_value + trust_value
##
##              Df Sum of Sq   RSS   AIC
## <none>                      5.8678 -185.10
## - trust_value     1   0.85525 6.7230 -176.90
## - my_trust_value  1   2.74185 8.6097 -158.34
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
## Final Model:
## RelSend ~ my_trust_value + trust_value
##
##
##              Step Df      Deviance Resid. Df Resid. Dev      AIC
## 1                                70   5.860013 -181.2002
## 2 - partner_reputation  1 0.0003496165      71   5.860362 -183.1958
## 3   - my_reputation  1 0.0074373488      72   5.867800 -185.1006
## [1] "Analyze:  SENDER for game: Score GAME"
## [1] "For Round 4 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_reputation +
##     partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.46239 -0.11244  0.00465  0.13368  0.35843
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.52728    0.09246  -5.703 2.60e-07 ***
## my_trust_value  0.24996    0.15348   1.629  0.10788
## trust_value    0.66078    0.15898   4.156 9.02e-05 ***
## my_reputation  0.71405    0.15780   4.525 2.41e-05 ***
## partner_reputation 0.64944    0.19617   3.311  0.00147 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1944 on 70 degrees of freedom
## Multiple R-squared:  0.7641, Adjusted R-squared:  0.7506
## F-statistic: 56.69 on 4 and 70 DF,  p-value: < 2.2e-16
##

```

```

## Start: AIC=-240.83
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq    RSS    AIC
## <none>                2.6460 -240.83
## - my_trust_value      1   0.10026 2.7463 -240.04
## - partner_reputation  1   0.41428 3.0603 -231.92
## - trust_value         1   0.65302 3.2990 -226.29
## - my_reputation       1   0.77394 3.4200 -223.59
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
## Final Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##      Step Df Deviance Resid. Df Resid. Dev      AIC
## 1              70    2.646013 -240.8326
## [1] "Analyze:  SENDER for game: Combine GAME"
## [1] "For Round 4 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_reputation +
##     partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.81688 -0.10212  0.01019  0.13581  0.35235
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.14628    0.09451  -1.548  0.126201
## my_trust_value    0.92753    0.17411   5.327 1.15e-06 ***
## trust_value      0.69977    0.17338   4.036 0.000137 ***
## my_reputation    0.13378    0.18592   0.720 0.474196
## partner_reputation -0.20831    0.19962  -1.044 0.300305
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.213 on 70 degrees of freedom
## Multiple R-squared:  0.7165, Adjusted R-squared:  0.7003
## F-statistic: 44.22 on 4 and 70 DF,  p-value: < 2.2e-16
##
## Start: AIC=-227.14
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq    RSS    AIC
## - my_reputation      1   0.02349 3.1997 -228.58
## - partner_reputation  1   0.04941 3.2256 -227.98
## <none>                3.1762 -227.14

```

```

## - trust_value          1    0.73916 3.9153 -213.44
## - my_trust_value       1    1.28764 4.4638 -203.61
##
## Step:  AIC=-228.58
## RelSend ~ my_trust_value + trust_value + partner_reputation
##
##              Df Sum of Sq    RSS    AIC
## - partner_reputation  1    0.06218 3.2618 -229.14
## <none>                  3.1997 -228.58
## - trust_value         1    0.76023 3.9599 -214.59
## - my_trust_value      1    2.37549 5.5751 -188.94
##
## Step:  AIC=-229.14
## RelSend ~ my_trust_value + trust_value
##
##              Df Sum of Sq    RSS    AIC
## <none>                  3.2618 -229.14
## - trust_value         1    0.87933 4.1412 -213.24
## - my_trust_value      1    2.40004 5.6619 -189.78
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
## Final Model:
## RelSend ~ my_trust_value + trust_value
##
##
##              Step Df   Deviance Resid. Df Resid. Dev      AIC
## 1                                70   3.176159 -227.1362
## 2      - my_reputation  1 0.02349254      71   3.199651 -228.5835
## 3 - partner_reputation  1 0.06218409      72   3.261835 -229.1399
## [1] "Analyze:  RECEIVER for game: Simple GAME"
## [1] "For Round 4 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + +my_reputation +
##     partner_reputation + AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.68473 -0.13463 -0.02017  0.06741  0.89334
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.11873    0.11843   1.002   0.322
## my_trust_value  0.10745    0.36213   0.297   0.768
## trust_value     0.09792    0.32575   0.301   0.765
## my_reputation   0.55643    0.39953   1.393   0.171
## partner_reputation -0.06296    0.32045  -0.196   0.845
## AbsPartnerSend -0.01473    0.02113  -0.697   0.490
##

```

```

## Residual standard error: 0.2651 on 40 degrees of freedom
## Multiple R-squared:  0.2708, Adjusted R-squared:  0.1796
## F-statistic: 2.971 on 5 and 40 DF,  p-value: 0.02259
##
## Start:  AIC=-116.58
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##      AbsPartnerSend
##
##              Df Sum of Sq    RSS      AIC
## - partner_reputation  1  0.002713 2.8136 -118.53
## - my_trust_value      1  0.006187 2.8171 -118.47
## - trust_value         1  0.006349 2.8173 -118.47
## - AbsPartnerSend     1  0.034156 2.8451 -118.02
## <none>                2.8109 -116.58
## - my_reputation      1  0.136302 2.9472 -116.40
##
## Step:  AIC=-118.53
## RelSend ~ my_trust_value + trust_value + my_reputation + AbsPartnerSend
##
##              Df Sum of Sq    RSS      AIC
## - trust_value      1  0.003638 2.8173 -120.47
## - my_trust_value   1  0.006125 2.8197 -120.43
## - AbsPartnerSend  1  0.039433 2.8531 -119.89
## <none>              2.8136 -118.53
## - my_reputation   1  0.146543 2.9602 -118.20
##
## Step:  AIC=-120.47
## RelSend ~ my_trust_value + my_reputation + AbsPartnerSend
##
##              Df Sum of Sq    RSS      AIC
## - my_trust_value   1  0.008307 2.8256 -122.34
## - AbsPartnerSend   1  0.040789 2.8580 -121.81
## <none>              2.8173 -120.47
## - my_reputation    1  0.142930 2.9602 -120.20
##
## Step:  AIC=-122.34
## RelSend ~ my_reputation + AbsPartnerSend
##
##              Df Sum of Sq    RSS      AIC
## - AbsPartnerSend   1  0.04553 2.8711 -123.60
## <none>              2.8256 -122.34
## - my_reputation    1  0.96990 3.7955 -110.76
##
## Step:  AIC=-123.6
## RelSend ~ my_reputation
##
##              Df Sum of Sq    RSS      AIC
## <none>          2.8711 -123.60
## - my_reputation  1  0.9836 3.8547 -112.05
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +

```

```

##      AbsPartnerSend
##
## Final Model:
## RelSend ~ my_reputation
##
##
##              Step Df      Deviance Resid. Df Resid. Dev      AIC
## 1                                40    2.810901 -116.5763
## 2 - partner_reputation  1 0.002712772      41    2.813614 -118.5319
## 3      - trust_value    1 0.003637699      42    2.817251 -120.4725
## 4      - my_trust_value  1 0.008307171      43    2.825559 -122.3370
## 5      - AbsPartnerSend  1 0.045534932      44    2.871094 -123.6016
## [1] "Analyze: RECEIVER for game: ID GAME"
## [1] "For Round 4 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_reputation +
##     partner_reputation + AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.45157 -0.05325 -0.00078  0.07554  0.43866
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.009483   0.098058  -0.097   0.9233
## my_trust_value    0.418895   0.174837   2.396   0.0197 *
## trust_value      0.250509   0.170720   1.467   0.1475
## my_reputation    0.423894   0.200644   2.113   0.0388 *
## partner_reputation -0.018038   0.181721  -0.099   0.9213
## AbsPartnerSend  -0.012220   0.008106  -1.508   0.1369
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1568 on 60 degrees of freedom
## Multiple R-squared:  0.5128, Adjusted R-squared:  0.4722
## F-statistic: 12.63 on 5 and 60 DF,  p-value: 2.16e-08
##
## Start:  AIC=-238.84
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation +
##     AbsPartnerSend
##
##              Df Sum of Sq    RSS    AIC
## - partner_reputation  1  0.000242 1.4757 -240.83
## <none>                        1.4755 -238.84
## - trust_value          1  0.052950 1.5284 -238.52
## - AbsPartnerSend       1  0.055895 1.5314 -238.39
## - my_reputation        1  0.109761 1.5853 -236.11
## - my_trust_value       1  0.141166 1.6167 -234.81
##
## Step:  AIC=-240.83
## RelSend ~ my_trust_value + trust_value + my_reputation + AbsPartnerSend
##

```

```

##              Df Sum of Sq    RSS    AIC
## <none>                1.4757 -240.83
## - AbsPartnerSend  1  0.059341 1.5351 -240.23
## - trust_value      1  0.067900 1.5436 -239.86
## - my_reputation    1  0.116975 1.5927 -237.80
## - my_trust_value   1  0.140932 1.6167 -236.81
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##   AbsPartnerSend
##
## Final Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + AbsPartnerSend
##
##
##              Step Df      Deviance Resid. Df Resid. Dev      AIC
## 1                                60    1.475493 -238.8437
## 2 - partner_reputation  1 0.0002422901    61    1.475736 -240.8329
## [1] "Analyze: RECEIVER for game: Score GAME"
## [1] "For Round 4 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + +my_reputation +
##   partner_reputation + AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.52121 -0.11240  0.04634  0.10671  0.39345
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.22935    0.13776   1.665   0.1013
## my_trust_value    0.19163    0.20453   0.937   0.3527
## trust_value      0.34446    0.19144   1.799   0.0772 .
## my_reputation    0.40643    0.24228   1.678   0.0988 .
## partner_reputation -0.07818    0.21787  -0.359   0.7210
## AbsPartnerSend  -0.02888    0.01386  -2.083   0.0417 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2063 on 58 degrees of freedom
## Multiple R-squared:  0.1694, Adjusted R-squared:  0.09784
## F-statistic: 2.367 on 5 and 58 DF,  p-value: 0.0506
##
## Start:  AIC=-196.33
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##   AbsPartnerSend
##
##              Df Sum of Sq    RSS    AIC
## - partner_reputation  1  0.005481 2.4744 -198.19
## - my_trust_value      1  0.037367 2.5063 -197.37

```

```

## <none>                2.4689 -196.33
## - my_reputation      1  0.119785 2.5887 -195.29
## - trust_value        1  0.137804 2.6067 -194.85
## - AbsPartnerSend     1  0.184713 2.6536 -193.71
##
## Step: AIC=-198.19
## RelSend ~ my_trust_value + trust_value + my_reputation + AbsPartnerSend
##
##           Df Sum of Sq   RSS   AIC
## - my_trust_value  1  0.047489 2.5219 -198.97
## <none>                2.4744 -198.19
## - my_reputation   1  0.140080 2.6144 -196.66
## - trust_value      1  0.140532 2.6149 -196.65
## - AbsPartnerSend  1  0.292450 2.7668 -193.04
##
## Step: AIC=-198.97
## RelSend ~ trust_value + my_reputation + AbsPartnerSend
##
##           Df Sum of Sq   RSS   AIC
## <none>                2.5219 -198.97
## - trust_value        1  0.18597 2.7078 -196.41
## - AbsPartnerSend     1  0.24514 2.7670 -195.03
## - my_reputation      1  0.26319 2.7850 -194.62
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##   AbsPartnerSend
##
## Final Model:
## RelSend ~ trust_value + my_reputation + AbsPartnerSend
##
##
##           Step Df   Deviance Resid. Df Resid. Dev      AIC
## 1                58   2.468883 -196.3275
## 2 - partner_reputation 1 0.005480987    59   2.474364 -198.1856
## 3   - my_trust_value  1 0.047488692    60   2.521853 -198.9689
## [1] "Analyze: RECEIVER for game: Combine GAME"
## [1] "For Round 4 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + +my_reputation +
##   partner_reputation + AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.42325 -0.08013 -0.00621  0.10060  0.26732
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.243472   0.067857   3.588 0.000685 ***
## my_trust_value -0.163151   0.131670  -1.239 0.220303

```



```

## trust_value          0.223352    0.153592    1.454 0.151285
## my_reputation        0.593264    0.142044    4.177 0.000101 ***
## partner_reputation -0.299402    0.134982   -2.218 0.030478 *
## AbsPartnerSend       0.006701    0.009313    0.720 0.474687
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1358 on 58 degrees of freedom
## Multiple R-squared:  0.4196, Adjusted R-squared:  0.3695
## F-statistic: 8.385 on 5 and 58 DF,  p-value: 5.127e-06
##
## Start:  AIC=-249.89
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##      AbsPartnerSend
##
##              Df Sum of Sq    RSS      AIC
## - AbsPartnerSend      1    0.00954 1.0787 -251.32
## - my_trust_value       1    0.02830 1.0975 -250.22
## <none>                  1.0692 -249.89
## - trust_value          1    0.03898 1.1082 -249.59
## - partner_reputation   1    0.09069 1.1599 -246.68
## - my_reputation        1    0.32157 1.3907 -235.06
##
## Step:  AIC=-251.32
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq    RSS      AIC
## - my_trust_value       1    0.02027 1.0990 -252.13
## <none>                  1.0787 -251.32
## - partner_reputation   1    0.08442 1.1631 -248.50
## - trust_value          1    0.08514 1.1639 -248.46
## - my_reputation        1    0.32411 1.4028 -236.50
##
## Step:  AIC=-252.13
## RelSend ~ trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq    RSS      AIC
## <none>                  1.0990 -252.13
## - trust_value          1    0.07408 1.1731 -249.95
## - partner_reputation   1    0.09417 1.1932 -248.87
## - my_reputation        1    0.41420 1.5132 -233.66
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##      AbsPartnerSend
##
## Final Model:
## RelSend ~ trust_value + my_reputation + partner_reputation
##
##
##              Step Df      Deviance Resid. Df Resid. Dev      AIC
## 1                    58    1.069182 -249.8873

```

## 2 - AbsPartnerSend	1	0.009544546	59	1.078726	-251.3185
## 3 - my_trust_value	1	0.020274811	60	1.099001	-252.1268

Round 5

```
## [1] "Analyze:  SENDER for game: Simple GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_reputation +
##     partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.37569 -0.13206 -0.03577  0.12390  0.88790
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.04187    0.05878  -0.712  0.478657
## my_trust_value    0.03502    0.20253   0.173  0.863210
## trust_value      0.19686    0.17530   1.123  0.265278
## my_reputation    0.86964    0.21505   4.044  0.000133 ***
## partner_reputation -0.11440    0.20182  -0.567  0.572639
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.23 on 70 degrees of freedom
## Multiple R-squared:  0.4204, Adjusted R-squared:  0.3872
## F-statistic: 12.69 on 4 and 70 DF,  p-value: 8.065e-08
##
## Start:  AIC=-215.64
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq  RSS    AIC
## - my_trust_value    1    0.00158 3.7038 -217.61
## - partner_reputation 1    0.01699 3.7192 -217.30
## - trust_value        1    0.06670 3.7689 -216.30
## <none>                  3.7022 -215.64
## - my_reputation      1    0.86491 4.5671 -201.90
##
## Step:  AIC=-217.61
## RelSend ~ trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq  RSS    AIC
## - partner_reputation 1    0.01725 3.7211 -219.26
## - trust_value        1    0.06838 3.7722 -218.24
## <none>                  3.7038 -217.61
## - my_reputation      1    2.31380 6.0176 -183.21
##
## Step:  AIC=-219.26
## RelSend ~ trust_value + my_reputation
##
##              Df Sum of Sq  RSS    AIC
## - trust_value    1    0.0627 3.7838 -220.01
## <none>              3.7211 -219.26
## - my_reputation  1    2.3929 6.1140 -184.02
```

```

##
## Step:  AIC=-220.01
## RelSend ~ my_reputation
##
##           Df Sum of Sq    RSS      AIC
## <none>                3.7838 -220.01
## - my_reputation  1      2.6034 6.3872 -182.74
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
## Final Model:
## RelSend ~ my_reputation
##
##
##           Step Df      Deviance Resid. Df Resid. Dev      AIC
## 1                                70    3.702236 -215.6413
## 2  - my_trust_value  1 0.001581543      71    3.703818 -217.6093
## 3 - partner_reputation  1 0.017254469      72    3.721072 -219.2607
## 4    - trust_value  1 0.062702961      73    3.783775 -220.0074
## [1] "Analyze:  SENDER for game: ID GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_reputation +
##     partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.86463 -0.14683 -0.00761  0.16897  0.49111
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.16507    0.12543  -1.316 0.192456
## my_trust_value    0.86190    0.18232   4.727 1.14e-05 ***
## trust_value      0.71972    0.17485   4.116 0.000104 ***
## my_reputation    0.02565    0.23103   0.111 0.911912
## partner_reputation -0.20793    0.22388  -0.929 0.356197
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2398 on 70 degrees of freedom
## Multiple R-squared:  0.5705, Adjusted R-squared:  0.5459
## F-statistic: 23.24 on 4 and 70 DF,  p-value: 2.996e-12
##
## Start:  AIC=-209.37
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##           Df Sum of Sq    RSS      AIC
## - my_reputation      1    0.00071 4.0260 -211.35
## - partner_reputation  1    0.04960 4.0749 -210.45

```

```

## <none>                                4.0253 -209.37
## - trust_value          1    0.97425 4.9995 -195.11
## - my_trust_value       1    1.28509 5.3103 -190.59
##
## Step: AIC=-211.35
## RelSend ~ my_trust_value + trust_value + partner_reputation
##
##              Df Sum of Sq    RSS    AIC
## - partner_reputation  1    0.05288 4.0789 -212.38
## <none>                                4.0260 -211.35
## - trust_value          1    0.97615 5.0021 -197.07
## - my_trust_value       1    2.83085 6.8568 -173.42
##
## Step: AIC=-212.38
## RelSend ~ my_trust_value + trust_value
##
##              Df Sum of Sq    RSS    AIC
## <none>                                4.0789 -212.38
## - trust_value          1    1.1674 5.2462 -195.50
## - my_trust_value       1    2.8827 6.9615 -174.28
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
## Final Model:
## RelSend ~ my_trust_value + trust_value
##
##
##              Step Df      Deviance Resid. Df Resid. Dev      AIC
## 1                                70    4.025261 -209.3674
## 2      - my_reputation  1 0.0007088607    71    4.025970 -211.3542
## 3 - partner_reputation  1 0.0528832901    72    4.078853 -212.3754
## [1] "Analyze:  SENDER for game: Score GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_reputation +
##     partner_reputation, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.55949 -0.10876  0.00554  0.13474  0.41292
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.3351     0.1015  -3.301  0.001517 **
## my_trust_value    0.1033     0.1658   0.623  0.535069
## trust_value      0.9122     0.1683   5.420 7.98e-07 ***
## my_reputation    0.7433     0.2103   3.534 0.000729 ***
## partner_reputation 0.1359     0.1942   0.700 0.486479
## ---

```

```

## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2102 on 70 degrees of freedom
## Multiple R-squared:  0.7273, Adjusted R-squared:  0.7117
## F-statistic: 46.67 on 4 and 70 DF,  p-value: < 2.2e-16
##
## Start:  AIC=-229.14
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq    RSS    AIC
## - my_trust_value      1   0.01717 3.1095 -230.73
## - partner_reputation  1   0.02162 3.1139 -230.62
## <none>                        3.0923 -229.14
## - my_reputation      1   0.55185 3.6442 -218.83
## - trust_value        1   1.29793 4.3902 -204.86
##
## Step:  AIC=-230.73
## RelSend ~ trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq    RSS    AIC
## - partner_reputation  1   0.02457 3.1340 -232.14
## <none>                        3.1095 -230.73
## - my_reputation      1   1.03190 4.1414 -211.24
## - trust_value        1   1.51826 4.6277 -202.91
##
## Step:  AIC=-232.14
## RelSend ~ trust_value + my_reputation
##
##              Df Sum of Sq    RSS    AIC
## <none>                        3.1340 -232.14
## - my_reputation      1   1.0309 4.1650 -212.81
## - trust_value        1   3.3457 6.4797 -179.66
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
## Final Model:
## RelSend ~ trust_value + my_reputation
##
##
##              Step Df   Deviance Resid. Df Resid. Dev      AIC
## 1              70   3.092304 -229.1429
## 2    - my_trust_value  1 0.01716616      71   3.109471 -230.7277
## 3  - partner_reputation  1 0.02457243      72   3.134043 -232.1373
## [1] "Analyze:  SENDER for game: Combine GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + my_reputation +
##     partner_reputation, data = cur_df)
##

```

```

## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.77454 -0.10361  0.01384  0.10568  0.98082
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.31403    0.09595  -3.273  0.00166 **
## my_trust_value  0.88411    0.19029   4.646 1.54e-05 ***
## trust_value    0.39375    0.20519   1.919  0.05907 .
## my_reputation  0.26880    0.18845   1.426  0.15820
## partner_reputation 0.23509    0.21647   1.086  0.28119
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2131 on 70 degrees of freedom
## Multiple R-squared:  0.717, Adjusted R-squared:  0.7008
## F-statistic: 44.33 on 4 and 70 DF,  p-value: < 2.2e-16
##
## Start:  AIC=-227.11
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##              Df Sum of Sq    RSS    AIC
## - partner_reputation  1    0.05354 3.2309 -227.85
## <none>                  3.1773 -227.11
## - my_reputation      1    0.09235 3.2697 -226.96
## - trust_value        1    0.16714 3.3445 -225.26
## - my_trust_value     1    0.97983 4.1572 -208.95
##
## Step:  AIC=-227.86
## RelSend ~ my_trust_value + trust_value + my_reputation
##
##              Df Sum of Sq    RSS    AIC
## <none>                  3.2309 -227.85
## - my_reputation      1    0.09756 3.3284 -227.62
## - trust_value        1    0.63227 3.8631 -216.45
## - my_trust_value     1    0.92695 4.1578 -210.94
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
## Final Model:
## RelSend ~ my_trust_value + trust_value + my_reputation
##
##              Step Df   Deviance Resid. Df Resid. Dev      AIC
## 1              70   3.177337   70   3.177337 -227.1083
## 2 - partner_reputation 1 0.05353784   71   3.230875 -227.8551
## [1] "Analyze: RECEIVER for game: Simple GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
##
## Call:

```

```

## lm(formula = RelSend ~ my_trust_value + trust_value + +my_reputation +
##     partner_reputation + AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.51282 -0.14744 -0.02313  0.11482  0.57804
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.19484    0.11435   1.704  0.0968 .
## my_trust_value    0.51397    0.20672   2.486  0.0175 *
## trust_value      0.10083    0.30498   0.331  0.7428
## my_reputation    0.16299    0.27241   0.598  0.5533
## partner_reputation -0.09565    0.34466  -0.278  0.7829
## AbsPartnerSend   -0.02836    0.01555  -1.824  0.0762 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2338 on 37 degrees of freedom
## Multiple R-squared:  0.3639, Adjusted R-squared:  0.2779
## F-statistic: 4.233 on 5 and 37 DF,  p-value: 0.003833
##
## Start:  AIC=-119.45
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##     AbsPartnerSend
##
##              Df Sum of Sq    RSS    AIC
## - partner_reputation  1    0.00421 2.0264 -121.36
## - trust_value         1    0.00597 2.0282 -121.32
## - my_reputation       1    0.01957 2.0418 -121.04
## <none>                 2.0222 -119.45
## - AbsPartnerSend     1    0.18185 2.2041 -117.75
## - my_trust_value      1    0.33787 2.3601 -114.81
##
## Step:  AIC=-121.36
## RelSend ~ my_trust_value + trust_value + my_reputation + AbsPartnerSend
##
##              Df Sum of Sq    RSS    AIC
## - trust_value         1    0.00186 2.0283 -123.32
## - my_reputation       1    0.02545 2.0519 -122.83
## <none>                 2.0264 -121.36
## - AbsPartnerSend     1    0.26025 2.2867 -118.17
## - my_trust_value      1    0.33377 2.3602 -116.81
##
## Step:  AIC=-123.32
## RelSend ~ my_trust_value + my_reputation + AbsPartnerSend
##
##              Df Sum of Sq    RSS    AIC
## - my_reputation       1    0.02456 2.0528 -124.81
## <none>                 2.0283 -123.32
## - AbsPartnerSend     1    0.26118 2.2895 -120.11
## - my_trust_value      1    0.33483 2.3631 -118.75
##
## Step:  AIC=-124.8

```



```

## RelSend ~ my_trust_value + AbsPartnerSend
##
##              Df Sum of Sq    RSS    AIC
## <none>                        2.0528 -124.81
## - AbsPartnerSend  1    0.25485 2.3077 -121.77
## - my_trust_value  1    0.93257 2.9854 -110.70
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##   AbsPartnerSend
##
## Final Model:
## RelSend ~ my_trust_value + AbsPartnerSend
##
##              Step Df    Deviance Resid. Df Resid. Dev    AIC
## 1                                37    2.022224 -119.4511
## 2 - partner_reputation  1 0.004209141    38    2.026433 -121.3617
## 3   - trust_value      1 0.001855018    39    2.028288 -123.3224
## 4   - my_reputation    1 0.024564099    40    2.052852 -124.8047
## [1] "Analyze: RECEIVER for game: ID GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + +my_reputation +
##   partner_reputation + AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.61793 -0.10859  0.01237  0.10951  0.36182
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   -0.20958    0.11457  -1.829   0.0724 .
## my_trust_value    0.30645    0.17992   1.703   0.0938 .
## trust_value      0.16595    0.18547   0.895   0.3745
## my_reputation    0.47847    0.21002   2.278   0.0264 *
## partner_reputation 0.24510    0.21818   1.123   0.2658
## AbsPartnerSend  -0.00058    0.01139  -0.051   0.9596
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1853 on 59 degrees of freedom
## Multiple R-squared:  0.3884, Adjusted R-squared:  0.3366
## F-statistic: 7.495 on 5 and 59 DF,  p-value: 1.68e-05
##
## Start:  AIC=-213.44
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##   AbsPartnerSend
##
##              Df Sum of Sq    RSS    AIC

```

```

## - AbsPartnerSend      1  0.000089  2.0262 -215.44
## - trust_value         1  0.027494  2.0536 -214.56
## - partner_reputation  1  0.043339  2.0694 -214.06
## <none>                 2.0261 -213.44
## - my_trust_value      1  0.099628  2.1257 -212.32
## - my_reputation       1  0.178236  2.2043 -209.96
##
## Step:  AIC=-215.43
## RelSend ~ my_trust_value + trust_value + my_reputation + partner_reputation
##
##           Df Sum of Sq    RSS    AIC
## - trust_value      1  0.031799  2.0580 -216.42
## - partner_reputation 1  0.043526  2.0697 -216.05
## <none>              2.0262 -215.44
## - my_trust_value   1  0.120120  2.1463 -213.69
## - my_reputation    1  0.178212  2.2044 -211.96
##
## Step:  AIC=-216.42
## RelSend ~ my_trust_value + my_reputation + partner_reputation
##
##           Df Sum of Sq    RSS    AIC
## <none>              2.0580 -216.42
## - my_trust_value    1  0.13566  2.1937 -214.27
## - my_reputation     1  0.20003  2.2580 -212.39
## - partner_reputation 1  0.27961  2.3376 -210.14
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##   AbsPartnerSend
##
## Final Model:
## RelSend ~ my_trust_value + my_reputation + partner_reputation
##
##           Step Df      Deviance Resid. Df Resid. Dev      AIC
## 1              59      2.026107 -213.4376
## 2 - AbsPartnerSend 1 8.900267e-05      60      2.026196 -215.4348
## 3   - trust_value  1 3.179913e-02      61      2.057995 -216.4226
## [1] "Analyze:  RECEIVER for game: Score GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + +my_reputation +
##   partner_reputation + AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.52280 -0.07340  0.03124  0.12084  0.42518
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)

```

```

## (Intercept)          0.11670      0.10569      1.104 0.274033
## my_trust_value        0.09809      0.19351      0.507 0.614124
## trust_value           0.18209      0.16403      1.110 0.271458
## my_reputation         0.75814      0.20076      3.776 0.000372 ***
## partner_reputation   -0.11756      0.22234     -0.529 0.598972
## AbsPartnerSend       -0.01905      0.01253     -1.520 0.133851
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1876 on 59 degrees of freedom
## Multiple R-squared:  0.3587, Adjusted R-squared:  0.3043
## F-statistic:  6.6 on 5 and 59 DF,  p-value: 6.114e-05
##
## Start:  AIC=-211.81
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##      AbsPartnerSend
##
##              Df Sum of Sq    RSS      AIC
## - my_trust_value      1    0.00905 2.0866 -213.53
## - partner_reputation  1    0.00984 2.0874 -213.50
## - trust_value          1    0.04339 2.1209 -212.47
## <none>                  2.0775 -211.81
## - AbsPartnerSend      1    0.08135 2.1589 -211.31
## - my_reputation       1    0.50217 2.5797 -199.74
##
## Step:  AIC=-213.53
## RelSend ~ trust_value + my_reputation + partner_reputation +
##      AbsPartnerSend
##
##              Df Sum of Sq    RSS      AIC
## - partner_reputation  1    0.00905 2.0956 -215.25
## - trust_value         1    0.05105 2.1376 -213.96
## <none>                  2.0866 -213.53
## - AbsPartnerSend      1    0.07236 2.1589 -213.31
## - my_reputation       1    0.82987 2.9164 -193.76
##
## Step:  AIC=-215.24
## RelSend ~ trust_value + my_reputation + AbsPartnerSend
##
##              Df Sum of Sq    RSS      AIC
## - trust_value         1    0.04204 2.1377 -215.95
## <none>                  2.0956 -215.25
## - AbsPartnerSend     1    0.13501 2.2306 -213.19
## - my_reputation      1    1.01214 3.1078 -191.63
##
## Step:  AIC=-215.95
## RelSend ~ my_reputation + AbsPartnerSend
##
##              Df Sum of Sq    RSS      AIC
## <none>                  2.1377 -215.95
## - AbsPartnerSend     1    0.09389 2.2316 -215.16
## - my_reputation      1    1.05464 3.1923 -191.89
## Stepwise Model Path
## Analysis of Deviance Table

```

```

##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##   AbsPartnerSend
##
## Final Model:
## RelSend ~ my_reputation + AbsPartnerSend
##
##
##           Step Df      Deviance Resid. Df Resid. Dev      AIC
## 1
## 2   - my_trust_value  1 0.009047210      60  2.086571 -213.5262
## 3 - partner_reputation  1 0.009052117      61  2.095623 -215.2449
## 4   - trust_value  1 0.042042859      62  2.137666 -215.9537
## [1] "Analyze: RECEIVER for game: Combine GAME"
## [1] "For Round 5 only"
## [1] "Residual on subject then multiple regression"
##
## Call:
## lm(formula = RelSend ~ my_trust_value + trust_value + +my_reputation +
##   partner_reputation + AbsPartnerSend, data = cur_df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.46928 -0.10544  0.01139  0.07297  0.47941
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    0.286271   0.102617   2.790  0.00713 **
## my_trust_value    0.014023   0.191371   0.073  0.94184
## trust_value      0.568426   0.207960   2.733  0.00830 **
## my_reputation    0.160977   0.203811   0.790  0.43284
## partner_reputation -0.448722   0.200593  -2.237  0.02915 *
## AbsPartnerSend    0.004408   0.011246   0.392  0.69651
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1818 on 58 degrees of freedom
## Multiple R-squared:  0.2125, Adjusted R-squared:  0.1446
## F-statistic: 3.131 on 5 and 58 DF,  p-value: 0.01436
##
## Start:  AIC=-212.49
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##   AbsPartnerSend
##
##           Df Sum of Sq    RSS      AIC
## - my_trust_value      1  0.000178 1.9180 -214.49
## - AbsPartnerSend      1  0.005081 1.9229 -214.32
## - my_reputation      1  0.020627 1.9384 -213.81
## <none>                  1.9178 -212.49
## - partner_reputation  1  0.165462 2.0833 -209.20
## - trust_value        1  0.247037 2.1648 -206.74
##
## Step:  AIC=-214.49

```

```

## RelSend ~ trust_value + my_reputation + partner_reputation +
##   AbsPartnerSend
##
##           Df Sum of Sq   RSS   AIC
## - AbsPartnerSend      1  0.005914 1.9239 -216.29
## - my_reputation        1  0.033112 1.9511 -215.39
## <none>                  1.9180 -214.49
## - partner_reputation   1  0.171795 2.0898 -211.00
## - trust_value          1  0.284913 2.2029 -207.62
##
## Step:  AIC=-216.29
## RelSend ~ trust_value + my_reputation + partner_reputation
##
##           Df Sum of Sq   RSS   AIC
## - my_reputation        1  0.05363 1.9775 -216.53
## <none>                  1.9239 -216.29
## - partner_reputation   1  0.16763 2.0915 -212.94
## - trust_value          1  0.36909 2.2930 -207.06
##
## Step:  AIC=-216.53
## RelSend ~ trust_value + partner_reputation
##
##           Df Sum of Sq   RSS   AIC
## <none>                  1.9775 -216.53
## - partner_reputation   1  0.17468 2.1522 -213.11
## - trust_value          1  0.43432 2.4118 -205.82
## Stepwise Model Path
## Analysis of Deviance Table
##
## Initial Model:
## RelSend ~ my_trust_value + trust_value + +my_reputation + partner_reputation +
##   AbsPartnerSend
##
## Final Model:
## RelSend ~ trust_value + partner_reputation
##
##           Step Df   Deviance Resid. Df Resid. Dev      AIC
## 1                    58  1.917799 -212.4931
## 2 - my_trust_value   1 0.000177531      59  1.917976 -214.4872
## 3 - AbsPartnerSend   1 0.005913855      60  1.923890 -216.2902
## 4 - my_reputation    1 0.053628499      61  1.977518 -216.5306

```

Analyze effect of SHOW_TRUST and SHOW_ID in individual send proportion

Date: Wed 14-Jun-2017


We will perform ANOVA without groupID.

```
## [1] "ANOVA on SHOW_TRUST and SHOW_ID for: SENDER"
##
## Error: id
##           Df Sum Sq Mean Sq
## SHOW_TRUST 1  4.318   4.318
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq
## SHOW_TRUST 1   2.97   2.97
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq
## SHOW_ID    1  3.307   3.307
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq
## SHOW_TRUST 1   1.13   1.13
##
## Error: Within
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST      1   3.08   3.076    26.61 2.83e-07 ***
## SHOW_ID          1   2.72   2.725    23.57 1.33e-06 ***
## SHOW_TRUST:SHOW_ID 1   5.39   5.394    46.65 1.23e-11 ***
## Residuals      1492 172.50   0.116
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "ANOVA on SHOW_TRUST and SHOW_ID for: RECEIVER"
##
## Error: id
##           Df Sum Sq Mean Sq
## SHOW_TRUST 1 0.3324  0.3324
##
## Error: id:SHOW_TRUST
##           Df Sum Sq Mean Sq
## SHOW_TRUST 1   2.85   2.85
##
## Error: id:SHOW_ID
##           Df Sum Sq Mean Sq
## SHOW_TRUST 1  1.094   1.094
##
## Error: id:SHOW_TRUST:SHOW_ID
##           Df Sum Sq Mean Sq
## SHOW_TRUST 1  1.345   1.345
##
## Error: Within
##           Df Sum Sq Mean Sq F value    Pr(>F)
## SHOW_TRUST      1   1.01   1.014    19.51 1.09e-05 ***
## SHOW_ID          1   1.38   1.380    26.57 2.96e-07 ***
## SHOW_TRUST:SHOW_ID 1   1.26   1.256    24.17 1.00e-06 ***
```

```
## Residuals          1235  64.16   0.052
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```


Understanding interactions between two trust values

Interaction in score game for type SENDER

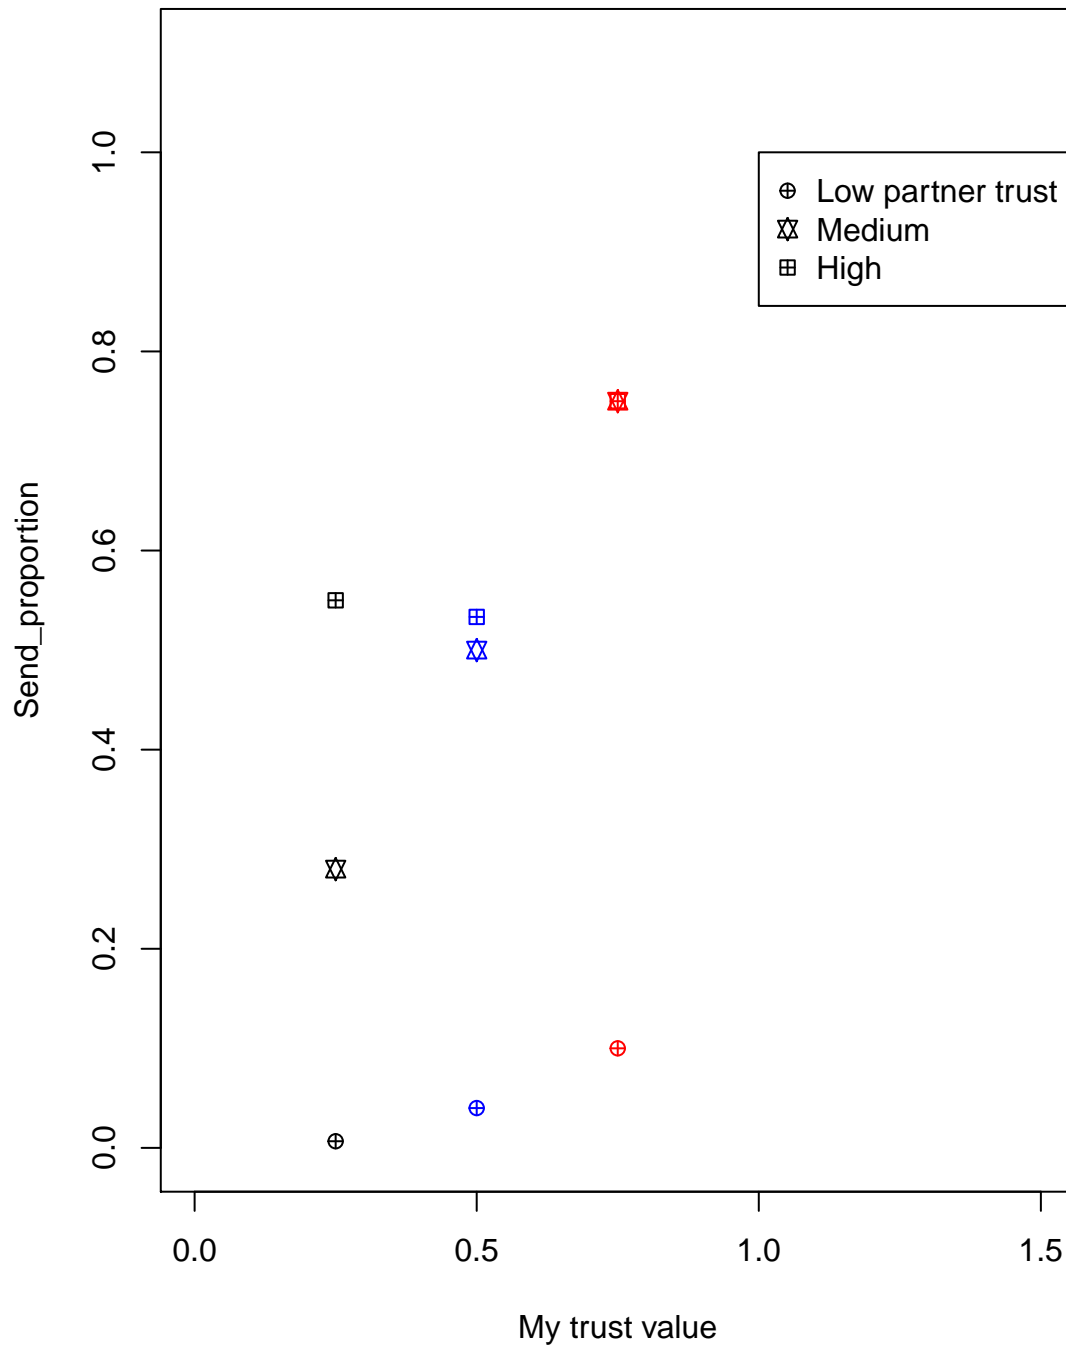


\pagebreak

Interaction in score game for type RECEIVER

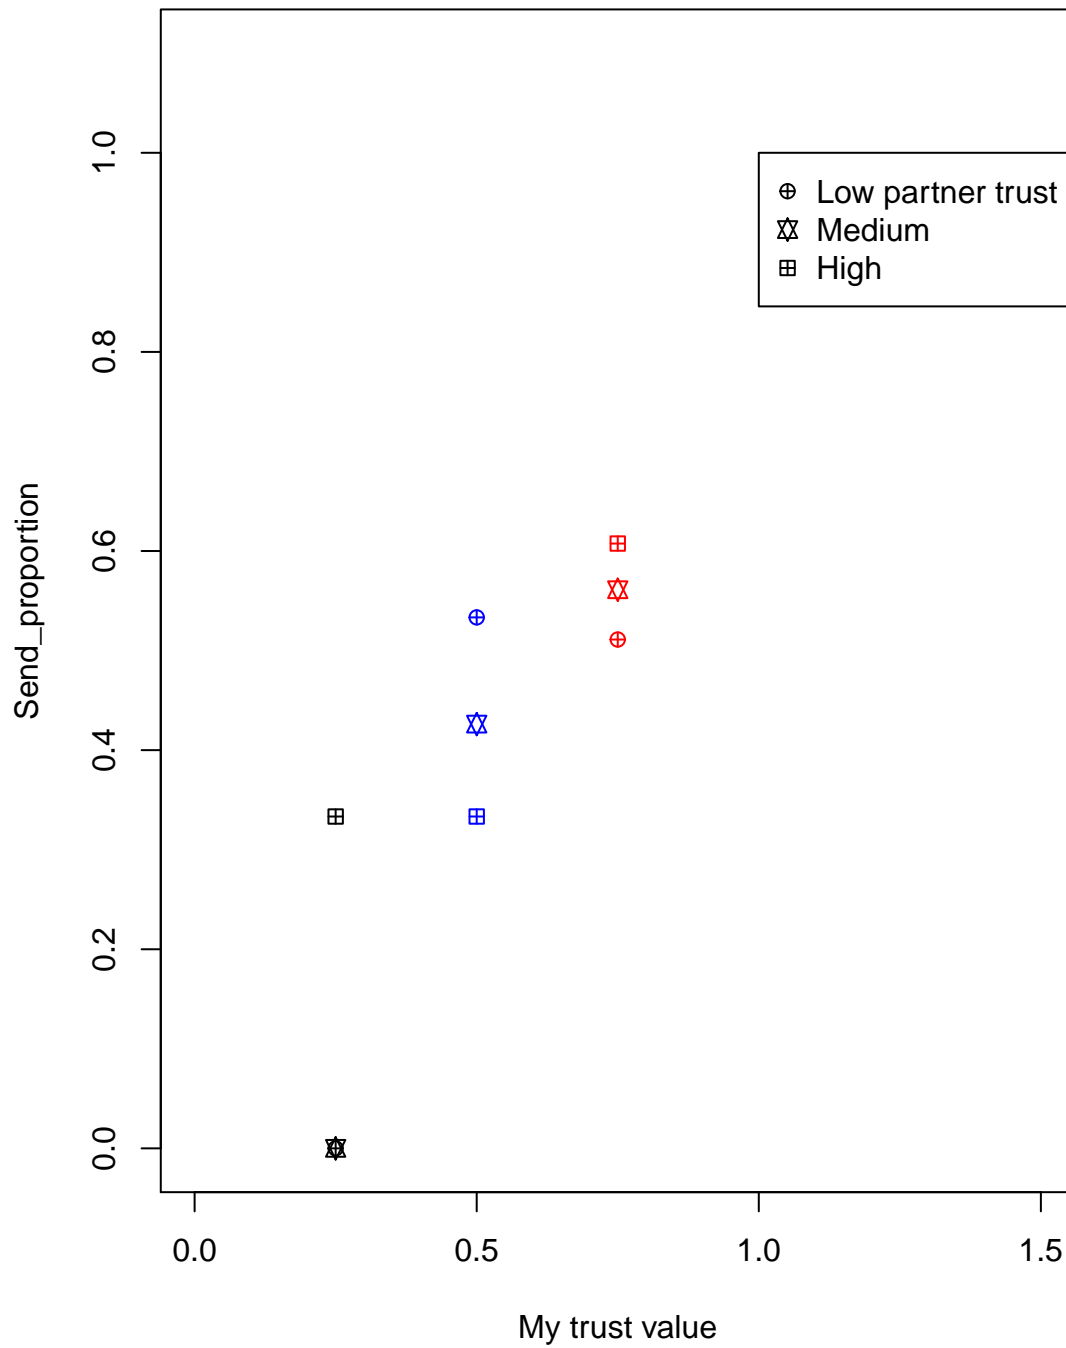


\pagebreak

Interaction in combine game for type SENDER

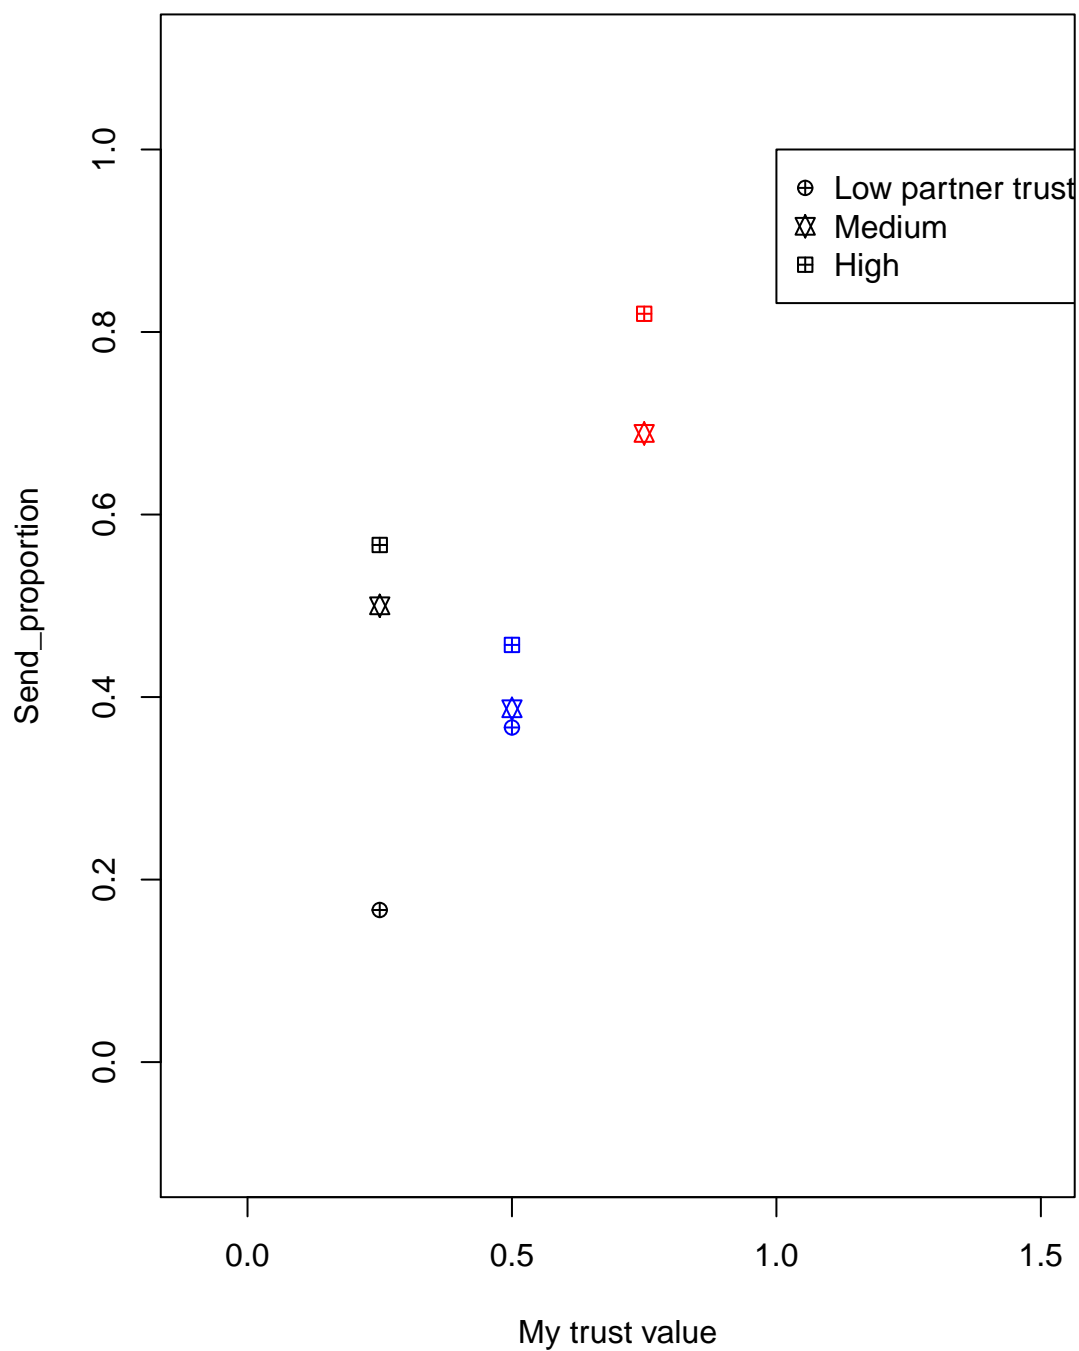

\pagebreak


Interaction in combine game for type RECEIVER

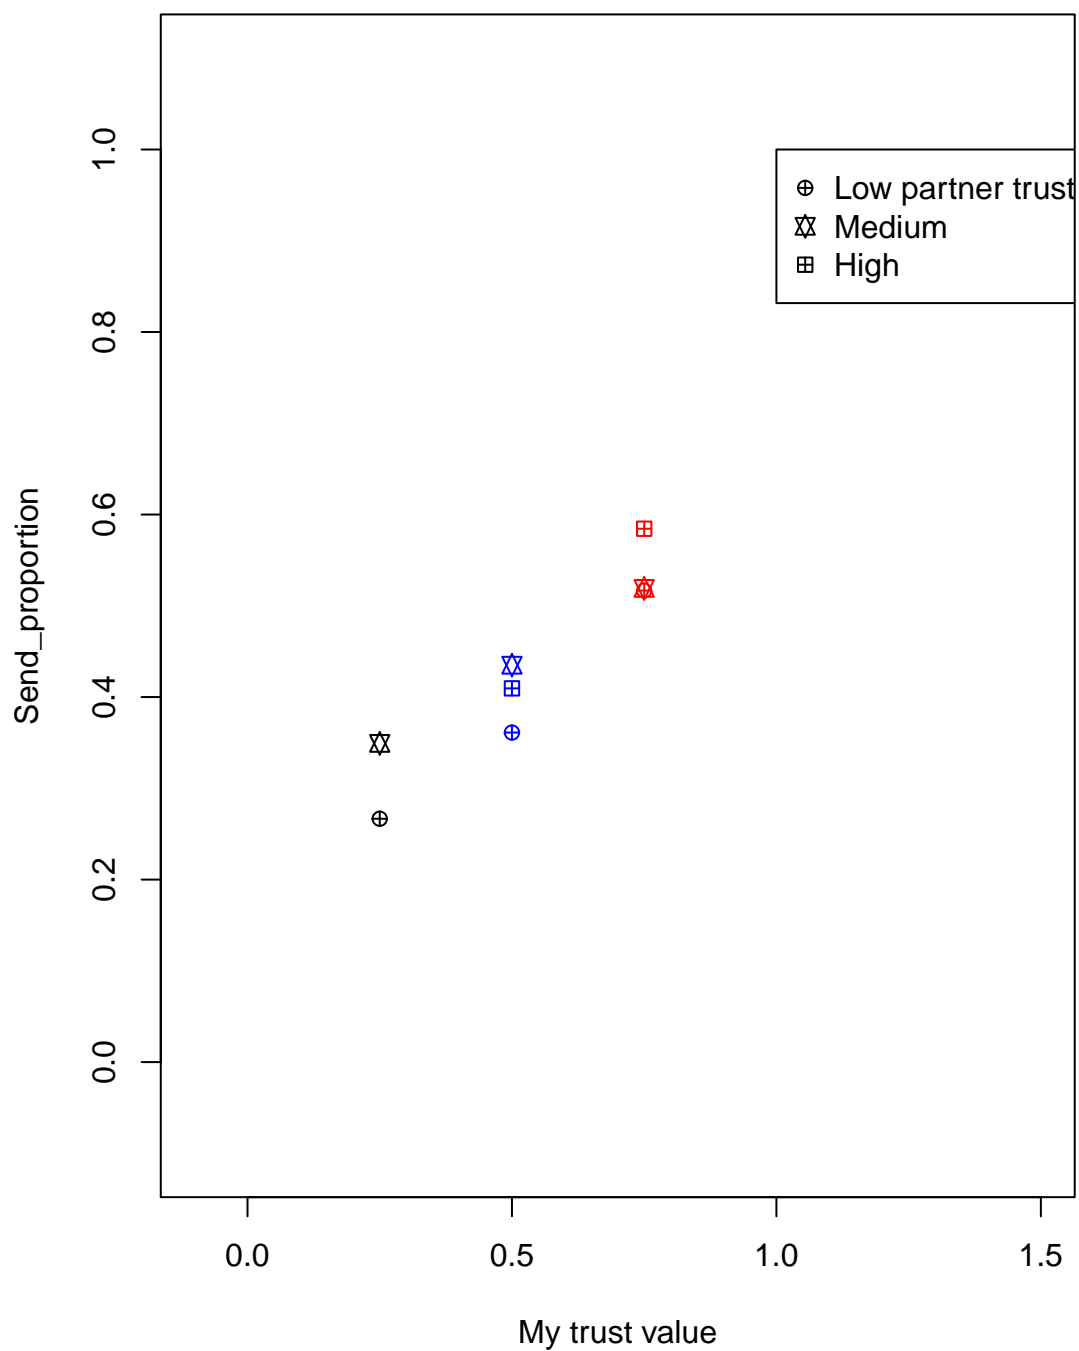


\pagebreak

Check the change of user behavior with a partner over time in presence of trust score


In this section, we will see do the behavior of one user converge in the end of a game.

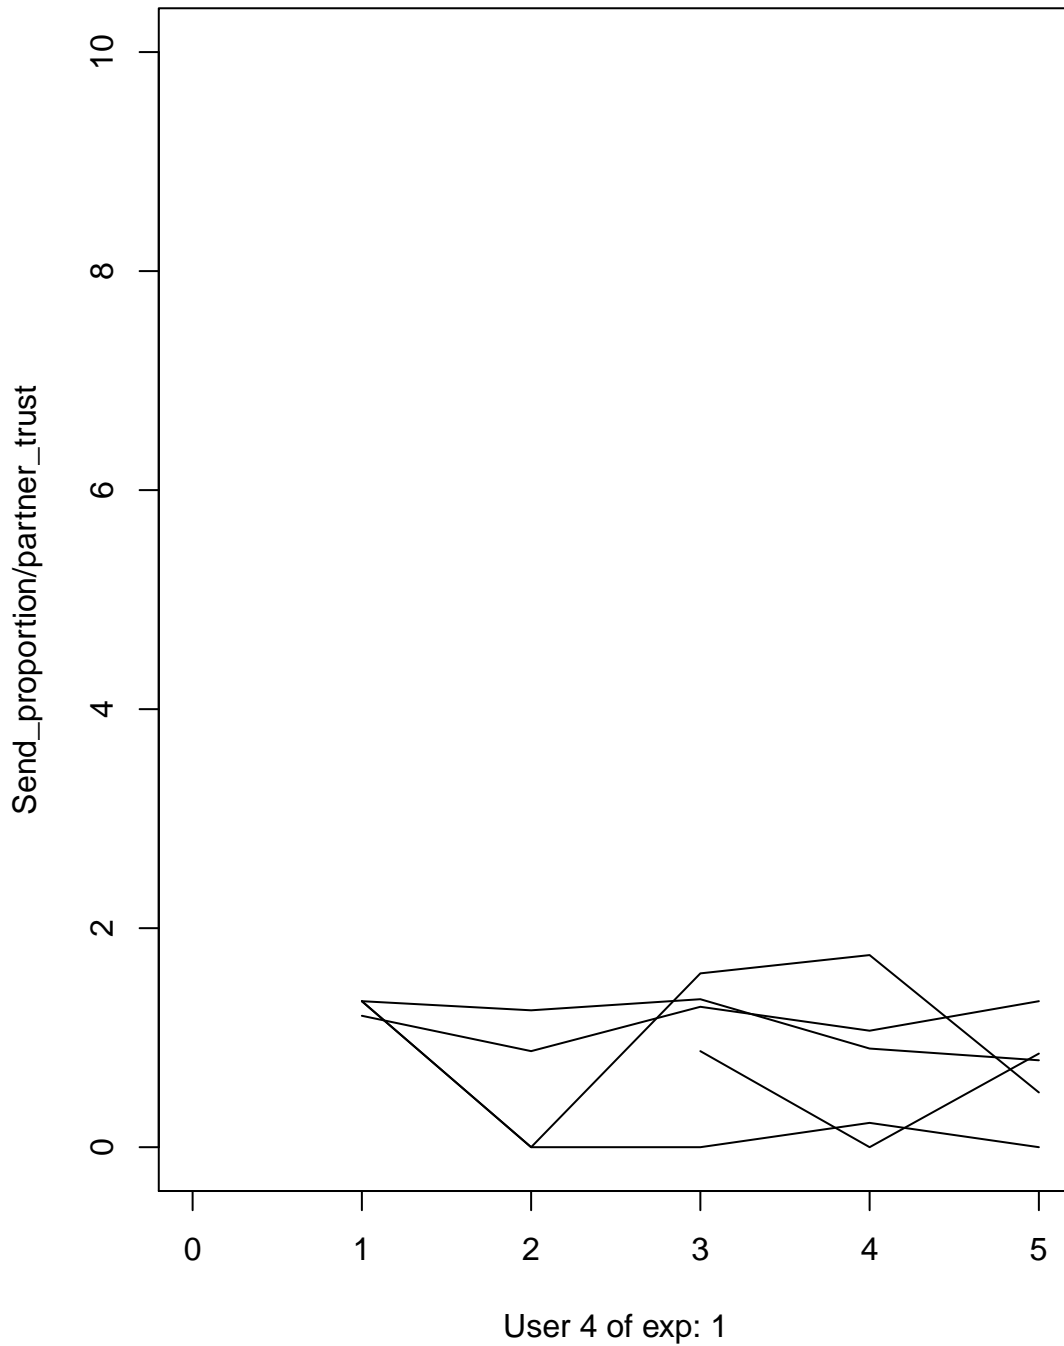


```
##  
##  
## \pagebreak
```

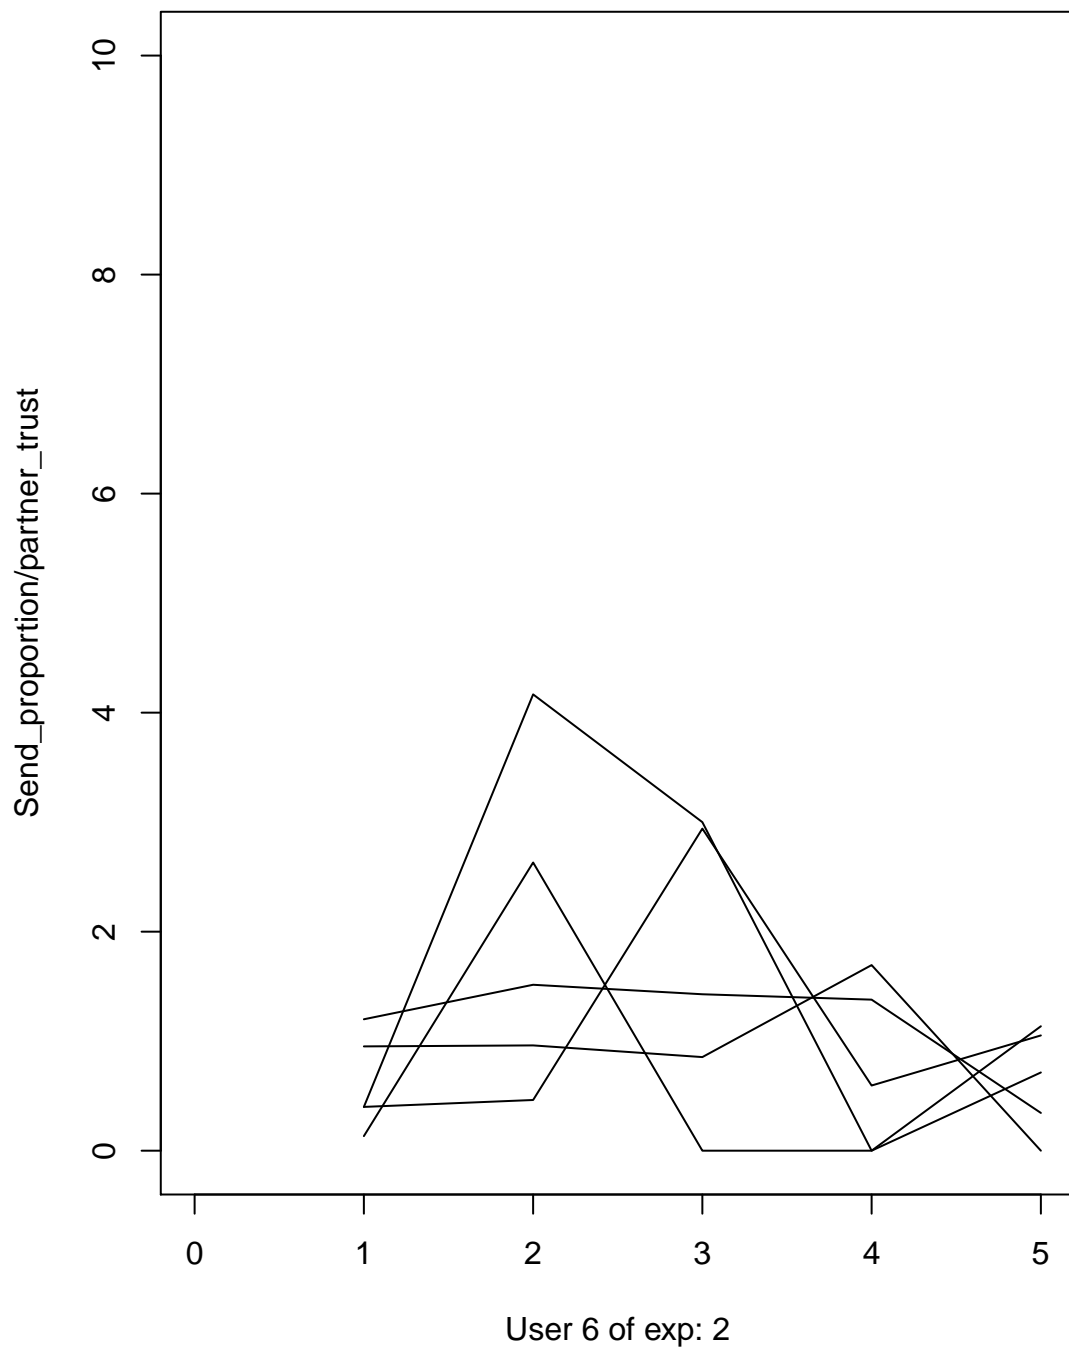


\pagebreak

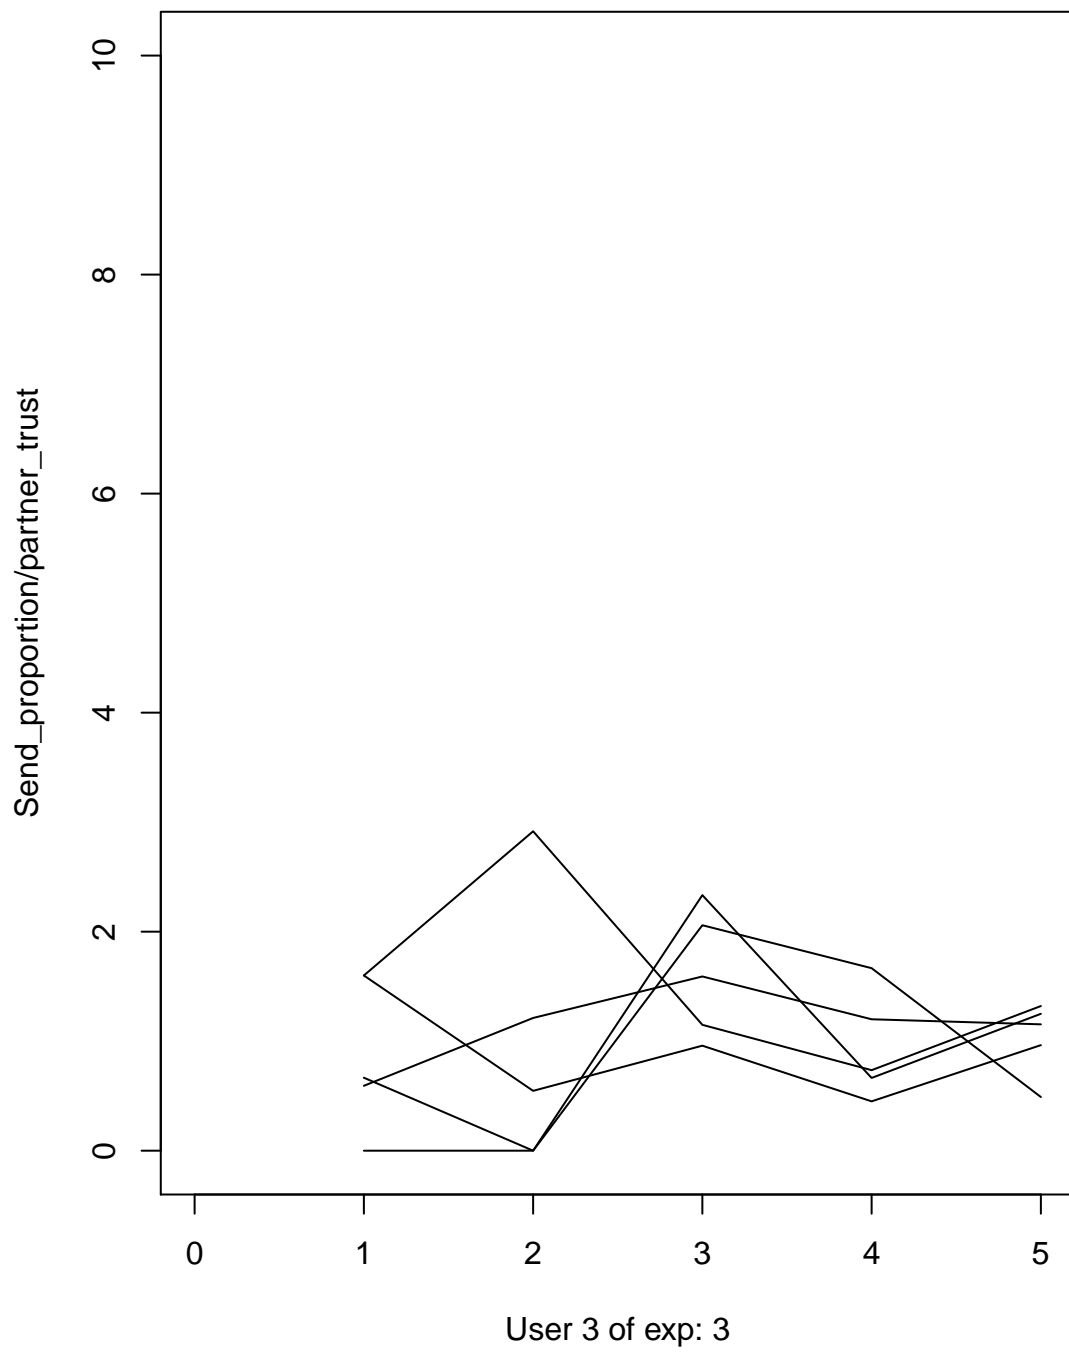

\pagebreak

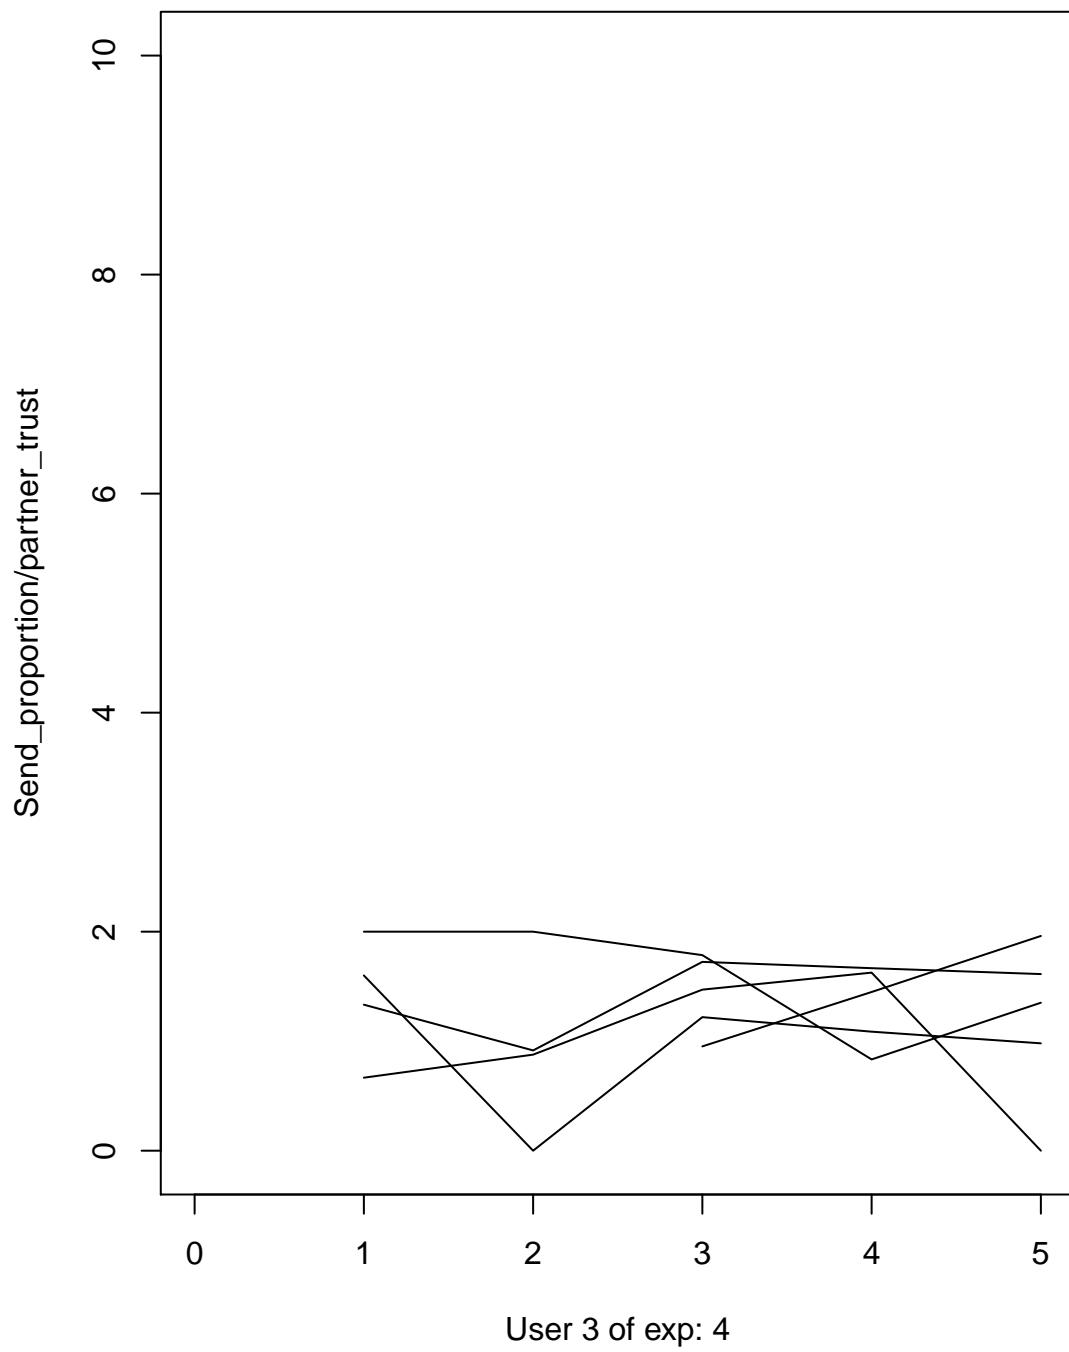


\pagebreak

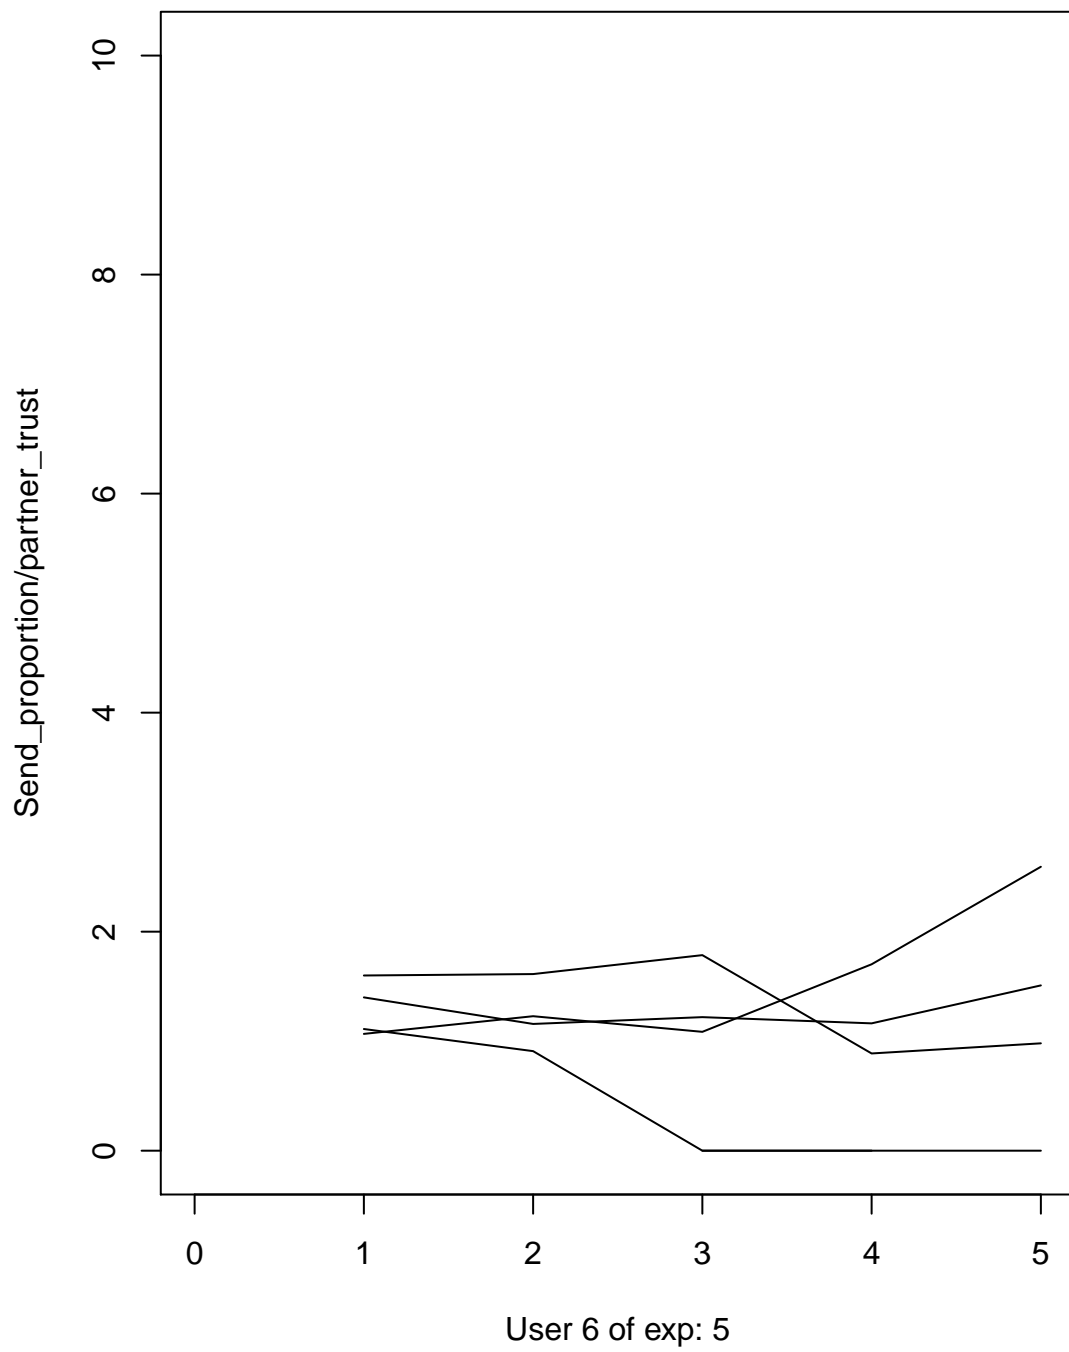


\pagebreak


As the metric $\text{send_proportion}/\text{partner_trust}$ does not say anything, we now display both send_proportion and partner_trust in one graph to check the stability of user behavior over time.

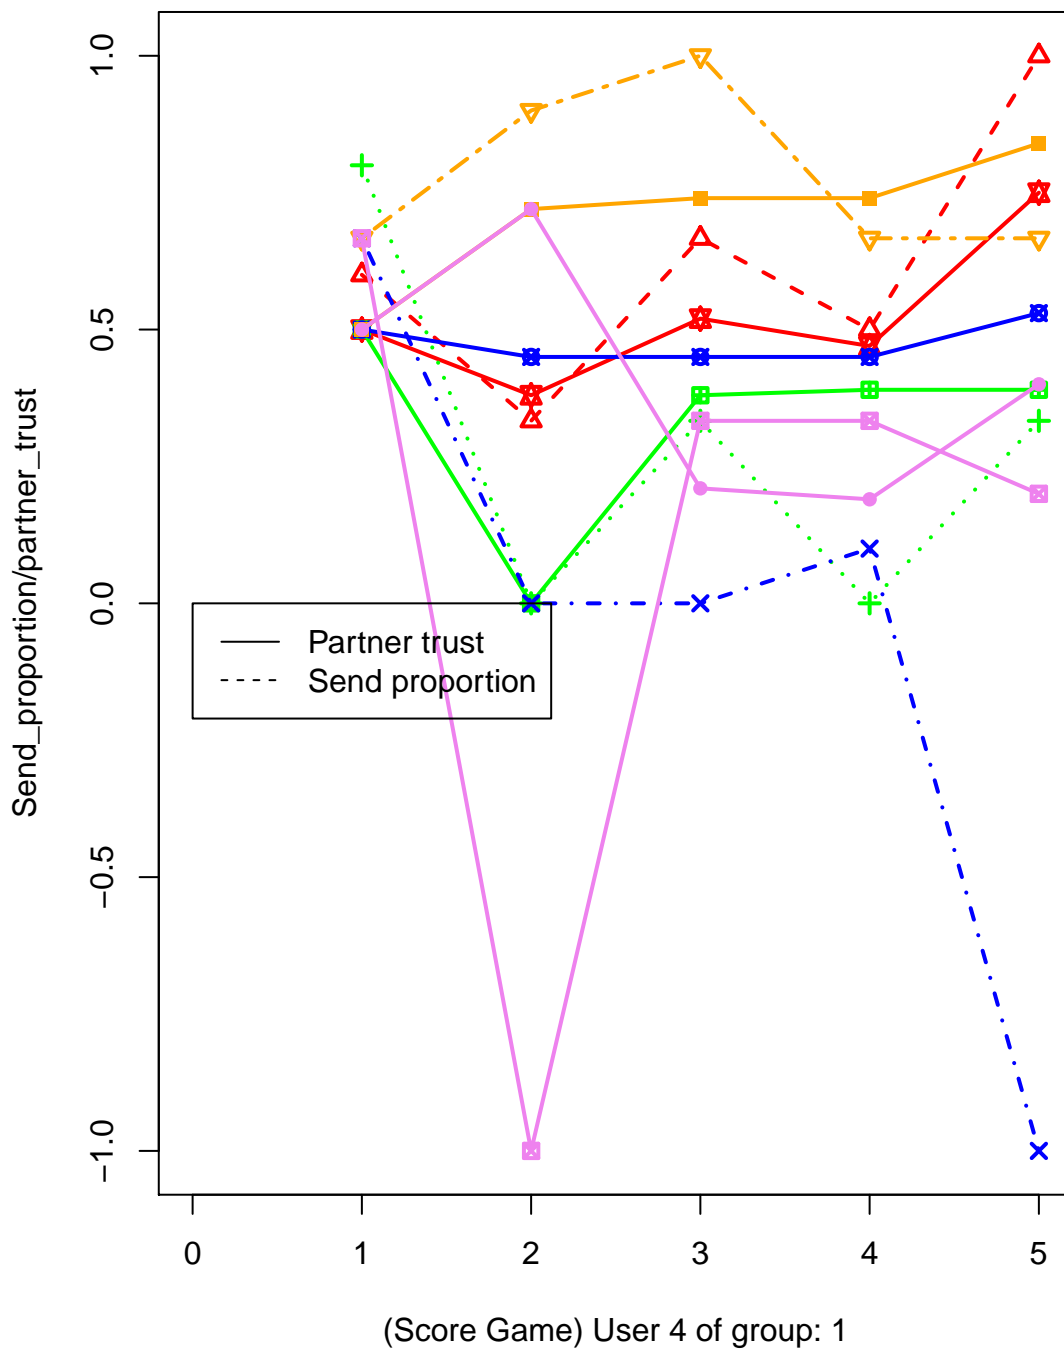


\pagebreak

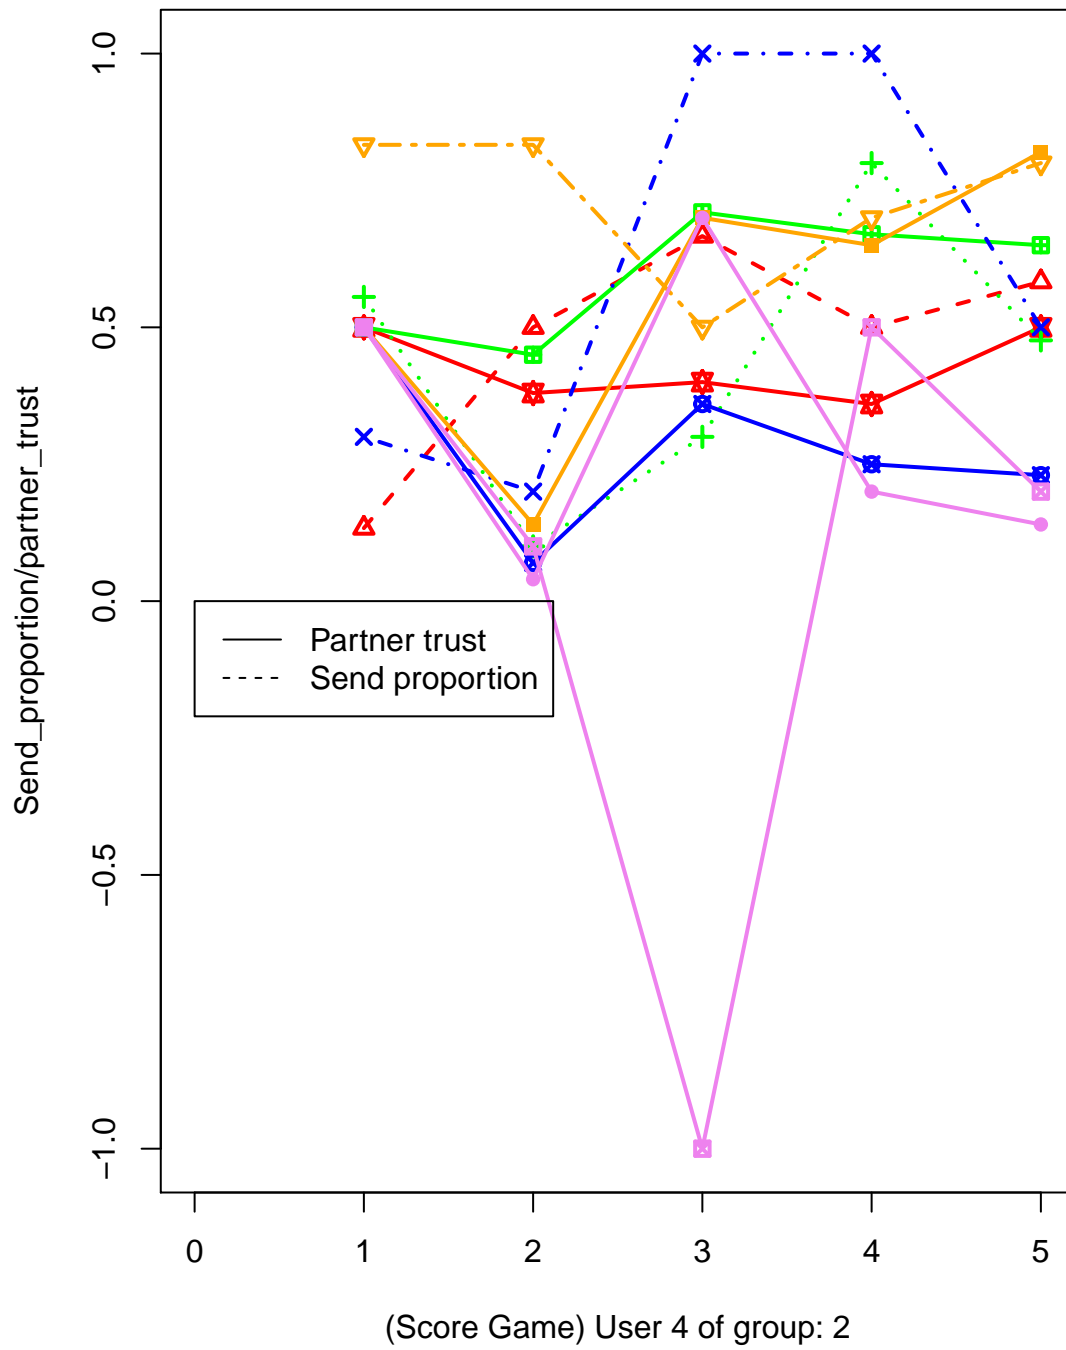


\pagebreak

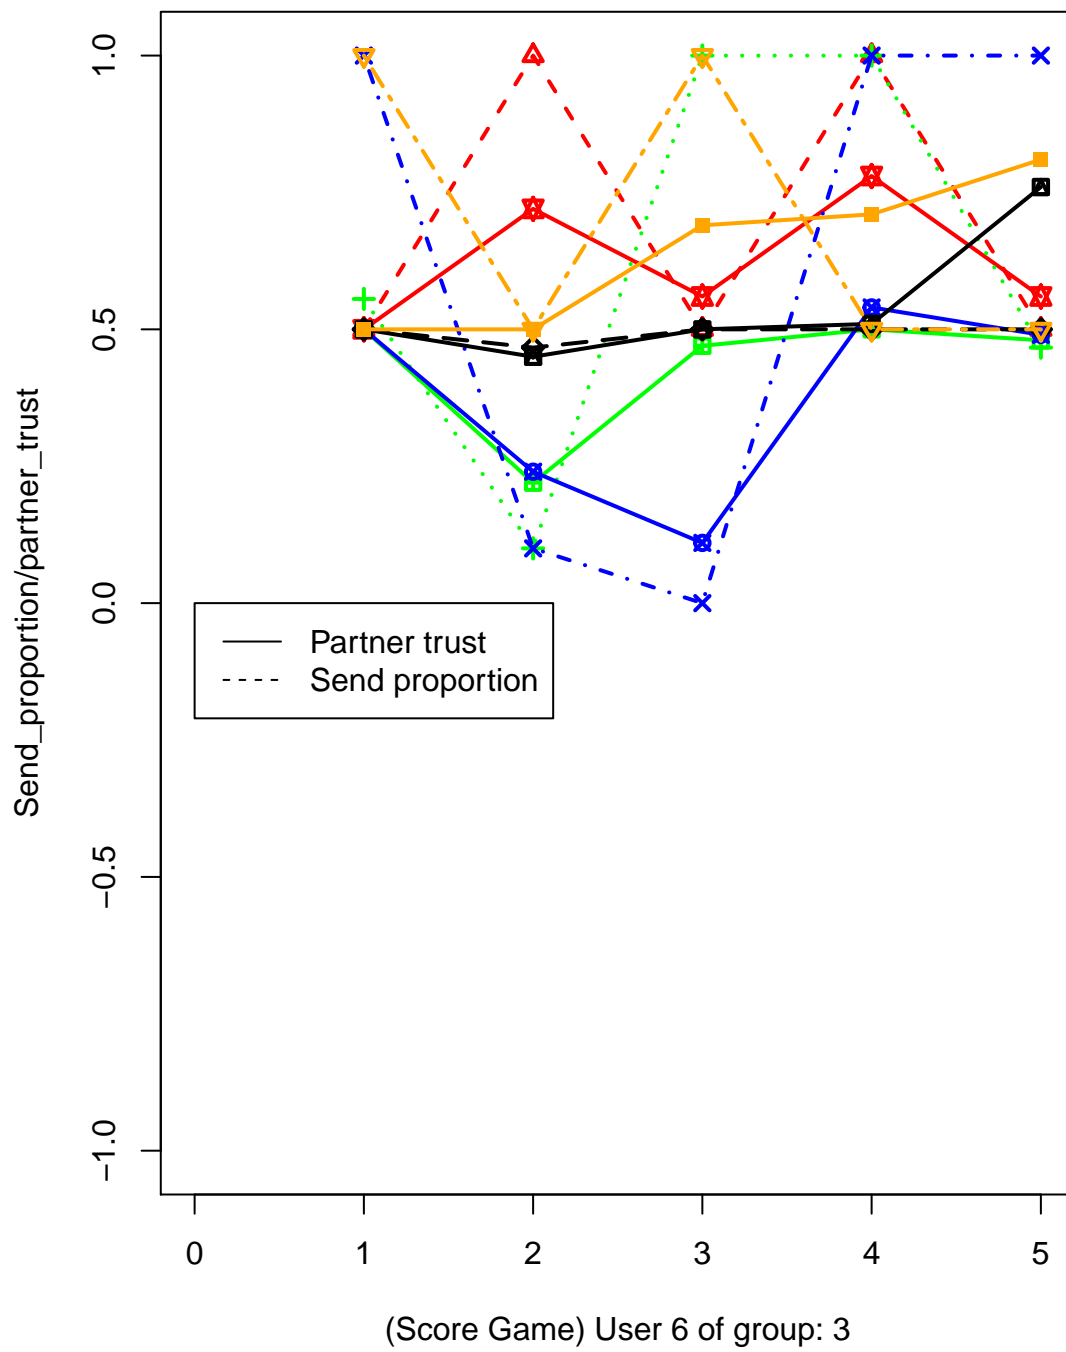

\pagebreak

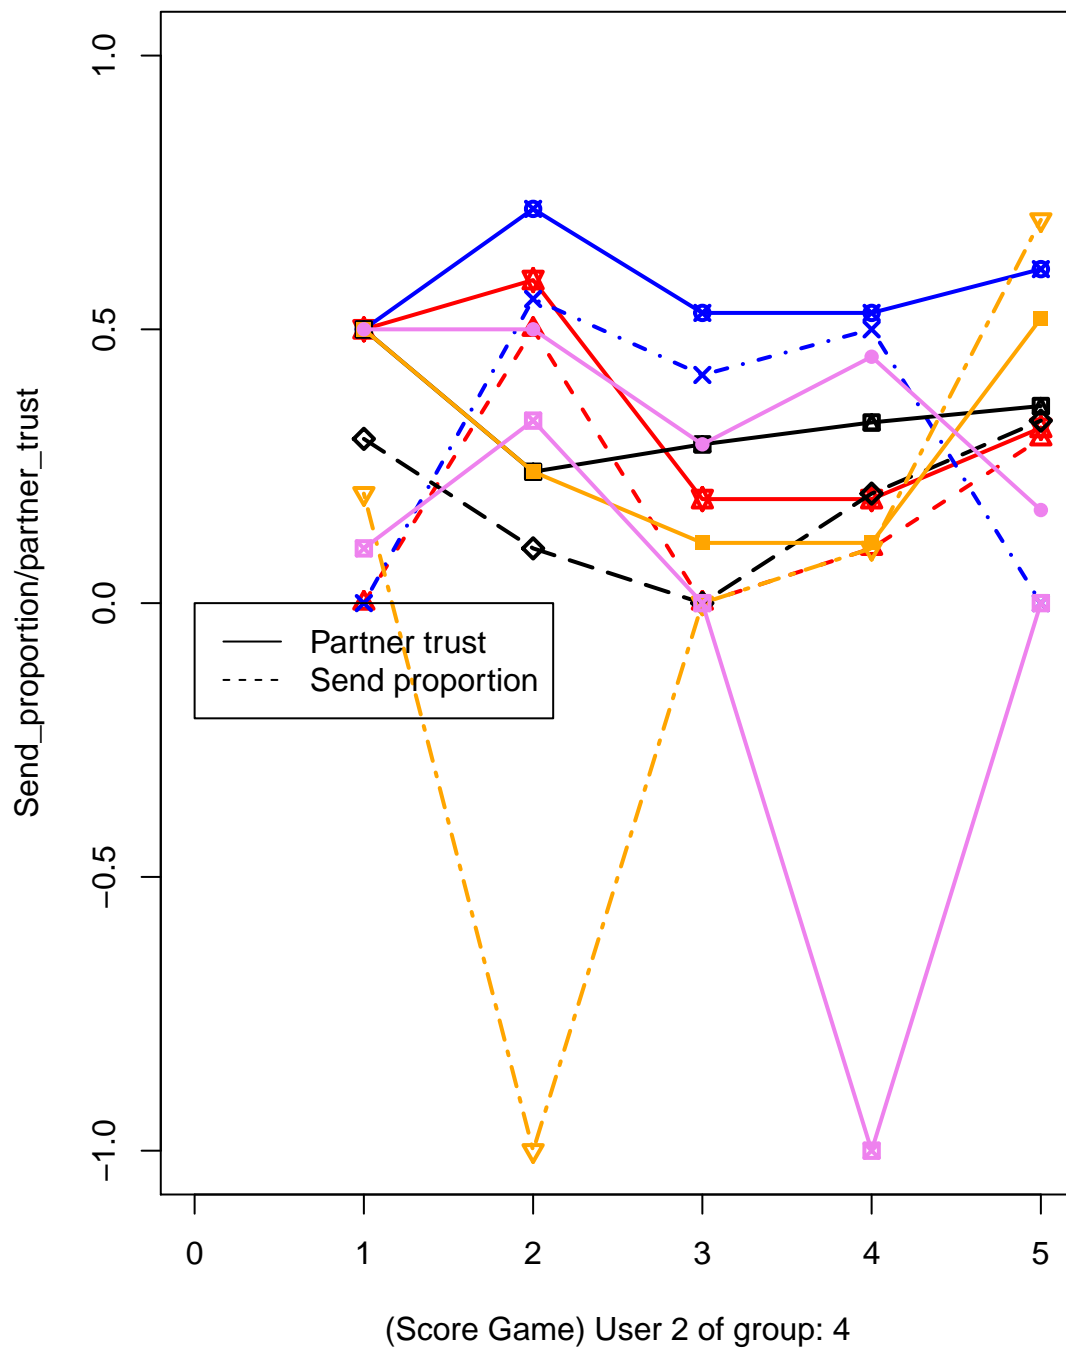

\pagebreak

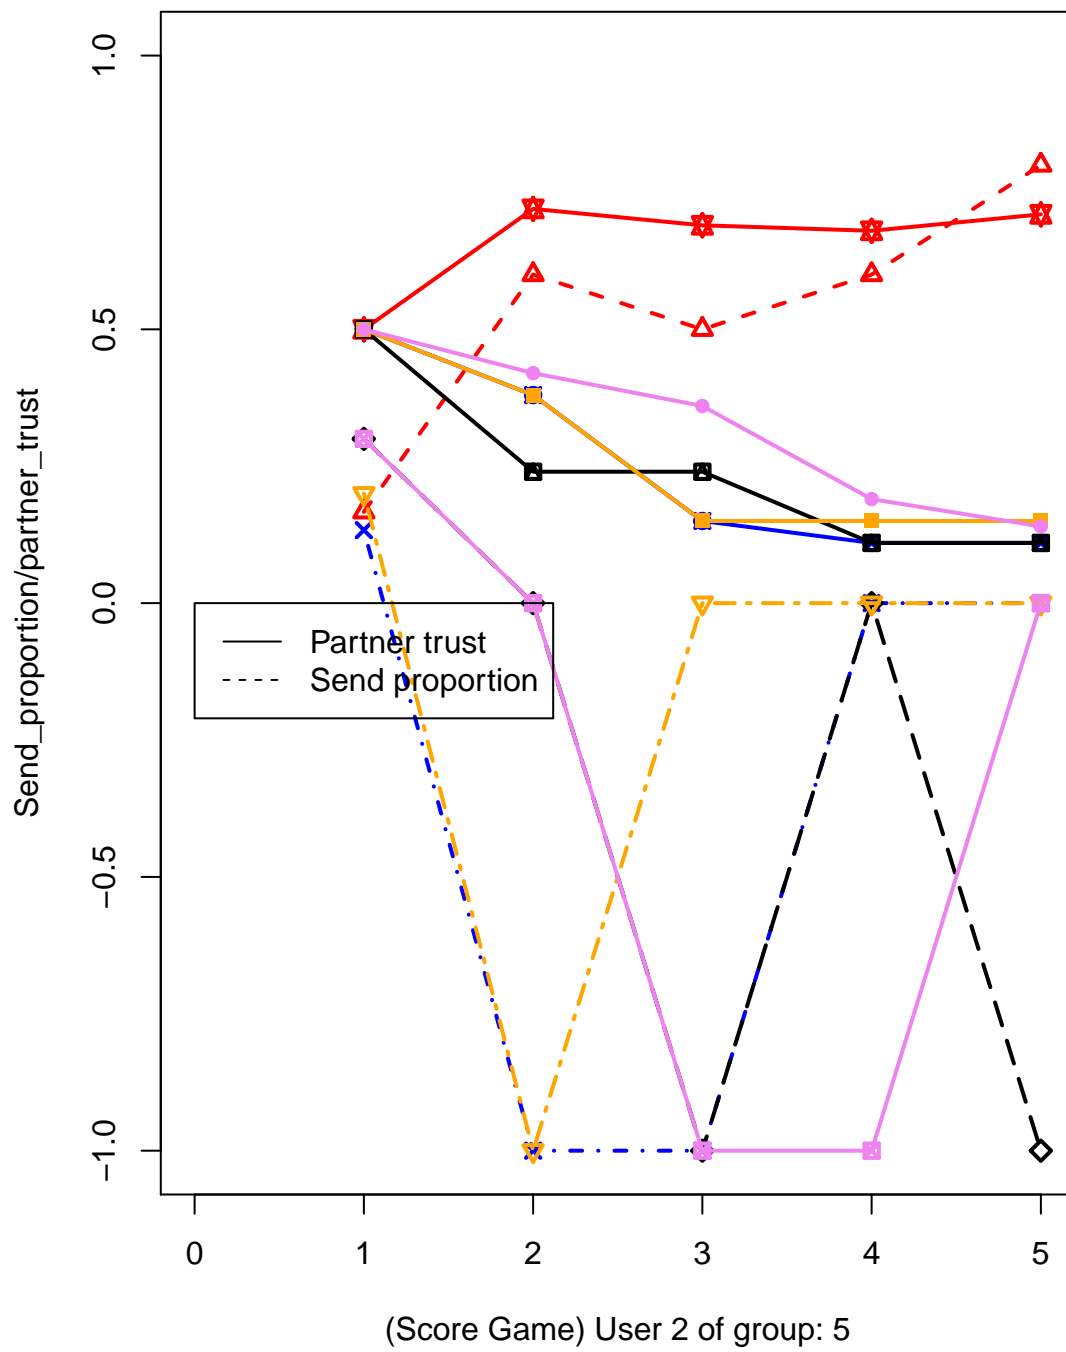


\pagebreak

Change of send_proportion ~ partner_trust over time


We want to see how user send proportion depends on partner trust in each round for each game

Simple Game SENDER

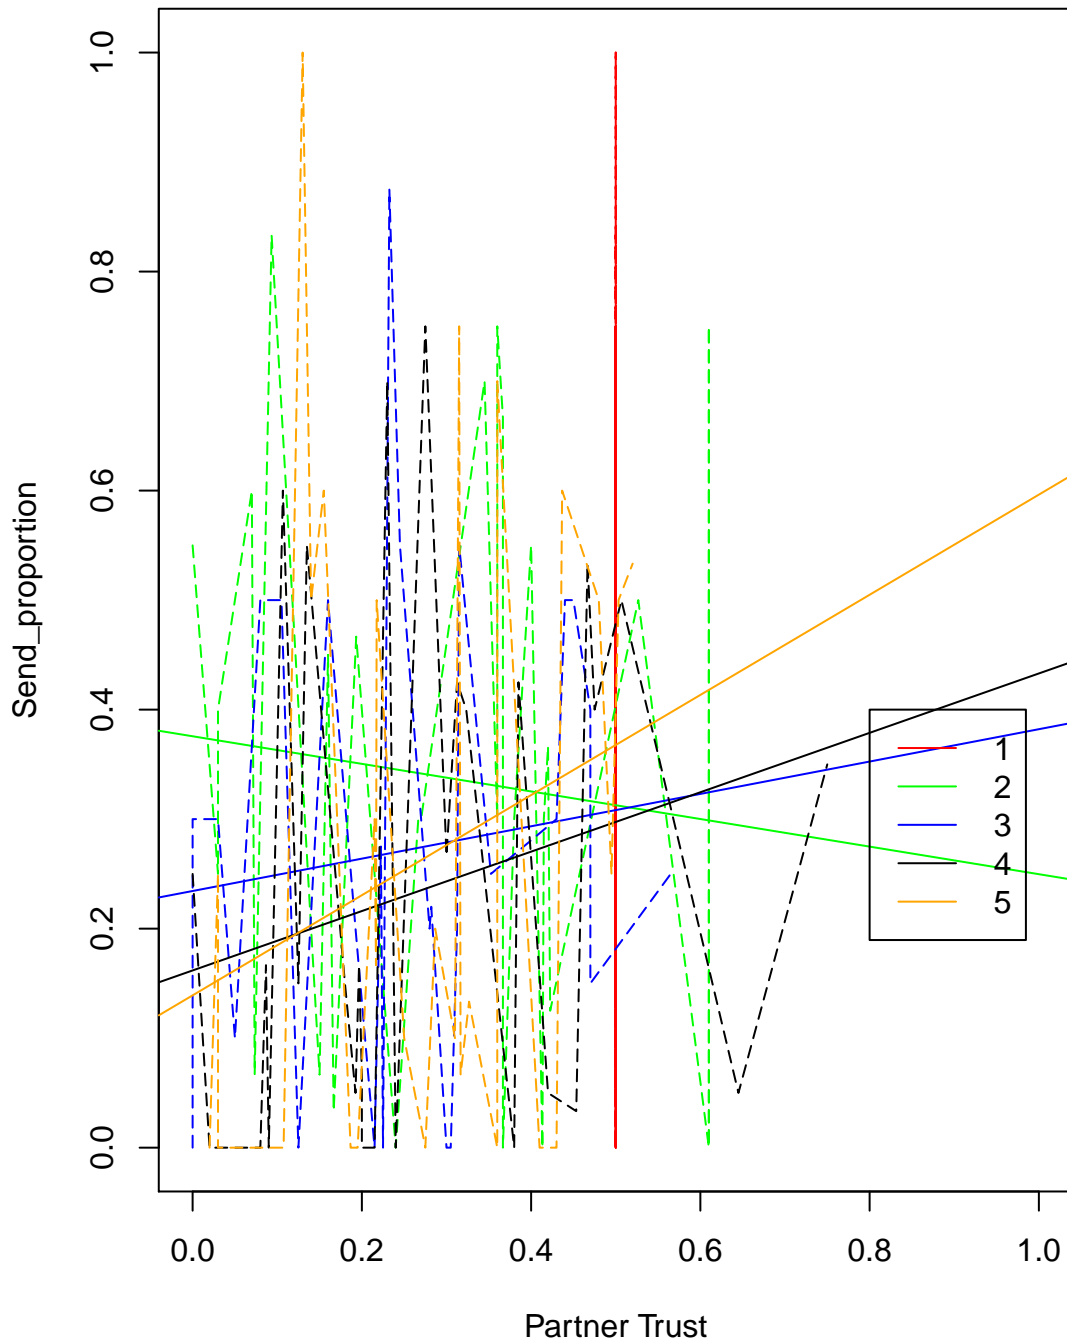


```
##  
##  
## \pagebreak
```

Simple Game RECEIVER

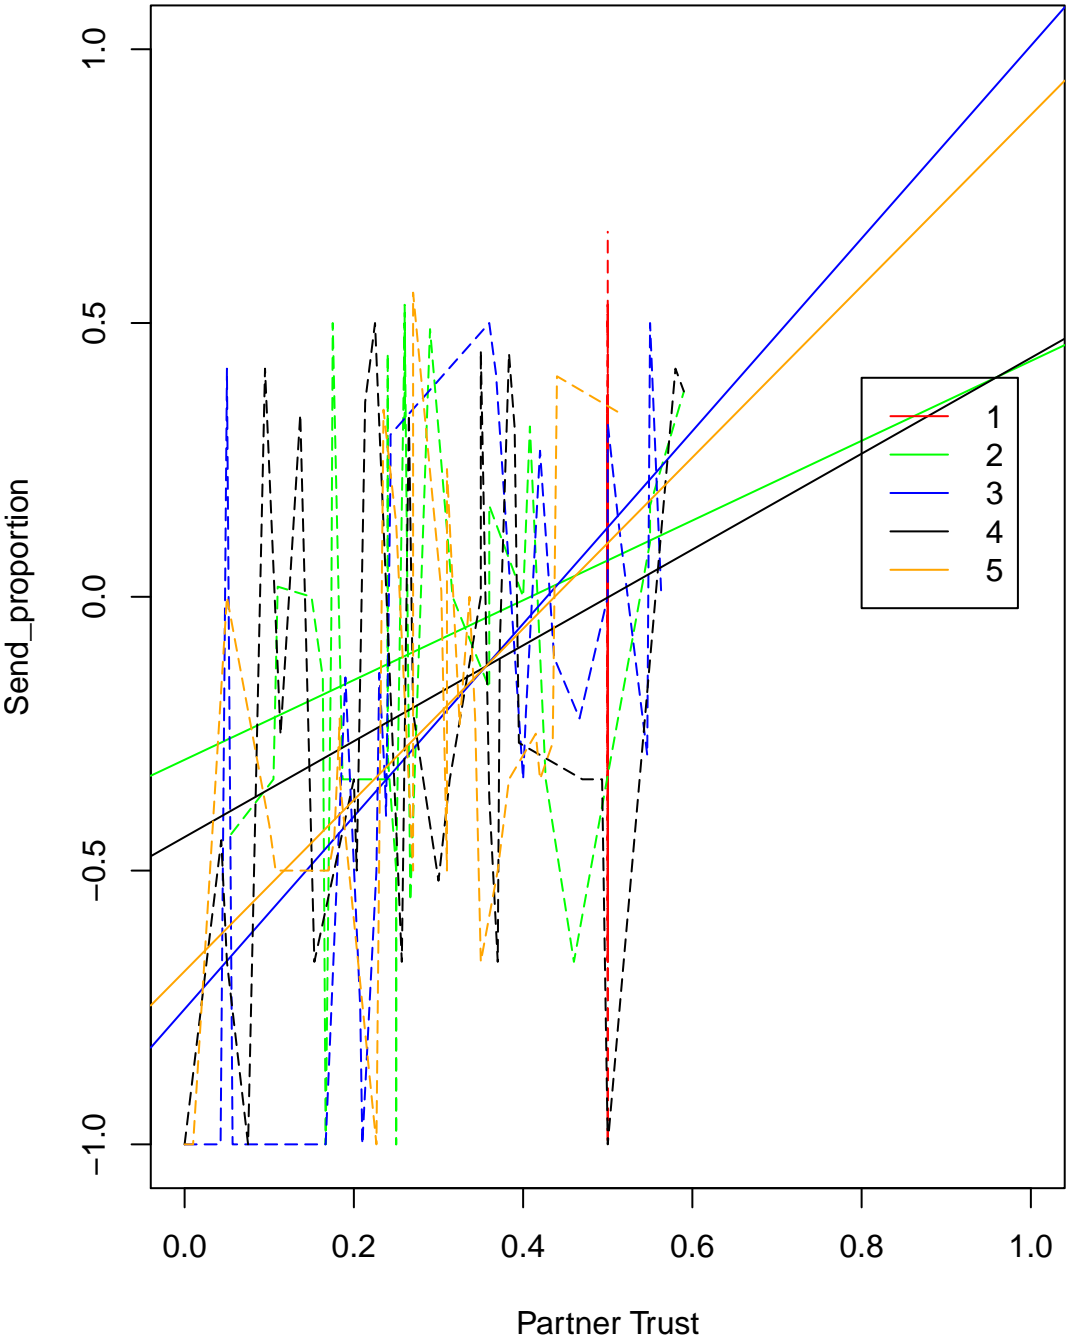


\pagebreak

ID Game SENDER

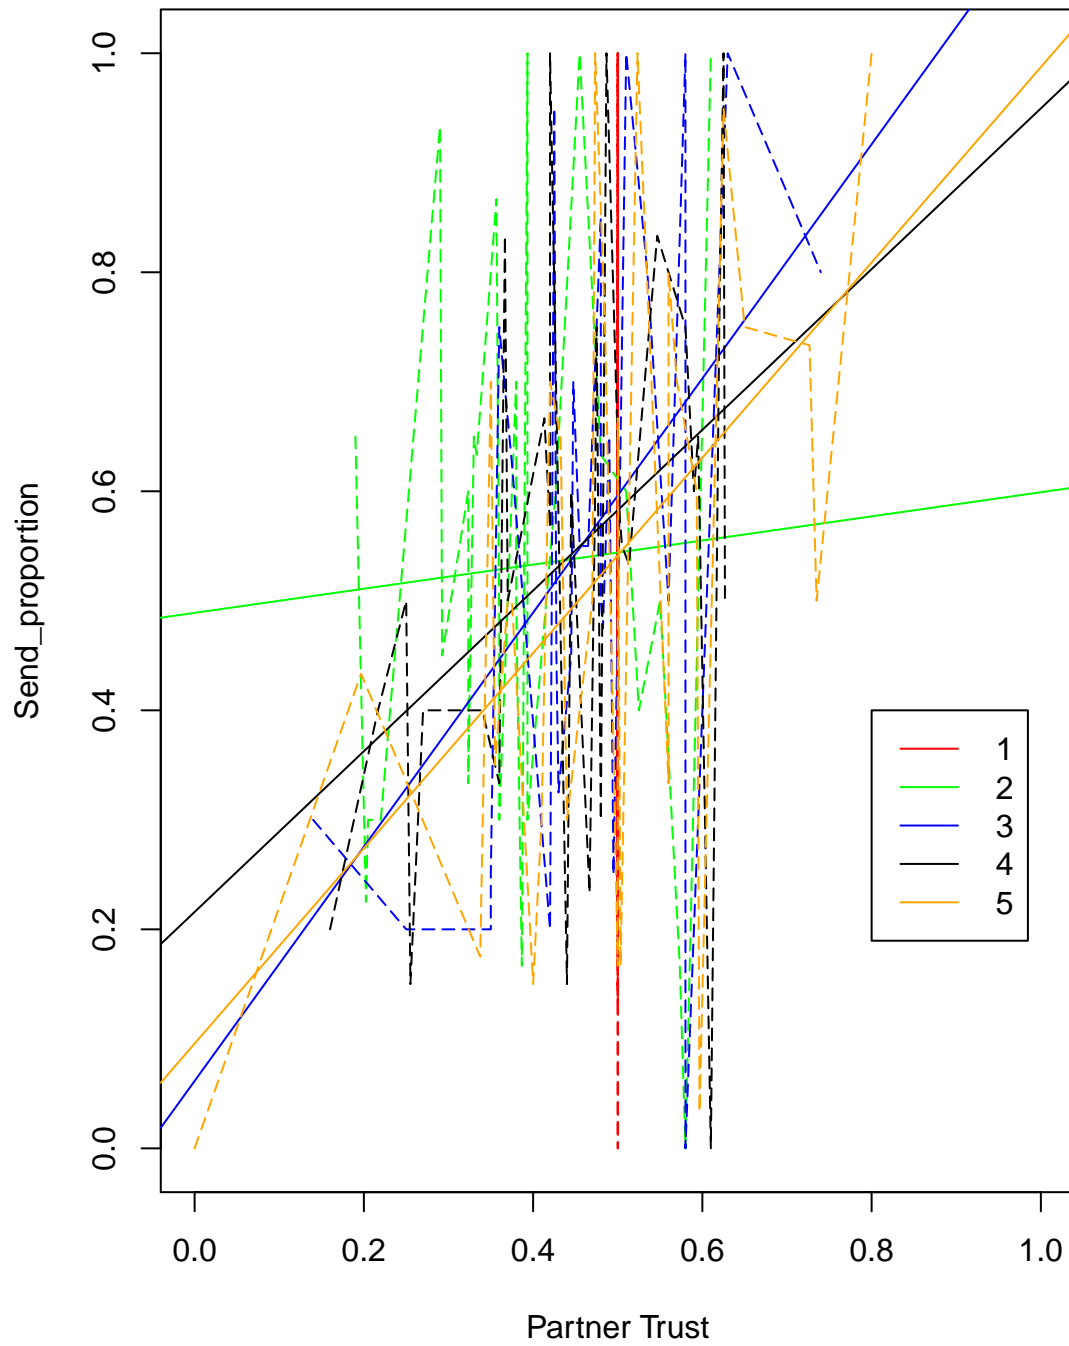


```
##  
##  
## \pagebreak
```


ID Game RECEIVER

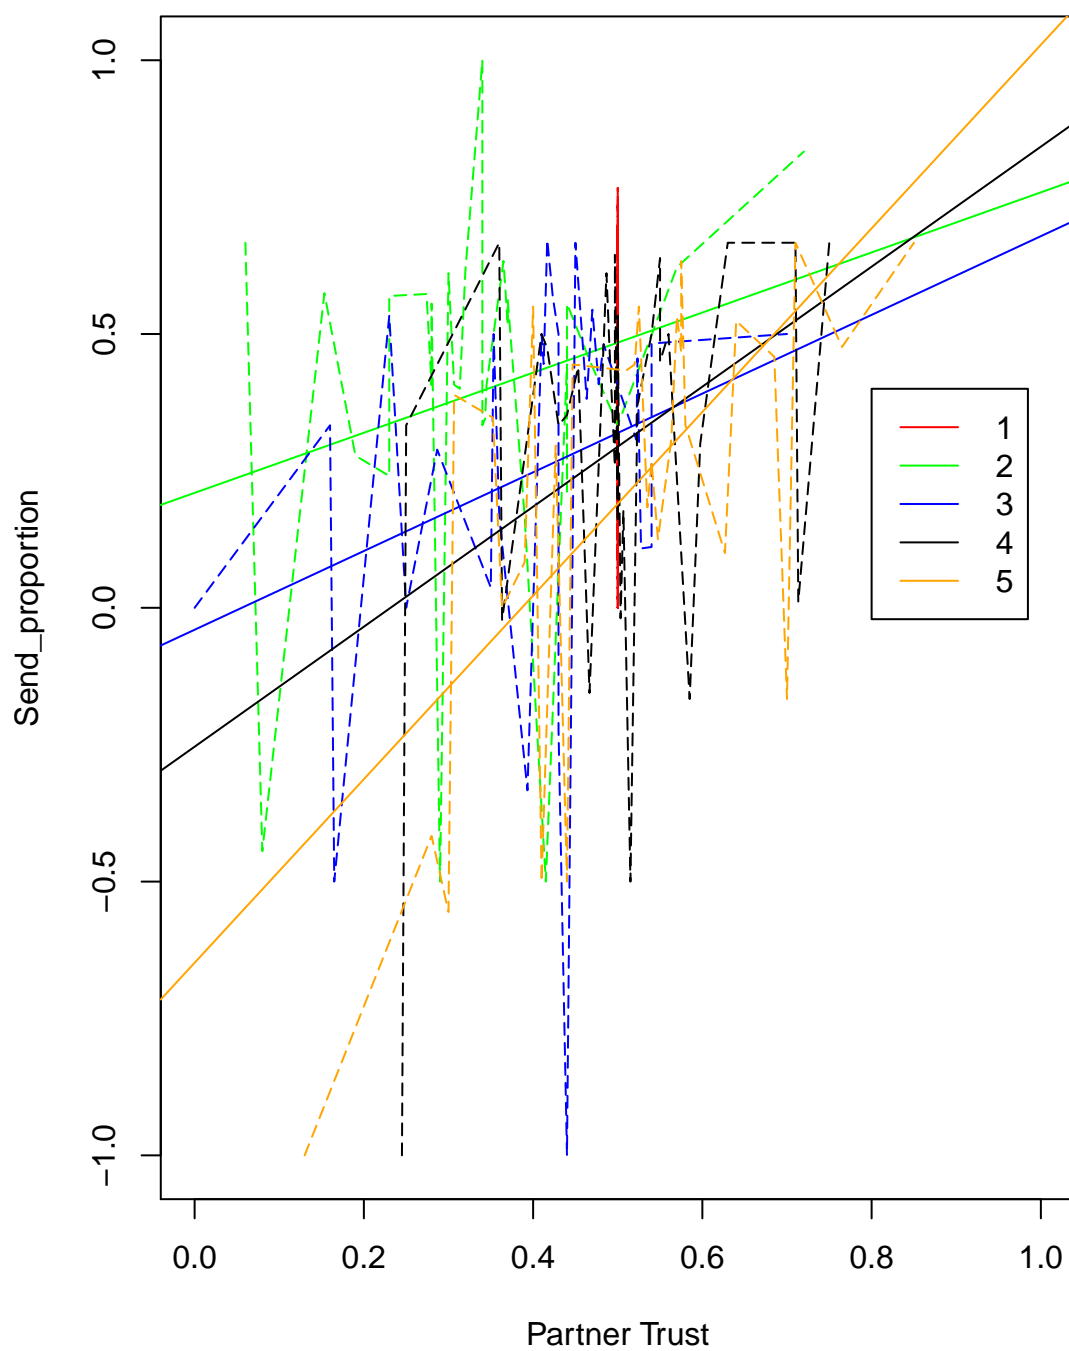


```
##  
##  
## \pagebreak
```

Score Game SENDER

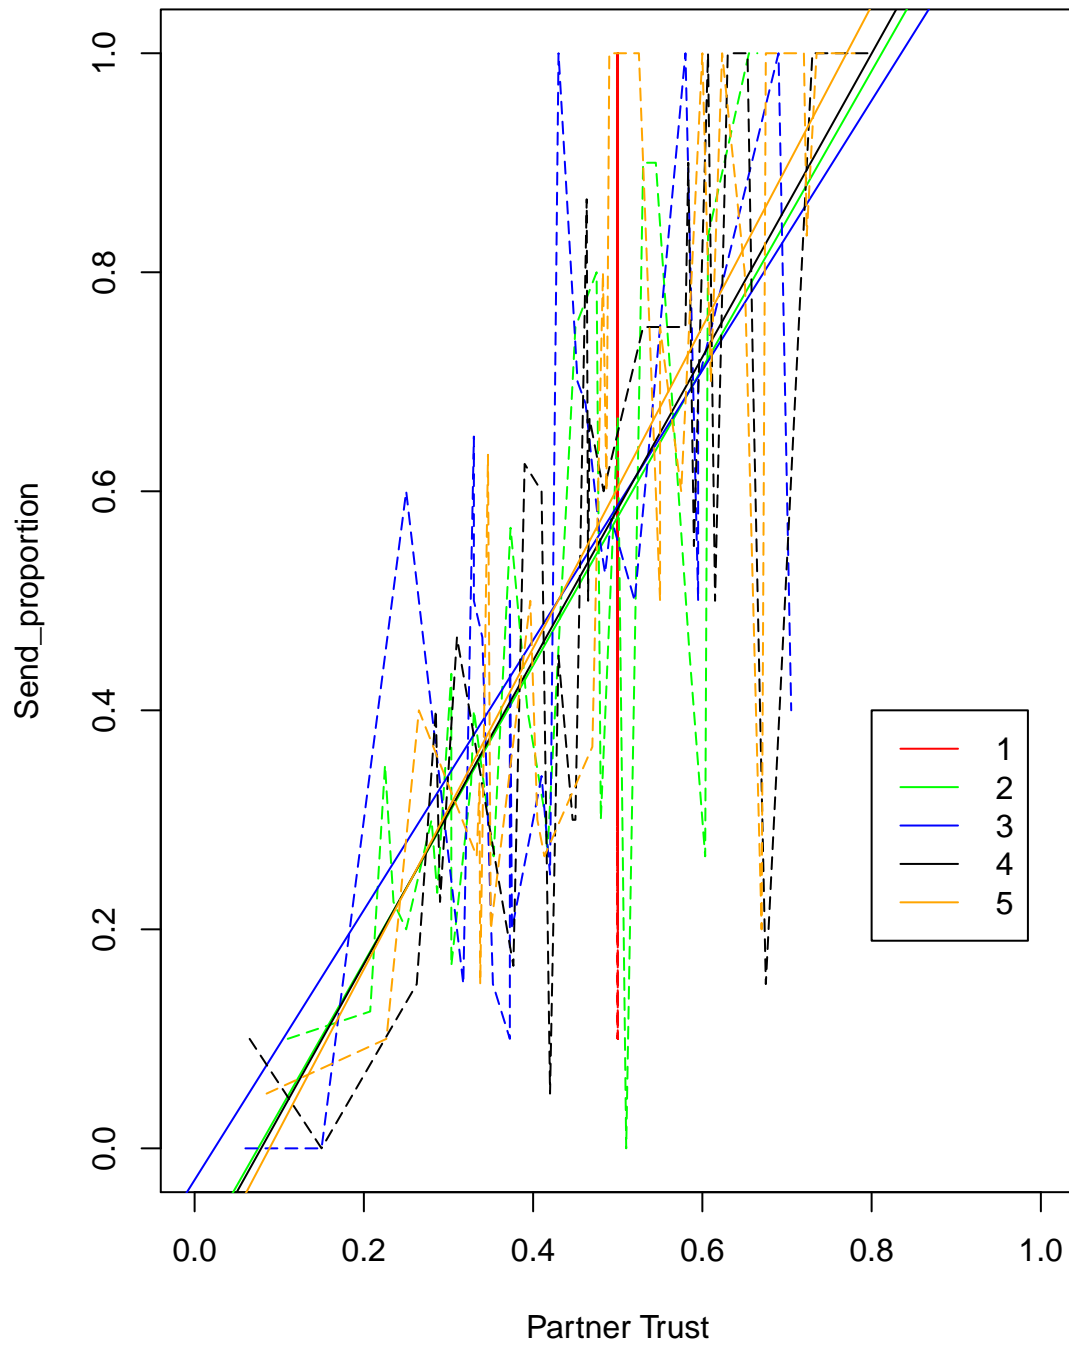


```
##  
##  
## \pagebreak
```

Score Game RECEIVER

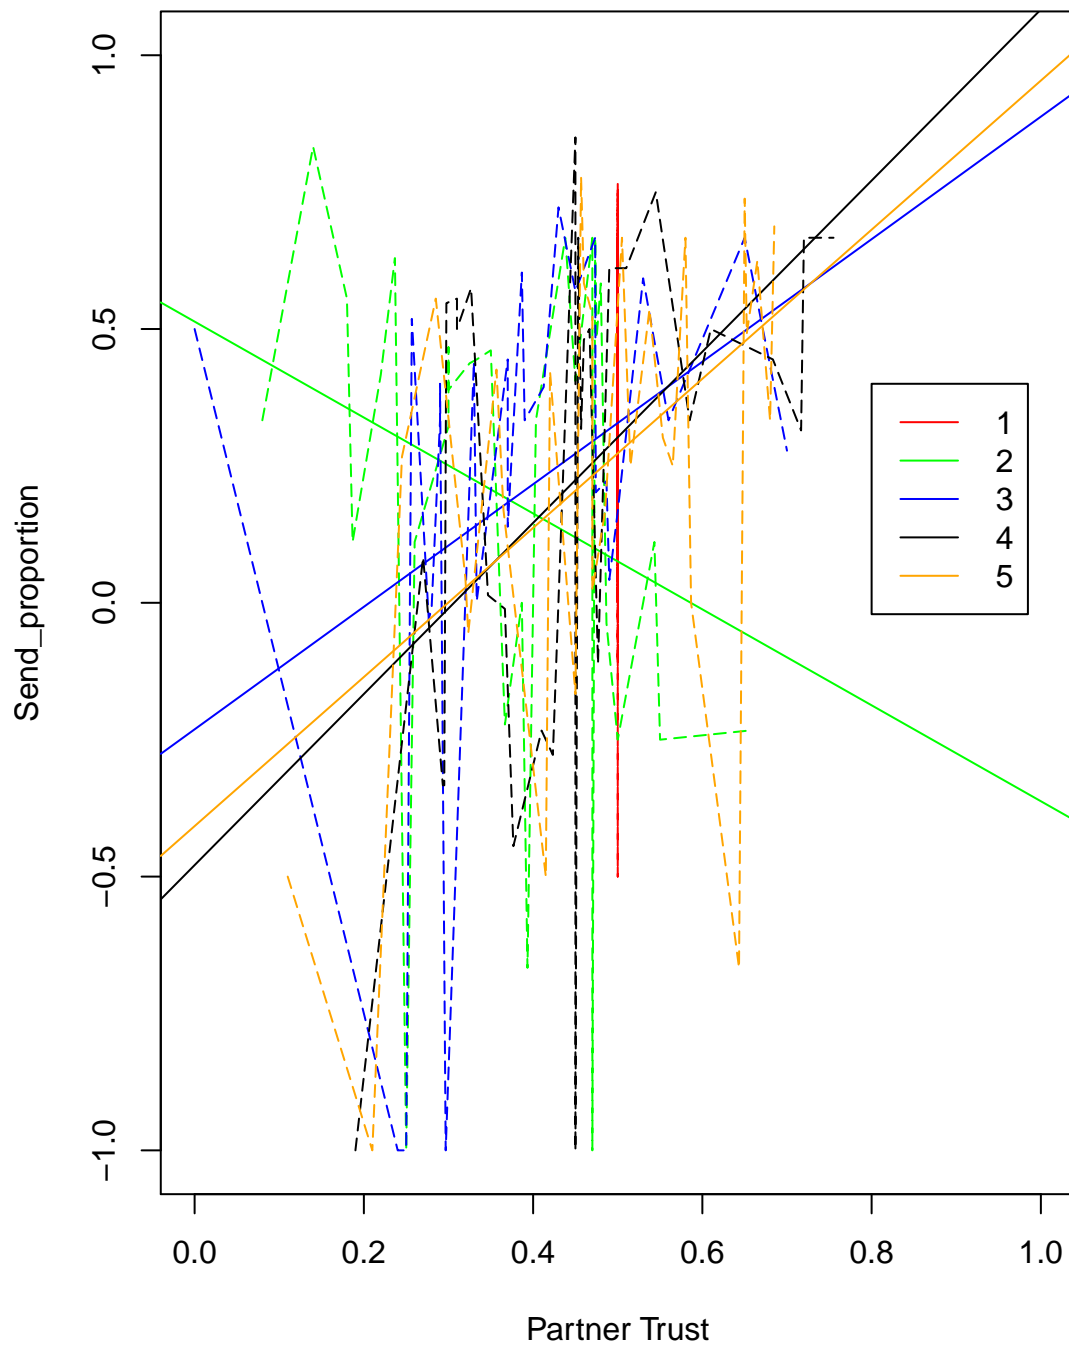


```
##  
##  
## \pagebreak
```

Combine Game SENDER

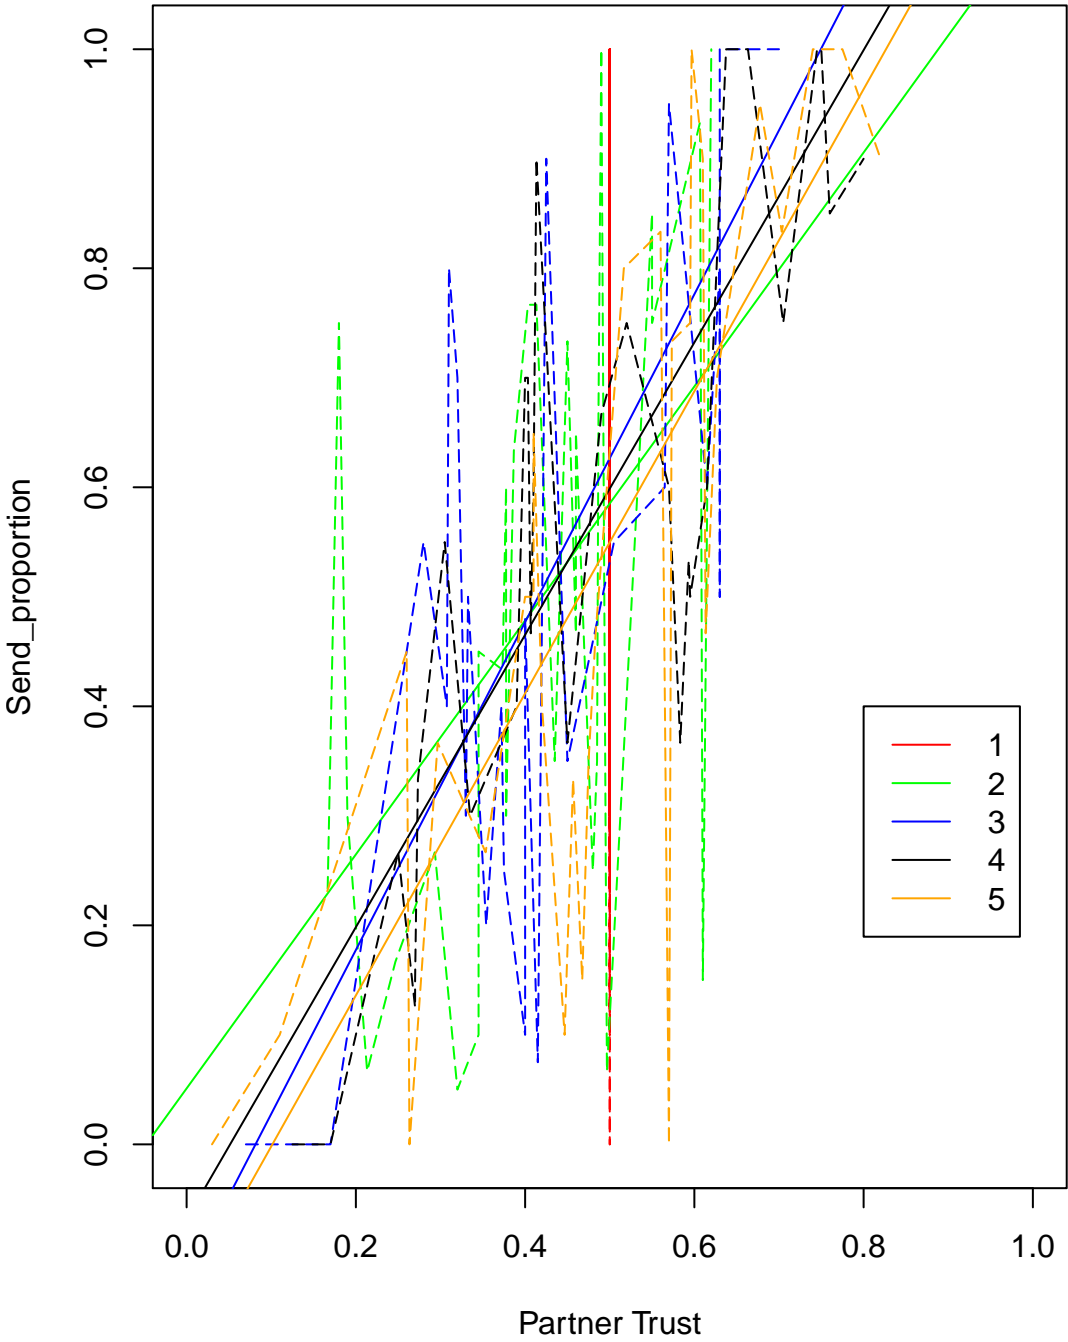

\pagebreak

Combine Game RECEIVER

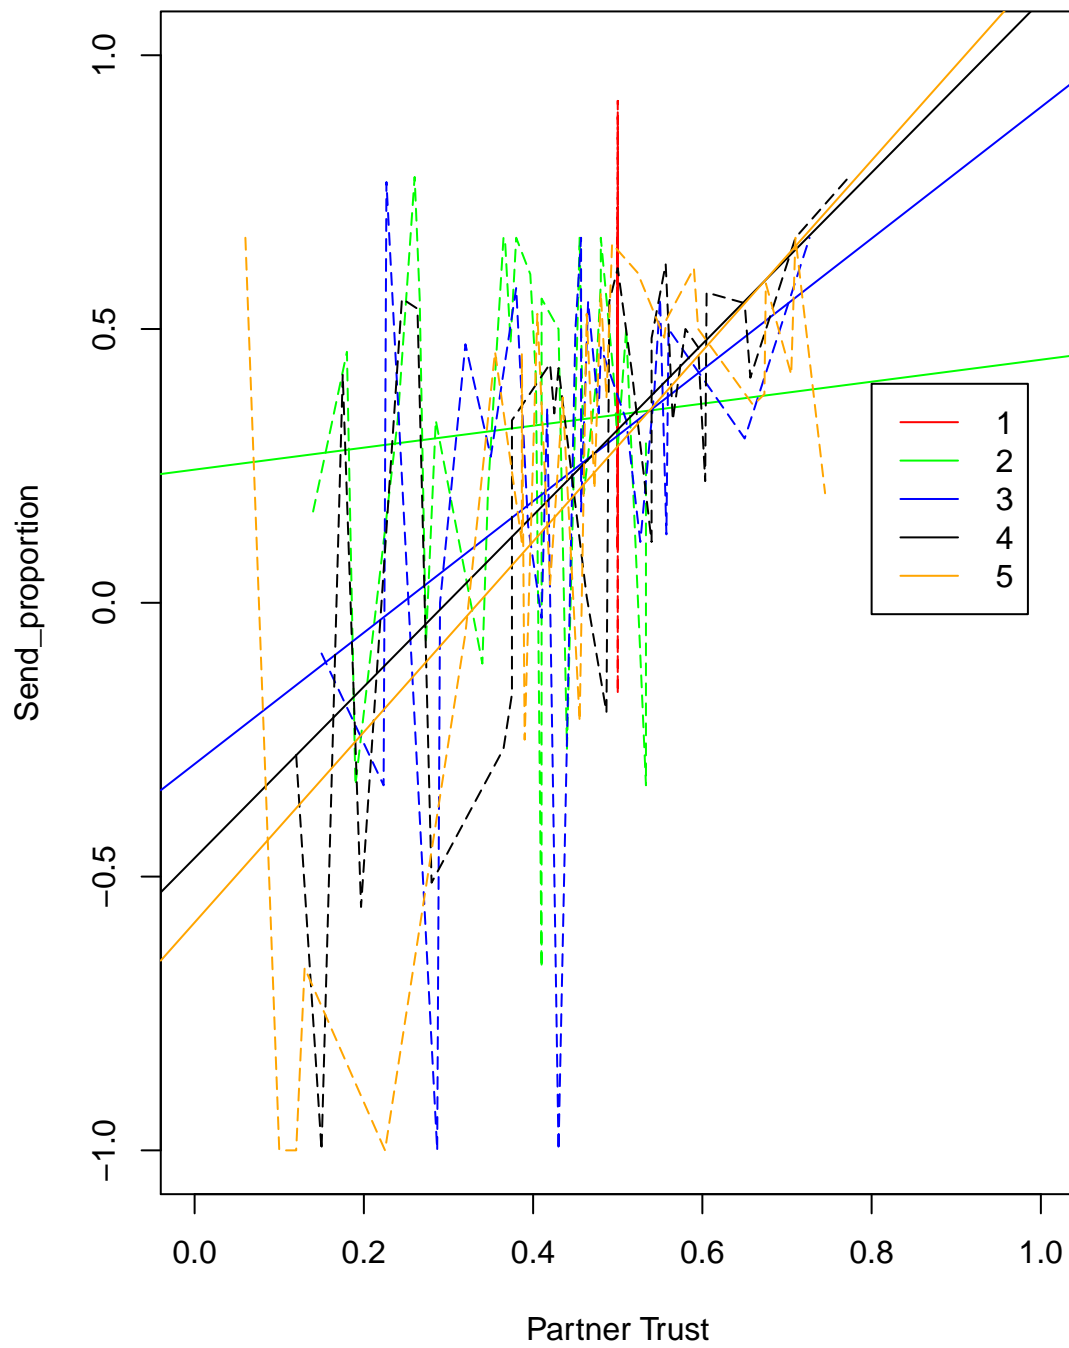

```
##  
##  
## \pagebreak
```

Group Effect on Regression Power (Sending ~ 2 trust scores)

Analyze the group effect on regression of sending behavior and own trust value

Also, we want to see can we predict the behavior of users based on trust score.

Temporary disable, because it is better to regression on 2 trust scores instead of 1

Analyze the group effect on correlation of sending behavior and own trust value

We want to see if the correlation (prediction power) of trust score we calculated to users and his own future action are consistency between groups.

Temporary disable because regression on 2 trust scores is better.

Analyze the group effect on correlation of sending behavior and own trust value without Group 3

We want to see if the correlation (prediction power) of trust score we calculated to users and his own future action are consistency between groups. From the above analysis, we can see that Group 3 is somehow strange, so we want to analyze without them.

Temporary remove

Analyze the correlation of behavior on the trust score of partners showed to users

We want to analyze the difference between groups, about the correlation of sending behavior and trust value of the partners.

Temporary disable because regression on 2 trust scores is better.

Analyze the correlation of behavior on the trust score of partners showed to users without Group 3

Temporary remove


Analyze on game and group and Tukey test

We analyze the difference between each group for each game


Plotting data

We plot absolute sending, relative sending and profit for each games, using standard error bars display.


```
plotGameMetrics(simple_games$Contribution, id_games$Contribution,  
  score_games$Contribution, combine_games$Contribution,  
  metric_name = "Net Sending Amount")
```

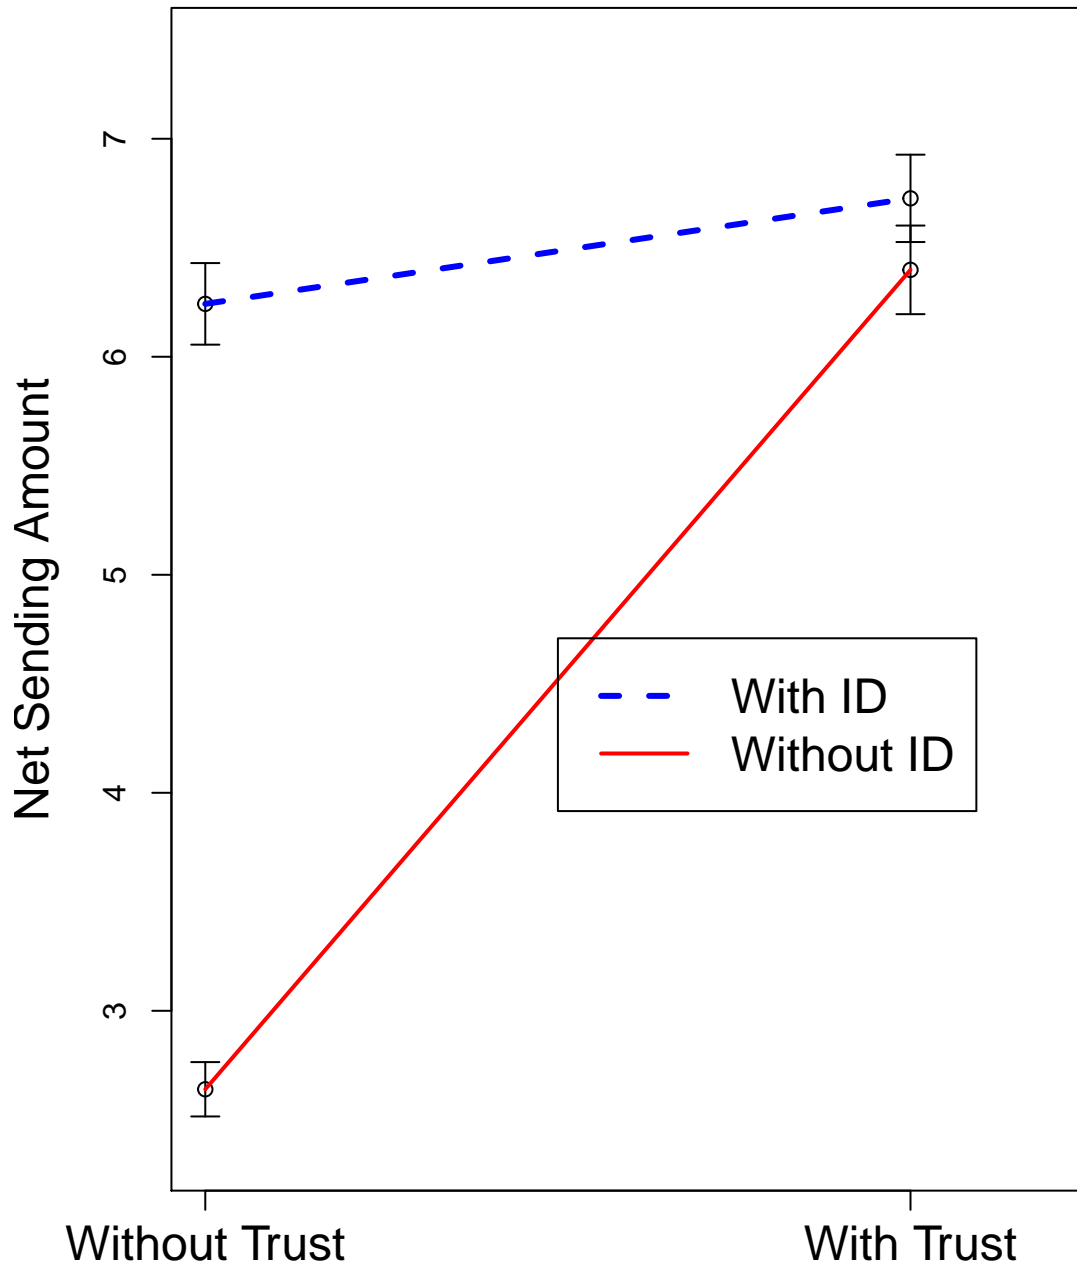

```
plotGameMetrics(simple_games[simple_games$my_send_proportional >= 0, ],  
  my_send_proportional * 100, id_games[id_games$my_send_proportional >= 0, ],  
  my_send_proportional * 100, score_games[score_games$my_send_proportional >= 0, ],  
  my_send_proportional * 100, combine_games[combine_games$my_send_proportional >= 0, ],  
  my_send_proportional * 100, metric_name = "Sending Percentage (%)")
```


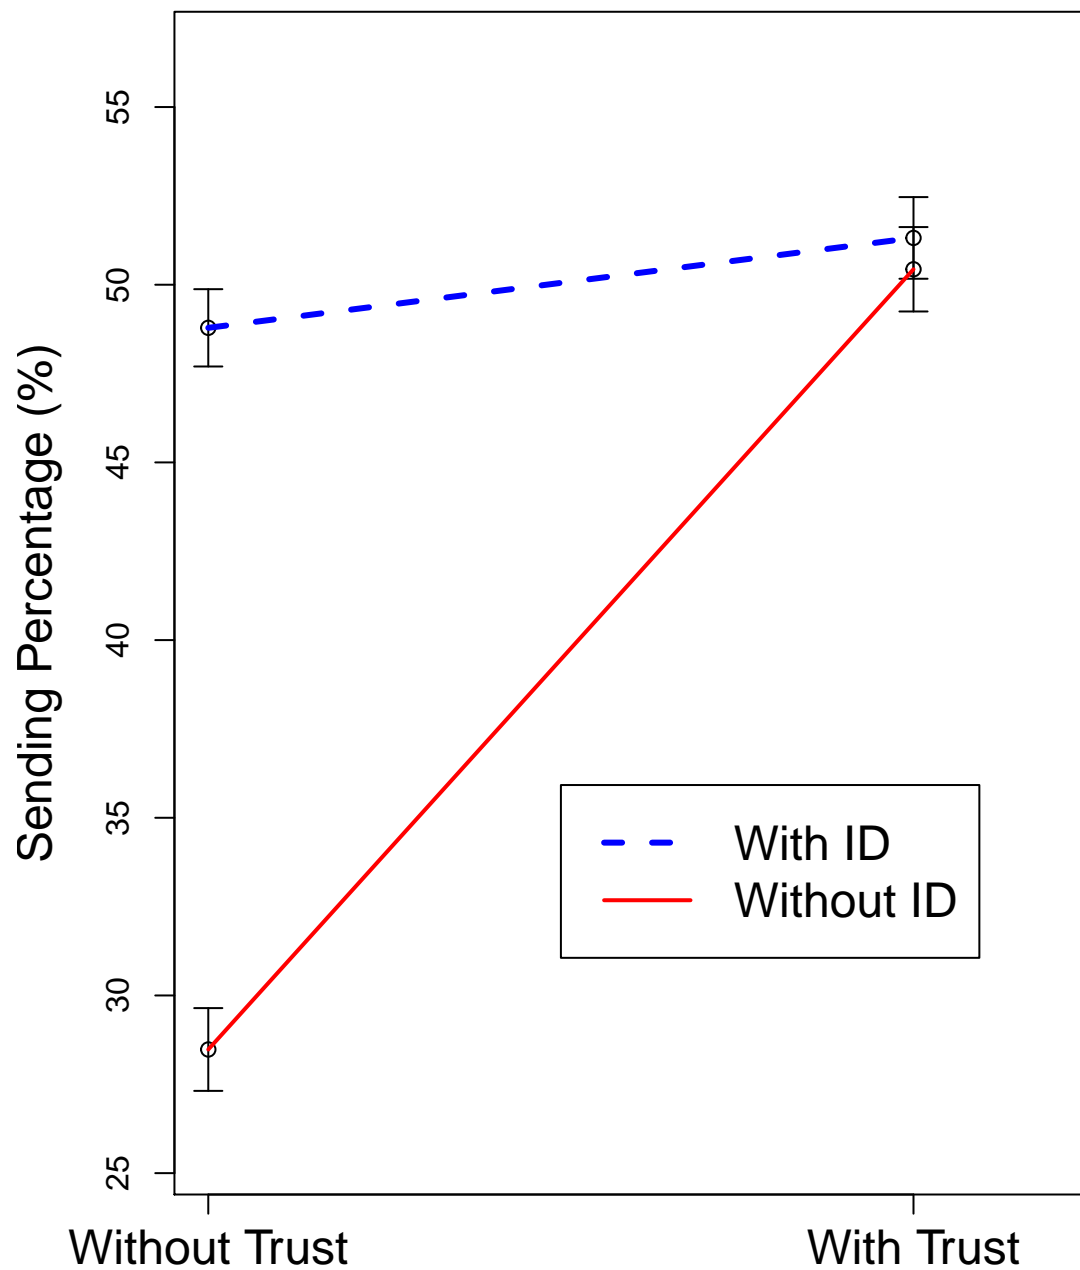




```
plotGameMetrics(simple_games$CurrGameProfit, id_games$CurrGameProfit,  
  score_games$CurrGameProfit, combine_games$CurrGameProfit,  
  metric_name = "Profit per games")
```

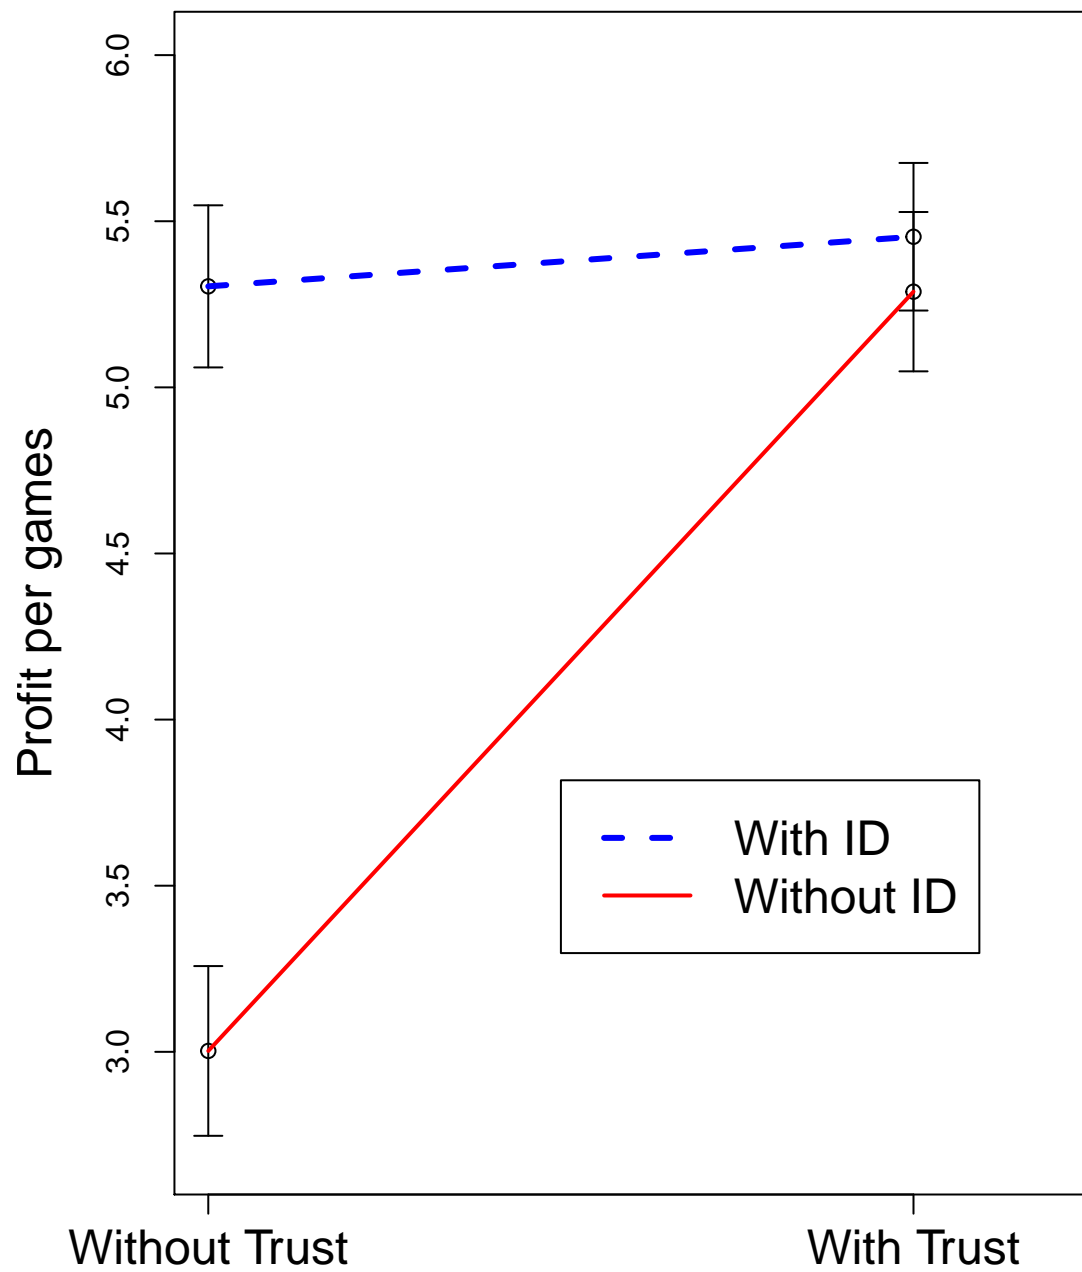

Date: Tue 7-Jun-2017

We divide the measure for sender and receiver and plot them separately

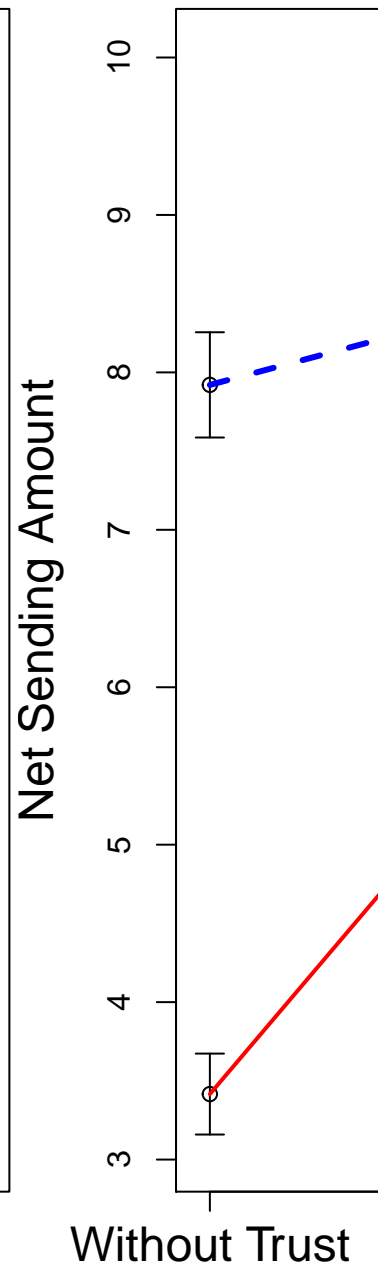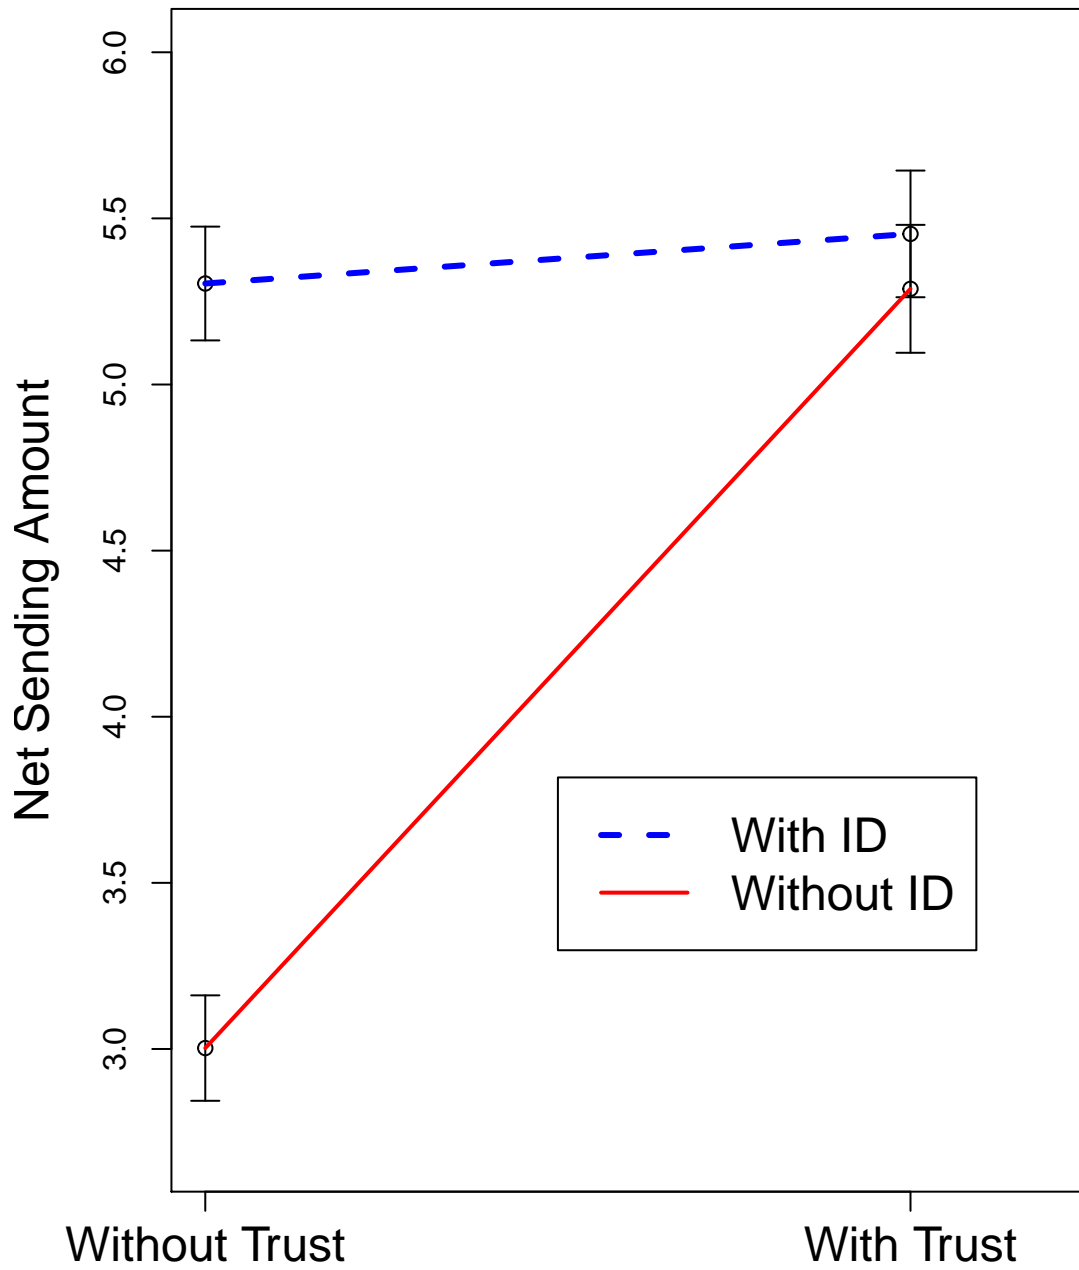

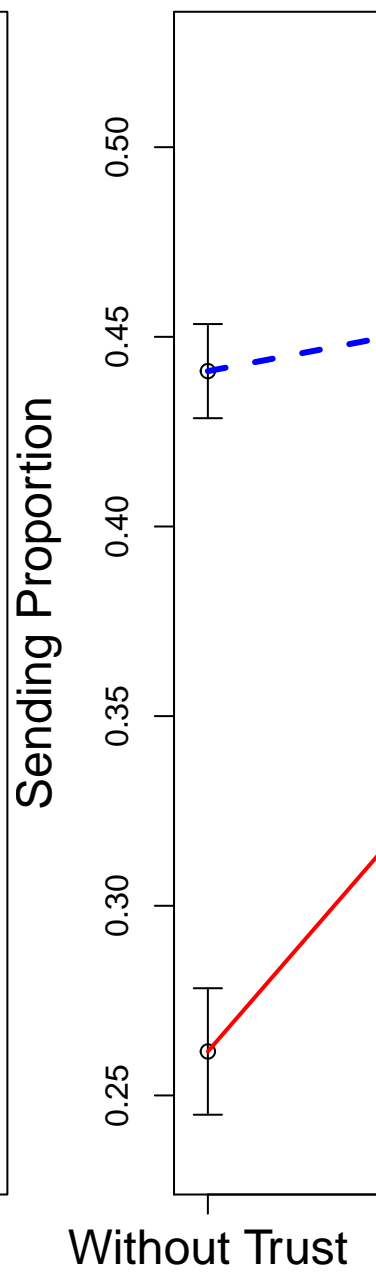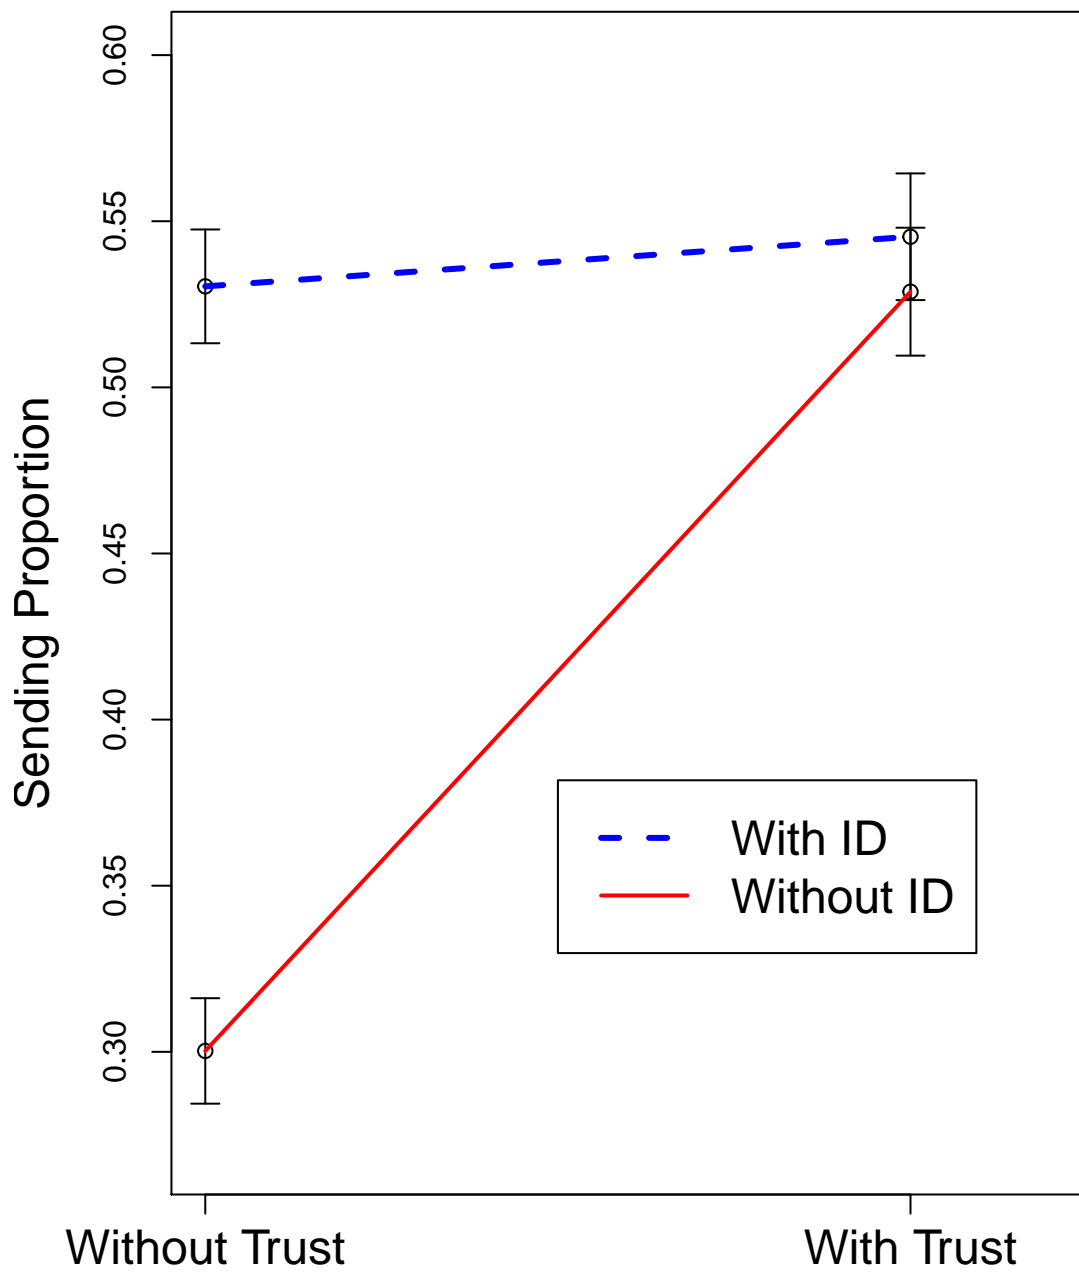

Comparing data

Giangiaco

We also collected data from another repeated simple games done by “Bravo, Giangiacomo, Flaminio Squazzoni, and Riccardo Boero.”Trust and partner selection in social networks: An experimentally grounded model." Social Networks 34, no. 4 (2012): 481-492." and we want to compare them.

```
require(BSDA)
data2 <- read.csv("./all_data/Data2.csv")

# id: participant id BS: the session was performed
# in Brescia CN: the session was performed in Cuneo
# type: 1 = player A; 2 = player B (role definition
# in the article) daAaB: amount invested daBaA:
# amount returned actualDaAaB: amount invested by
# the opponent when playing as B actualDaBaA:
# amount returned by the opponent when playing as A
# prevA: amount received last time the subject
# played as A (= last non NA actualDaBaA) prevB:
# amount received last time the subject played as B
# (= last non NA actualDaAaB)

# Convert ID to universal ID
data2$id <- data2$id + (as.numeric(data2$treatment) -
  1) * 36

data2$send_proportion <- ifelse(data2$type == 1, data2$daAaB/10,
  data2$daBaA/3/data2$actualDaAaB)
data2$send_proportion <- ifelse(data2$send_proportion >
  1, 1, data2$send_proportion)

means <- as.numeric()
std_errors <- as.numeric()

# print ('Comparing two dataset for SENDERS') print
# (z.test(data2[!is.na(data2$daAaB),]$daAaB,
# sigma.x = 6.8)) print
# (z.test(simple_games[simple_games$type ==
# 0,]$Contribution, sigma.x = 6.8))

# For our simple game senders
sent1 = aggregate(simple_games[simple_games$type ==
  0,]$Contribution, list(simple_games[simple_games$type ==
  0,]$Subject, simple_games[simple_games$type ==
  0,]$Date), mean)
means = c(means, mean(sent1$x))
std_errors = c(std_errors, pop.sd(sent1$x)/sqrt(length(sent1$x)))

# For Giangiacomo senders
sent2 = aggregate(data2[!is.na(data2$daAaB),]$daAaB,
  list(data2[!is.na(data2$daAaB),]$id), mean)
```

```

means = c(means, mean(sent2$x))
std_errors = c(std_errors, pop.sd(sent2$x)/sqrt(length(sent2$x)))

# Compare data
print(t.test(sent1$x, sent2$x))

##
## Welch Two Sample t-test
##
## data: sent1$x and sent2$x
## t = -0.99144, df = 45.3, p-value = 0.3267
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -1.3726571 0.4669504
## sample estimates:
## mean of x mean of y
## 3.032332 3.485185

# print ('Comparing two dataset for RECEIVERS')
# print (z.test(data2[!is.na(data2$daBaA),]$daBaA,
# sigma.x = 6.8)) print
# (z.test(simple_games[simple_games$Type ==
# 1,]$Contribution, sigma.x = 6.8))

# For our simple game receivers
sent1 = aggregate(simple_games[simple_games$Type ==
1, ]$Contribution, list(simple_games[simple_games$Type ==
1, ]$Subject, simple_games[simple_games$Type ==
1, ]$Date), mean)
means = c(means, mean(sent1$x))
std_errors = c(std_errors, pop.sd(sent1$x)/sqrt(length(sent1$x)))

# For Giangiacomo receivers
sent2 = aggregate(data2[!is.na(data2$daBaA), ]$daBaA,
list(data2[!is.na(data2$daBaA), ]$id), mean)
means = c(means, mean(sent2$x))
std_errors = c(std_errors, pop.sd(sent2$x)/sqrt(length(sent2$x)))

print(t.test(sent1$x, sent2$x))

##
## Welch Two Sample t-test
##
## data: sent1$x and sent2$x
## t = -0.88156, df = 50.526, p-value = 0.3822
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -1.3095888 0.5105319
## sample estimates:
## mean of x mean of y
## 2.393064 2.792593

# Plotting comparison
xs = c(0.75, 1.25, 2.75, 3.25)
# plot (x = xs, y = means, ylab = 'Average sending

```

```

# amount', main = 'Comparing two datasets
# w/standard errors', xaxt = 'n', xlim = c(0,8),
# ylim = c(0,4), xlab = '')
plot(x = xs, y = means, ylab = "Average sending amount",
     main = "Comparing Simple Game data", xaxt = "n",
     xlim = c(0, 8), ylim = c(0, 4), xlab = "")
axis(1, at = 1:5, labels = c("Sender", "", "Receiver",
    "", ""), las = 2)
segments(x0 = 0.75, y0 = means[1] - std_errors[1],
     x1 = 0.75, y1 = means[1] + std_errors[1], col = "red")
segments(x0 = 0.7, y0 = means[1] - std_errors[1], x1 = 0.8,
     y1 = means[1] - std_errors[1], col = "red")
segments(x0 = 0.7, y0 = means[1] + std_errors[1], x1 = 0.8,
     y1 = means[1] + std_errors[1], col = "red")

segments(x0 = 1.25, y0 = means[2] - std_errors[2],
     x1 = 1.25, y1 = means[2] + std_errors[2], col = "blue",
     lty = 2)
segments(x0 = 1.2, y0 = means[2] - std_errors[2], x1 = 1.3,
     y1 = means[2] - std_errors[2], col = "blue")
segments(x0 = 1.2, y0 = means[2] + std_errors[2], x1 = 1.3,
     y1 = means[2] + std_errors[2], col = "blue")


segments(x0 = 2.75, y0 = means[3] - std_errors[3],
     x1 = 2.75, y1 = means[3] + std_errors[3], col = "red")
segments(x0 = 2.7, y0 = means[3] - std_errors[3], x1 = 2.8,
     y1 = means[3] - std_errors[3], col = "red")
segments(x0 = 2.7, y0 = means[3] + std_errors[3], x1 = 2.8,
     y1 = means[3] + std_errors[3], col = "red")

segments(x0 = 3.25, y0 = means[4] - std_errors[4],
     x1 = 3.25, y1 = means[4] + std_errors[4], col = "blue",
     lty = 2)
segments(x0 = 3.2, y0 = means[4] - std_errors[4], x1 = 3.3,
     y1 = means[4] - std_errors[4], col = "blue")
segments(x0 = 3.2, y0 = means[4] + std_errors[4], x1 = 3.3,
     y1 = means[4] + std_errors[4], col = "blue")

legend(4, max(means) * 1.05, c("Our data", "Bravo's data"),
     lty = c(1, 2), lwd = c(3, 2), col = c("red", "blue"))

```

Comparing Simple Game data

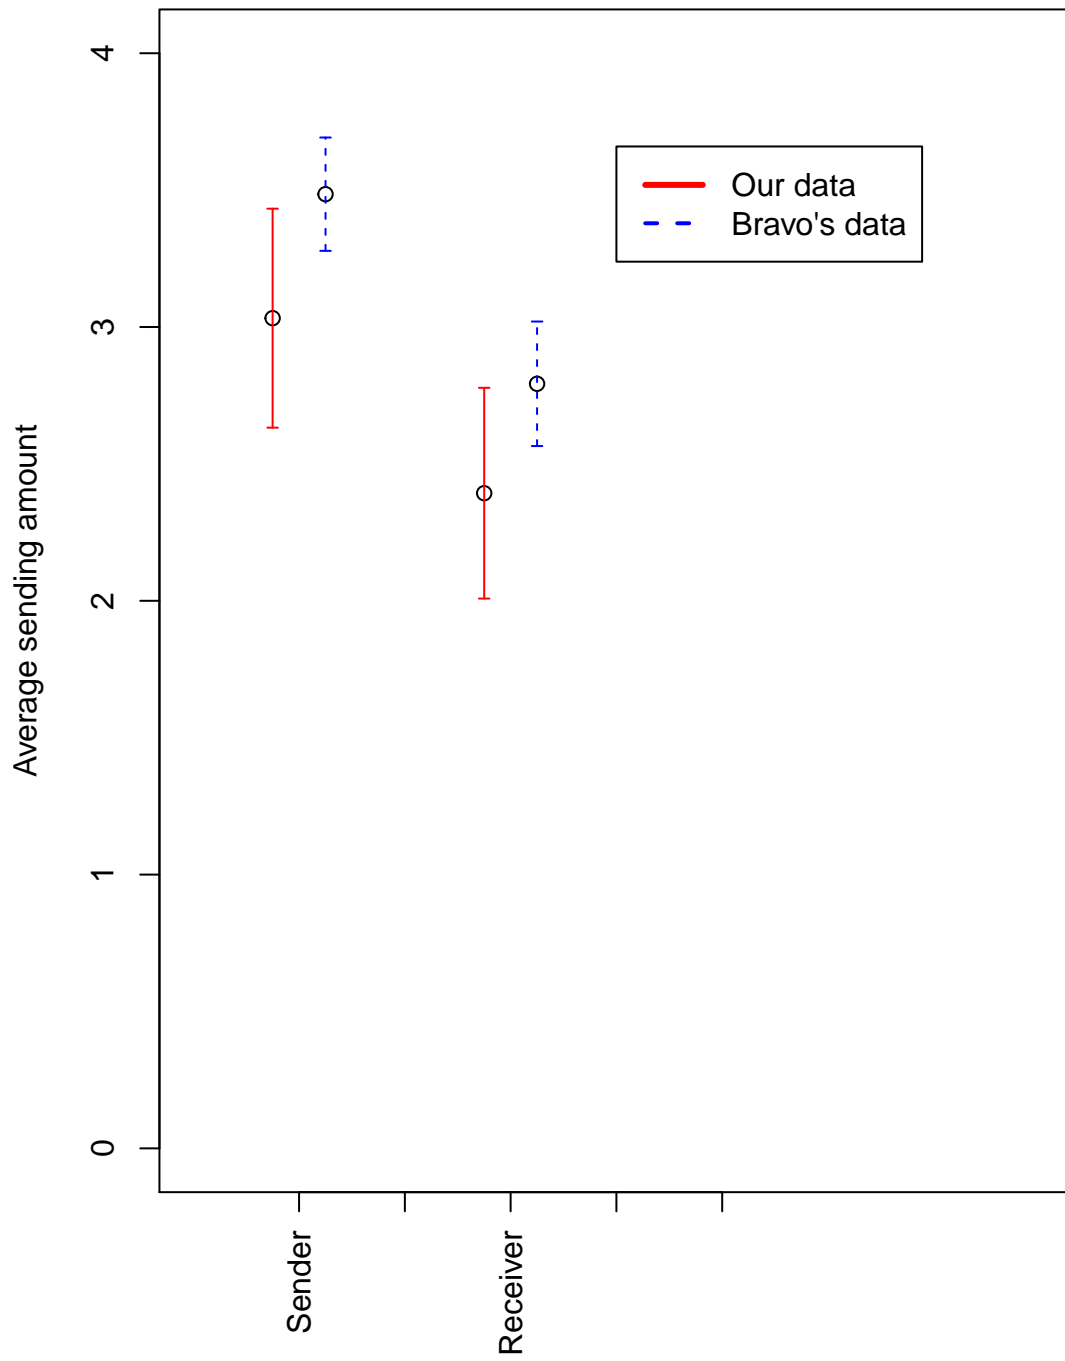

Dubois

Analyze group effect of Dubois's data

```
dubois <- read.csv("./all_data/data_dubois.csv", sep = ";")
dubois$group <- dubois$group + dubois$treatment * 6
dubois$player_uid <- dubois$player_uid + dubois$treatment *
  36
dubois$group <- as.factor(dubois$group)
dubois$treatment <- as.factor(dubois$treatment)
dubois$player_uid <- as.factor(dubois$player_uid)

# Anova analysis per each interaction res1 <- lm
# (sent ~ treatment + treatment/group, data =
# dubois) print ('Per interaction') print
# (anova(res1))

# Anova analysis per each user
user_sent <- as.vector(aggregate(dubois$sent, list(dubois$player_uid),
  mean)[, "x"])
user_sent_back <- as.vector(aggregate(dubois$sent_back,
  list(dubois$player_uid), mean)[, "x"])
user_reciprocity <- as.vector(aggregate(dubois$sent_back/dubois$received,
  list(dubois$player_uid), mean, na.rm = TRUE)[,
  "x"])
user_sender_payoff <- as.vector(aggregate(dubois$returned -
  dubois$sent, list(dubois$player_uid), mean, na.rm = TRUE)[,
  "x"])
user_receiver_payoff <- as.vector(aggregate(dubois$received -
  dubois$sent_back, list(dubois$player_uid), mean,
  na.rm = TRUE)[, "x"])
treatment <- as.factor(c(rep(0, 36), rep(1, 36), rep(2,
  36)))
group <- as.factor(rep(1:18, each = 6))

res2 <- lm(user_sent ~ treatment + treatment/group)
a <- anova(res2)
a$`F value`[1] <- (a$`Sum Sq`[1]/a$Df[1])/(a$`Sum Sq`[2]/a$Df[2])
a$`Pr(>F)`[1] <- 1 - pf(a$`F value`[1], df1 = a$Df[1],
  df2 = a$Df[2])
print(a)
```

Analysis of Variance Table

##

Response: user_sent

```
##           Df Sum Sq Mean Sq F value Pr(>F)
## treatment    2  27.941  13.9707   2.0951 0.15761
## treatment:group 15 100.023   6.6682   2.0706 0.01846 *
## Residuals    90 289.836   3.2204
```

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```
res2 <- lm(user_reciprocity ~ treatment + treatment/group)
a <- anova(res2)
a$`F value`[1] <- (a$`Sum Sq`[1]/a$Df[1])/(a$`Sum Sq`[2]/a$Df[2])
```

```

a$`Pr(>F)`[1] <- 1 - pf(a$`F value`[1], df1 = a$Df[1],
  df2 = a$Df[2])
print(a)

## Analysis of Variance Table
##
## Response: user_reciprocity
##              Df Sum Sq Mean Sq F value Pr(>F)
## treatment      2  0.06941  0.034704   1.7882 0.2011
## treatment:group 15  0.29112  0.019408   0.7685 0.7083
## Residuals      90  2.27300  0.025256

res2 <- lm(user_sender_payoff ~ treatment + treatment/group)
a <- anova(res2)
a$`F value`[1] <- (a$`Sum Sq`[1]/a$Df[1])/(a$`Sum Sq`[2]/a$Df[2])
a$`Pr(>F)`[1] <- 1 - pf(a$`F value`[1], df1 = a$Df[1],
  df2 = a$Df[2])
print(a)

## Analysis of Variance Table
##
## Response: user_sender_payoff
##              Df Sum Sq Mean Sq F value    Pr(>F)
## treatment      2  21.006  10.5030   2.4575    0.1194
## treatment:group 15  64.108   4.2739   3.7518 4.119e-05 ***
## Residuals      90 102.525   1.1392
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1


res2 <- lm(user_receiver_payoff ~ treatment + treatment/group)
a <- anova(res2)
a$`F value`[1] <- (a$`Sum Sq`[1]/a$Df[1])/(a$`Sum Sq`[2]/a$Df[2])
a$`Pr(>F)`[1] <- 1 - pf(a$`F value`[1], df1 = a$Df[1],
  df2 = a$Df[2])
print(a)

## Analysis of Variance Table
##
## Response: user_receiver_payoff
##              Df Sum Sq Mean Sq F value    Pr(>F)
## treatment      2  58.57  29.2853   1.0625    0.3702
## treatment:group 15 413.44  27.5626   5.5594 7.684e-08 ***
## Residuals      90 446.20   4.9578
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```


Comparing Dubois data

Compare with Dubois of type SENDER

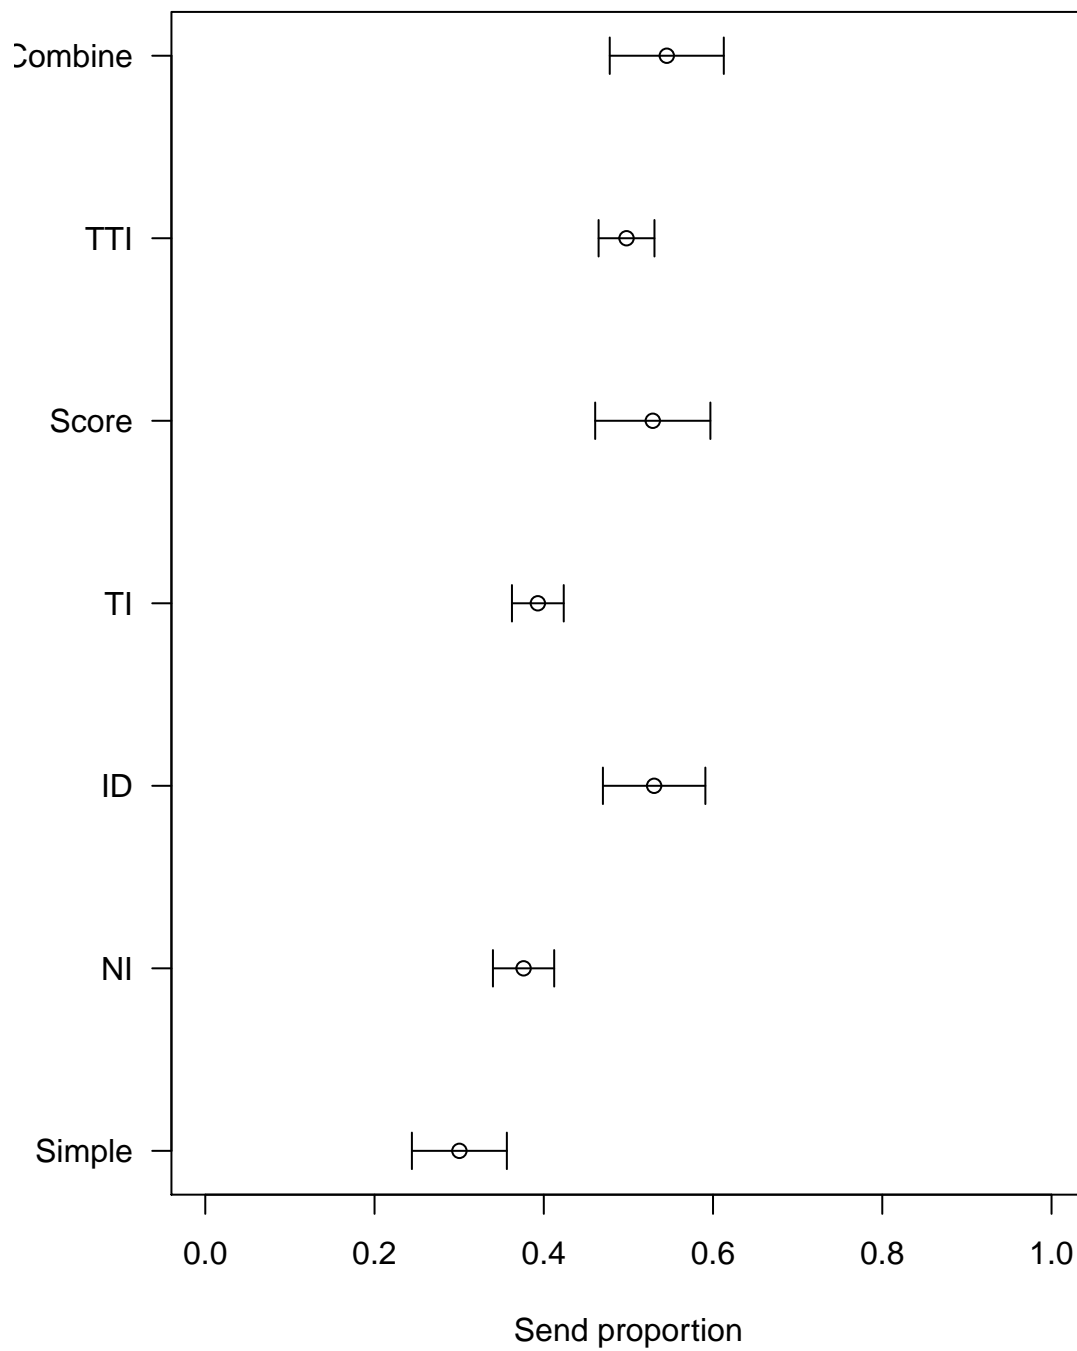

\pagebreak

Compare with Dubois of type RECEIVER

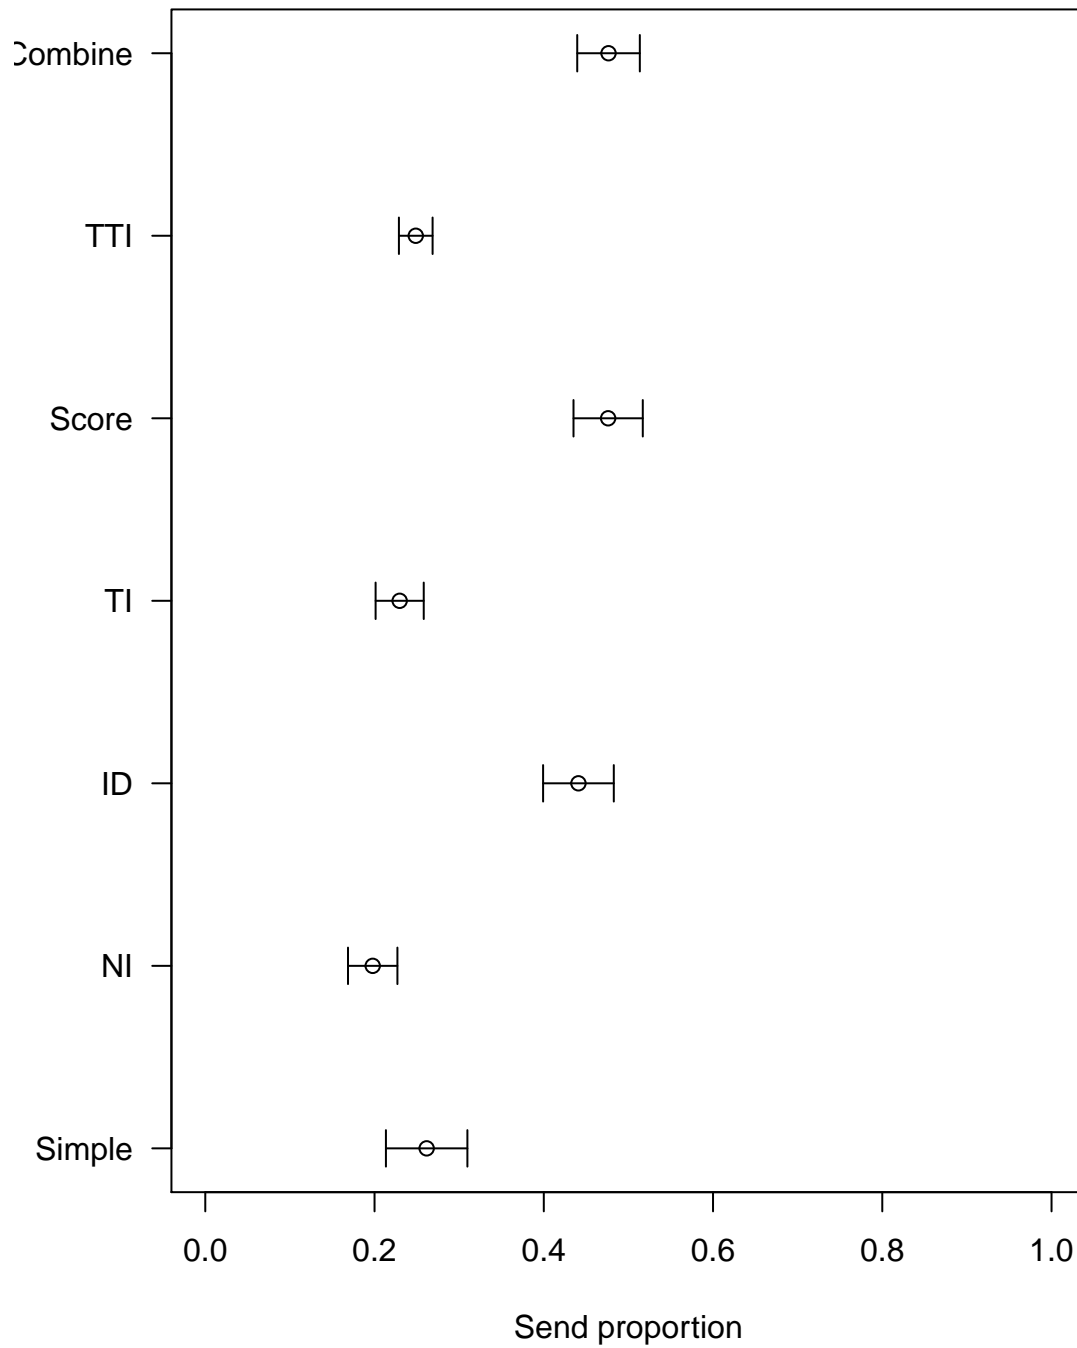

\pagebreak

```

# Plot send proportion for three datasets Date: Thu
# 12-Jun-2017
require(plotrix)
means <- c()
std_errors <- c()
for (type in 0:1) {

  data_dubois <- as.numeric()
  if (type == 0) {
    data_dubois <- user_sent[1:36]/10
  } else if (type == 1) {
    data_dubois <- user_reciprocity[1:36]
  }
  # Our data
  our_data <- simple_games[simple_games$Type == type &
    simple_games$my_send_proportional >= 0, ]
  our_send_proportion <- aggregate(our_data$my_send_proportional,
    list(our_data$Subject, our_data$Date), mean)$x

  means <- c(means, mean(our_send_proportion))
  std_errors <- c(std_errors, pop.sd(simple_games[simple_games$Type ==
    type & simple_games$my_send_proportional >=
    0, ]$my_send_proportional)/sqrt(30))

  # Dubois
  means <- c(means, mean(data_dubois[1:36]))
  std_errors <- c(std_errors, pop.sd(data_dubois[1:36])/sqrt(36))

  # Bravo
  bravo <- data2
  bravo_send_proportion <- aggregate(bravo[bravo$type ==
    type + 1 & !is.na(bravo$send_proportion), ]$send_proportion,
    list(bravo[bravo$type == type + 1 & !is.na(bravo$send_proportion),
    ]$id), mean)$x
  means <- c(means, mean(bravo_send_proportion))
  std_errors <- c(std_errors, pop.sd(bravo_send_proportion)/sqrt(108))

  print(paste("t-test between send proportions:",
    Type_names[type + 1]))

  print("With Dubois")
  print(t.test(our_send_proportion, data_dubois))

  print("With Bravo")
  bravo_send_proportion <- aggregate(bravo[bravo$type ==
    type + 1 & !is.na(bravo$send_proportion), ]$send_proportion,
    list(bravo[bravo$type == type + 1 & !is.na(bravo$send_proportion),
    ]$id), mean)$x
  print(t.test(our_send_proportion, bravo_send_proportion))
}

```

```

## [1] "t-test between send proportions: SENDER"
## [1] "With Dubois"

```

```

##
## Welch Two Sample t-test
##
## data: our_send_proportion and data_dubois
## t = -1.3304, df = 61.606, p-value = 0.1883
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.1823901 0.0366342
## sample estimates:
## mean of x mean of y
## 0.3032332 0.3761111
##
## [1] "With Bravo"
##
## Welch Two Sample t-test
##
## data: our_send_proportion and bravo_send_proportion
## t = -0.99144, df = 45.3, p-value = 0.3267
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.13726571 0.04669504
## sample estimates:
## mean of x mean of y
## 0.3032332 0.3485185
##
## [1] "t-test between send proportions: RECEIVER"
## [1] "With Dubois"
##
## Welch Two Sample t-test
##
## data: our_send_proportion and data_dubois
## t = 1.6863, df = 55.878, p-value = 0.09732
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.01571286 0.18285528
## sample estimates:
## mean of x mean of y
## 0.2814123 0.1978410
##
## [1] "With Bravo"
##
## Welch Two Sample t-test
##
## data: our_send_proportion and bravo_send_proportion
## t = -0.5979, df = 45.638, p-value = 0.5529
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -0.11677459 0.06329791
## sample estimates:
## mean of x mean of y
## 0.2814123 0.3081506
xs = c(0.75, 1, 1.25, 2.75, 3, 3.25)
# plot (x = xs, y = means, ylab = 'Average sending

```

```

# amount', main = 'Comparing two datasets
# w/standard errors', xaxt = 'n', xlim = c(0,8),
# ylim = c(0,4), xlab = '')
plot(x = xs, y = means, ylab = "Send proportion", main = "",
     xaxt = "n", xlim = c(0, 7), ylim = c(0.1, 0.5),
     xlab = "")
axis(1, at = 1:5, labels = c("Sender", "", "Receiver",
                             "", ""), las = 2)

# Our data
segments(x0 = 0.75, y0 = means[1] - std_errors[1],
         x1 = 0.75, y1 = means[1] + std_errors[1], col = "red")
segments(x0 = 0.7, y0 = means[1] - std_errors[1], x1 = 0.8,
         y1 = means[1] - std_errors[1], col = "red")
segments(x0 = 0.7, y0 = means[1] + std_errors[1], x1 = 0.8,
         y1 = means[1] + std_errors[1], col = "red")

# Dubois
segments(x0 = 1, y0 = means[2] - std_errors[2], x1 = 1,
         y1 = means[2] + std_errors[2], col = "blue", lty = 2)
segments(x0 = 0.95, y0 = means[2] - std_errors[2],
         x1 = 1.05, y1 = means[2] - std_errors[2], col = "blue")
segments(x0 = 0.95, y0 = means[2] + std_errors[2],
         x1 = 1.05, y1 = means[2] + std_errors[2], col = "blue")

# Bravo
segments(x0 = 1.25, y0 = means[3] - std_errors[3],
         x1 = 1.25, y1 = means[3] + std_errors[3], col = "black",
         lty = 3)
segments(x0 = 1.2, y0 = means[3] - std_errors[3], x1 = 1.3,
         y1 = means[3] - std_errors[3], col = "black")
segments(x0 = 1.2, y0 = means[3] + std_errors[3], x1 = 1.3,
         y1 = means[3] + std_errors[3], col = "black")

# our
segments(x0 = 2.75, y0 = means[4] - std_errors[4],
         x1 = 2.75, y1 = means[4] + std_errors[4], col = "red")
segments(x0 = 2.7, y0 = means[4] - std_errors[4], x1 = 2.8,
         y1 = means[4] - std_errors[4], col = "red")
segments(x0 = 2.7, y0 = means[4] + std_errors[4], x1 = 2.8,
         y1 = means[4] + std_errors[4], col = "red")

# Dubois
segments(x0 = 3, y0 = means[5] - std_errors[5], x1 = 3,
         y1 = means[5] + std_errors[5], col = "blue", lty = 2)
segments(x0 = 2.95, y0 = means[5] - std_errors[5],
         x1 = 3.05, y1 = means[5] - std_errors[5], col = "blue")
segments(x0 = 2.95, y0 = means[5] + std_errors[5],
         x1 = 3.05, y1 = means[5] + std_errors[5], col = "blue")

# Bravo
segments(x0 = 3.25, y0 = means[6] - std_errors[6],
         x1 = 3.25, y1 = means[6] + std_errors[6], col = "black",
         lty = 3)


```

```

segments(x0 = 3.2, y0 = means[6] - std_errors[6], x1 = 3.3,
        y1 = means[6] - std_errors[6], col = "black")
segments(x0 = 3.2, y0 = means[6] + std_errors[6], x1 = 3.3,
        y1 = means[6] + std_errors[6], col = "black")

legend(4, max(means) * 1.05, c("Our data", "Dubois's data",
    "Bravo's data"), lty = c(1, 2, 3), lwd = c(1, 1,
    1), col = c("red", "blue", "black"))

```

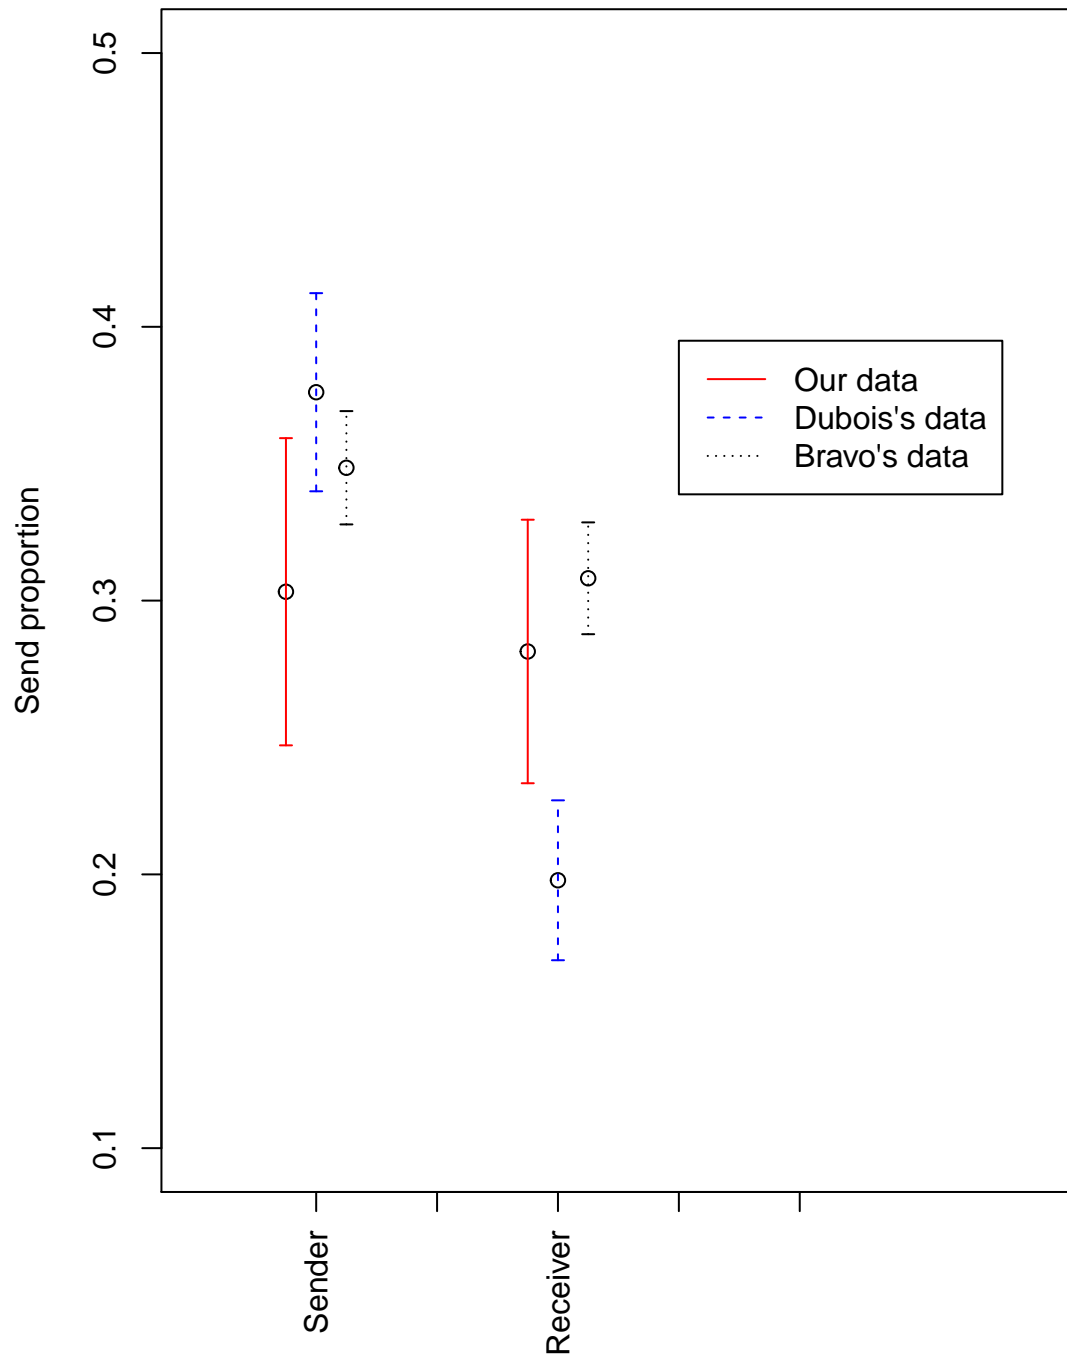

Plot net sending amount of three datasets in one figure

```
## [1] "Test sending amount of senders"


##
## Welch Two Sample t-test
##
## data: sent1$x and sent2$x
## t = -0.99144, df = 45.3, p-value = 0.3267
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -1.3726571 0.4669504
## sample estimates:
## mean of x mean of y
## 3.032332 3.485185

##
## Welch Two Sample t-test
##
## data: sent1$x and sent3
## t = -1.3304, df = 61.606, p-value = 0.1883
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -1.823901 0.366342
## sample estimates:
## mean of x mean of y
## 3.032332 3.761111

## [1] "Compare sending amount of receivers"

##
## Welch Two Sample t-test
##
## data: sent1$x and sent2$x
## t = -0.88156, df = 50.526, p-value = 0.3822
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -1.3095888 0.5105319
## sample estimates:
## mean of x mean of y
## 2.393064 2.792593


##
## Welch Two Sample t-test
##
## data: sent1$x and sent3/10
## t = 5.4993, df = 29.515, p-value = 5.993e-06
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## 1.358628 2.965649
## sample estimates:
## mean of x mean of y
## 2.3930642 0.2309259
```

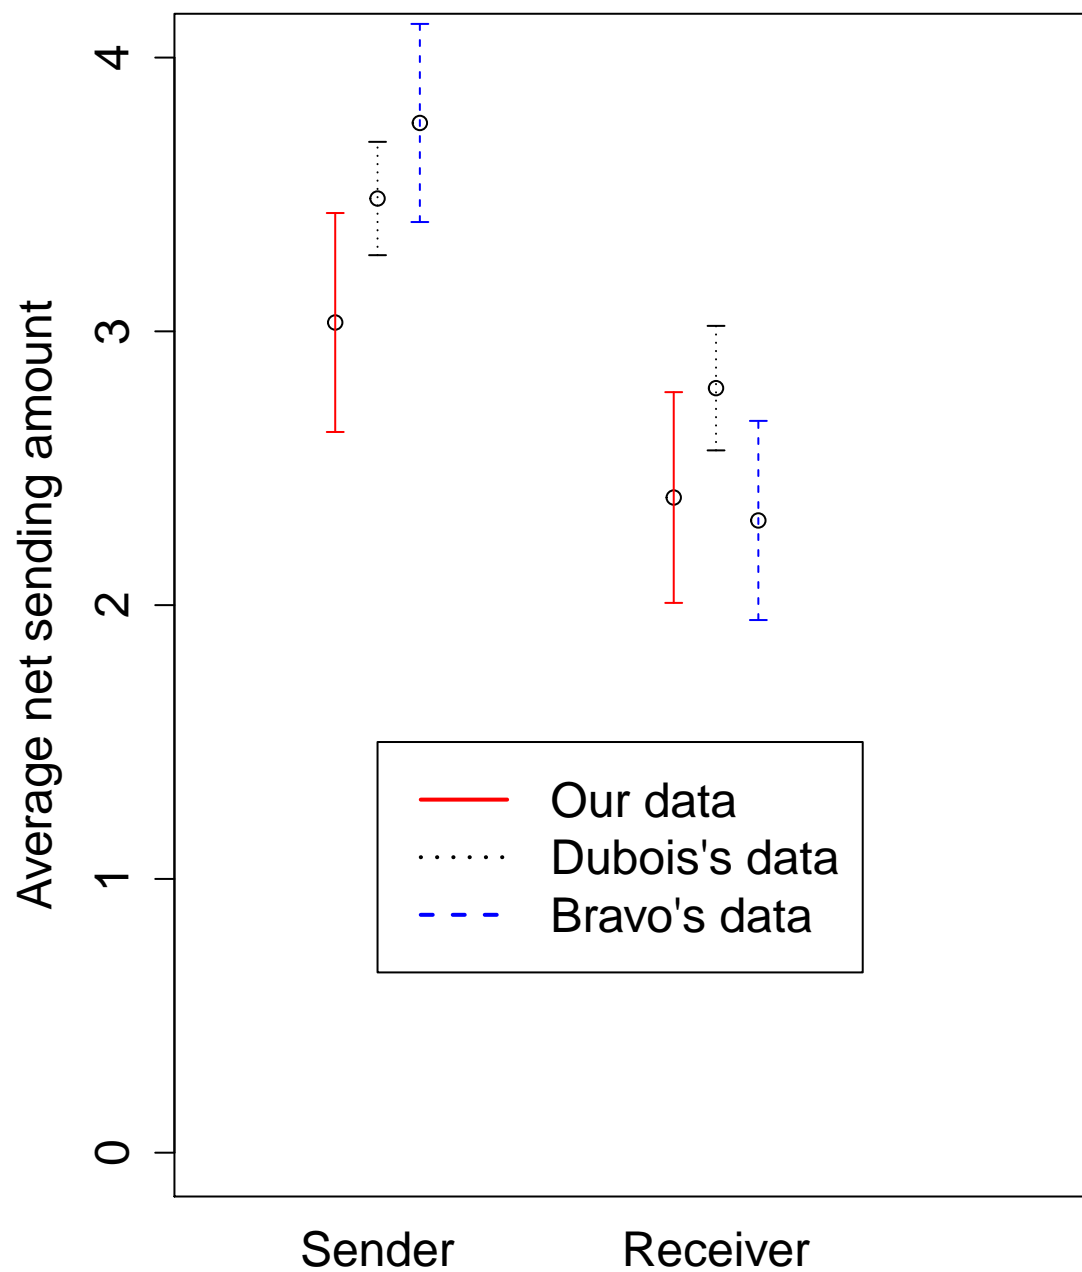

Behavior over time

After reading the questionnaire, there is a hypothesis that, people send less in the end of game (i.e, people learn the length of the game and adapt to the game). However, after running the regression test between sending behavior and period, there is no evidence to prove the hypothesis.

r_value of behavior over time of SENDER

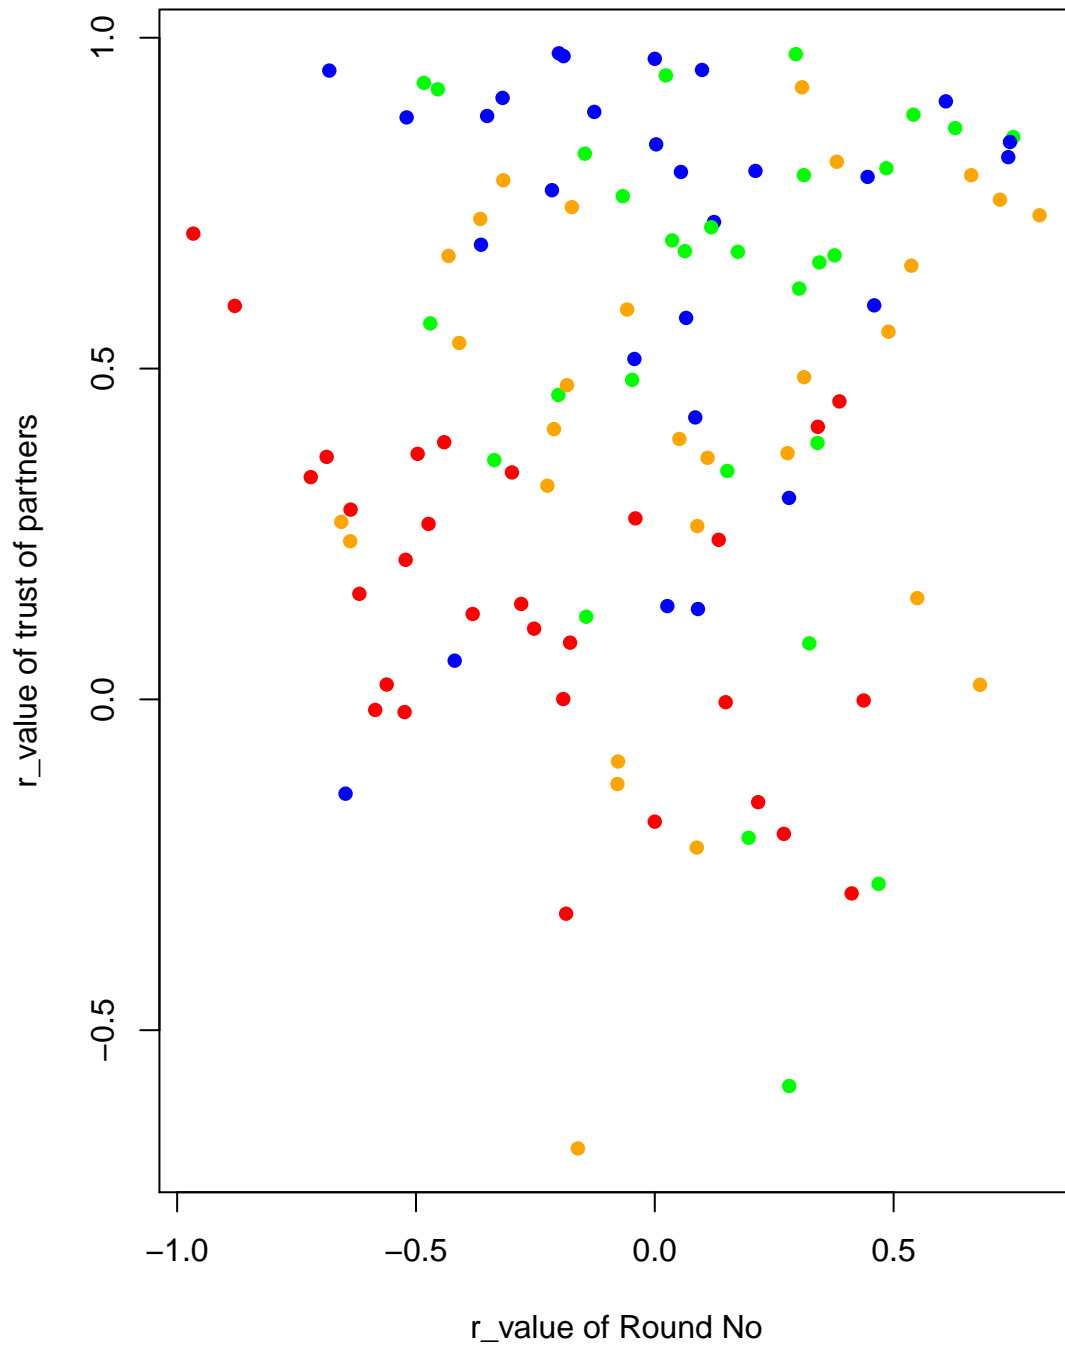

```
##           NA      NA      NA
## 1  Slope Without trust 0.02183 0.00639
## 2  Slope   With trust 0.02256 0.0124
```




```

## 3 Intercept Without trust 0.50555 0.3186
## 4 Intercept With trust 0.31454 0.20829
## 5 r_value Without trust 0.63535 0.10645
## 6 r_value With trust 0.61977 0.1123
## 7 r_value Without ID 0.63808 0.1228
## 8 r_value With ID 0.62 0.11
## [1] "Anova analysis for slope"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Sender"
##
## SS num Df Error SS den Df F
## (Intercept) 0.00000193 1 0.0034749 24 0.0133
## GroupID 0.00086383 4 0.0034749 24 1.4916
## SHOW_TRUST 0.00049717 1 0.0034653 24 4.1313
## GroupID:SHOW_TRUST 0.00048138 4 0.0034653 24 0.8335
## SHOW_ID 0.00058784 1 0.0027101 24 2.9728
## GroupID:SHOW_ID 0.00079096 4 0.0027101 24 1.7511
## SHOW_TRUST:SHOW_ID 0.00099708 1 0.0028265 24 4.8548
## GroupID:SHOW_TRUST:SHOW_ID 0.00082152 4 0.0028265 24 1.7439
## Pr(>F)
## (Intercept) 0.90900
## GroupID 0.23607
## SHOW_TRUST 0.11189
## GroupID:SHOW_TRUST 0.51724
## SHOW_ID 0.15977
## GroupID:SHOW_ID 0.17177
## SHOW_TRUST:SHOW_ID 0.09231
## GroupID:SHOW_TRUST:SHOW_ID 0.17330
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"
## [1] "Anova analysis for intercept"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Sender"
##
## SS num Df Error SS den Df F
## (Intercept) 1.18242 1 1.04262 24 27.2181
## GroupID 0.29525 4 1.04262 24 1.6991
## SHOW_TRUST 0.19793 1 1.41746 24 3.9575
## GroupID:SHOW_TRUST 0.20005 4 1.41746 24 0.8468
## SHOW_ID 0.01085 1 0.83865 24 2.5412
## GroupID:SHOW_ID 0.01708 4 0.83865 24 0.1222
## SHOW_TRUST:SHOW_ID 0.03465 1 1.18402 24 0.5485
## GroupID:SHOW_TRUST:SHOW_ID 0.25264 4 1.18402 24 1.2802
## Pr(>F)
## (Intercept) 2.401e-05 ***
## GroupID 0.1831
## SHOW_TRUST 0.1175
## GroupID:SHOW_TRUST 0.5095
## SHOW_ID 0.1861
## GroupID:SHOW_ID 0.9732
## SHOW_TRUST:SHOW_ID 0.5000
## GroupID:SHOW_TRUST:SHOW_ID 0.3054
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"

```

```
## [1] "Anova analysis for R value"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Sender"
##
##          SS num Df Error SS den Df      F Pr(>F)
## (Intercept)      0.00368      1   1.9572    23  0.0432 0.8371
## GroupID          0.53986      4   1.9572    23  1.5860 0.2117
## SHOW_TRUST       0.31137      1   2.0440    23  3.1651 0.1498
## GroupID:SHOW_TRUST 0.39351      4   2.0440    23  1.1070 0.3771
## SHOW_ID          0.64977      1   1.7228    23 17.6350 0.0137 *
## GroupID:SHOW_ID   0.14738      4   1.7228    23  0.4919 0.7417
## SHOW_TRUST:SHOW_ID 0.48743      1   1.8761    23  2.8501 0.1666
## GroupID:SHOW_TRUST:SHOW_ID 0.68408      4   1.8761    23  2.0966 0.1141
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----*****-----"
##
##
## \pagebreak
```

r_value of behavior over time of RECEIVER

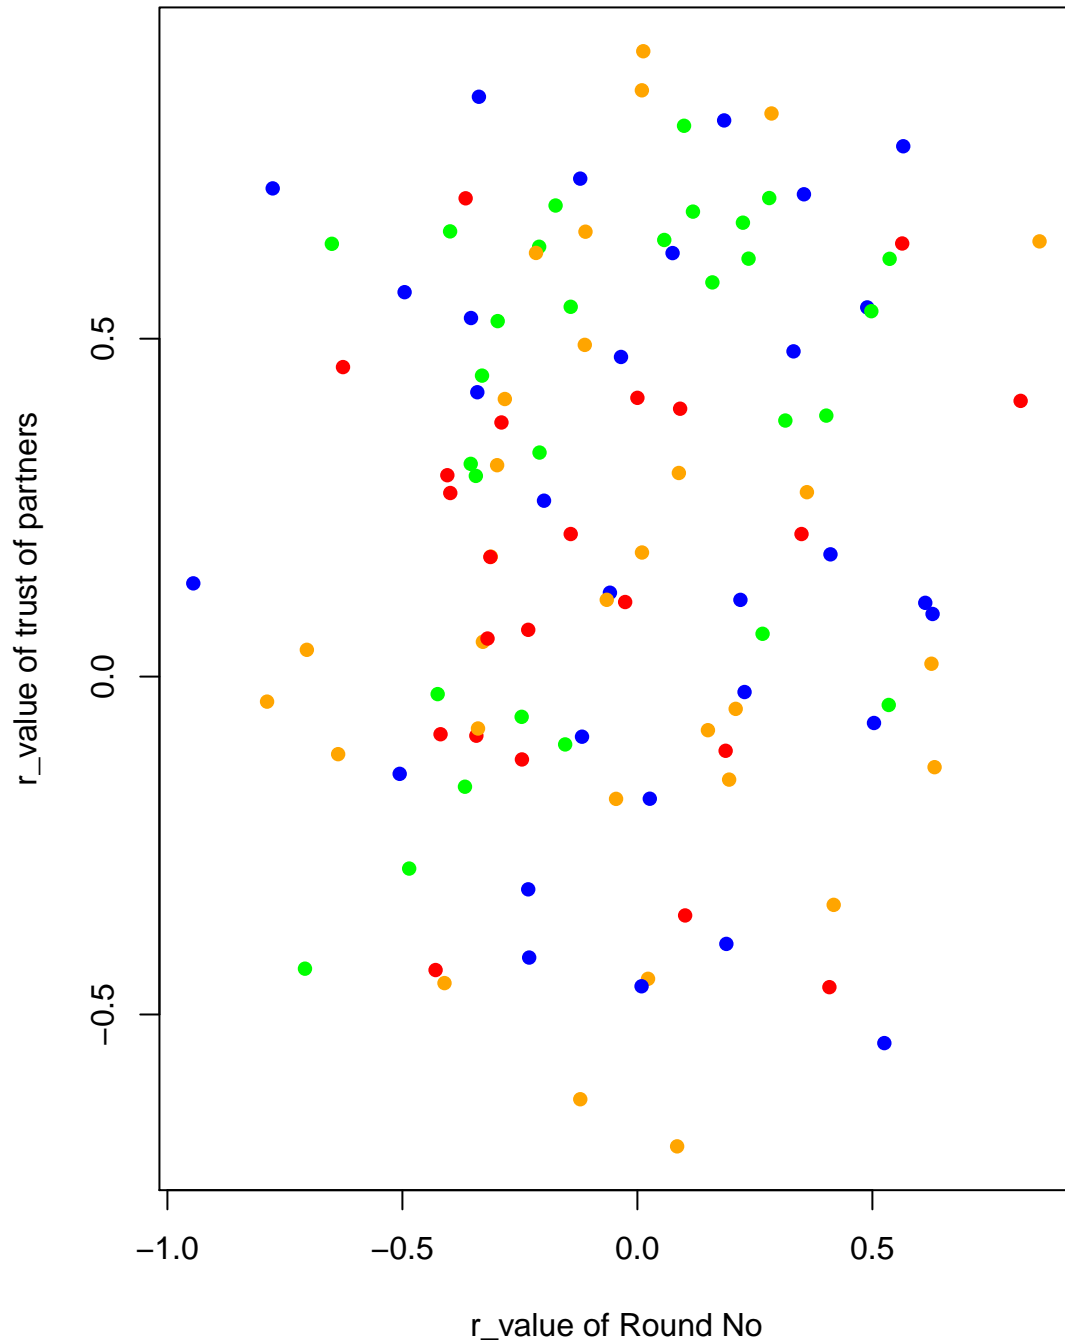

```
##           NA      NA      NA
## 1  Slope Without trust 0.00826 0.00284
## 2  Slope   With trust 0.00595 0.00121
## 3 Intercept Without trust 0.72518 0.24914
## 4 Intercept   With trust 0.56743 0.15225
## 5  r_value Without trust 0.74394 0.14981
## 6  r_value   With trust 0.55454 0.04005
## 7  r_value Without ID  0.5605 0.05218
```


```
## 8 r_value With ID 0.67 0.13
## [1] "Anova analysis for slope"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##
## SS num Df Error SS den Df F
## (Intercept) 1.2602e-04 1 0.00116706 17 1.8357
## GroupID 3.1315e-04 4 0.00116706 17 1.1404
## SHOW_TRUST 5.9253e-05 1 0.00059534 17 0.7738
## GroupID:SHOW_TRUST 3.0629e-04 4 0.00059534 17 2.1865
## SHOW_ID 2.0170e-05 1 0.00066218 17 0.2897
## GroupID:SHOW_ID 2.7853e-04 4 0.00066218 17 1.7876
## SHOW_TRUST:SHOW_ID 1.1654e-04 1 0.00123391 17 1.8225
## GroupID:SHOW_TRUST:SHOW_ID 2.5579e-04 4 0.00123391 17 0.8810
## Pr(>F)
## (Intercept) 0.1932
## GroupID 0.3710
## SHOW_TRUST 0.4287
## GroupID:SHOW_TRUST 0.1141
## SHOW_ID 0.6190
## GroupID:SHOW_ID 0.1779
## SHOW_TRUST:SHOW_ID 0.2484
## GroupID:SHOW_TRUST:SHOW_ID 0.4959
## [1] "----*-----"
## [1] "Anova analysis for intercept"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##
## SS num Df Error SS den Df F Pr(>F)
## (Intercept) 0.48013 1 0.86570 17 9.4284 0.006928
## GroupID 0.13089 4 0.86570 17 0.6426 0.639491
## SHOW_TRUST 0.01316 1 0.49867 17 0.1338 0.733030
## GroupID:SHOW_TRUST 0.39339 4 0.49867 17 3.3527 0.033854
## SHOW_ID 0.00709 1 0.65748 17 0.1179 0.748586
## GroupID:SHOW_ID 0.24064 4 0.65748 17 1.5555 0.231309
## SHOW_TRUST:SHOW_ID 0.23109 1 1.02451 17 4.1807 0.110356
## GroupID:SHOW_TRUST:SHOW_ID 0.22111 4 1.02451 17 0.9172 0.476531
##
## (Intercept) **
## GroupID
## SHOW_TRUST
## GroupID:SHOW_TRUST *
## SHOW_ID
## GroupID:SHOW_ID
## SHOW_TRUST:SHOW_ID
## GroupID:SHOW_TRUST:SHOW_ID
## ---
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"
## [1] "Anova analysis for R value"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##
## SS num Df Error SS den Df F Pr(>F)
## (Intercept) 0.004447 1 1.25021 17 0.0605 0.8087
## GroupID 0.271292 4 1.25021 17 0.9222 0.4739
## SHOW_TRUST 0.114339 1 0.55834 17 2.4233 0.1945
```

```

## GroupID:SHOW_TRUST      0.188735      4  0.55834      17  1.4366  0.2648
## SHOW_ID                 0.008131      1  0.72676      17  0.2571  0.6388
## GroupID:SHOW_ID        0.126522      4  0.72676      17  0.7399  0.5777
## SHOW_TRUST:SHOW_ID     0.002261      1  1.41863      17  0.0861  0.7838
## GroupID:SHOW_TRUST:SHOW_ID 0.105058      4  1.41863      17  0.3147  0.8642
## [1] "----*---"
##
##
## \pagebreak


```

Sending behavior of Simple Games over time of: SENDER

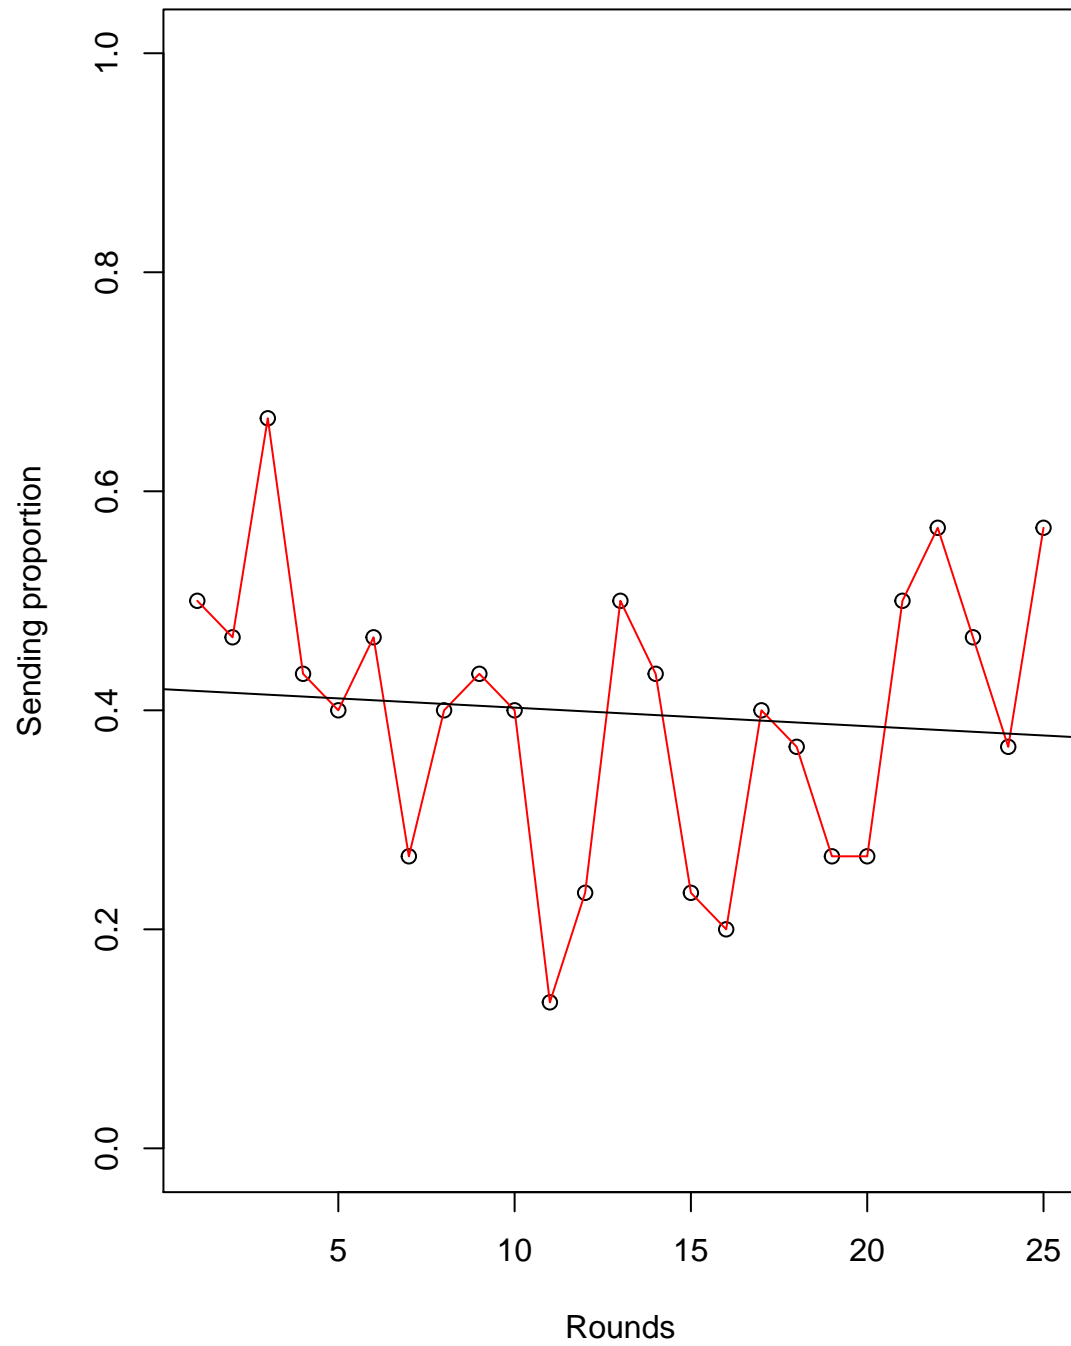


\pagebreak

Sending behavior of Simple Games over time of: RECEIVER

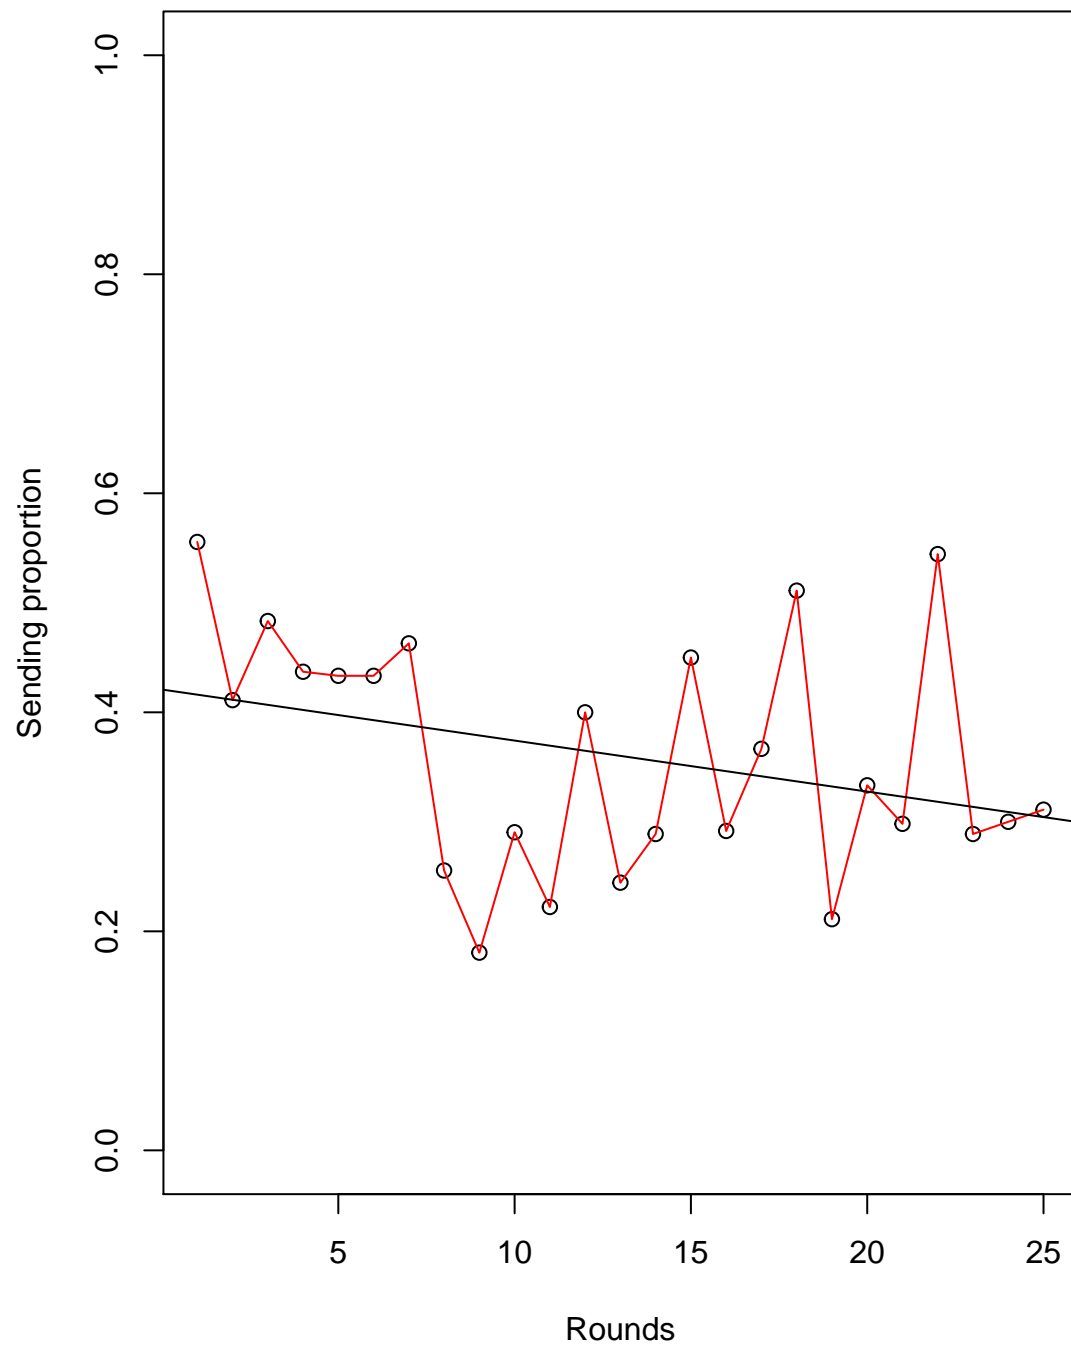


\pagebreak

Sending behavior of ID Games over time of: SENDER

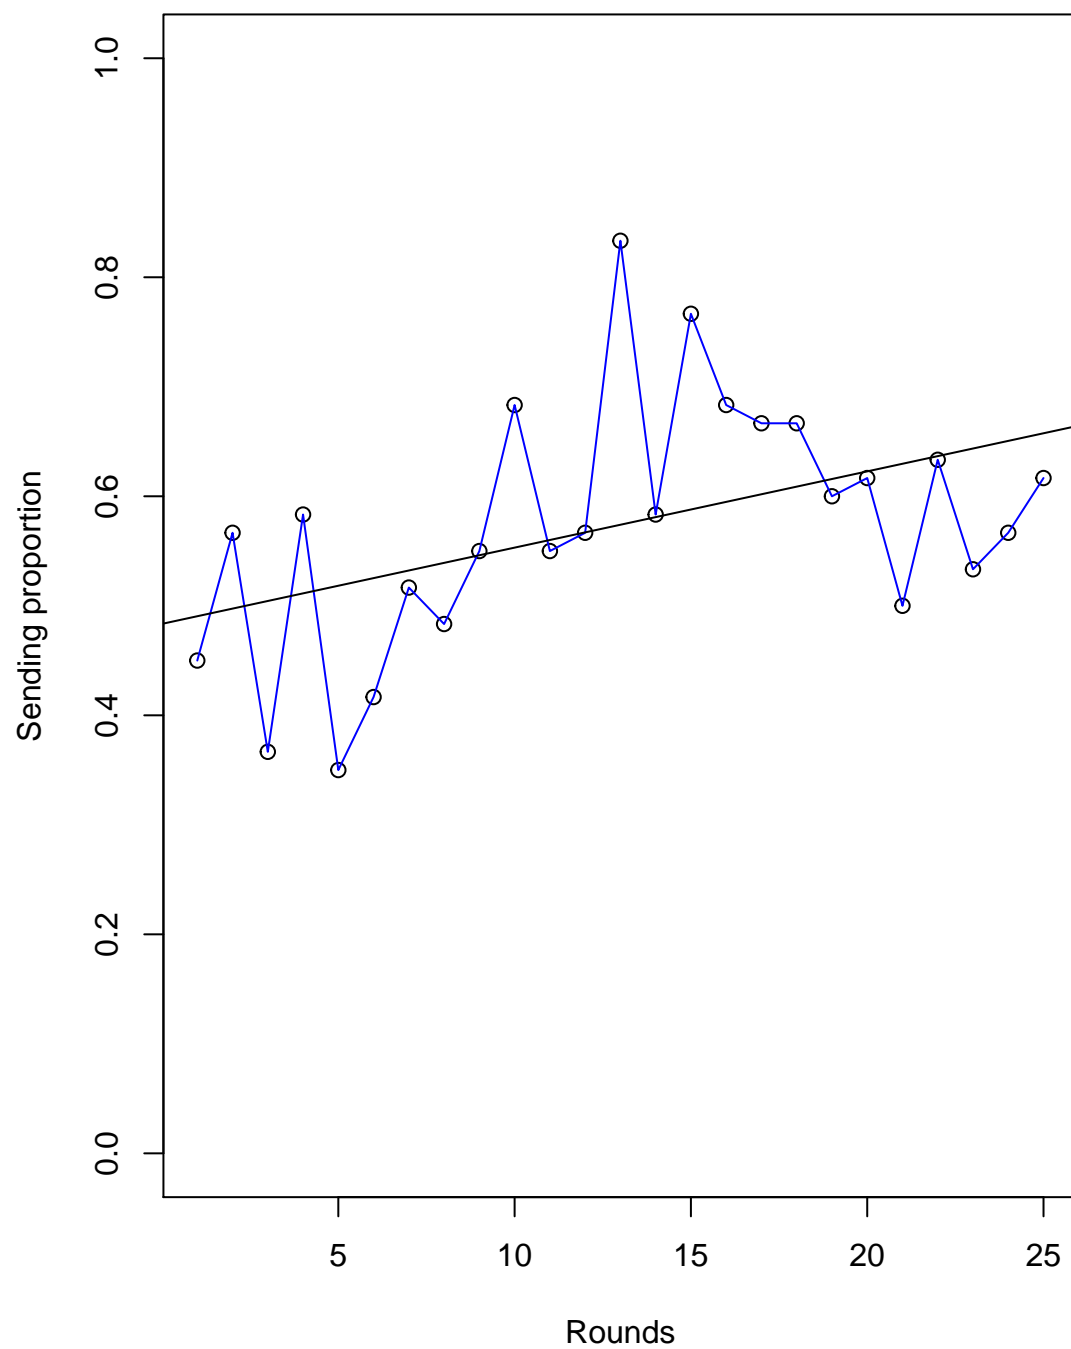


\pagebreak

Sending behavior of ID Games over time of: RECEIVER

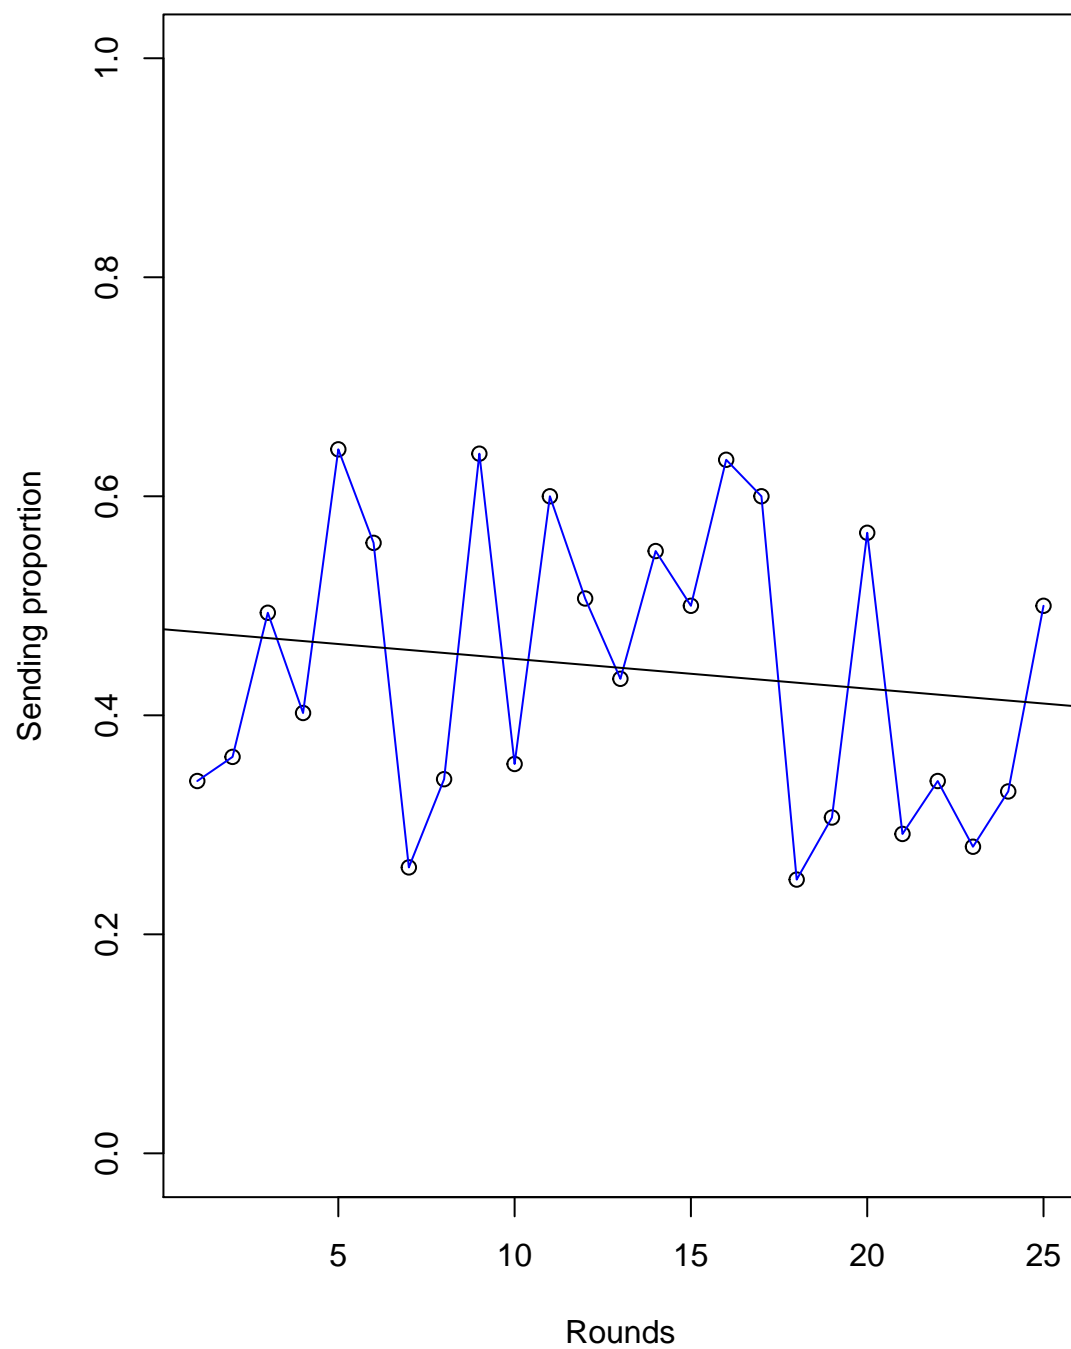


\pagebreak

Sending behavior of Score Games over time of: SENDER

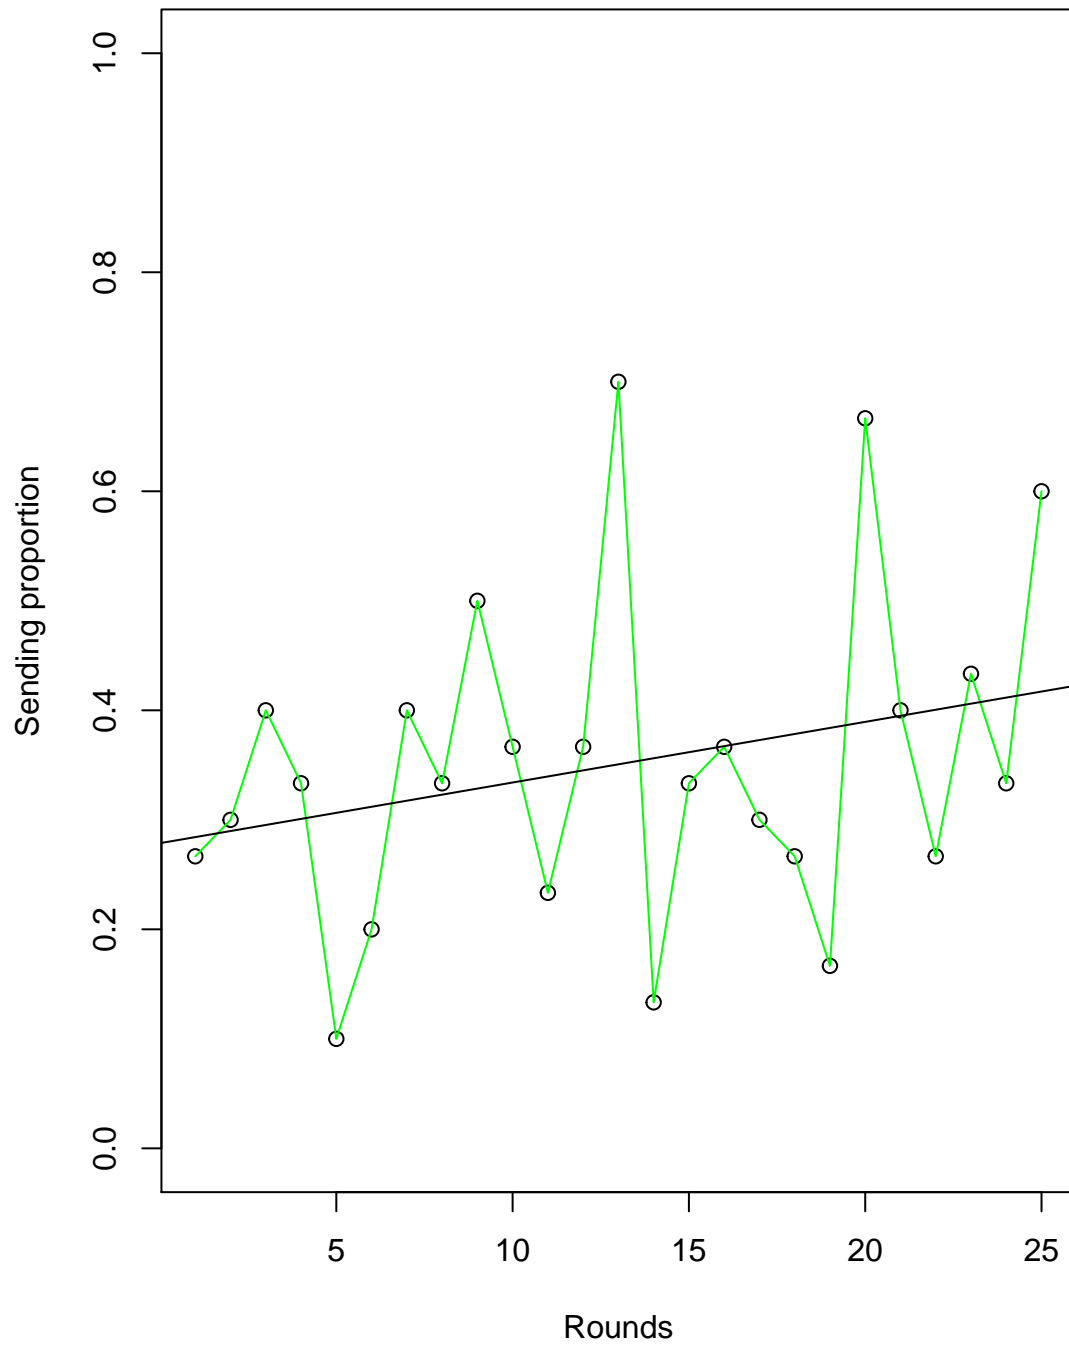


\pagebreak

Sending behavior of Score Games over time of: RECEIVER

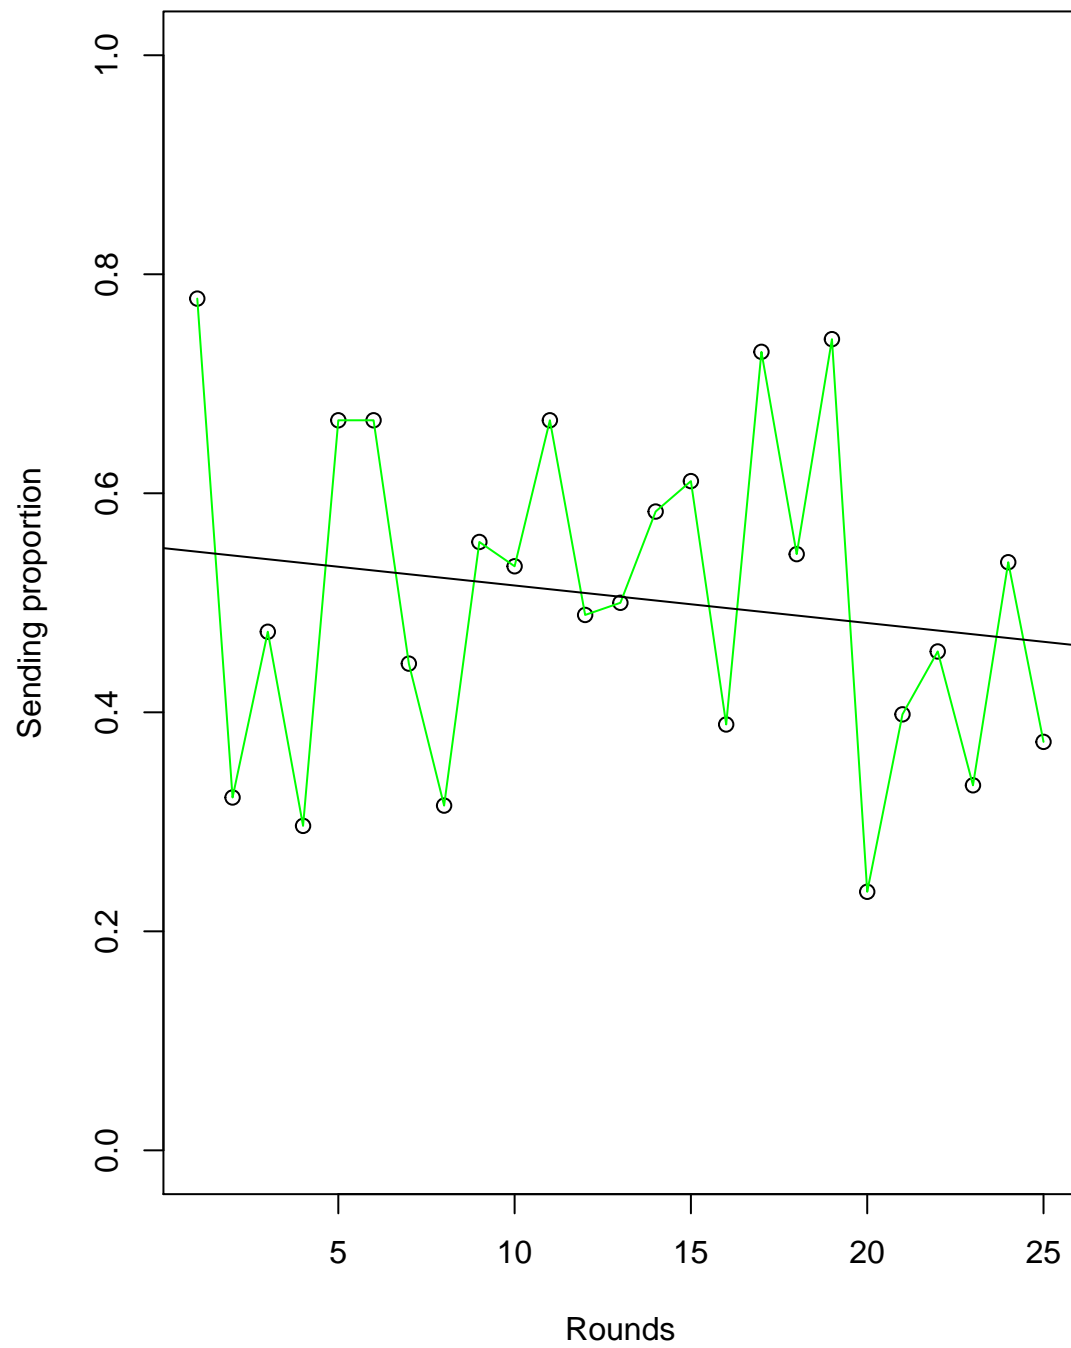


\pagebreak

Sending behavior of Combine Games over time of: SENDER

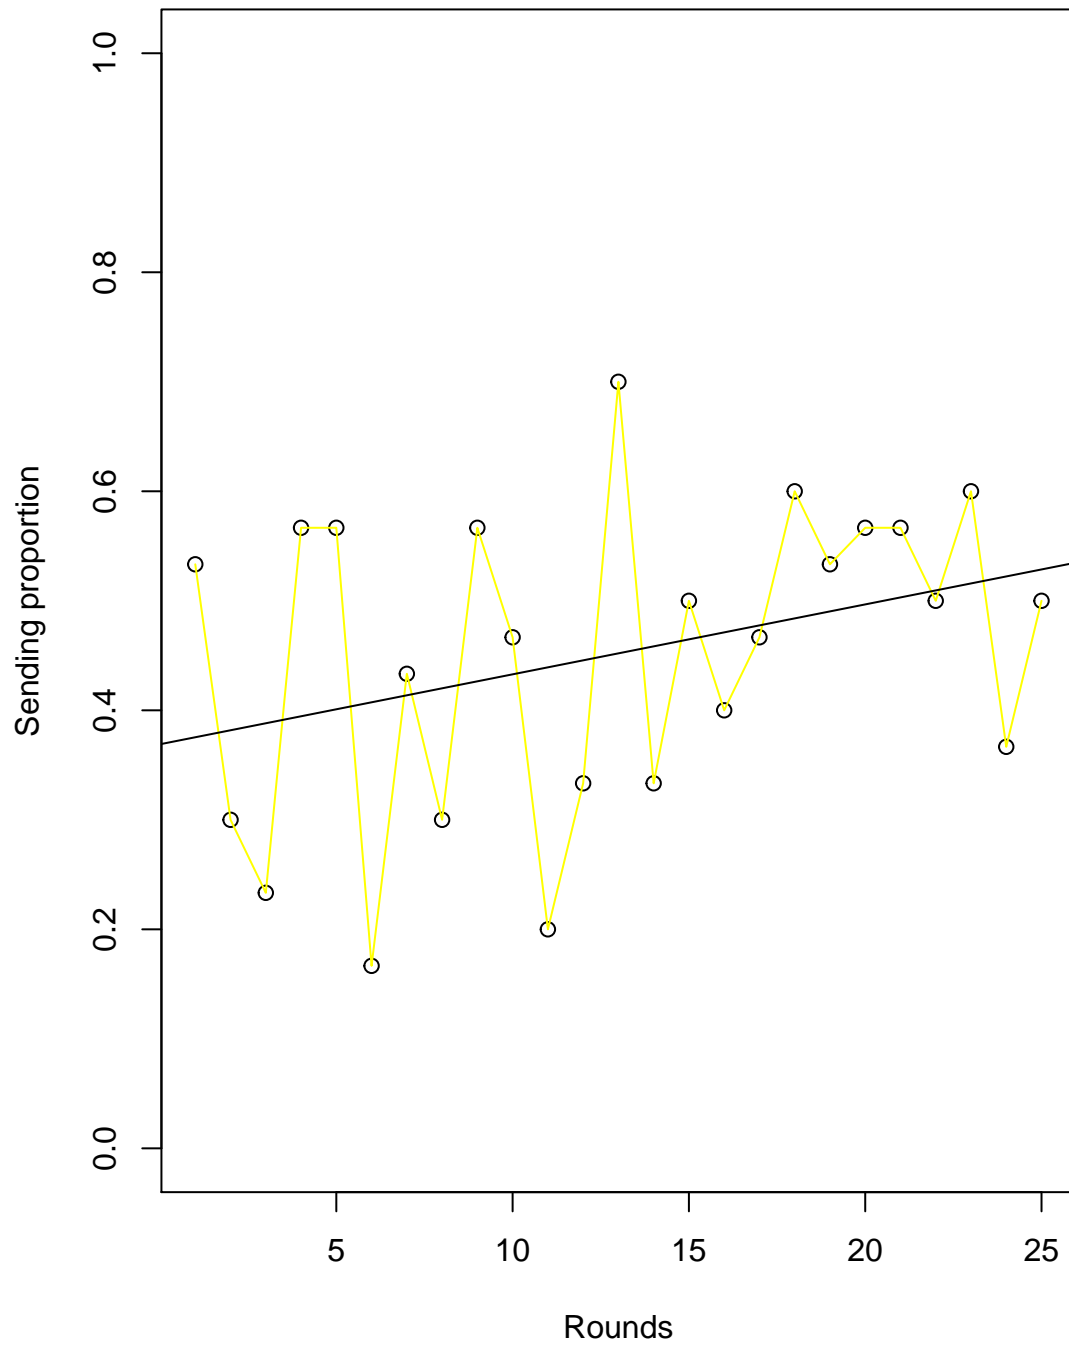


\pagebreak

Sending behavior of Combine Games over time of: RECEIVER

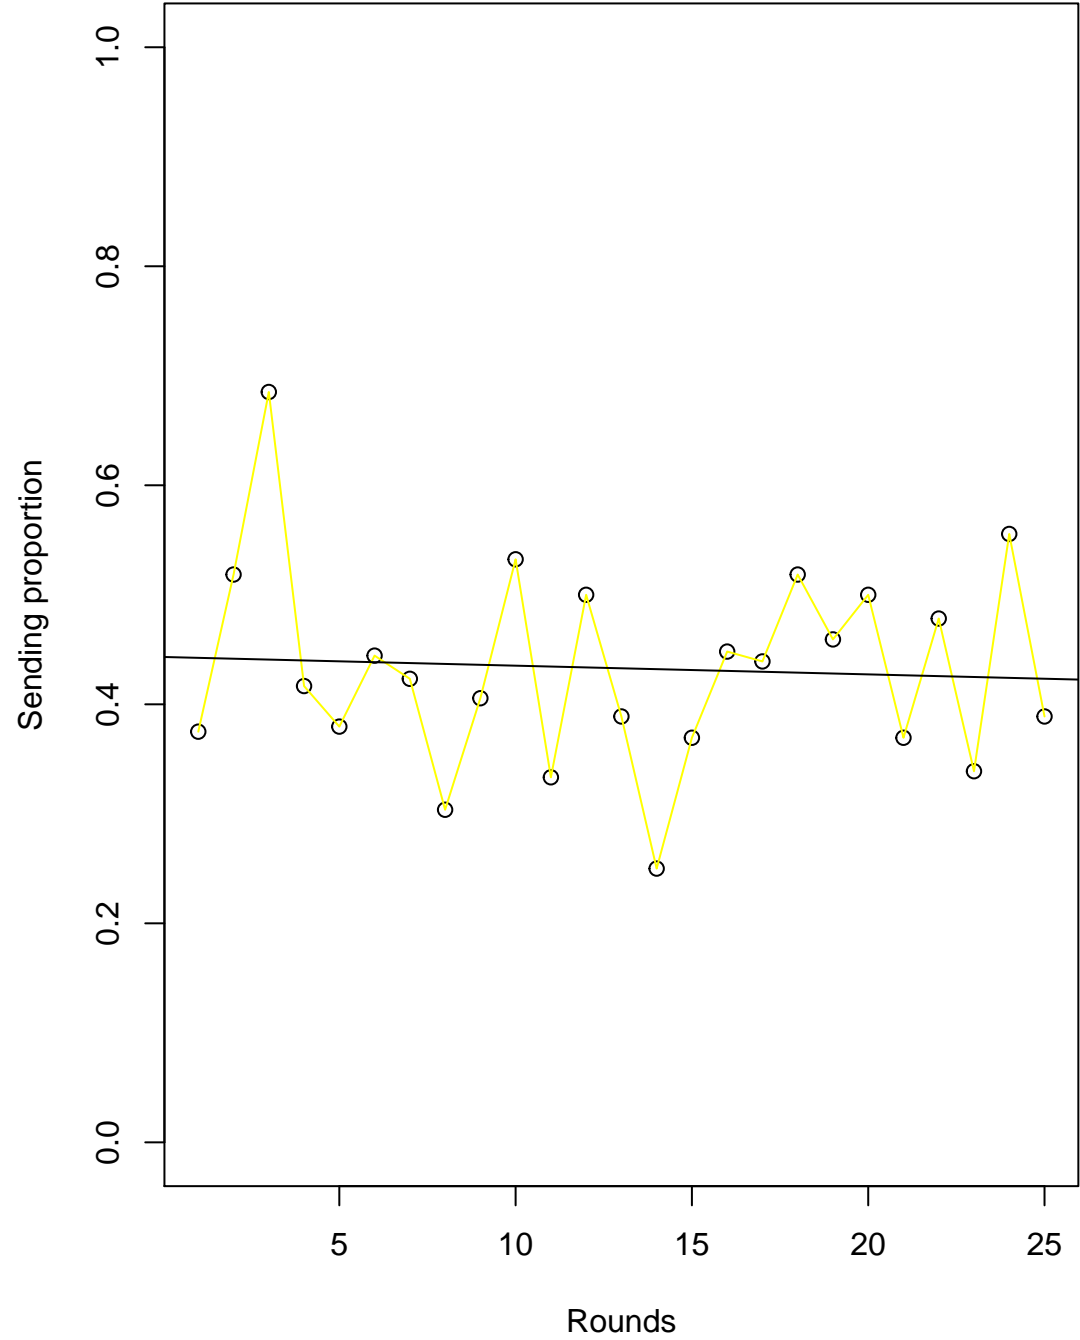

\pagebreak

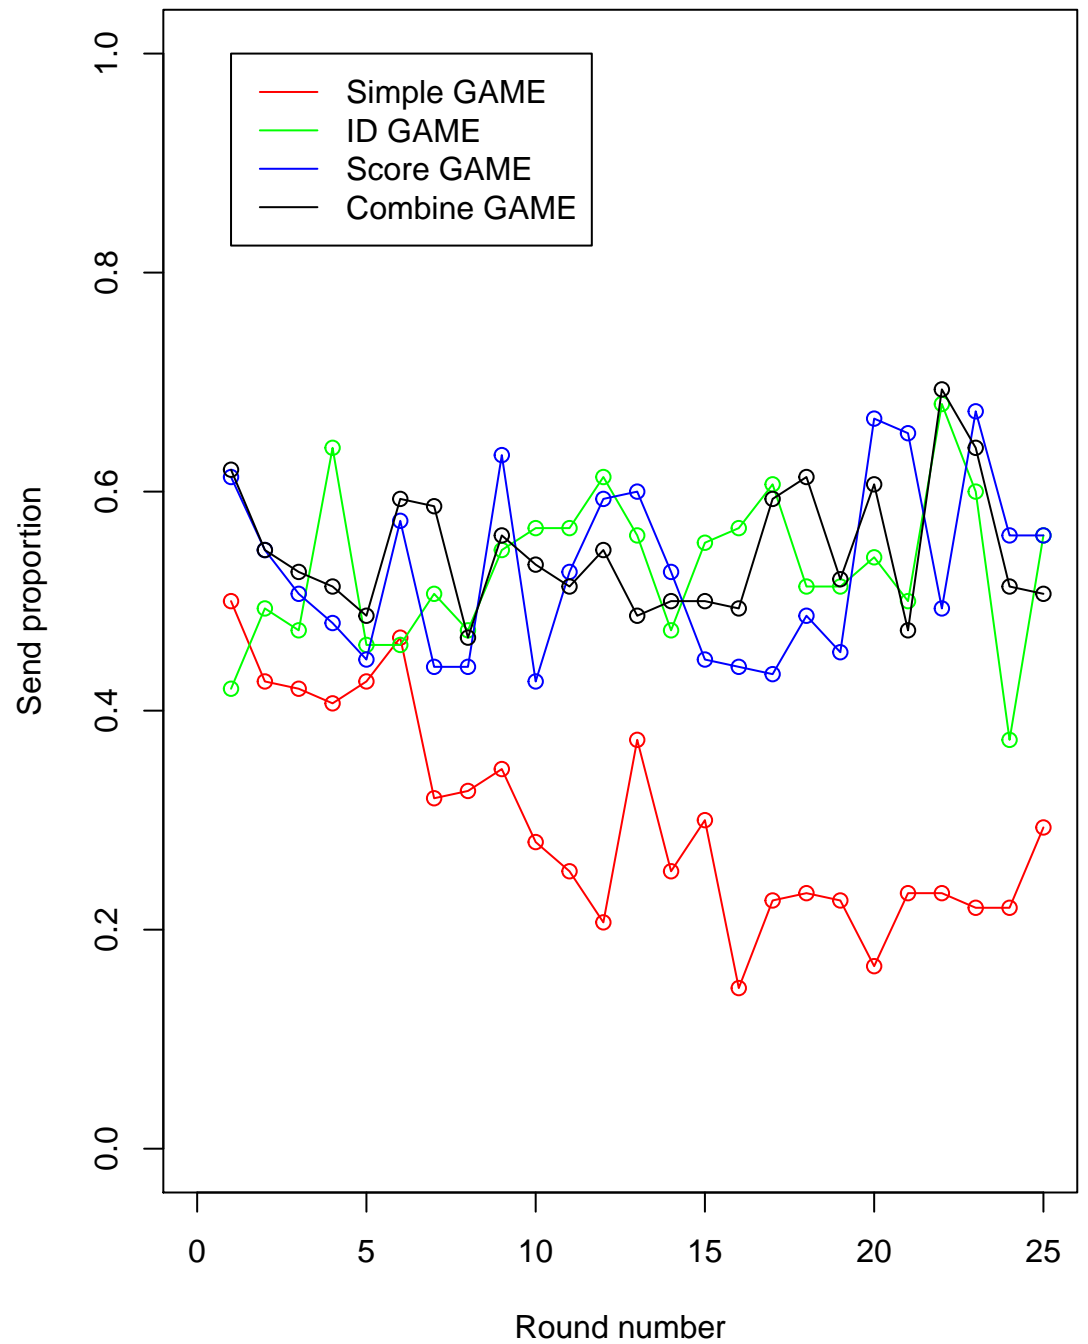

date: Wed 7-Jun-2017

```
## [1] "GAME: Simple GAME for type: SENDER"
```

```
##
```

```
## Call:
```

```
## lm(formula = send_behavior ~ rounds)
```

```
##
```

```
## Residuals:
```

```
##      Min       1Q   Median       3Q      Max
```

```
## -0.12192 -0.03637  0.01025  0.02810  0.11977
```

```
##
```

```
## Coefficients:
```

```
##              Estimate Std. Error t value Pr(>|t|)
```

```


## (Intercept)  0.437533    0.024477  17.875 5.51e-15 ***
## rounds      -0.010559    0.001647  -6.413 1.52e-06 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.05937 on 23 degrees of freedom
## Multiple R-squared:  0.6413, Adjusted R-squared:  0.6257
## F-statistic: 41.13 on 1 and 23 DF,  p-value: 1.522e-06
##
## [1] "GAME: ID GAME  for type: SENDER"
##
## Call:
## lm(formula = send_behavior ~ rounds)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.183974 -0.044836 -0.007523  0.041159  0.131615
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.498600    0.028607  17.429 9.48e-15 ***
## rounds      0.002446    0.001924   1.271  0.216
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.06938 on 23 degrees of freedom
## Multiple R-squared:  0.06565, Adjusted R-squared:  0.02502
## F-statistic: 1.616 on 1 and 23 DF,  p-value: 0.2164
##
## [1] "GAME: Score GAME  for type: SENDER"
##
## Call:
## lm(formula = send_behavior ~ rounds)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.104472 -0.075292  0.000379  0.066785  0.122108
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.499533    0.033150  15.07 2.08e-13 ***
## rounds      0.002251    0.002230   1.01  0.323
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.0804 on 23 degrees of freedom
## Multiple R-squared:  0.04244, Adjusted R-squared:  0.0008026
## F-statistic: 1.019 on 1 and 23 DF,  p-value: 0.3232
##
## [1] "GAME: Combine GAME  for type: SENDER"
##
## Call:
## lm(formula = send_behavior ~ rounds)
##

```

```

## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.079918 -0.047313 -0.009031  0.047272  0.139092
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept) 0.5324667  0.0244471  21.780  <2e-16 ***
## rounds      0.0009897  0.0016445   0.602    0.553
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.05929 on 23 degrees of freedom
## Multiple R-squared:  0.0155, Adjusted R-squared:  -0.0273
## F-statistic: 0.3622 on 1 and 23 DF,  p-value: 0.5532
##
##
##
## \pagebreak

```
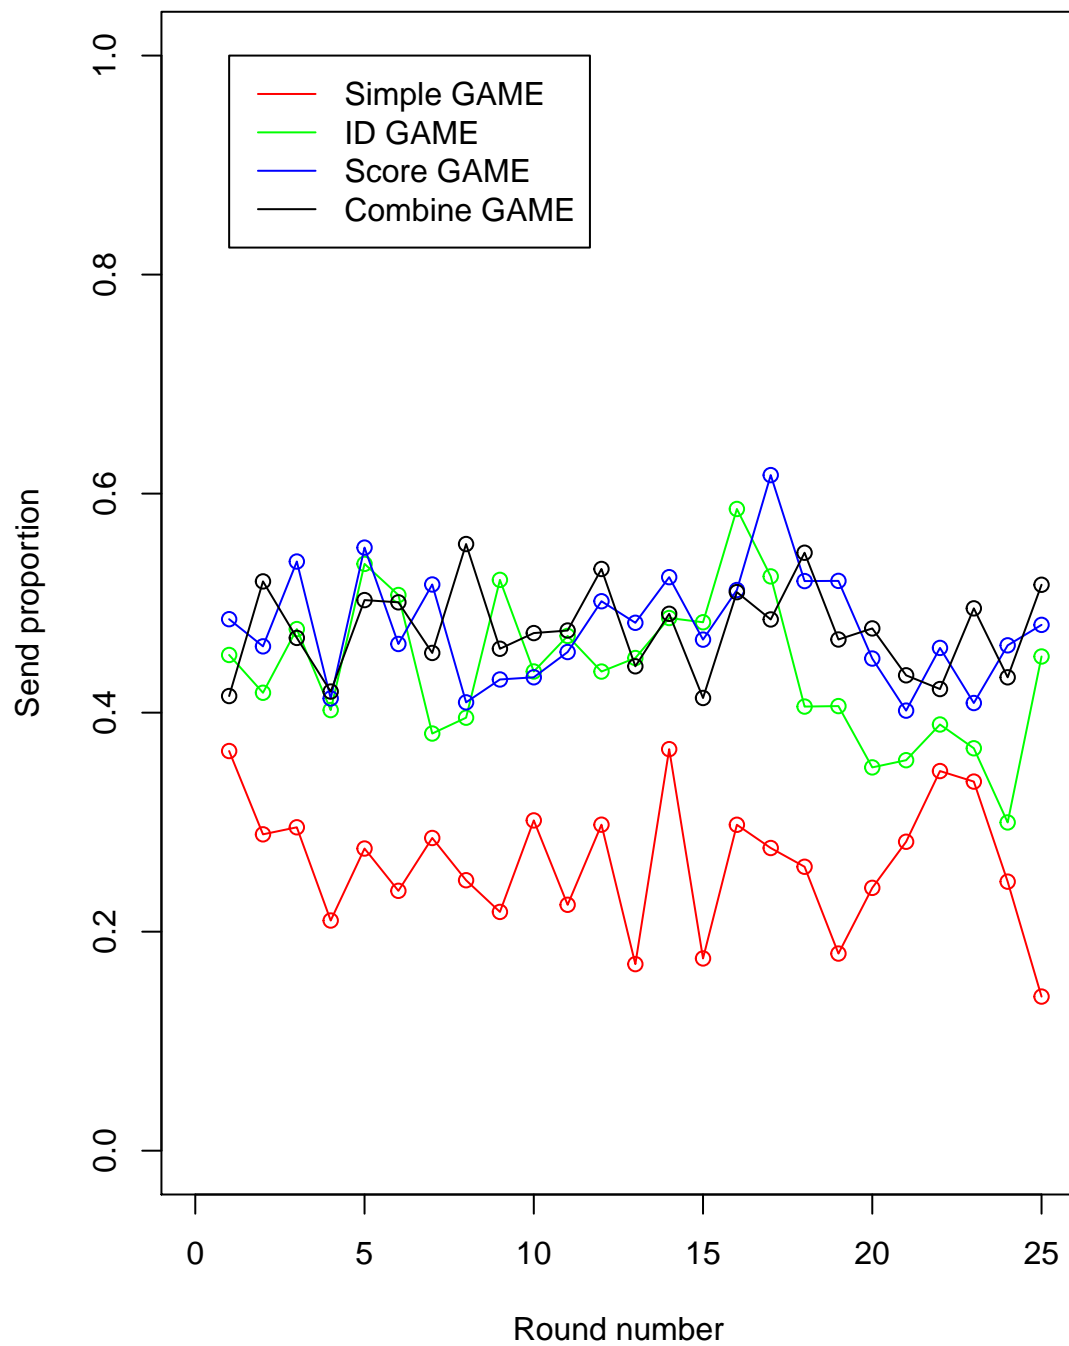
```
## [1] "GAME: Simple GAME for type: RECEIVER"
##
## Call:
## lm(formula = send_behavior ~ rounds)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.104956 -0.040882  0.003702  0.033675  0.105474
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
```

```

## (Intercept)  0.280915    0.024914  11.276 7.58e-11 ***
## rounds      -0.001409    0.001676  -0.841    0.409
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.06042 on 23 degrees of freedom
## Multiple R-squared:  0.02981,    Adjusted R-squared:  -0.01238
## F-statistic: 0.7066 on 1 and 23 DF,  p-value: 0.4092
##
## [1] "GAME: ID GAME for type: RECEIVER"
##
## Call:
## lm(formula = send_behavior ~ rounds)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.10325 -0.05641 -0.01202  0.04958  0.15635
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.482910    0.026250  18.396 2.97e-15 ***
## rounds      -0.003330    0.001766  -1.886    0.072 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.06367 on 23 degrees of freedom
## Multiple R-squared:  0.1339, Adjusted R-squared:  0.09629
## F-statistic: 3.557 on 1 and 23 DF,  p-value: 0.07198
##
## [1] "GAME: Score GAME for type: RECEIVER"
##
## Call:
## lm(formula = send_behavior ~ rounds)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.07276 -0.02567 -0.01075  0.03587  0.14044
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.484435    0.021645  22.381 <2e-16 ***
## rounds      -0.000468    0.001456  -0.321    0.751
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.0525 on 23 degrees of freedom
## Multiple R-squared:  0.004473,    Adjusted R-squared:  -0.03881
## F-statistic: 0.1033 on 1 and 23 DF,  p-value: 0.7508
##
## [1] "GAME: Combine GAME for type: RECEIVER"
##
## Call:
## lm(formula = send_behavior ~ rounds)
##

```

```

## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.062590 -0.033791 -0.001223  0.026182  0.077559
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  4.769e-01  1.726e-02  27.634  <2e-16 ***
## rounds      -6.216e-05  1.161e-03  -0.054    0.958
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.04186 on 23 degrees of freedom
## Multiple R-squared:  0.0001246, Adjusted R-squared:  -0.04335
## F-statistic: 0.002867 on 1 and 23 DF, p-value: 0.9578
##
##
##
## \pagebreak

```

Standard deviation of each user by game


```
## [1] "Anova analysis for standard deviation of relative sending"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##              SS num Df Error SS den Df      F
## (Intercept)      6.2513      1 0.50229      25 311.1424
## GroupID          0.1419      4 0.50229      25  1.7659
## SHOW_TRUST       0.0233      1 0.24129      25  0.4137
## GroupID:SHOW_TRUST 0.2255      4 0.24129      25  5.8408
## SHOW_ID          0.0127      1 0.16420      25  0.8293
## GroupID:SHOW_ID   0.0610      4 0.16420      25  2.3232
## SHOW_TRUST:SHOW_ID 0.0547      1 0.17377      25  2.4027
## GroupID:SHOW_TRUST:SHOW_ID 0.0911      4 0.17377      25  3.2780
##
##              Pr(>F)
## (Intercept)      1.279e-15 ***
## GroupID          0.167331
## SHOW_TRUST       0.555113
## GroupID:SHOW_TRUST 0.001842 **
## SHOW_ID          0.413987
## GroupID:SHOW_ID   0.084418 .
## SHOW_TRUST:SHOW_ID 0.196058
## GroupID:SHOW_TRUST:SHOW_ID 0.027247 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*****--"
## [1] "Mean of standard deviation by game"
## [1] 0.182673
## [1] 0.253273
## [1] 0.245929
## [1] 0.231093
## [1] "Anova analysis for standard deviation of relative sending"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Receiver"
##
##              SS num Df Error SS den Df      F
## (Intercept)      2.52343      1 0.54722      25 115.2847
## GroupID          0.03184      4 0.54722      25  0.3636
## SHOW_TRUST       0.00407      1 0.21234      25  0.8069
## GroupID:SHOW_TRUST 0.02017      4 0.21234      25  0.5938
## SHOW_ID          0.00028      1 0.19251      25  0.0378
## GroupID:SHOW_ID   0.03008      4 0.19251      25  0.9767
## SHOW_TRUST:SHOW_ID 0.00268      1 0.11743      25  0.2861
## GroupID:SHOW_TRUST:SHOW_ID 0.03753      4 0.11743      25  1.9976
##
##              Pr(>F)
## (Intercept)      7.489e-11 ***
## GroupID          0.8321
## SHOW_TRUST       0.4198
## GroupID:SHOW_TRUST 0.6703
## SHOW_ID          0.8553
## GroupID:SHOW_ID   0.4379
## SHOW_TRUST:SHOW_ID 0.6211
## GroupID:SHOW_TRUST:SHOW_ID 0.1257
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
## [1] "----*---"
## [1] "Mean of standard deviation by game"
## [1] 0.1359977
## [1] 0.1571053
## [1] 0.1423797
## [1] 0.144567
```

Behavior on trust score over time

We want to see the adaptation of user on trust score over time.

Regression on trust over time of SENDER

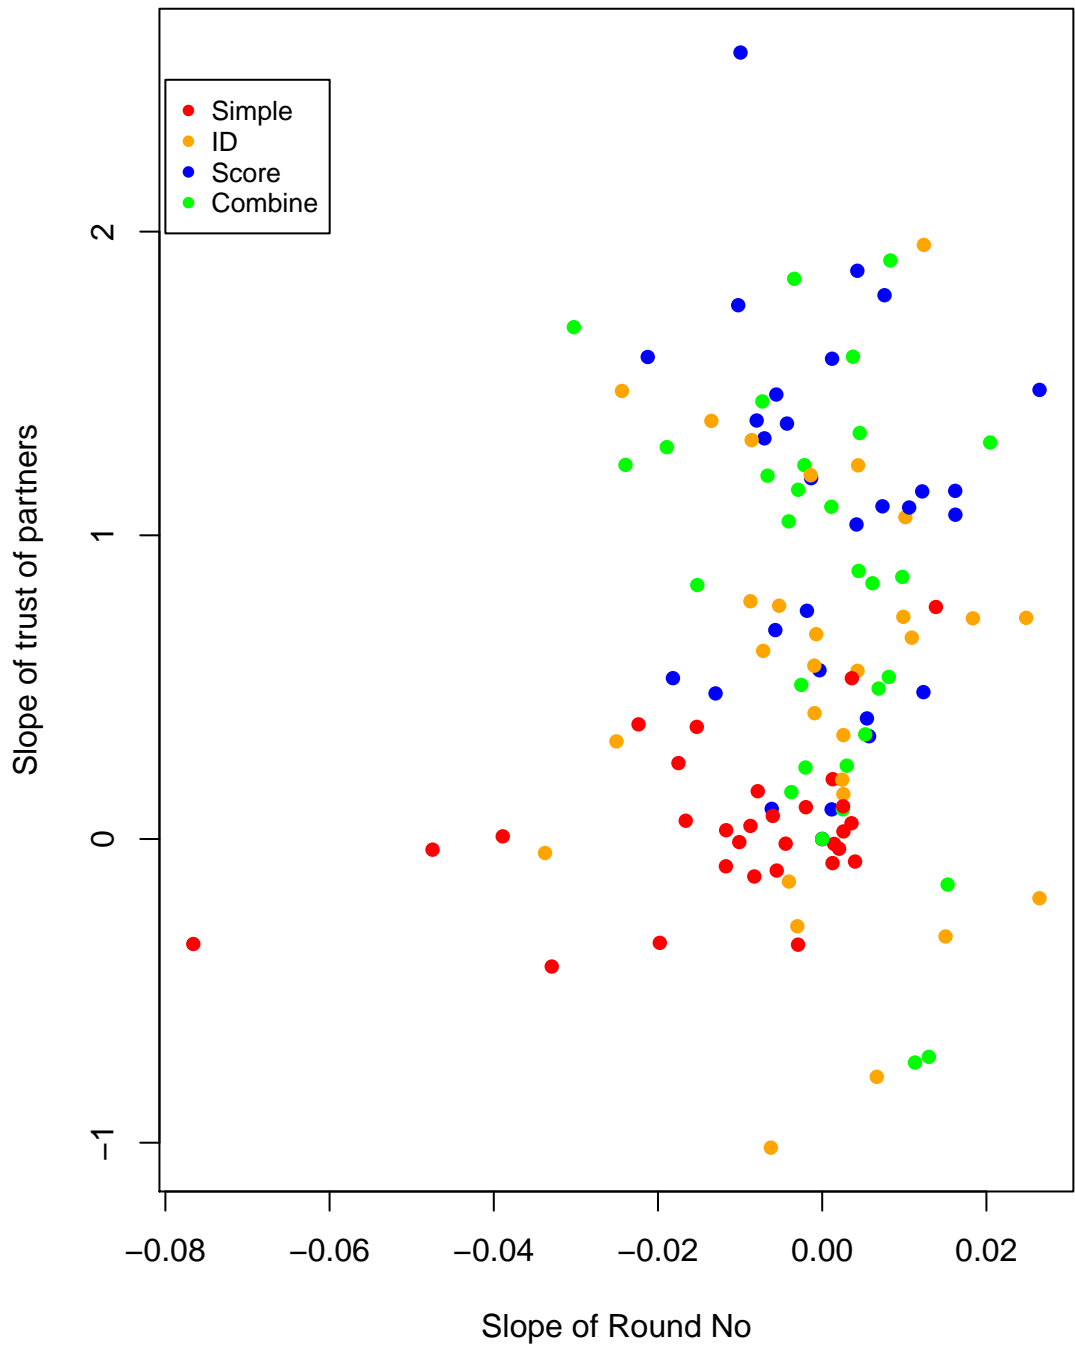

##	X.metric.....as.character..	X.criteria.....as.character..
## 1	Slope 1	Without trust
## 2	Slope 1	With trust
## 3	Slope 2	Without trust
## 4	Slope 2	With trust

```

## 5          Intercept          Without trust
## 6          Intercept          With trust
## 7          r_value          Without trust
## 8          r_value          With trust
## 9          r_value          Without ID
## 10         r_value          With ID
## X.Mean.....as.numeric.. X.std.....as.numeric..
## 1          0.01466          0.00729
## 2          0.01028          0.00705
## 3          0.62572          0.53448
## 4          1.20593          0.5589
## 5          0.5651          0.36383
## 6          0.19369          0.09538
## 7          0.5734          0.1638
## 8          0.53229          0.15817
## 9          0.59957          0.13413
## 10         0.53          0.17
## [1] "Anova analysis for slope of round ID"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Sender"
##
##          SS num Df  Error SS den Df      F
## (Intercept)      0.00007475      1 0.0027016      24 0.6641
## GroupID          0.00078933      4 0.0027016      24 1.7530
## SHOW_TRUST       0.00043572      1 0.0029410      24 3.1151
## GroupID:SHOW_TRUST 0.00055950      4 0.0029410      24 1.1414
## SHOW_ID          0.00043619      1 0.0021703      24 5.9448
## GroupID:SHOW_ID   0.00029349      4 0.0021703      24 0.8114
## SHOW_TRUST:SHOW_ID 0.00092180      1 0.0018506      24 4.9127
## GroupID:SHOW_TRUST:SHOW_ID 0.00075054      4 0.0018506      24 2.4334
##
##          Pr(>F)
## (Intercept)      0.42314
## GroupID          0.17137
## SHOW_TRUST       0.15233
## GroupID:SHOW_TRUST 0.36098
## SHOW_ID          0.07135 .
## GroupID:SHOW_ID   0.53027
## SHOW_TRUST:SHOW_ID 0.09097 .
## GroupID:SHOW_TRUST:SHOW_ID 0.07505 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*****----"
## [1] "Anova analysis for slope of trust of partners"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Sender"
##
##          SS num Df Error SS den Df      F      Pr(>F)
## (Intercept)      8.9533      1 13.3546      24 16.0903 0.0005121
## GroupID          1.2310      4 13.3546      24 0.5531 0.6986806
## SHOW_TRUST       2.9256      1  6.2610      24 7.7710 0.0494306
## GroupID:SHOW_TRUST 1.5059      4  6.2610      24 1.4431 0.2504663
## SHOW_ID          0.0311      1  3.0610      24 0.5357 0.5047749
## GroupID:SHOW_ID   0.2322      4  3.0610      24 0.4551 0.7677338
## SHOW_TRUST:SHOW_ID 1.4568      1  6.5879      24 9.0870 0.0393770
## GroupID:SHOW_TRUST:SHOW_ID 0.6413      4  6.5879      24 0.5840 0.6771880
##


```

```

## (Intercept)          ***
## GroupID
## SHOW_TRUST           *
## GroupID:SHOW_TRUST
## SHOW_ID
## GroupID:SHOW_ID
## SHOW_TRUST:SHOW_ID   *
## GroupID:SHOW_TRUST:SHOW_ID
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"
## [1] "Anova analysis for intercept"
## [1] "-----*-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##          SS num Df Error SS den Df      F  Pr(>F)
## (Intercept)      0.24865      1  1.63355      24 3.6531 0.06798 .
## GroupID          0.21266      4  1.63355      24 0.7811 0.54853
## SHOW_TRUST       0.50076      1  1.60492      24 9.3747 0.03759 *
## GroupID:SHOW_TRUST 0.21366      4  1.60492      24 0.7988 0.53781
## SHOW_ID          0.04311      1  0.97672      24 4.5564 0.09969 .
## GroupID:SHOW_ID   0.03785      4  0.97672      24 0.2325 0.91734
## SHOW_TRUST:SHOW_ID 0.24281      1  0.98892      24 9.8727 0.03478 *
## GroupID:SHOW_TRUST:SHOW_ID 0.09838      4  0.98892      24 0.5969 0.66838
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"
## [1] "Anova analysis for R value"
## [1] "-----*-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms):  Sender"
##
##          SS num Df Error SS den Df      F  Pr(>F)
## (Intercept)      0.00098      1  2.1830      23 0.0103 0.919920
## GroupID          0.79302      4  2.1830      23 2.0888 0.115157
## SHOW_TRUST       0.25225      1  2.5088      23 3.7464 0.125014
## GroupID:SHOW_TRUST 0.26933      4  2.5088      23 0.6173 0.654617
## SHOW_ID          0.92531      1  1.9594      23 44.6771 0.002605
## GroupID:SHOW_ID   0.08284      4  1.9594      23 0.2431 0.910875
## SHOW_TRUST:SHOW_ID 0.32345      1  1.9235      23 1.8518 0.245195
## GroupID:SHOW_TRUST:SHOW_ID 0.69867      4  1.9235      23 2.0886 0.115188
##
## (Intercept)
## GroupID
## SHOW_TRUST
## GroupID:SHOW_TRUST
## SHOW_ID              **
## GroupID:SHOW_ID
## SHOW_TRUST:SHOW_ID
## GroupID:SHOW_TRUST:SHOW_ID
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"

```


Regression on trust over time of RECEIVER

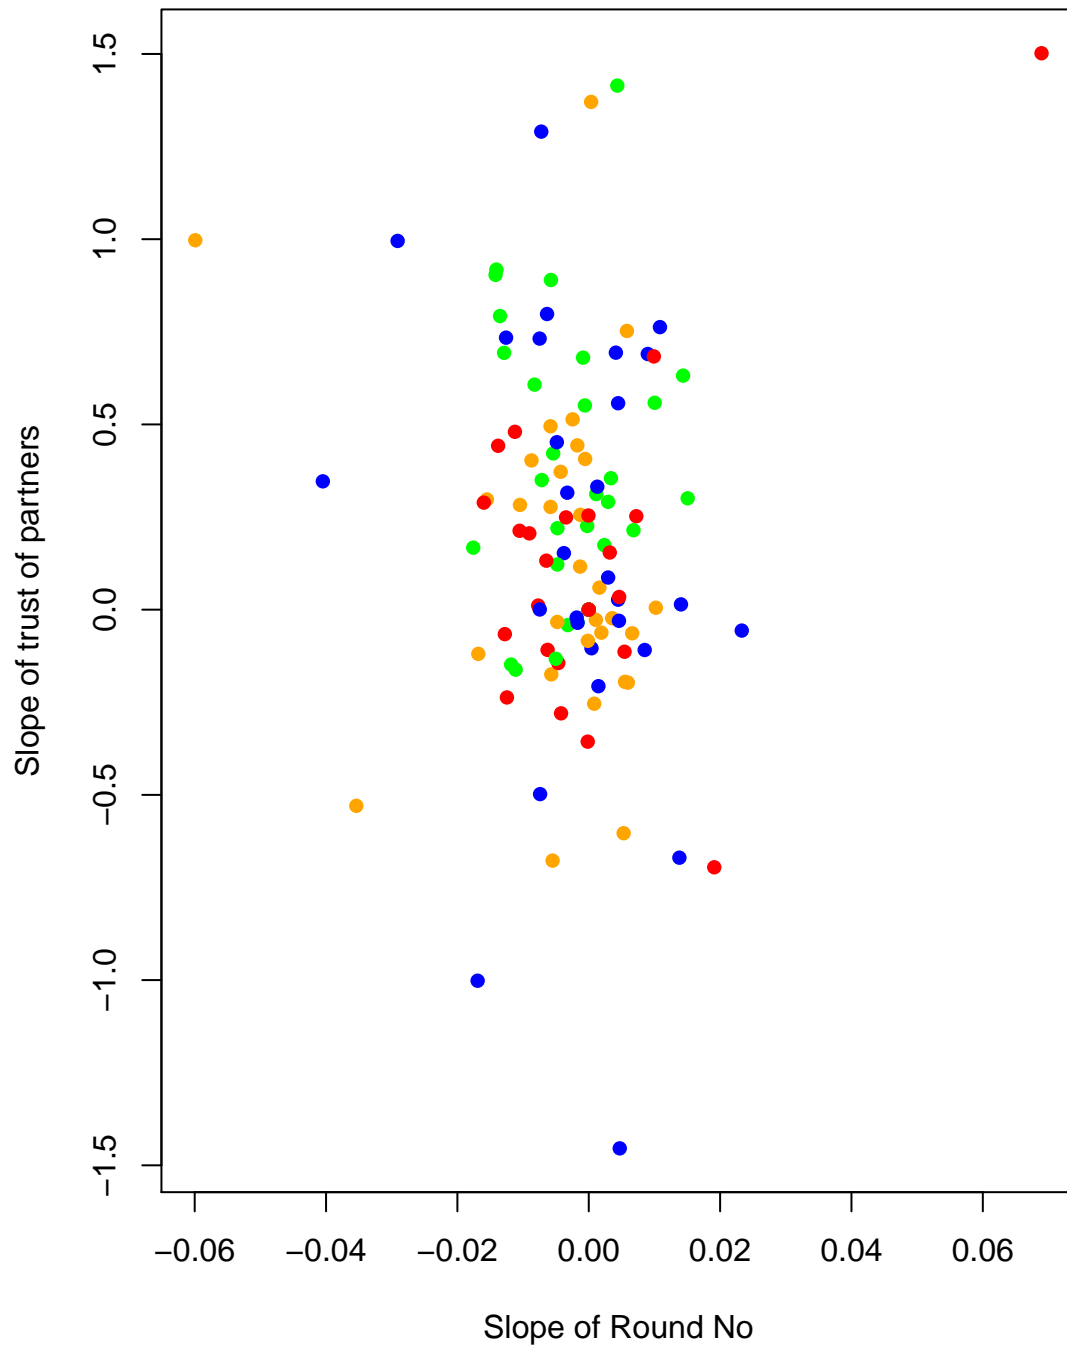

```
## X.metric.....as.character.. X.criteria.....as.character..
## 1 Slope 1 Without trust
## 2 Slope 1 With trust
## 3 Slope 2 Without trust
## 4 Slope 2 With trust
## 5 Intercept Without trust
## 6 Intercept With trust
## 7 r_value Without trust
```

```

## 8          r_value          With trust
## 9          r_value          Without ID
## 10         r_value          With ID
## X.Mean.....as.numeric.. X.std.....as.numeric..
## 1          0.03958          0.03939
## 2          0.00434          0.00268
## 3          0.67759          0.66709
## 4          0.48181          0.26954
## 5          0.76553          0.27779
## 6          0.461           0.16972
## 7          0.83548          0.02699
## 8          0.55454          0.04005
## 9          0.62422          0.12929
## 10         0.7             0.16
## [1] "Anova analysis for slope of round ID"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##          SS num Df  Error SS den Df      F
## (Intercept)      0.00005552      1 0.0010043      17 0.9398
## GroupID          0.00017305      4 0.0010043      17 0.7323
## SHOW_TRUST       0.00000227      1 0.0003877      17 0.0560
## GroupID:SHOW_TRUST 0.00016187      4 0.0003877      17 1.7742
## SHOW_ID          0.00021497      1 0.0023923      17 0.4144
## GroupID:SHOW_ID   0.00207482      4 0.0023923      17 3.6860
## SHOW_TRUST:SHOW_ID 0.00039331      1 0.0032947      17 0.9392
## GroupID:SHOW_TRUST:SHOW_ID 0.00167515      4 0.0032947      17 2.1609
##          Pr(>F)
## (Intercept)      0.3459
## GroupID          0.5824
## SHOW_TRUST       0.8246
## GroupID:SHOW_TRUST 0.1806
## SHOW_ID          0.5548
## GroupID:SHOW_ID   0.0245 *
## SHOW_TRUST:SHOW_ID 0.3874
## GroupID:SHOW_TRUST:SHOW_ID 0.1174
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"
## [1] "Anova analysis for slope of trust of partners"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##          SS num Df  Error SS den Df      F Pr(>F)
## (Intercept)      0.11002      1 0.77707      17 2.4070 0.13921
## GroupID          0.83202      4 0.77707      17 4.5505 0.01109 *
## SHOW_TRUST       0.01162      1 1.08190      17 0.0697 0.80480
## GroupID:SHOW_TRUST 0.66693      4 1.08190      17 2.6199 0.07158 .
## SHOW_ID          0.02173      1 0.19461      17 1.8777 0.24247
## GroupID:SHOW_ID   0.04628      4 0.19461      17 1.0107 0.42942
## SHOW_TRUST:SHOW_ID 0.01998      1 0.10908      17 0.8667 0.40456
## GroupID:SHOW_TRUST:SHOW_ID 0.09221      4 0.10908      17 3.5924 0.02680 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "----*-----"
## [1] "Anova analysis for intercept"

```

```
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##
##          SS num Df Error SS den Df      F Pr(>F)
## (Intercept)      0.33688      1  0.78376      17 7.3069 0.01508 *
## GroupID          0.11207      4  0.78376      17 0.6077 0.66254
## SHOW_TRUST       0.00018      1  0.41501      17 0.0023 0.96406
## GroupID:SHOW_TRUST 0.30754      4  0.41501      17 3.1494 0.04145 *
## SHOW_ID          0.07797      1  0.92954      17 0.4054 0.55893
## GroupID:SHOW_ID    0.76927      4  0.92954      17 3.5172 0.02882 *
## SHOW_TRUST:SHOW_ID 0.32187      1  1.67419      17 4.4288 0.10313
## GroupID:SHOW_TRUST:SHOW_ID 0.29070      4  1.67419      17 0.7380 0.57889
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----*****-----"
## [1] "Anova analysis for R value"
## [1] "-----*****-----"
## [1] "ANOVA 3-ways Analysis in wide format for type (with corrected error terms): Receiver"
##
##          SS num Df Error SS den Df      F Pr(>F)
## (Intercept)      0.00241      1  1.28537      17 0.0318 0.86049
## GroupID          0.25044      4  1.28537      17 0.8281 0.52548
## SHOW_TRUST       0.03310      1  0.53545      17 0.4338 0.54610
## GroupID:SHOW_TRUST 0.30514      4  0.53545      17 2.4220 0.08838 .
## SHOW_ID          0.06071      1  0.75648      17 0.4218 0.55144
## GroupID:SHOW_ID    0.57568      4  0.75648      17 3.2342 0.03808 *
## SHOW_TRUST:SHOW_ID 0.00425      1  1.92036      17 0.1279 0.73868
## GroupID:SHOW_TRUST:SHOW_ID 0.13279      4  1.92036      17 0.2939 0.87788
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
## [1] "-----*****-----"
```

Questionnaire analysis

In this section, we present the summary of questionnaire we asked participants after the experiment

```
print("What game the receivers will send back most, with the same amount of sending first?")

## [1] "What game the receivers will send back most, with the same amount of sending first?"
print(summary(SBJs$receive_back_most))

##               Game 1 (Simple Game)
##                               3
##           Game 3 (Partner Information Game)
##                               9
## Game 4 (Partner Identity and Information Game)
##                               13
##           Game 2 (Partner Identity Game)
##                               4
##           No idea / Do not remember
##                               1
print("What game is best for personal earning?")

## [1] "What game is best for personal earning?"
print(summary(SBJs$best_personal))

##           Game 3 (Partner Information Game)
##                               9
## Game 4 (Partner Identity and Information Game)
##                               16
##           Game 1 (Simple Game)
##                               2
##           Game 2 (Partner Identity Game)
##                               3
print("What game is worst for personal earning?")

## [1] "What game is worst for personal earning?"
print(summary(SBJs$worst_personal))

##               Game 1 (Simple Game)
##                               26
## Game 4 (Partner Identity and Information Game)
##                               3
##           Game 3 (Partner Information Game)
##                               1
print("What game is best for total earning?")

## [1] "What game is best for total earning?"
print(summary(SBJs$best_total))

##           Game 3 (Partner Information Game)
##                               10
## Game 4 (Partner Identity and Information Game)
##                               15
```

```

##                No idea / Do not remember
##                1
##                Game 1 (Simple Game)
##                1
##                Game 2 (Partner Identity Game)
##                3
print("What game is worst for total earning?")

## [1] "What game is worst for total earning?"
print(summary(SBJs$worst_total))

##                Game 1 (Simple Game)
##                24
##                Game 2 (Partner Identity Game)
##                2
## Game 4 (Partner Identity and Information Game)
##                2
##                No idea / Do not remember
##                1
##                Game 3 (Partner Information Game)
##                1
print("In Simple Game, profit is higher if you send more?")

## [1] "In Simple Game, profit is higher if you send more?"
print(summary(SBJs$send_more_for_profit))

##    Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##    1.0    1.0    1.0    1.8    3.0    4.0
print("In Simple Game, profit is higher if you send less?")

## [1] "In Simple Game, profit is higher if you send less?"
print(summary(SBJs$send_less_for_profit))

##    Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##    1.000    2.000    2.500    2.633    3.750    4.000
print("In Simple Game, you are receive, you send back more if your sender send more?")

## [1] "In Simple Game, you are receive, you send back more if your sender send more?"
print(summary(SBJs$trust_help_receiver))

##    Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##    1.000    2.000    3.000    2.733    4.000    5.000
print("Show ID and Score help to realize behavior of partners in the history?")

## [1] "Show ID and Score help to realize behavior of partners in the history?"
print(summary(SBJs$show_id_help))

##    Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##    1.000    2.000    3.000    2.633    3.000    5.000
print(summary(SBJs$show_score_help))

```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.0      3.0      3.0      3.2      4.0      5.0
print(summary(SBJs$show_combine_help))

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.000      2.250      3.000      2.667      3.000      4.000
print("In Combine game, trust score reflects correct behavior of the partner?")

## [1] "In Combine game, trust score reflects correct behavior of the partner?"
print(summary(SBJs$trust_score_correctness))

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.000      3.000      3.000      3.267      4.000      5.000
print("In Score game, you send more if your partner has higher trust score?")

## [1] "In Score game, you send more if your partner has higher trust score?"
print(summary(SBJs$trust_help_sender))

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.0      2.0      3.0      2.8      3.0      5.0
print("Showing ID and score help you decide how to behave?")

## [1] "Showing ID and score help you decide how to behave?"
print(summary(SBJs$identity_help_decide))

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.000      2.000      3.000      2.633      3.000      5.000
print(summary(SBJs$trust_score_help_decide))

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.0      3.0      3.0      3.2      4.0      4.0
print(summary(SBJs$combine_help_decide))

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.0      3.0      4.0      3.3      4.0      4.0
print("What factor is more important?")

## [1] "What factor is more important?"
print(summary(SBJs$important_factor))

##      Identity No Preference    Trust score
##      16          1          13
print("Do you think your partners are fair?")

## [1] "Do you think your partners are fair?"
print(summary(SBJs$partner_fair))

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      1.0      2.0      2.0      2.4      3.0      5.0
```

Chi square test between factorial questions

We want to see if the questionnaire showed the correct experience of users.

For factorial question, we will calculate chi - square test to see whether they are significant or not.

```
chi_square(SBJs$receive_back_most, SBJs$best_personal)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]    3    0    0    0
## [2,]    4    4    0    1
## [3,]    2    9    1    1
## [4,]    0    2    1    1
##
## Fisher's Exact Test for Count Data
##
## data:  mm
## p-value = 0.08833
## alternative hypothesis: two.sided
```

```
chi_square(SBJs$receive_back_most, SBJs$worst_personal)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]    2    1    0    0
## [2,]    9    0    0    0
## [3,]   11    2    0    0
## [4,]    3    0    1    0
##
## Fisher's Exact Test for Count Data
##
## data:  mm
## p-value = 0.173
## alternative hypothesis: two.sided
```

```
chi_square(SBJs$receive_back_most, SBJs$best_total)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]    0    2    1    0
## [2,]    4    4    0    0
## [3,]    4    8    0    1
## [4,]    2    0    0    0
##
## Fisher's Exact Test for Count Data
##
## data:  mm
## p-value = 0.187
## alternative hypothesis: two.sided
```

```
chi_square(SBJs$receive_back_most, SBJs$worst_total)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]    2    1    0    0
## [2,]    6    1    1    1
## [3,]   12    0    1    0
## [4,]    3    0    0    0
##
## Fisher's Exact Test for Count Data
```

```
##
## data: mm
## p-value = 0.457
## alternative hypothesis: two.sided
chi_square(SBJs$best_personal, SBJs$worst_personal)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]    8    1    0    0
## [2,]   16    0    0    0
## [3,]    0    1    1    0
## [4,]    2    1    0    0
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 0.003941
## alternative hypothesis: two.sided
```

```
chi_square(SBJs$best_personal, SBJs$best_total)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]    4    4    1    0
## [2,]    5   10    0    0
## [3,]    1    0    0    1
## [4,]    0    1    0    0
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 0.1626
## alternative hypothesis: two.sided
```

```
chi_square(SBJs$best_personal, SBJs$worst_total)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]    6    2    0    1
## [2,]   14    0    1    0
## [3,]    1    0    1    0
## [4,]    3    0    0    0
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 0.1317
## alternative hypothesis: two.sided
```

```
chi_square(SBJs$worst_personal, SBJs$best_total)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]    9   14    0    0
## [2,]    0    1    1    1
## [3,]    1    0    0    0
## [4,]    0    0    0    0
##
## Fisher's Exact Test for Count Data
##
```



```
## data: mm
## p-value = 0.01752
## alternative hypothesis: two.sided
chi_square(SBJs$worst_personal, SBJs$worst_total)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]  22   1   1   1
## [2,]   1   1   1   0
## [3,]   1   0   0   0
## [4,]   0   0   0   0
##
## Fisher's Exact Test for Count Data
##
```

```
## data: mm
## p-value = 0.1478
## alternative hypothesis: two.sided
chi_square(SBJs$best_total, SBJs$worst_total)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]   8   0   1   1
## [2,]  14   1   0   0
## [3,]   0   1   0   0
## [4,]   0   0   1   0
##
## Fisher's Exact Test for Count Data
##
```

```
## data: mm
## p-value = 0.01349
## alternative hypothesis: two.sided
```

Comparing questionnaire with real data

Highest sending back

In the first question, we ask what game the receivers will send back most, given the same amount of sending first by senders.

First, we analyze for all games. From the above analysis (basic data analysis), we know the increasing order is: Simple Game < Score Game < ID Game < Combine Game, but actually the difference between 3 last games are very small.

Best and worst game for personal earning and total earning

In the questionnaire, for the best game, 16 people selected game 4, 9 selected game 3 (Score Game), 3 and 2 selected Game 2 (ID Game) and Game 1 (Simple Game) respectively.

For the worst game, the numbers are: 26 for game 1, 1 for Game 3 and 3 for Game 4.

For best game for total earnings,

We can analyze the data to see what is the correct answer, the numbers selected Game 1, 2, 3, 4 are 1, 3, 10, 15 respectively, and there is 1 person has no idea

For the worst, the numbers are 24, 2, 1, 2, and again there is 1 person has no idea.

```
best_personal_earnings = c(0, 0, 0, 0)
worst_personal_earnings = c(0, 0, 0, 0)
best_total_earnings = c(0, 0, 0, 0)
worst_total_earnings = c(0, 0, 0, 0)

real_best_personal = as.numeric()
real_worst_personal = as.numeric()
real_best_total = as.numeric()
real_worst_total = as.numeric()
for (exp_id in 1:num_exp) {
  first_round_of_exp_subjects = (exp_id - 1) * num_rounds_per_game *
    num_users + 1
  last_round_of_exp_subjects = exp_id * num_rounds_per_game *
    num_users

  simple_game = simple_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  id_game = id_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  score_game = score_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  combine_game = combine_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]

  for (user_id in 1:num_users) {
    earning = c(sum(simple_game[simple_game$Subject ==
      user_id, ]$CurrGameProfit), sum(id_game[id_game$Subject ==
      user_id, ]$CurrGameProfit), sum(score_game[score_game$Subject ==
      user_id, ]$CurrGameProfit), sum(combine_game[combine_game$Subject ==
      user_id, ]$CurrGameProfit))
    best_personal_earnings[which.max(earning)] = best_personal_earnings[which.max(earning)] +
```

```

        1
        worst_personal_earnings[which.min(earning)] = worst_personal_earnings[which.min(earning)] +
        1
        real_best_personal <- c(real_best_personal,
                                which.max(earning))
        real_worst_personal <- c(real_worst_personal,
                                which.min(earning))
    }
    earning = c(sum(simple_game$CurrGameProfit), sum(id_game$CurrGameProfit),
                sum(score_game$CurrGameProfit), sum(combine_game$CurrGameProfit))
    best_total_earnings[which.max(earning)] = best_total_earnings[which.max(earning)] +
    1
    worst_total_earnings[which.min(earning)] = worst_total_earnings[which.min(earning)] +
    1

    real_best_total <- c(real_best_total, which.max(earning))
    real_worst_total <- c(real_worst_total, which.min(earning))
}
print(best_personal_earnings)

## [1] 3 9 7 11
print(worst_personal_earnings)

## [1] 25 3 2 0
print(best_total_earnings)

## [1] 0 3 0 2
print(worst_total_earnings)

## [1] 4 0 1 0
print("Comparing questionnaire with real data, one by one")

## [1] "Comparing questionnaire with real data, one by one"
print(data.frame(SBJs$best_personal, real_best_personal))

##
##          SBJs.best_personal real_best_personal
## 1 Game 4 (Partner Identity and Information Game)      3
## 2           Game 3 (Partner Information Game)      2
## 3 Game 4 (Partner Identity and Information Game)      2
## 4 Game 4 (Partner Identity and Information Game)      3
## 5 Game 4 (Partner Identity and Information Game)      3
## 6           Game 3 (Partner Information Game)      2
## 7           Game 2 (Partner Identity Game)      2
## 8 Game 4 (Partner Identity and Information Game)      4
## 9           Game 1 (Simple Game)      4
## 10          Game 3 (Partner Information Game)      4
## 11          Game 2 (Partner Identity Game)      2
## 12          Game 3 (Partner Information Game)      3
## 13 Game 4 (Partner Identity and Information Game)      4
## 14 Game 4 (Partner Identity and Information Game)      4
## 15          Game 3 (Partner Information Game)      4
## 16 Game 4 (Partner Identity and Information Game)      4

```

```
## 17 Game 4 (Partner Identity and Information Game) 3
## 18 Game 4 (Partner Identity and Information Game) 4
## 19 Game 2 (Partner Identity Game) 3
## 20 Game 4 (Partner Identity and Information Game) 2
## 21 Game 3 (Partner Information Game) 4
## 22 Game 4 (Partner Identity and Information Game) 2
## 23 Game 4 (Partner Identity and Information Game) 2
## 24 Game 4 (Partner Identity and Information Game) 4
## 25 Game 3 (Partner Information Game) 3
## 26 Game 3 (Partner Information Game) 1
## 27 Game 3 (Partner Information Game) 1
## 28 Game 1 (Simple Game) 1
## 29 Game 4 (Partner Identity and Information Game) 2
## 30 Game 4 (Partner Identity and Information Game) 4
```

```
print(data.frame(SBJs$worst_personal, real_worst_personal))
```

```
## SBJs.worst_personal real_worst_personal
## 1 Game 1 (Simple Game) 1
## 2 Game 4 (Partner Identity and Information Game) 1
## 3 Game 1 (Simple Game) 1
## 4 Game 1 (Simple Game) 1
## 5 Game 1 (Simple Game) 1
## 6 Game 1 (Simple Game) 1
## 7 Game 1 (Simple Game) 1
## 8 Game 1 (Simple Game) 1
## 9 Game 4 (Partner Identity and Information Game) 1
## 10 Game 1 (Simple Game) 1
## 11 Game 1 (Simple Game) 1
## 12 Game 1 (Simple Game) 1
## 13 Game 1 (Simple Game) 1
## 14 Game 1 (Simple Game) 1
## 15 Game 1 (Simple Game) 1
## 16 Game 1 (Simple Game) 1
## 17 Game 1 (Simple Game) 1
## 18 Game 1 (Simple Game) 2
## 19 Game 4 (Partner Identity and Information Game) 1
## 20 Game 1 (Simple Game) 1
## 21 Game 1 (Simple Game) 1
## 22 Game 1 (Simple Game) 1
## 23 Game 1 (Simple Game) 1
## 24 Game 1 (Simple Game) 1
## 25 Game 1 (Simple Game) 2
## 26 Game 1 (Simple Game) 3
## 27 Game 1 (Simple Game) 2
## 28 Game 3 (Partner Information Game) 3
## 29 Game 1 (Simple Game) 1
## 30 Game 1 (Simple Game) 1
```

```
print(data.frame(SBJs$best_total, real_best_total))
```

```
## SBJs.best_total real_best_total
## 1 Game 4 (Partner Identity and Information Game) 2
## 2 No idea / Do not remember 2
## 3 Game 4 (Partner Identity and Information Game) 4
```

## 4	Game 3 (Partner Information Game)	2
## 5	Game 4 (Partner Identity and Information Game)	4
## 6	Game 4 (Partner Identity and Information Game)	2
## 7	Game 2 (Partner Identity Game)	2
## 8	Game 3 (Partner Information Game)	4
## 9	Game 1 (Simple Game)	2
## 10	Game 3 (Partner Information Game)	4
## 11	Game 2 (Partner Identity Game)	2
## 12	Game 4 (Partner Identity and Information Game)	2
## 13	Game 4 (Partner Identity and Information Game)	4
## 14	Game 4 (Partner Identity and Information Game)	2
## 15	Game 3 (Partner Information Game)	4
## 16	Game 4 (Partner Identity and Information Game)	2
## 17	Game 4 (Partner Identity and Information Game)	2
## 18	Game 4 (Partner Identity and Information Game)	4
## 19	Game 4 (Partner Identity and Information Game)	2
## 20	Game 2 (Partner Identity Game)	4
## 21	Game 3 (Partner Information Game)	2
## 22	Game 3 (Partner Information Game)	2
## 23	Game 4 (Partner Identity and Information Game)	4
## 24	Game 3 (Partner Information Game)	2
## 25	Game 3 (Partner Information Game)	4
## 26	Game 4 (Partner Identity and Information Game)	2
## 27	Game 4 (Partner Identity and Information Game)	2
## 28	Game 3 (Partner Information Game)	4
## 29	Game 3 (Partner Information Game)	2
## 30	Game 4 (Partner Identity and Information Game)	4

```
print(data.frame(SBJs$worst_total, real_worst_total))
```

##	SBJs.worst_total	real_worst_total
## 1	Game 1 (Simple Game)	1
## 2	Game 2 (Partner Identity Game)	1
## 3	Game 1 (Simple Game)	1
## 4	Game 1 (Simple Game)	1
## 5	Game 1 (Simple Game)	3
## 6	Game 1 (Simple Game)	1
## 7	Game 1 (Simple Game)	1
## 8	Game 1 (Simple Game)	1
## 9	Game 4 (Partner Identity and Information Game)	1
## 10	No idea / Do not remember	3
## 11	Game 1 (Simple Game)	1
## 12	Game 1 (Simple Game)	1
## 13	Game 1 (Simple Game)	1
## 14	Game 1 (Simple Game)	1
## 15	Game 1 (Simple Game)	3
## 16	Game 1 (Simple Game)	1
## 17	Game 1 (Simple Game)	1
## 18	Game 1 (Simple Game)	1
## 19	Game 1 (Simple Game)	1
## 20	Game 3 (Partner Information Game)	3
## 21	Game 1 (Simple Game)	1
## 22	Game 1 (Simple Game)	1
## 23	Game 1 (Simple Game)	1
## 24	Game 4 (Partner Identity and Information Game)	1

## 25	Game 1 (Simple Game)	3
## 26	Game 2 (Partner Identity Game)	1
## 27	Game 1 (Simple Game)	1
## 28	Game 1 (Simple Game)	1
## 29	Game 1 (Simple Game)	1
## 30	Game 1 (Simple Game)	3

Consistency between questionnaire and real data in best personal earning

```
# profit of game people believe that it is the best
best_person_earning_questionnaire = as.numeric()
worst_person_earning_questionnaire = as.numeric()

# profit of game which is really best for personal
# earning
real_best_person_earning = as.numeric()
real_worst_person_earning = as.numeric()

for (exp_id in 1:num_exp) {
  first_round_of_exp_subjects = (exp_id - 1) * num_rounds_per_game *
    num_users + 1
  last_round_of_exp_subjects = exp_id * num_rounds_per_game *
    num_users

  simple_game = simple_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  id_game = id_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  score_game = score_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  combine_game = combine_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]

  for (user_id in 1:num_users) {
    earning = c(sum(simple_game[simple_game$Subject ==
      user_id, ]$CurrGameProfit), sum(id_game[id_game$Subject ==
      user_id, ]$CurrGameProfit), sum(score_game[score_game$Subject ==
      user_id, ]$CurrGameProfit), sum(combine_game[combine_game$Subject ==
      user_id, ]$CurrGameProfit))

    best_person_earning_questionnaire <- c(best_person_earning_questionnaire,
      earning[as.numeric(SBJs$best_personal[(user_id +
        (exp_id - 1) * num_users))]))
    real_best_person_earning <- c(real_best_person_earning,
      max(earning))

    worst_person_earning_questionnaire <- c(worst_person_earning_questionnaire,
      earning[as.numeric(SBJs$worst_personal[(user_id +
        (exp_id - 1) * num_users))]))
    real_worst_person_earning <- c(real_worst_person_earning,
      min(earning))
    # print ('---') print
    # (earning[as.numeric(SBJs$worst_personal[(user_id
    # + (exp_id - 1) * num_users))])) print
    # (min(earning))
  }
}

print(t.test(best_person_earning_questionnaire, real_best_person_earning,
  paired = TRUE))
```

```

##
## Paired t-test
##
## data: best_person_earning_questionnaire and real_best_person_earning
## t = -5.9516, df = 29, p-value = 1.819e-06
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## -77.08027 -37.65307
## sample estimates:
## mean of the differences
## -57.36667

print(t.test(worst_person_earning_questionnaire, real_worst_person_earning,
             paired = TRUE))

##
## Paired t-test
##
## data: worst_person_earning_questionnaire and real_worst_person_earning
## t = 2.3022, df = 29, p-value = 0.0287
## alternative hypothesis: true difference in means is not equal to 0
## 95 percent confidence interval:
## 1.748415 29.584918
## sample estimates:
## mean of the differences
## 15.66667

```


Chi square test between questionnaire and real data

```
best_personal_earnings = c(0, 0, 0, 0)
worst_personal_earnings = c(0, 0, 0, 0)
best_total_earnings = c(0, 0, 0, 0)
worst_total_earnings = c(0, 0, 0, 0)

real_best_personal = as.numeric()
real_worst_personal = as.numeric()
real_best_total = as.numeric()
real_worst_total = as.numeric()
for (exp_id in 1:num_exp) {
  first_round_of_exp_subjects = (exp_id - 1) * num_rounds_per_game *
    num_users + 1
  last_round_of_exp_subjects = exp_id * num_rounds_per_game *
    num_users

  simple_game = simple_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  id_game = id_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  score_game = score_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  combine_game = combine_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]

  for (user_id in 1:num_users) {
    earning = c(sum(simple_game[simple_game$Subject ==
      user_id, ]$CurrGameProfit), sum(id_game[id_game$Subject ==
      user_id, ]$CurrGameProfit), sum(score_game[score_game$Subject ==
      user_id, ]$CurrGameProfit), sum(combine_game[combine_game$Subject ==
      user_id, ]$CurrGameProfit))
    best_personal_earnings[which.max(earning)] = best_personal_earnings[which.max(earning)] +
      1
    worst_personal_earnings[which.min(earning)] = worst_personal_earnings[which.min(earning)] +
      1
    real_best_personal <- c(real_best_personal,
      which.max(earning))
    real_worst_personal <- c(real_worst_personal,
      which.min(earning))
  }
  earning = c(sum(simple_game$CurrGameProfit), sum(id_game$CurrGameProfit),
    sum(score_game$CurrGameProfit), sum(combine_game$CurrGameProfit))
  best_total_earnings[which.max(earning)] = best_total_earnings[which.max(earning)] +
    1
  worst_total_earnings[which.min(earning)] = worst_total_earnings[which.min(earning)] +
    1

  # repeat 6 times for 6 users because all of 6 users
  # have the same best game for total earning
  for (i in 1:num_users) {
    real_best_total <- c(real_best_total, which.max(earning))
    real_worst_total <- c(real_worst_total, which.min(earning))
  }
}
```

```

    }
}

chi_square(SBJs$best_personal, real_best_personal)

##      [,1] [,2] [,3] [,4]
## [1,]    2    2    2    3
## [2,]    0    5    4    7
## [3,]    1    0    0    1
## [4,]    0    2    1    0
##
## Fisher's Exact Test for Count Data
##
## data:  mm
## p-value = 0.3075
## alternative hypothesis: two.sided

chi_square(SBJs$worst_personal, real_worst_personal)

##      [,1] [,2] [,3] [,4]
## [1,]   22    3    1    0
## [2,]    3    0    0    0
## [3,]    0    0    1    0
## [4,]    0    0    0    0
##
## Fisher's Exact Test for Count Data
##
## data:  mm
## p-value = 0.1607
## alternative hypothesis: two.sided

chi_square(SBJs$best_total, real_best_total)

##      [,1] [,2] [,3] [,4]
## [1,]    0    6    0    4
## [2,]    0    7    0    8
## [3,]    0    1    0    0
## [4,]    0    1    0    0
##
## Fisher's Exact Test for Count Data
##
## data:  mm
## p-value = 0.9067
## alternative hypothesis: two.sided

chi_square(SBJs$worst_total, real_worst_total)

##      [,1] [,2] [,3] [,4]
## [1,]   19    0    5    0
## [2,]    1    0    1    0
## [3,]    2    0    0    0
## [4,]    1    0    0    0
##
## Fisher's Exact Test for Count Data
##
## data:  mm

```

```
## p-value = 0.7167
## alternative hypothesis: two.sided
```

Chi square after reducing the dimension of game

Above, we analyze chi - square for each game (game 1, 2, 3, 4). In this section, we reduce the game to games: without and with trust, or without and with ID.

```
best_personal_earnings = c(0, 0, 0, 0)
worst_personal_earnings = c(0, 0, 0, 0)
best_total_earnings = c(0, 0, 0, 0)
worst_total_earnings = c(0, 0, 0, 0)

real_best_personal = as.numeric()
real_worst_personal = as.numeric()
real_best_total = as.numeric()
real_worst_total = as.numeric()
for (exp_id in 1:num_exp) {
  first_round_of_exp_subjects = (exp_id - 1) * num_rounds_per_game *
    num_users + 1
  last_round_of_exp_subjects = exp_id * num_rounds_per_game *
    num_users

  simple_game = simple_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  id_game = id_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  score_game = score_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]
  combine_game = combine_games[first_round_of_exp_subjects:last_round_of_exp_subjects,
    ]

  for (user_id in 1:num_users) {
    earning = c(sum(simple_game[simple_game$Subject ==
      user_id, ]$CurrGameProfit), sum(id_game[id_game$Subject ==
      user_id, ]$CurrGameProfit), sum(score_game[score_game$Subject ==
      user_id, ]$CurrGameProfit), sum(combine_game[combine_game$Subject ==
      user_id, ]$CurrGameProfit))
    best_personal_earnings[which.max(earning)] = best_personal_earnings[which.max(earning)] +
      1
    worst_personal_earnings[which.min(earning)] = worst_personal_earnings[which.min(earning)] +
      1
    real_best_personal <- c(real_best_personal,
      which.max(earning))
    real_worst_personal <- c(real_worst_personal,
      which.min(earning))
  }
  earning = c(sum(simple_game$CurrGameProfit), sum(id_game$CurrGameProfit),
    sum(score_game$CurrGameProfit), sum(combine_game$CurrGameProfit))
  best_total_earnings[which.max(earning)] = best_total_earnings[which.max(earning)] +
    1
  worst_total_earnings[which.min(earning)] = worst_total_earnings[which.min(earning)] +
    1

  # repeat 6 times for 6 users because all of 6 users
  # have the same best game for total earning
  for (i in 1:num_users) {
```

```

    real_best_total <- c(real_best_total, which.max(earning))
    real_worst_total <- c(real_worst_total, which.min(earning))
  }
}

```

```
print("Without and with trust")
```

```
## [1] "Without and with trust"
```

```
chi_square_2x2(floor(as.numeric(SBJs$best_personal)/2),
  floor(as.numeric(real_best_personal)/2))
```

```
##      [,1] [,2]
## [1,]   20   1
## [2,]    7   2
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 0.2069
## alternative hypothesis: true odds ratio is not equal to 1
## 95 percent confidence interval:
##  0.2430957 352.5438640
## sample estimates:
## odds ratio
##  5.332763

```

```
print("Without and with ID")
```

```
## [1] "Without and with ID"
```

```
chi_square_2x2(floor(as.numeric(SBJs$best_personal)%2),
  floor(as.numeric(real_best_personal)%2))
```

```
##      [,1] [,2]
## [1,]    5    6
## [2,]    5   14
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 0.4253
## alternative hypothesis: true odds ratio is not equal to 1
## 95 percent confidence interval:
##  0.3686582 14.5597297
## sample estimates:
## odds ratio
##  2.264668

```

```
print("Without and with trust")
```

```
## [1] "Without and with trust"
```

```
chi_square_2x2(floor(as.numeric(SBJs$worst_personal)/2),
  floor(as.numeric(real_worst_personal)/2))
```

```
##      [,1] [,2]

```

```

## [1,] 1 3
## [2,] 4 22
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 0.5384
## alternative hypothesis: true odds ratio is not equal to 1
## 95 percent confidence interval:
## 0.02800005 30.45845665
## sample estimates:
## odds ratio
## 1.790938

print("Without and with ID")

## [1] "Without and with ID"

chi_square_2x2(floor(as.numeric(SBJs$worst_personal)%2),
               floor(real_worst_personal%2))

##      [,1] [,2]
## [1,] 24 3
## [2,] 3 0
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 1
## alternative hypothesis: true odds ratio is not equal to 1
## 95 percent confidence interval:
## 0.00000 27.89887
## sample estimates:
## odds ratio
## 0

print("Without and with trust")

## [1] "Without and with trust"

chi_square_2x2(floor(as.numeric(SBJs$best_total)/2),
               floor(real_best_total/2))

##      [,1] [,2]
## [1,] 20 0
## [2,] 10 0
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 1
## alternative hypothesis: true odds ratio is not equal to 1
## 95 percent confidence interval:
## 0 Inf
## sample estimates:
## odds ratio
## 0

```

```

print("Without and with ID")

## [1] "Without and with ID"
chi_square_2x2(floor(as.numeric(SBJs$best_total)%2),
  floor(real_best_total%2))

##      [,1] [,2]
## [1,]    0  14
## [2,]    0  16
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 1
## alternative hypothesis: true odds ratio is not equal to 1
## 95 percent confidence interval:
##      0 Inf
## sample estimates:
## odds ratio
##      0

print("Without and with trust")

## [1] "Without and with trust"
chi_square_2x2(floor(as.numeric(SBJs$worst_total)/2),
  floor(real_worst_total/2))

##      [,1] [,2]
## [1,]    1    5
## [2,]    5   19
##
## Fisher's Exact Test for Count Data
##
## data: mm
## p-value = 1
## alternative hypothesis: true odds ratio is not equal to 1
## 95 percent confidence interval:
##  0.0134252 9.6981212
## sample estimates:
## odds ratio
##  0.7666526

print("Without and with ID")

## [1] "Without and with ID"
chi_square_2x2(floor(as.numeric(SBJs$worst_total)%2),
  floor(real_worst_total%2))

##      [,1] [,2]
## [1,]   27    0
## [2,]    3    0
##
## Fisher's Exact Test for Count Data
##

```

```
## data:  mm
## p-value = 1
## alternative hypothesis: true odds ratio is not equal to 1
## 95 percent confidence interval:
##      0 Inf
## sample estimates:
## odds ratio
##          0
```