

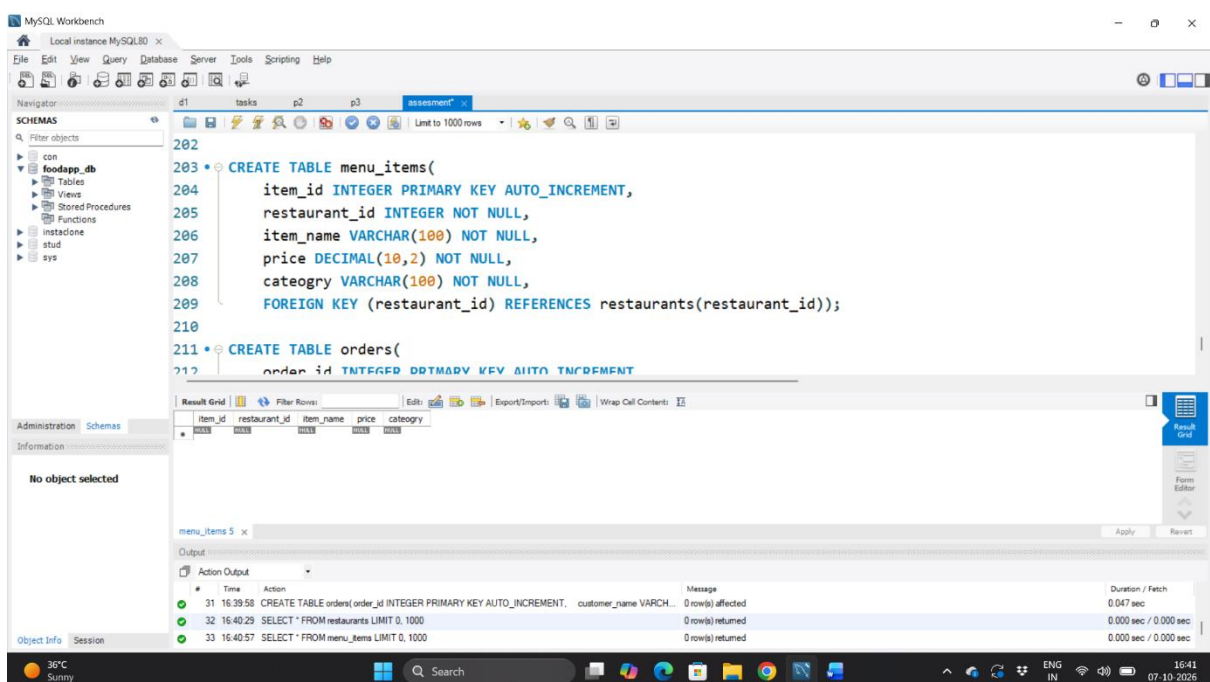



SECTION C

Q1. Create three tables: restaurants (restaurant_id, name, city, cuisine_type, created_at), menu_items (item_id, restaurant_id, item_name, price, category) with a FOREIGN KEY on restaurant_id, and orders (order_id, customer_name, restaurant_id, item_id, quantity, total_amount, order_date) with a FOREIGN KEY on restaurant_id — all with appropriate PRIMARY KEY and NOT NULL constraints.

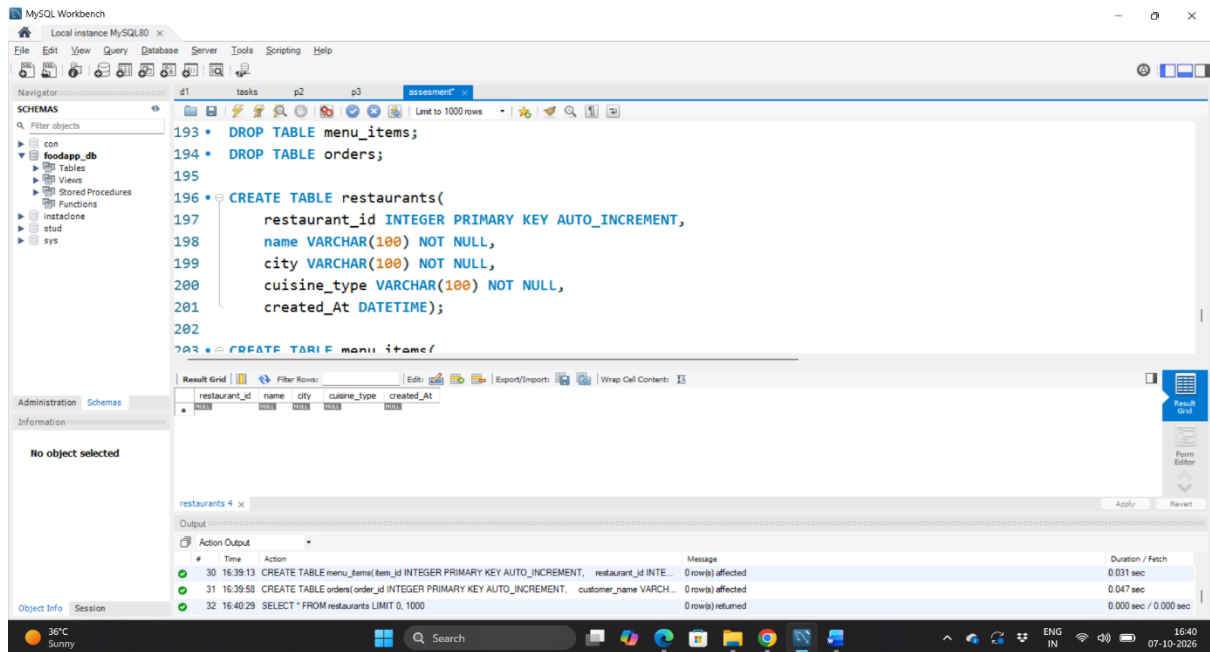

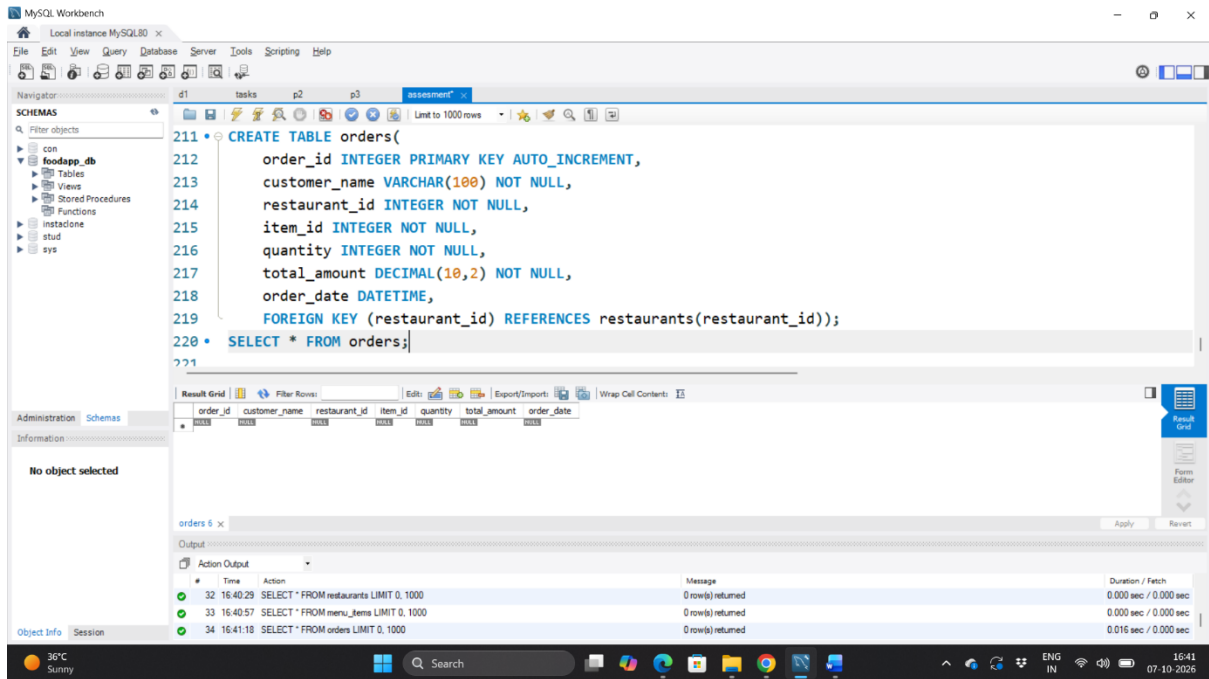

Q2. Populate with at least 3 restaurants, 4 menu categories, and 15 order records distributed across restaurants.

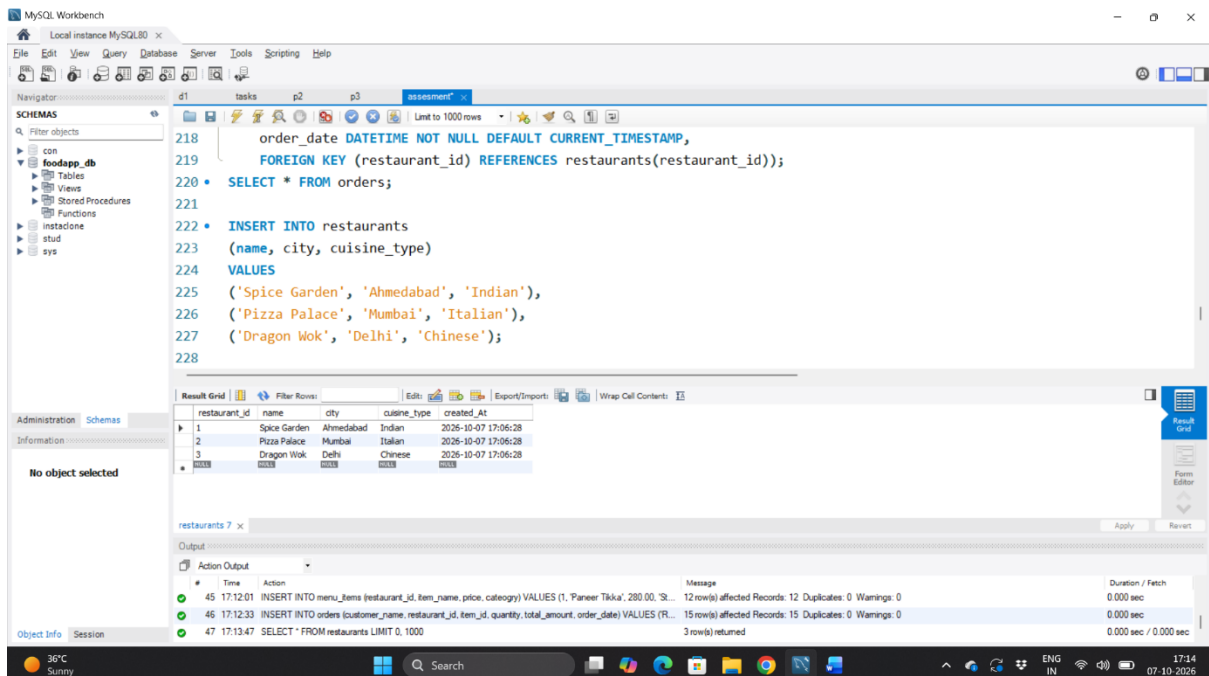

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHMAS

Filter objects

- con
- foodapp_db
 - Tables
 - Views
 - Stored Procedures
 - Functions
- instadone
- stud
- sys

Administration Schemas

Information

No object selected

tasks p2 p3 assessment

Limit to 1000 rows

```

229 INSERT INTO menu_items
230 (restaurant_id, item_name, price, category)
231 VALUES
232 (1, 'Paneer Tikka', 280.00, 'Starter'),
233 (1, 'Butter Chicken', 350.00, 'Main Course'),
234 (1, 'Garlic Naan', 80.00, 'Main Course'),
235 (1, 'Veg Biryani', 250.00, 'Main Course'),
236
237 (2, 'Margherita Pizza', 450.00, 'Pizza'),
238 (2, 'Farmhouse Pizza', 550.00, 'Pizza'),
239 (2, 'Garlic Bread', 180.00, 'Starter'),
240 (2, 'Cheese Burst Pizza', 600.00, 'Pizza'),
241
242 (3, 'Veg noka noodles', 250.00, 'Noodles'),
243 (3, 'Chicken noodles', 320.00, 'Noodles'),
244 (3, 'Munchurian', 220.00, 'Starter'),
  
```

Result Grid

item_id	restaurant_id	item_name	price	category
1	1	Paneer Tikka	280.00	Starter
2	1	Butter Chicken	350.00	Main Course
3	1	Garlic Naan	80.00	Main Course
4	1	Veg Biryani	250.00	Main Course
5	2	Margherita Pizza	450.00	Pizza
6	2	Farmhouse Pizza	550.00	Pizza
7	2	Garlic Bread	180.00	Starter

menu_items 0 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
46	17:12:33	INSERT INTO orders (customer_name, restaurant_id, item_id, quantity, total_amount, order_date) VALUES (R...	15 row(s) affected. Records: 15 Duplicates: 0 Warnings: 0	0.000 sec
47	17:13:47	SELECT * FROM restaurants LIMIT 0. 1000	3 row(s) returned	0.000 sec / 0.000 sec
48	17:14:33	SELECT * FROM menu_items LIMIT 0. 1000	12 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

36°C Sunny

Search

ENG IN

17:15 07-10-2026

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHMAS

Filter objects

- con
- foodapp_db
 - Tables
 - Views
 - Stored Procedures
 - Functions
- instadone
- stud
- sys

Administration Schemas

Information

No object selected

tasks p2 p3 assessment

Limit to 1000 rows

```

247 INSERT INTO orders
248 (customer_name, restaurant_id, item_id, quantity, total_amount, order_date)
249 VALUES
250 ('Rahul Sharma', 1, 1, 2, 560.00, '2026-10-01 10:30:00'),
251 ('Priya Patel', 1, 2, 1, 350.00, '2026-10-01 12:15:00'),
252 ('Amit Shah', 1, 3, 3, 240.00, '2026-10-02 13:20:00'),
253 ('Neha Mehta', 1, 4, 2, 500.00, '2026-10-03 14:10:00'),
254 ('Karan Joshi', 1, 1, 1, 280.00, '2026-10-04 18:30:00'),
255
256 ('Rohan Patel', 2, 5, 1, 450.00, '2026-10-01 11:00:00'),
257 ('Pooja Shah', 2, 6, 2, 1100.00, '2026-10-02 12:30:00'),
258 ('Vivek Mehta', 2, 7, 1, 180.00, '2026-10-03 15:00:00'),
259 ('Anjali Desai', 2, 5, 1, 450.00, '2026-10-04 19:30:00'),
260 ('Dev Patel', 2, 3, 2, 360.00, '2026-10-05 20:10:00'),
261
262 ('Arjun Shah', 3, 9, 2, 500.00, '2026-10-01 12:00:00'),
  
```

Result Grid

order_id	customer_name	restaurant_id	item_id	quantity	total_amount	order_date
1	Rahul Sharma	1	1	2	560.00	2026-10-01 10:30:00
2	Priya Patel	1	2	1	350.00	2026-10-01 12:15:00
3	Amit Shah	1	3	3	240.00	2026-10-02 13:20:00
4	Neha Mehta	1	4	2	500.00	2026-10-03 14:10:00
5	Karan Joshi	1	1	1	280.00	2026-10-04 18:30:00
6	Rohan Patel	2	5	1	450.00	2026-10-01 11:00:00
7	Pooja Shah	2	6	2	1100.00	2026-10-02 12:30:00

orders 7 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
47	17:13:47	SELECT * FROM restaurants LIMIT 0. 1000	3 row(s) returned	0.000 sec / 0.000 sec
48	17:14:33	SELECT * FROM menu_items LIMIT 0. 1000	12 row(s) returned	0.000 sec / 0.000 sec
49	17:15:05	SELECT * FROM orders LIMIT 0. 1000	15 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

36°C Sunny

Search

ENG IN

17:15 07-10-2026

Q3. Create a VIEW named restaurant_sales_summary showing restaurant name, total number of orders, and total revenue grouped by restaurant.

```

271
272 • CREATE VIEW restaurant_sales_summary AS
273 SELECT
274     r.name AS restaurant_name,
275     COUNT(o.order_id) AS total_orders,
276     SUM(o.total_amount) AS total_revenue
277 FROM restaurants r
278 LEFT JOIN orders o
279     ON r.restaurant_id = o.restaurant_id
280 GROUP BY r.restaurant_id, r.name;
281 • SELECT * FROM restaurant_sales_summary;

```

restaurant_name	total_orders	total_revenue
Spice Garden	5	1930.00
Pizza Palace	5	3230.00
Dragon Wok	5	2290.00

restaurant_sales_summary 10 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
51	17:20:02	SELECT * FROM restaurant_sales_summary LIMIT 0, 1000	Error Code: 1146: Table 'foodapp_db.restaurant_sales_summary' doesn't exist	0.000 sec
52	17:20:07	CREATE VIEW restaurant_sales_summary AS SELECT r.name AS restaurant_name, COUNT(o.order_id) ...	0 row(s) affected	0.016 sec
53	17:20:10	SELECT * FROM restaurant_sales_summary LIMIT 0, 1000	3 row(s) returned	0.000 sec / 0.000 sec

Q4. Write a stored procedure named add_order that accepts customer_name, restaurant_id, item_id, and quantity, calculates total_amount from the menu item price, validates the restaurant exists (ROLLBACK if not), and inserts the order record.

```

280 GROUP BY r.restaurant_id, r.name;
281 • SELECT * FROM restaurant_sales_summary;
282
283 DELIMITER //
284 CREATE PROCEDURE add_order(
285     IN p_customer_name VARCHAR(100),
286     IN p_restaurant_id INT,
287     IN p_item_id INT,
288     IN p_quantity INT
289 )
290 BEGIN
291     DECLARE restaurant_count INT;
292     DECLARE item_price DECIMAL(10,2);
293     DECLARE total_amount DECIMAL(10,2);
294     START TRANSACTION;
295     -- Check whether restaurant exists
296     SELECT COUNT(*)
297     INTO restaurant_count
298     FROM restaurants
299     WHERE restaurant_id = p_restaurant_id;
300     IF restaurant_count = 0 THEN
301         ROLLBACK;
302         SELECT 'restaurant does not exist. Order cancelled.' AS message;
303     ELSE
304         -- Get menu item price
305         SELECT price

```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
51	17:20:02	SELECT * FROM restaurant_sales_summary LIMIT 0, 1000	Error Code: 1146: Table 'foodapp_db.restaurant_sales_summary' doesn't exist	0.000 sec
52	17:20:07	CREATE VIEW restaurant_sales_summary AS SELECT r.name AS restaurant_name, COUNT(o.order_id) ...	0 row(s) affected	0.016 sec
53	17:20:10	SELECT * FROM restaurant_sales_summary LIMIT 0, 1000	3 row(s) returned	0.000 sec / 0.000 sec

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHMAS

Filter objects

con

foodapp_db

Tables

Views

Stored Procedures

Functions

instadone

stud

sys

Administration Schemas

Information

No object selected

Object Info Session

tasks p2 p3 assessment

Limit to 1000 rows

```

296 SELECT COUNT(*)
297 INTO restaurant_count
298 FROM restaurants
299 WHERE restaurant_id = p_restaurant_id;
300 IF restaurant_count = 0 THEN
301   ROLLBACK;
302   SELECT 'restaurant does not exist. order cancelled.' AS message;
303 ELSE
304   -- Get menu item price
305   SELECT price
306   INTO item_price
307   FROM menu_items
308   WHERE item_id = p_item_id
309   AND restaurant_id = p_restaurant_id;
310   -- Calculate total amount
311   SET total_amount = item_price * p_quantity;
312   -- Insert order
313   INSERT INTO orders
314     (customer_name, restaurant_id, item_id, quantity, total_amount)
315   VALUES
316     (p_customer_name, p_restaurant_id, p_item_id, p_quantity, total_amount);
317   COMMIT;
318   SELECT 'order added successfully.' AS message;
319 END IF;
320 END //
321 DELIMITER ;

```

Output

Action Output

#	Time	Action	Message	Duration / Fetch
51	17:20:02	SELECT * FROM restaurant_sales_summary LIMIT 0, 1000	Error Code: 1146 Table 'foodapp_db.restaurant_sales_summary' doesn't exist	0.000 sec
52	17:20:07	CREATE VIEW restaurant_sales_summary AS SELECT r.name AS restaurant_name, COUNT(o.order_id) ...	0 row(s) affected	0.016 sec
53	17:20:10	SELECT * FROM restaurant_sales_summary LIMIT 0, 1000	3 row(s) returned	0.000 sec / 0.000 sec

36°C Sunny

Search

17:25 07-10-2026

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHMAS

Filter objects

con

foodapp_db

Tables

Views

Stored Procedures

Functions

instadone

stud

sys

Administration Schemas

Information

No object selected

Object Info Session

tasks p2 p3 assessment

Limit to 1000 rows

```

307 FROM menu_items
308 WHERE item_id = p_item_id
309 AND restaurant_id = p_restaurant_id;
310 -- Calculate total amount
311 SET total_amount = item_price * p_quantity;
312 -- Insert order
313 INSERT INTO orders
314   (customer_name, restaurant_id, item_id, quantity, total_amount)
315 VALUES
316   (p_customer_name, p_restaurant_id, p_item_id, p_quantity, total_amount);
317 COMMIT;
318 SELECT 'order added successfully.' AS message;
319 END IF;
320 END //
321 DELIMITER ;
322 CALL add_order('Raj Patel', 1, 1, 2);

```

Result Grid

Filter Rows:

Exports

Wrap Cell Contents

message

Order added successfully.

Result 11 x

Read Only

Output

Action Output

#	Time	Action	Message	Duration / Fetch
54	17:25:35	CALL add_order('Raj Patel', 1, 1, 2)	Error Code: 1305 PROCEDURE foodapp_db.add_order does not exist	0.016 sec
55	17:25:50	CREATE PROCEDURE add_order(IN p_customer_name VARCHAR(100), IN p_restaurant_id INT, IN ...	0 row(s) affected	0.015 sec
56	17:25:52	CALL add_order('Raj Patel', 1, 1, 2)	1 row(s) returned	0.016 sec / 0.000 sec

36°C Sunny

Search

17:25 07-10-2026

The screenshot shows the MySQL Workbench interface with a stored procedure named `add_order` defined in the `assessment` database. The procedure calculates the total amount for an order and inserts it into the `orders` table. The execution results show a successful insert for a customer named 'Raj Patel'.

```

310 -- calculate total amount
311 SET total_amount = item_price * p_quantity;
312 -- Insert order
313 INSERT INTO orders
314 (customer_name, restaurant_id, item_id, quantity, total_amount)
315 VALUES
316 (p_customer_name, p_restaurant_id, p_item_id, p_quantity, total_amount);
317 COMMIT;
318 SELECT 'Order added successfully.' AS message;
319 END IF;
320 END //
321 DELIMITER ;
322 CALL add_order('Raj Patel', 1, 1, 2);
323 SELECT * FROM orders
324 ORDER BY order_id DESC
325 LIMIT 1;

```

order_id	customer_name	restaurant_id	item_id	quantity	total_amount	order_date
16	Raj Patel	1	1	2	560.00	2026-10-07 17:25:52

Output:

#	Time	Action	Message	Duration / Fetch
55	17:25:50	CREATE PROCEDURE add_order(IN p_customer_name VARCHAR(100), IN p_restaurant_id INT, IN p_item_id INT, IN p_quantity INT, IN p_total_amount DECIMAL(10,2))	0 row(s) affected	0.015 sec
56	17:25:52	CALL add_order('Raj Patel', 1, 1, 2)	1 row(s) returned	0.016 sec / 0.000 sec
57	17:26:00	SELECT * FROM orders ORDER BY order_id DESC LIMIT 1	1 row(s) returned	0.000 sec / 0.000 sec

Q5. Write a TRIGGER named after `_order_insert` that logs a record into an `order_audit` table (`order_id`, `restaurant_id`, `action='INSERT'`, `log_time=NOW()`) immediately after every new order is created.

The screenshot shows the MySQL Workbench interface with the creation of an `order_audit` table and a trigger named `after_order_insert`. The trigger logs every new order into the audit table. The execution results show the successful creation of the table and the trigger.

```

325 LIMIT 1;
326
327 CREATE TABLE order_audit (
328     audit_id INT AUTO_INCREMENT PRIMARY KEY,
329     order_id INT NOT NULL,
330     restaurant_id INT NOT NULL,
331     action VARCHAR(20) NOT NULL,
332     log_time DATETIME NOT NULL
333 );
334
335 DELIMITER //
336
337 CREATE TRIGGER after_order_insert
338 AFTER INSERT ON orders
339 FOR EACH ROW
340 BEGIN
341     INSERT INTO order_audit (order_id, restaurant_id, action, log_time)
342     VALUES (NEW.order_id, NEW.restaurant_id, 'INSERT', NOW());
343 END //
344 DELIMITER ;

```

Output:

#	Time	Action	Message	Duration / Fetch
58	17:30:48	CREATE TABLE order_audit (audit_id INT AUTO_INCREMENT PRIMARY KEY, order_id INT NOT NULL, restaurant_id INT NOT NULL, action VARCHAR(20) NOT NULL, log_time DATETIME NOT NULL)	0 row(s) affected	0.031 sec
59	17:31:01	CREATE TRIGGER after_order_insert AFTER INSERT ON orders FOR EACH ROW BEGIN INSERT INTO order_audit (order_id, restaurant_id, action, log_time) VALUES (NEW.order_id, NEW.restaurant_id, 'INSERT', NOW());	0 row(s) affected	0.016 sec
60	17:31:21	CALL add_order('Raj Patel', 1, 1, 2)	1 row(s) returned	0.016 sec / 0.000 sec

MySQL Workbench

Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Navigator

Filter objects

SCHEMAS

- con
- foodapp_db
 - Tables
 - Views
 - Stored Procedures
 - Functions
- instadone
- stud
- sys

Administration Schemas

Information

No object selected

Result Grid

message

Order added successfully.

Result 13 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
58	17:30:48	CREATE TABLE order_audit (audit_id INT AUTO_INCREMENT PRIMARY KEY, order_id INT NOT NULL	0 row(s) affected	0.031 sec
59	17:31:01	CREATE TRIGGER after_order_insert AFTER INSERT ON orders FOR EACH ROW BEGIN INSERT INTO	0 row(s) affected	0.016 sec
60	17:31:21	CALL add_order('Raj Patel', 1, 1, 2);	1 row(s) returned	0.016 sec / 0.000 sec

Object Info Session

36°C Sunny

Search

ENG IN

17:31 07-10-2026

MySQL Workbench

Local instance MySQL80 x

File Edit View Query Database Server Tools Scripting Help

Navigator

Filter objects

SCHEMAS

- con
- foodapp_db
 - Tables
 - Views
 - Stored Procedures
 - Functions
- instadone
- stud
- sys

Administration Schemas

Information

No object selected

Result Grid

audit_id order_id restaurant_id action log_time

1	17	1	INSERT	2026-10-07 17:31:21
---	----	---	--------	---------------------

order_audit 14 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
59	17:31:01	CREATE TRIGGER after_order_insert AFTER INSERT ON orders FOR EACH ROW BEGIN INSERT INTO	0 row(s) affected	0.016 sec
60	17:31:21	CALL add_order('Raj Patel', 1, 1, 2);	1 row(s) returned	0.016 sec / 0.000 sec
61	17:31:58	SELECT * FROM order_audit LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

36°C Sunny

Search

ENG IN

17:32 07-10-2026