

FOR BACKEND DEVS

3 things that break Firefly calls before a pixel renders



24 hours per token



Tokens




Files



Retries


1 Tokens last 24 hours

Fetch one, cache it, reuse it.

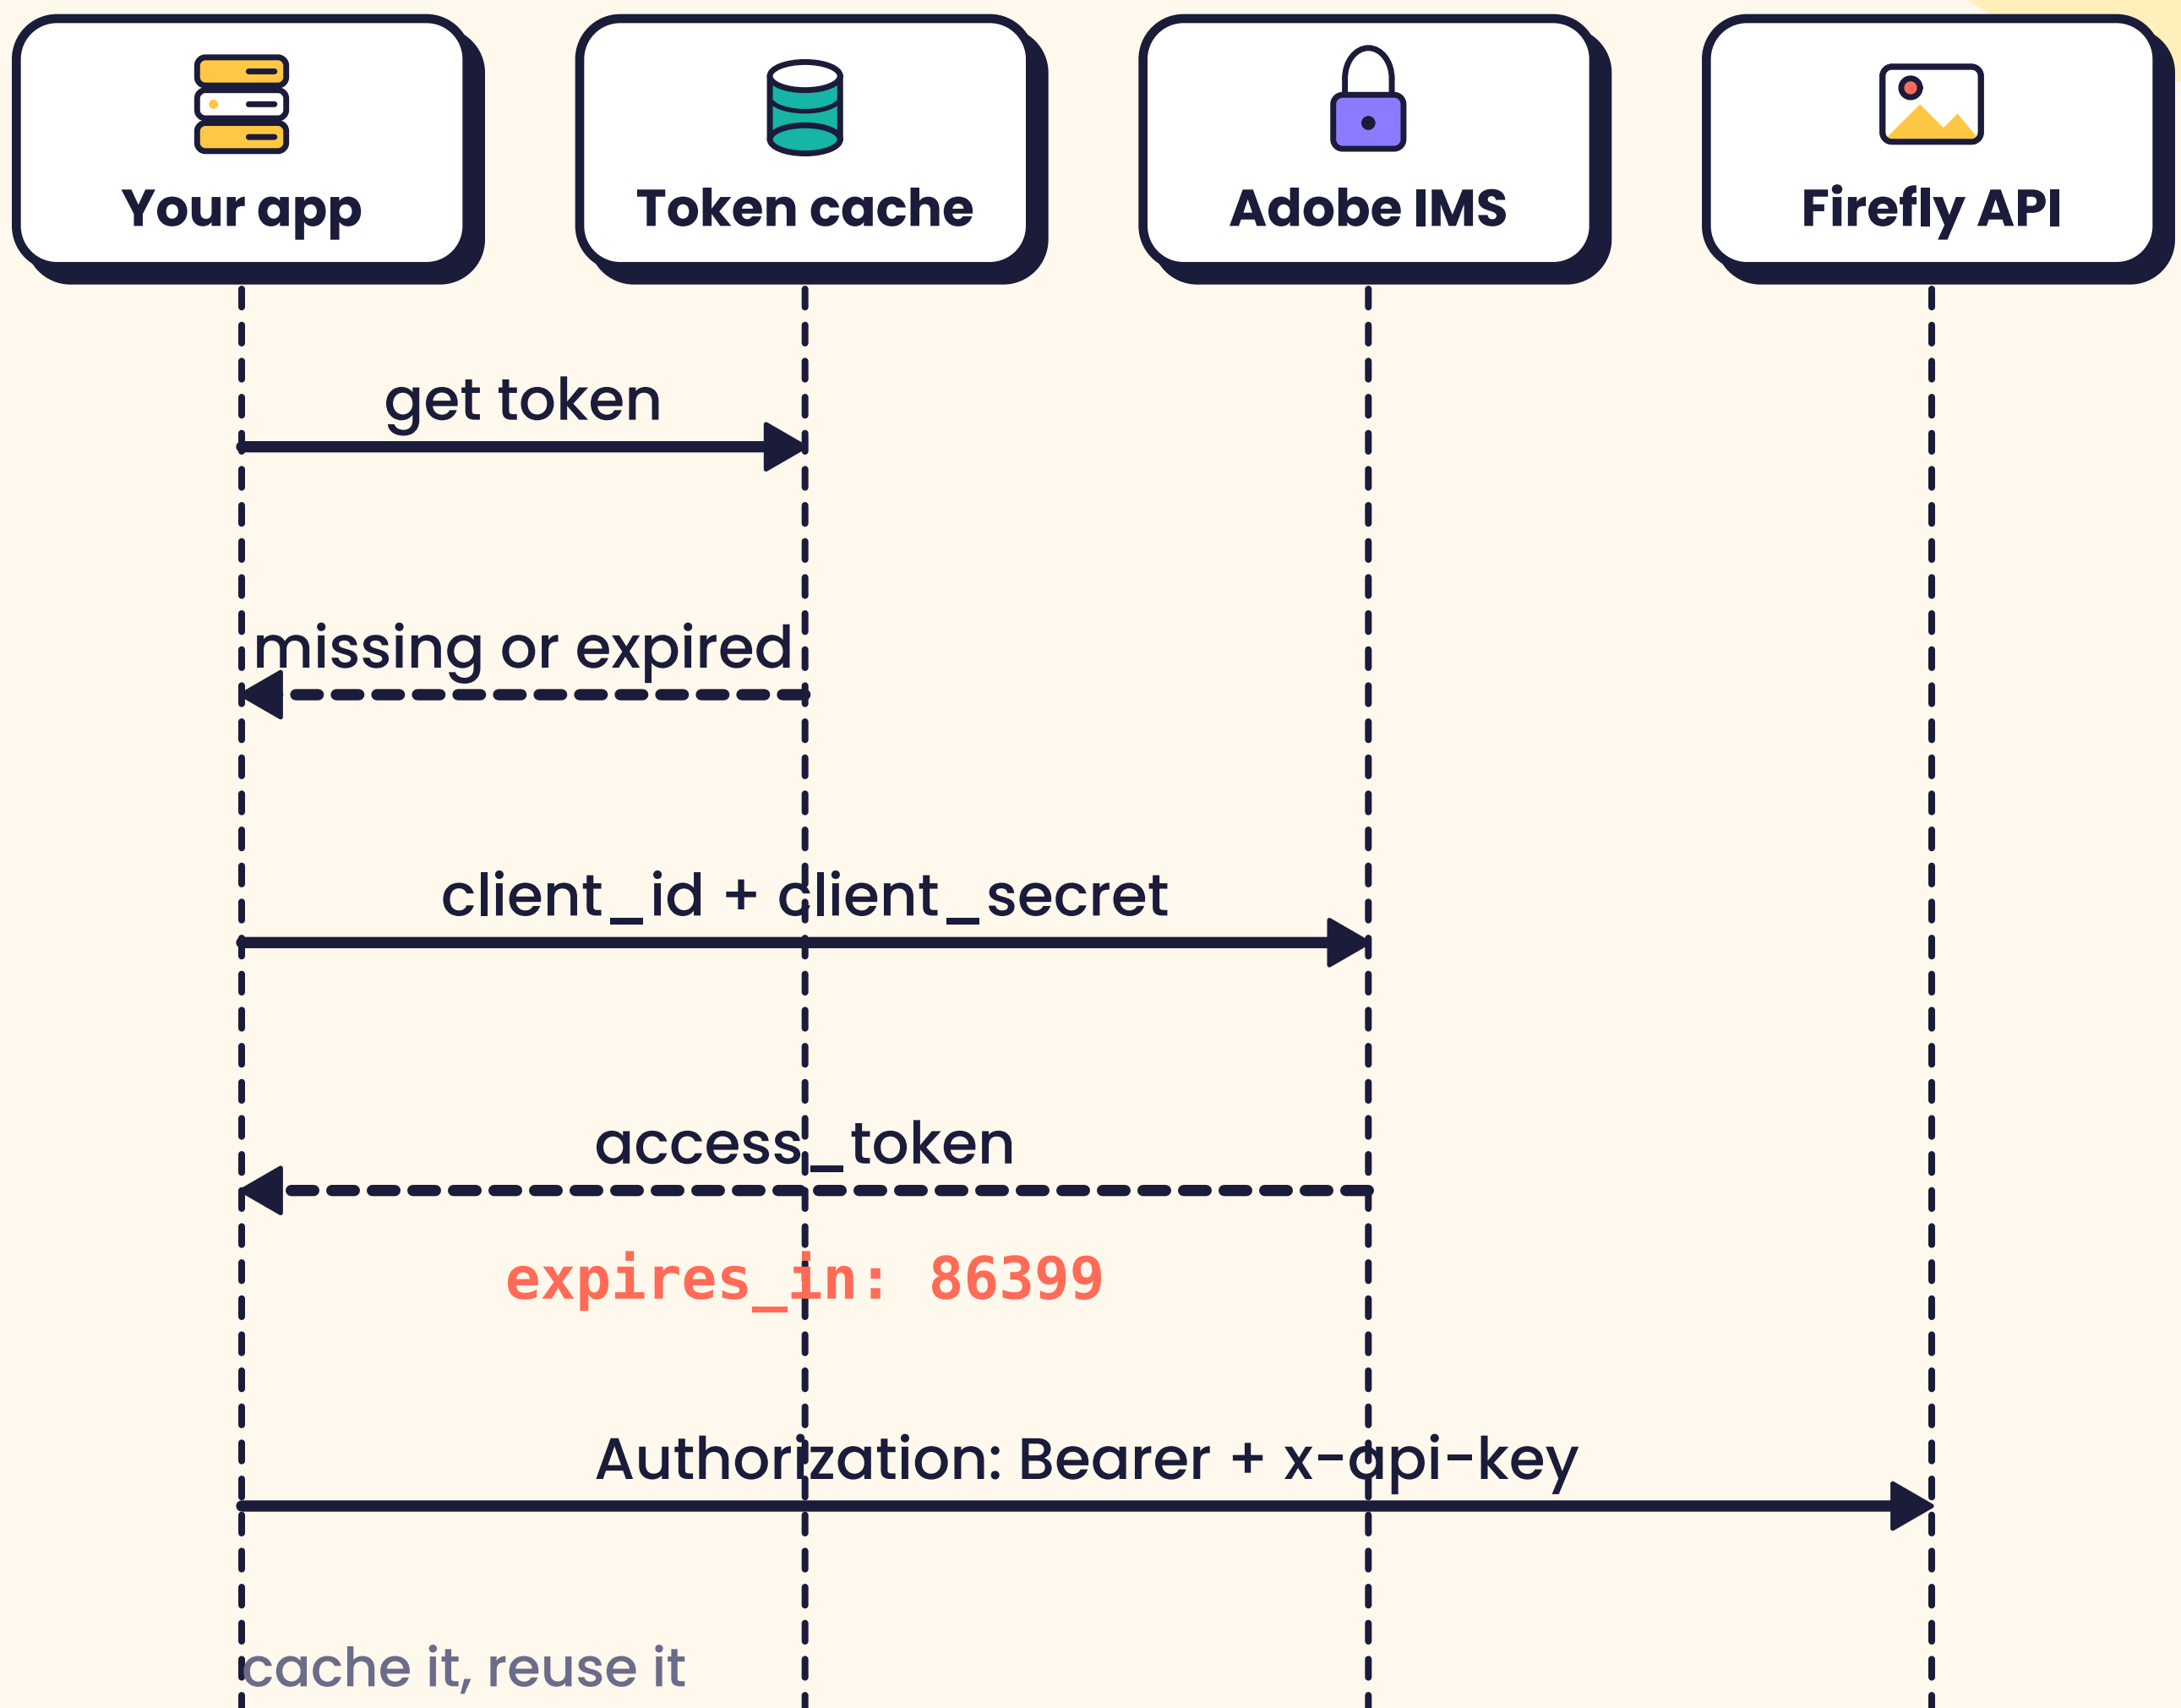

2 Refresh before it dies

Adobe's advice: store the token and renew it before it expires.

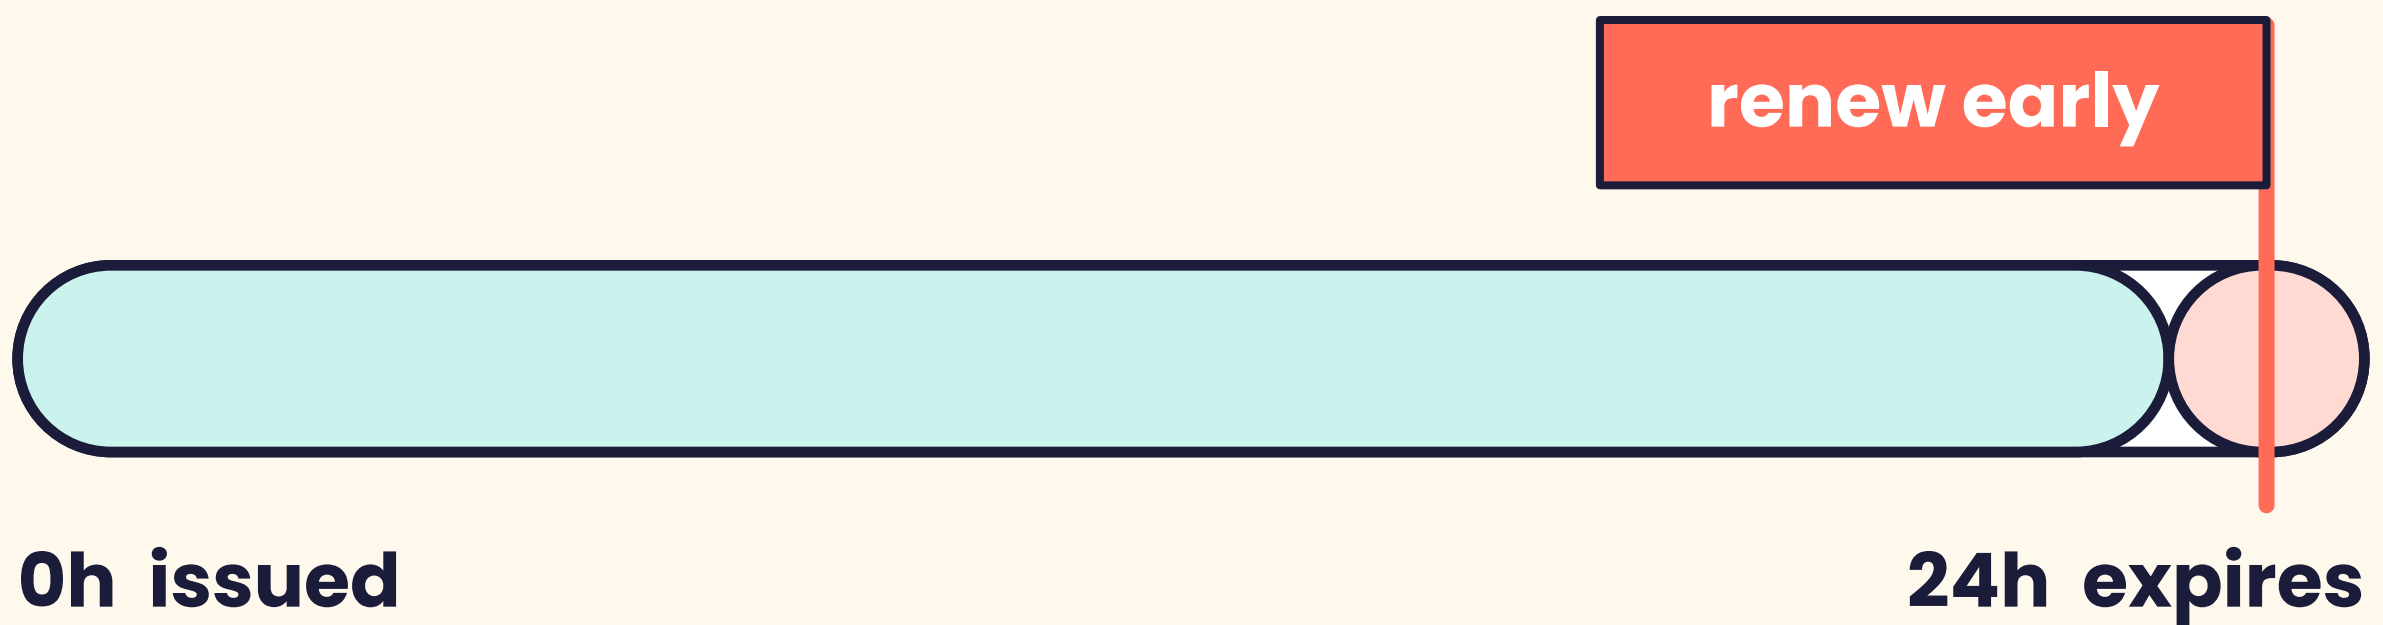

One habit I like: renew about an hour early. That's a personal rule of thumb, not an Adobe requirement.



New token per call



One token in an env var, forever



Cache + refresh + OAuth library

3 Files travel by URL

Firefly reads your inputs from signed links, not from the request body.

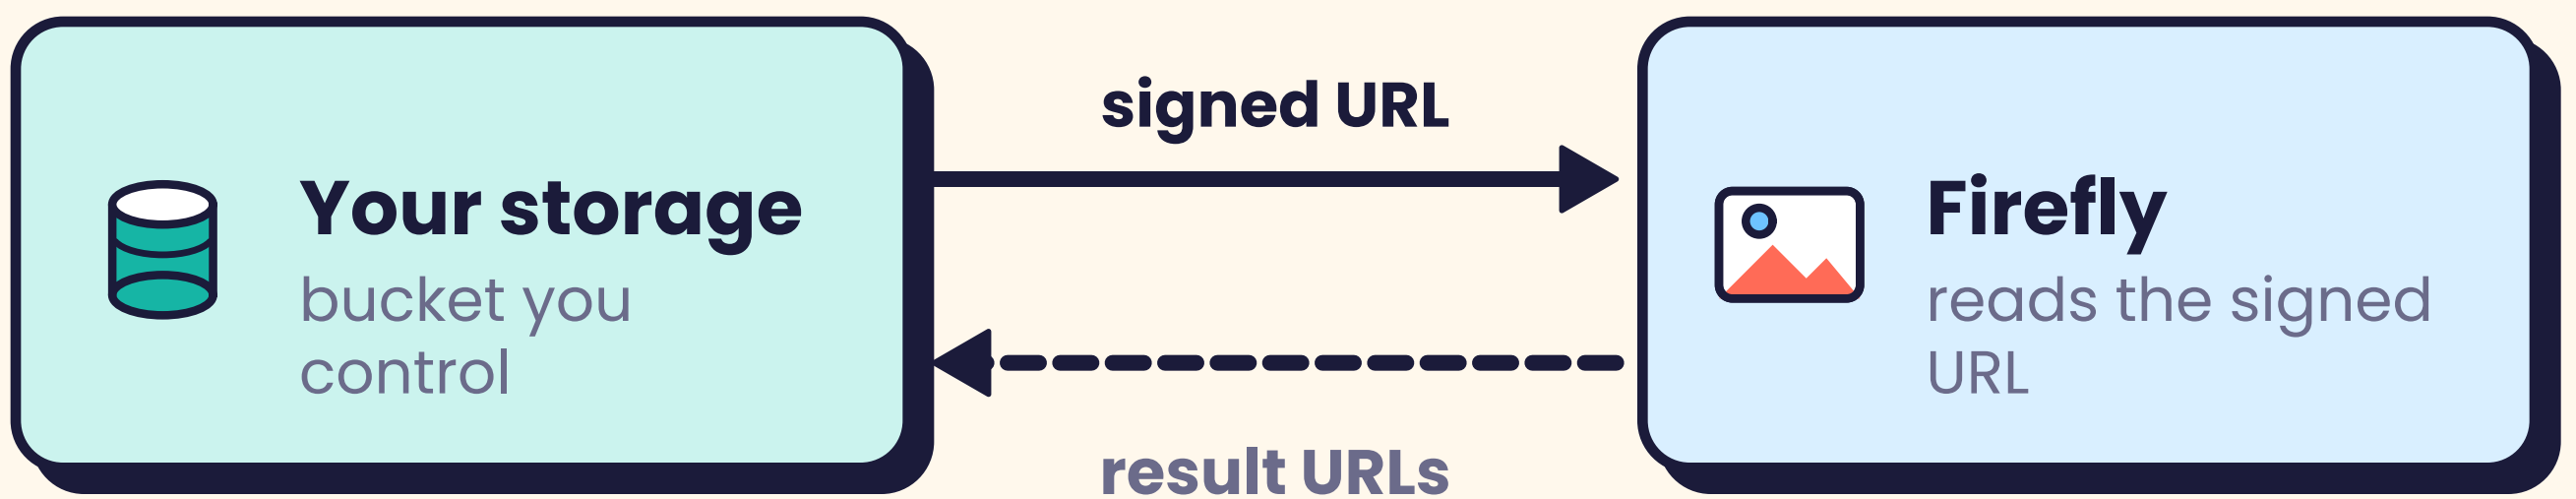


Image workflows list three domains:

*.amazonaws.com

*.windows.net

*.dropboxusercontent.com



Other Firefly Services APIs list different domains. Check each API's storage page.

4 Or upload first

Two ways to hand Firefly a file.



Signed URL

You host the file.
Firefly fetches it.

Amazon / Azure / Dropbox



Upload endpoint

Send the bytes once.
Get an ID back.

7 days


15 MB max



firefly-api.adobe.io

```
POST /v2/storage/image
Content-Type: image/png
-> {"images":[{"id": "..."}]}
```

5 Don't retry every error the same

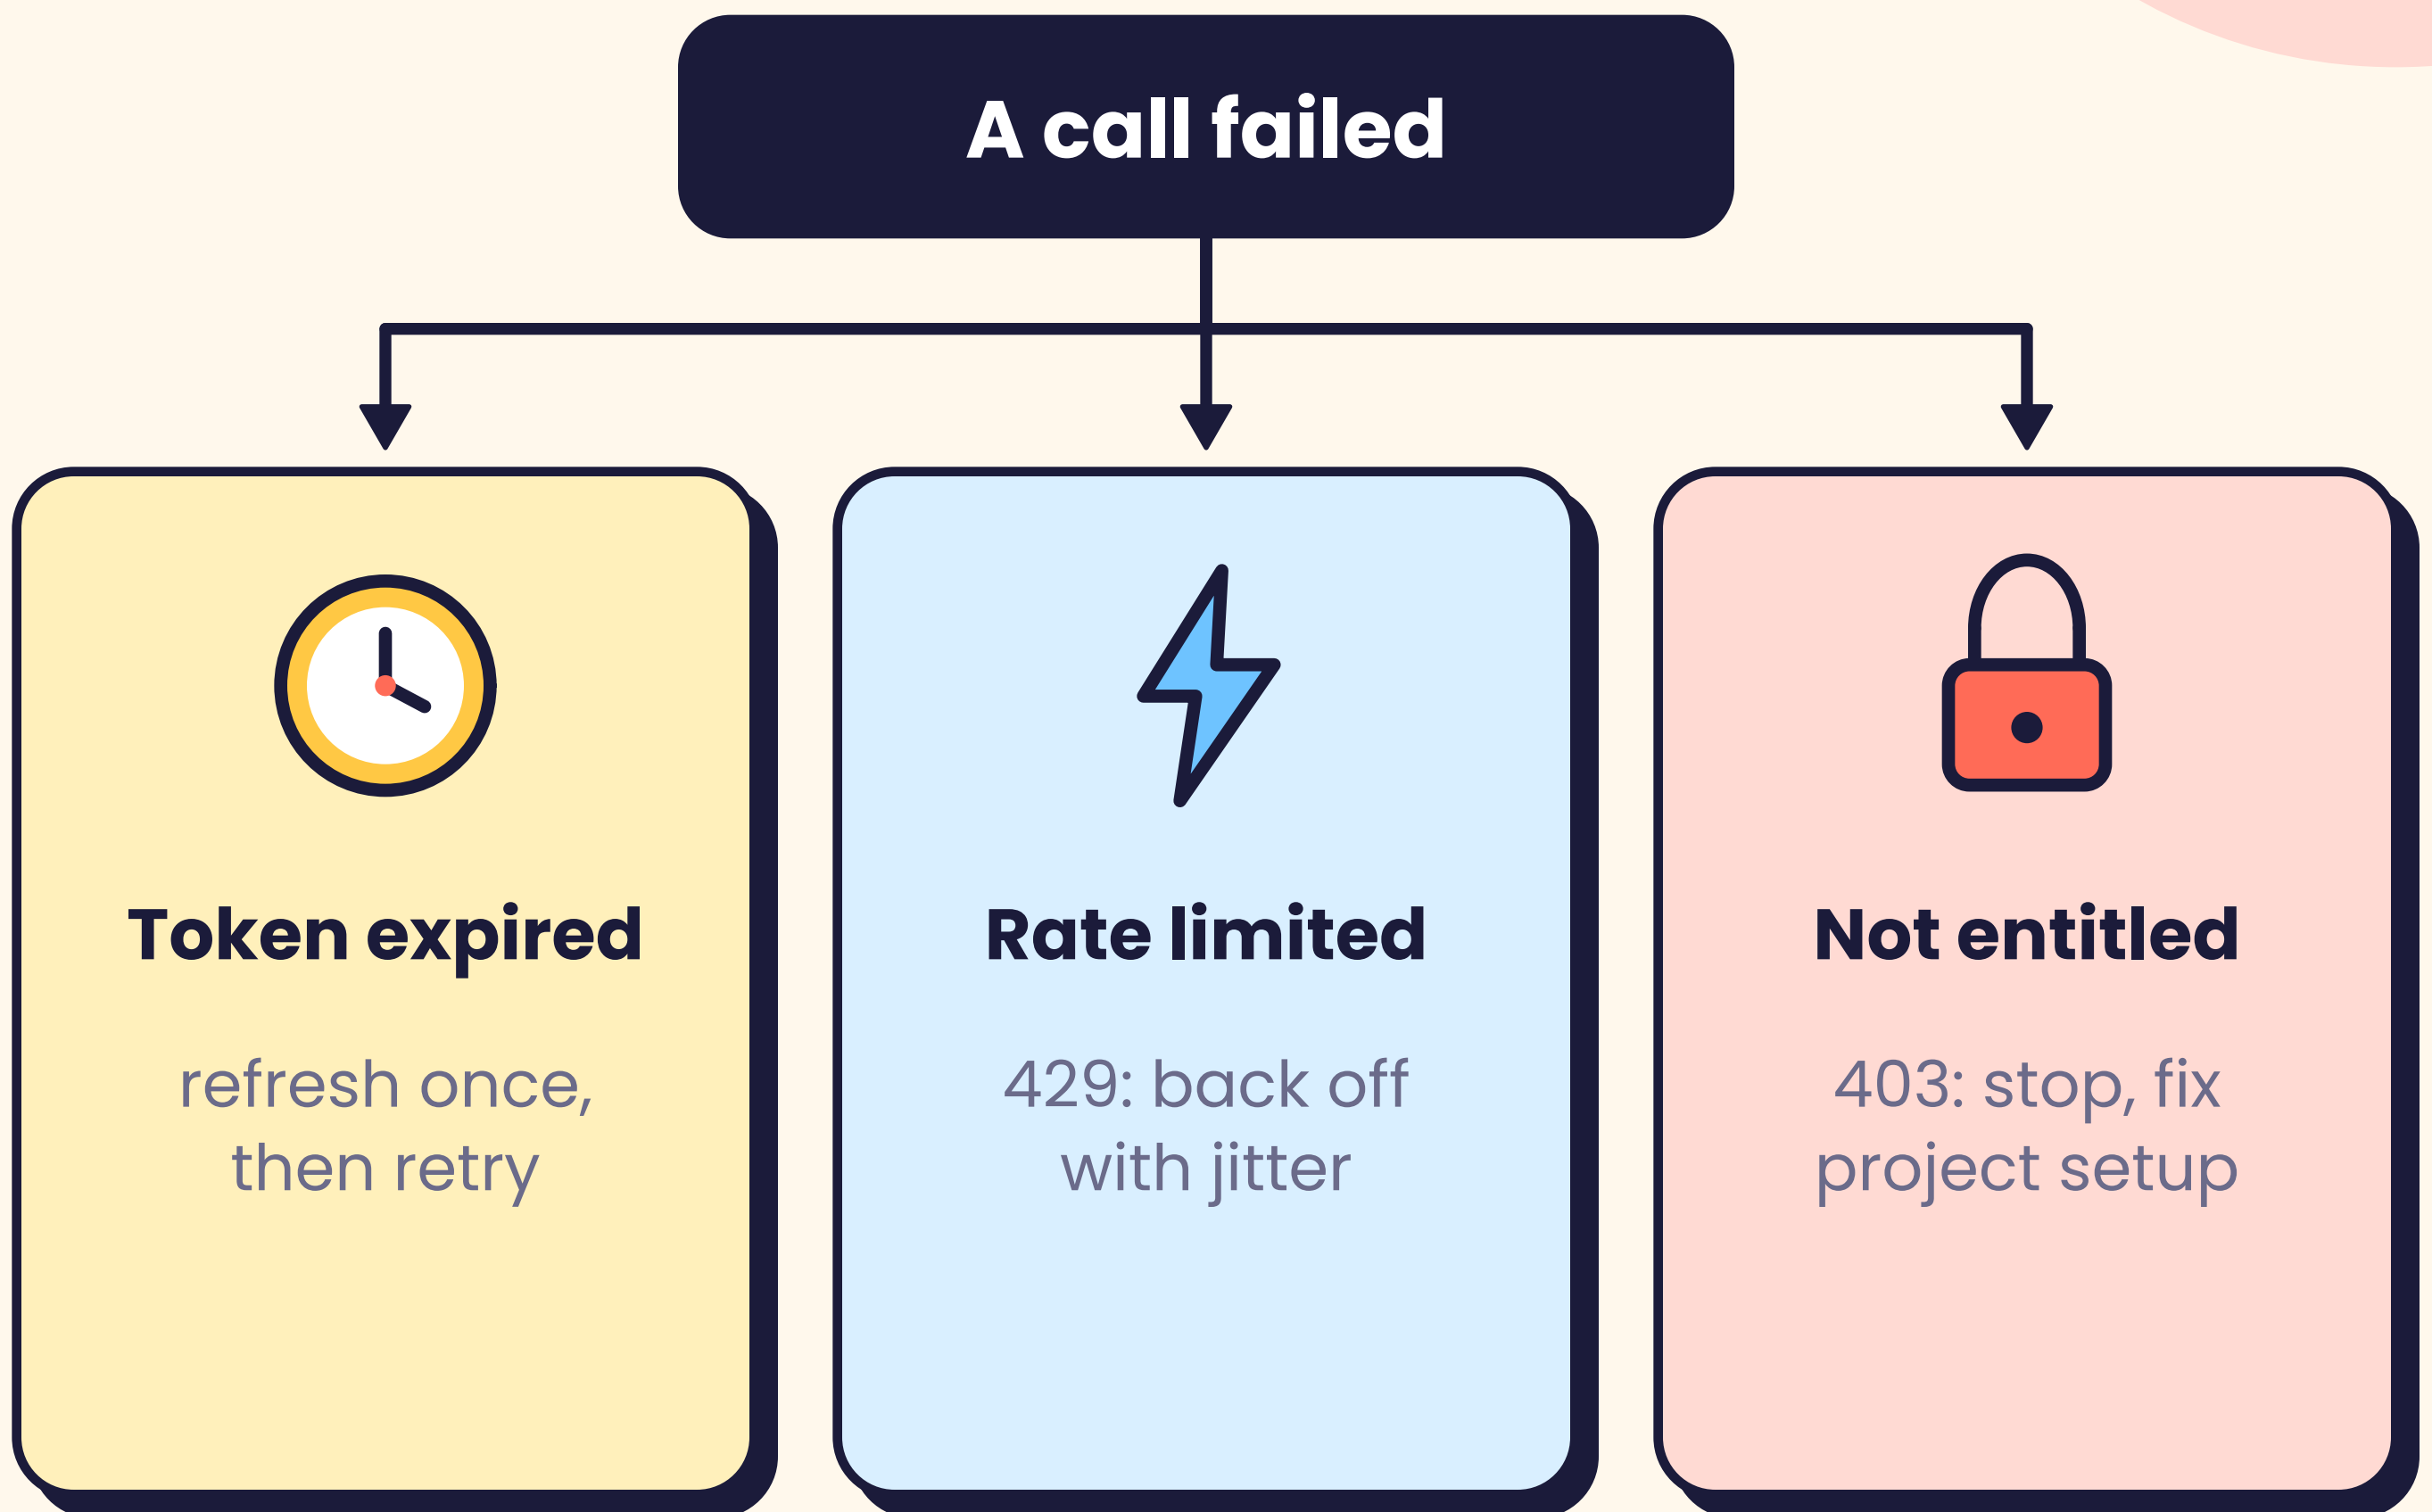

Only 403 and 429 are named in Adobe's API reference. Treat the rest as guidance, and log each case separately.

How do you share one token across workers?

Answer in the comments. I read every one.

Redis

Secrets manager

Per worker

Something else



Next: why Firefly is async-only now, and what changed with Image5.