



CONTENT AUTOMATION

3 Firefly endpoints for adapting images at scale

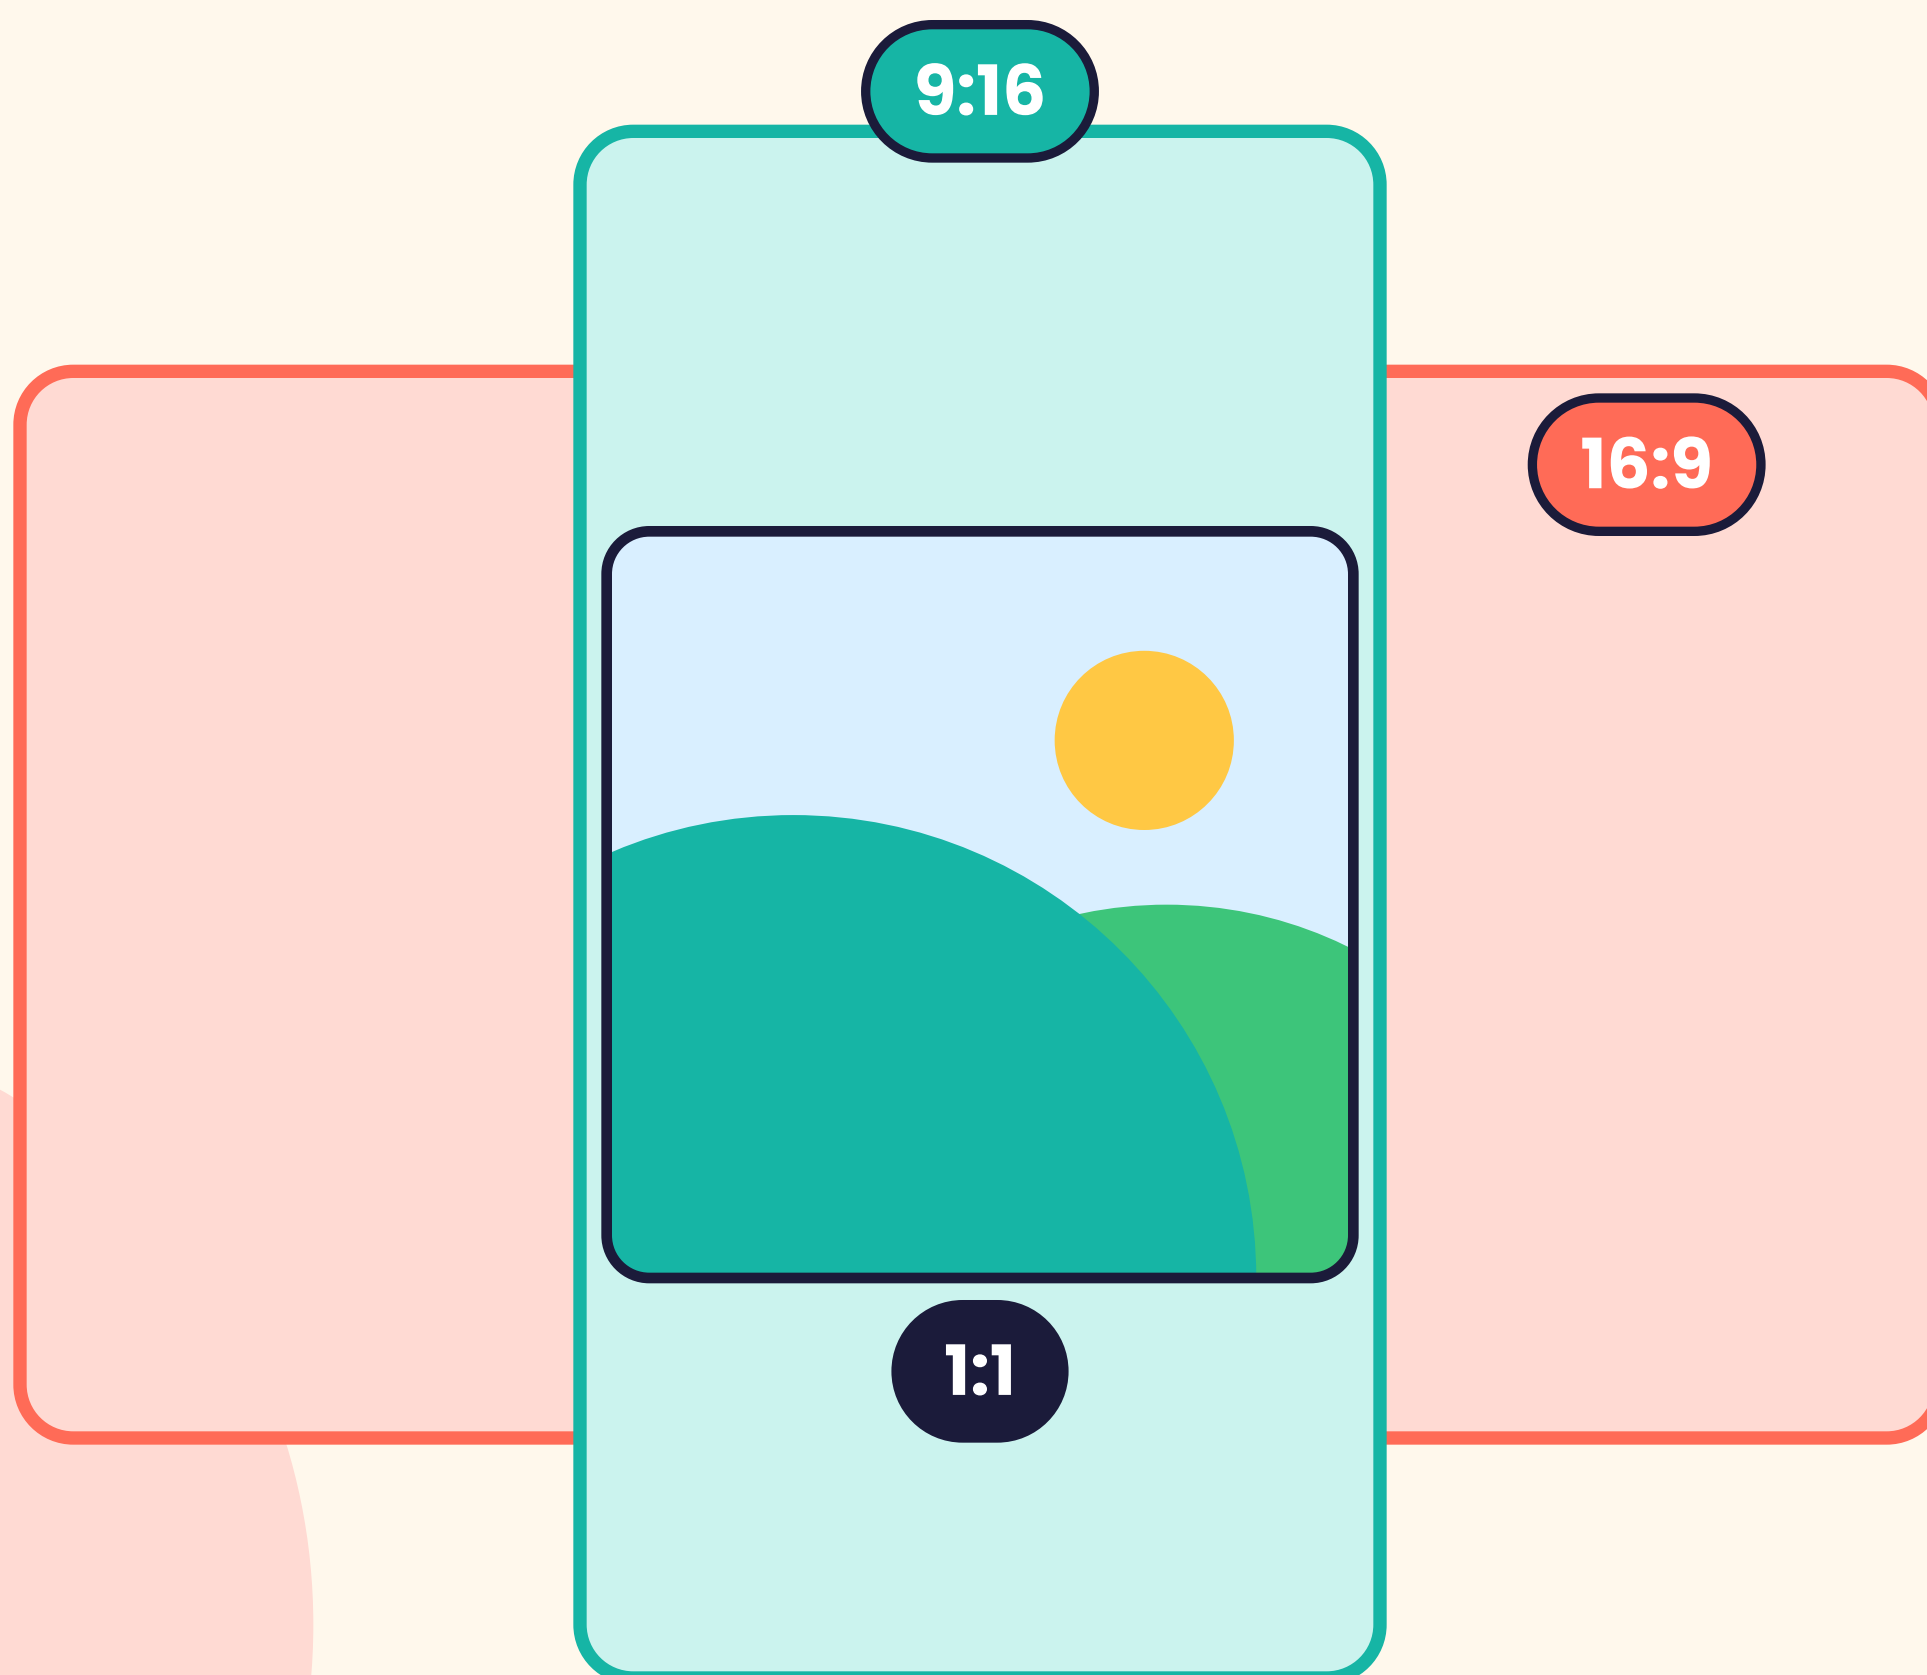

1 Expand changes the canvas

Send the source and a target size.

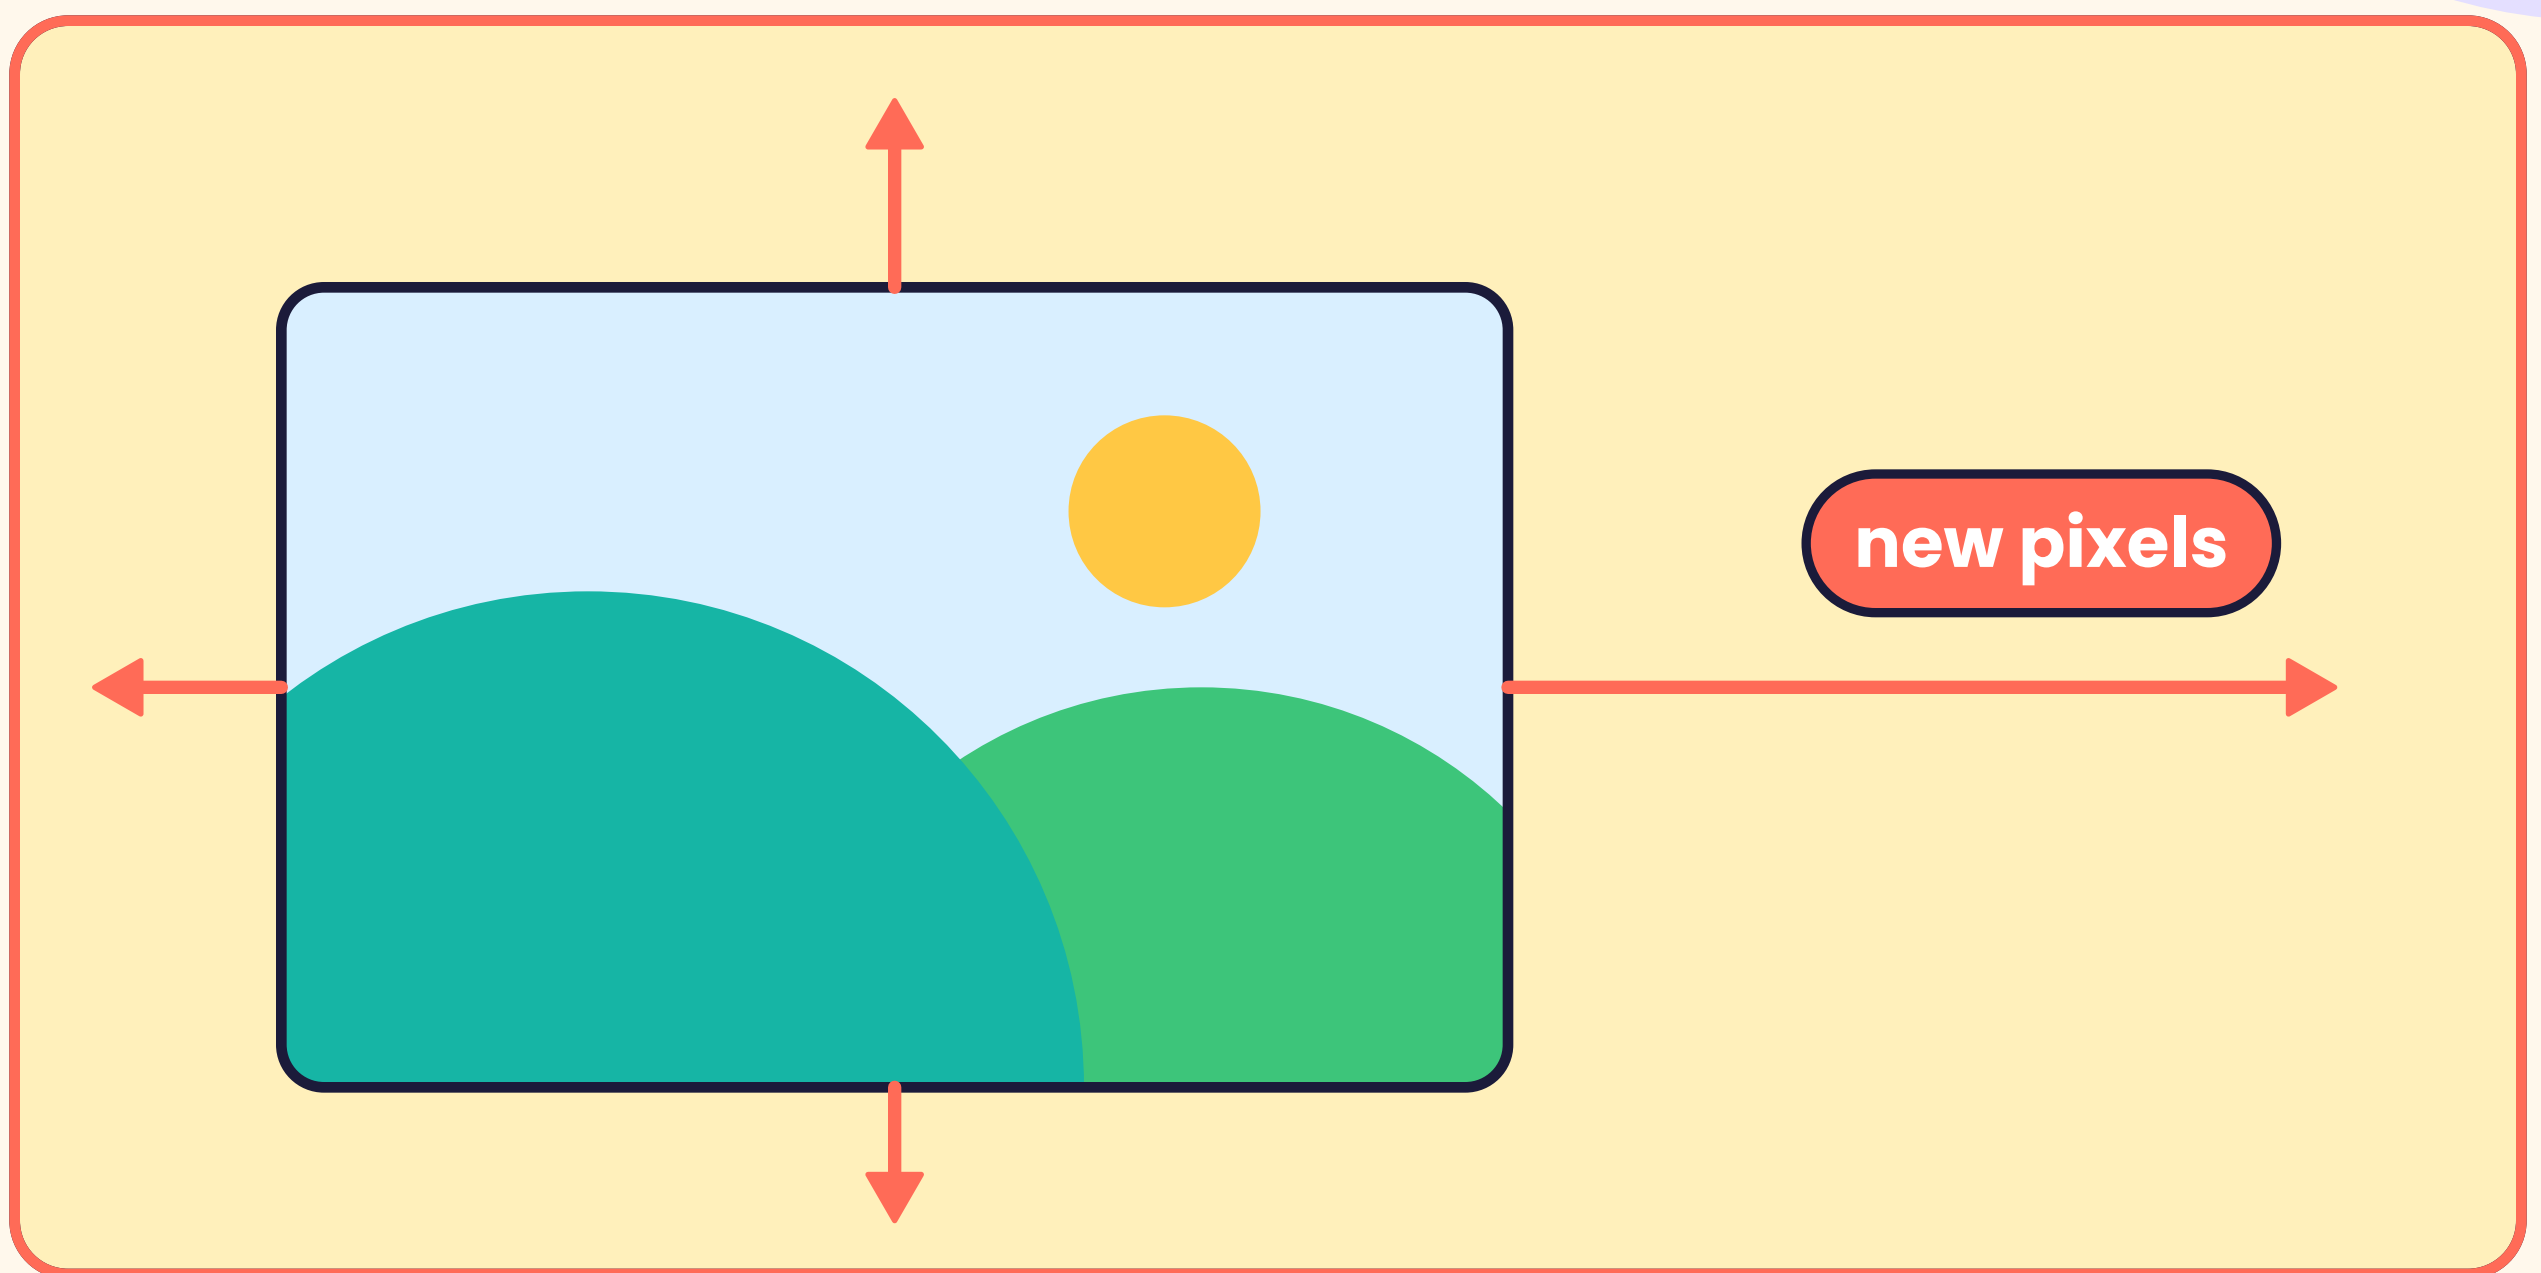

size = the full canvas you want

Position the original with placement (alignment and inset), or point at a mask. A prompt is optional.

```
POST /v3/images/expand-async
{"image":{"source":{"...}}}, "size":{"...}}
```

2 Fill swaps a region

White in the mask can change. Black stays put.




```
image.source + image.mask + size  
size: 1 to 2688 px per side (Fill guide)
```

Adobe's Fill tutorial swaps employee headshot backgrounds.


3 Similar makes variants

Start from an approved image.

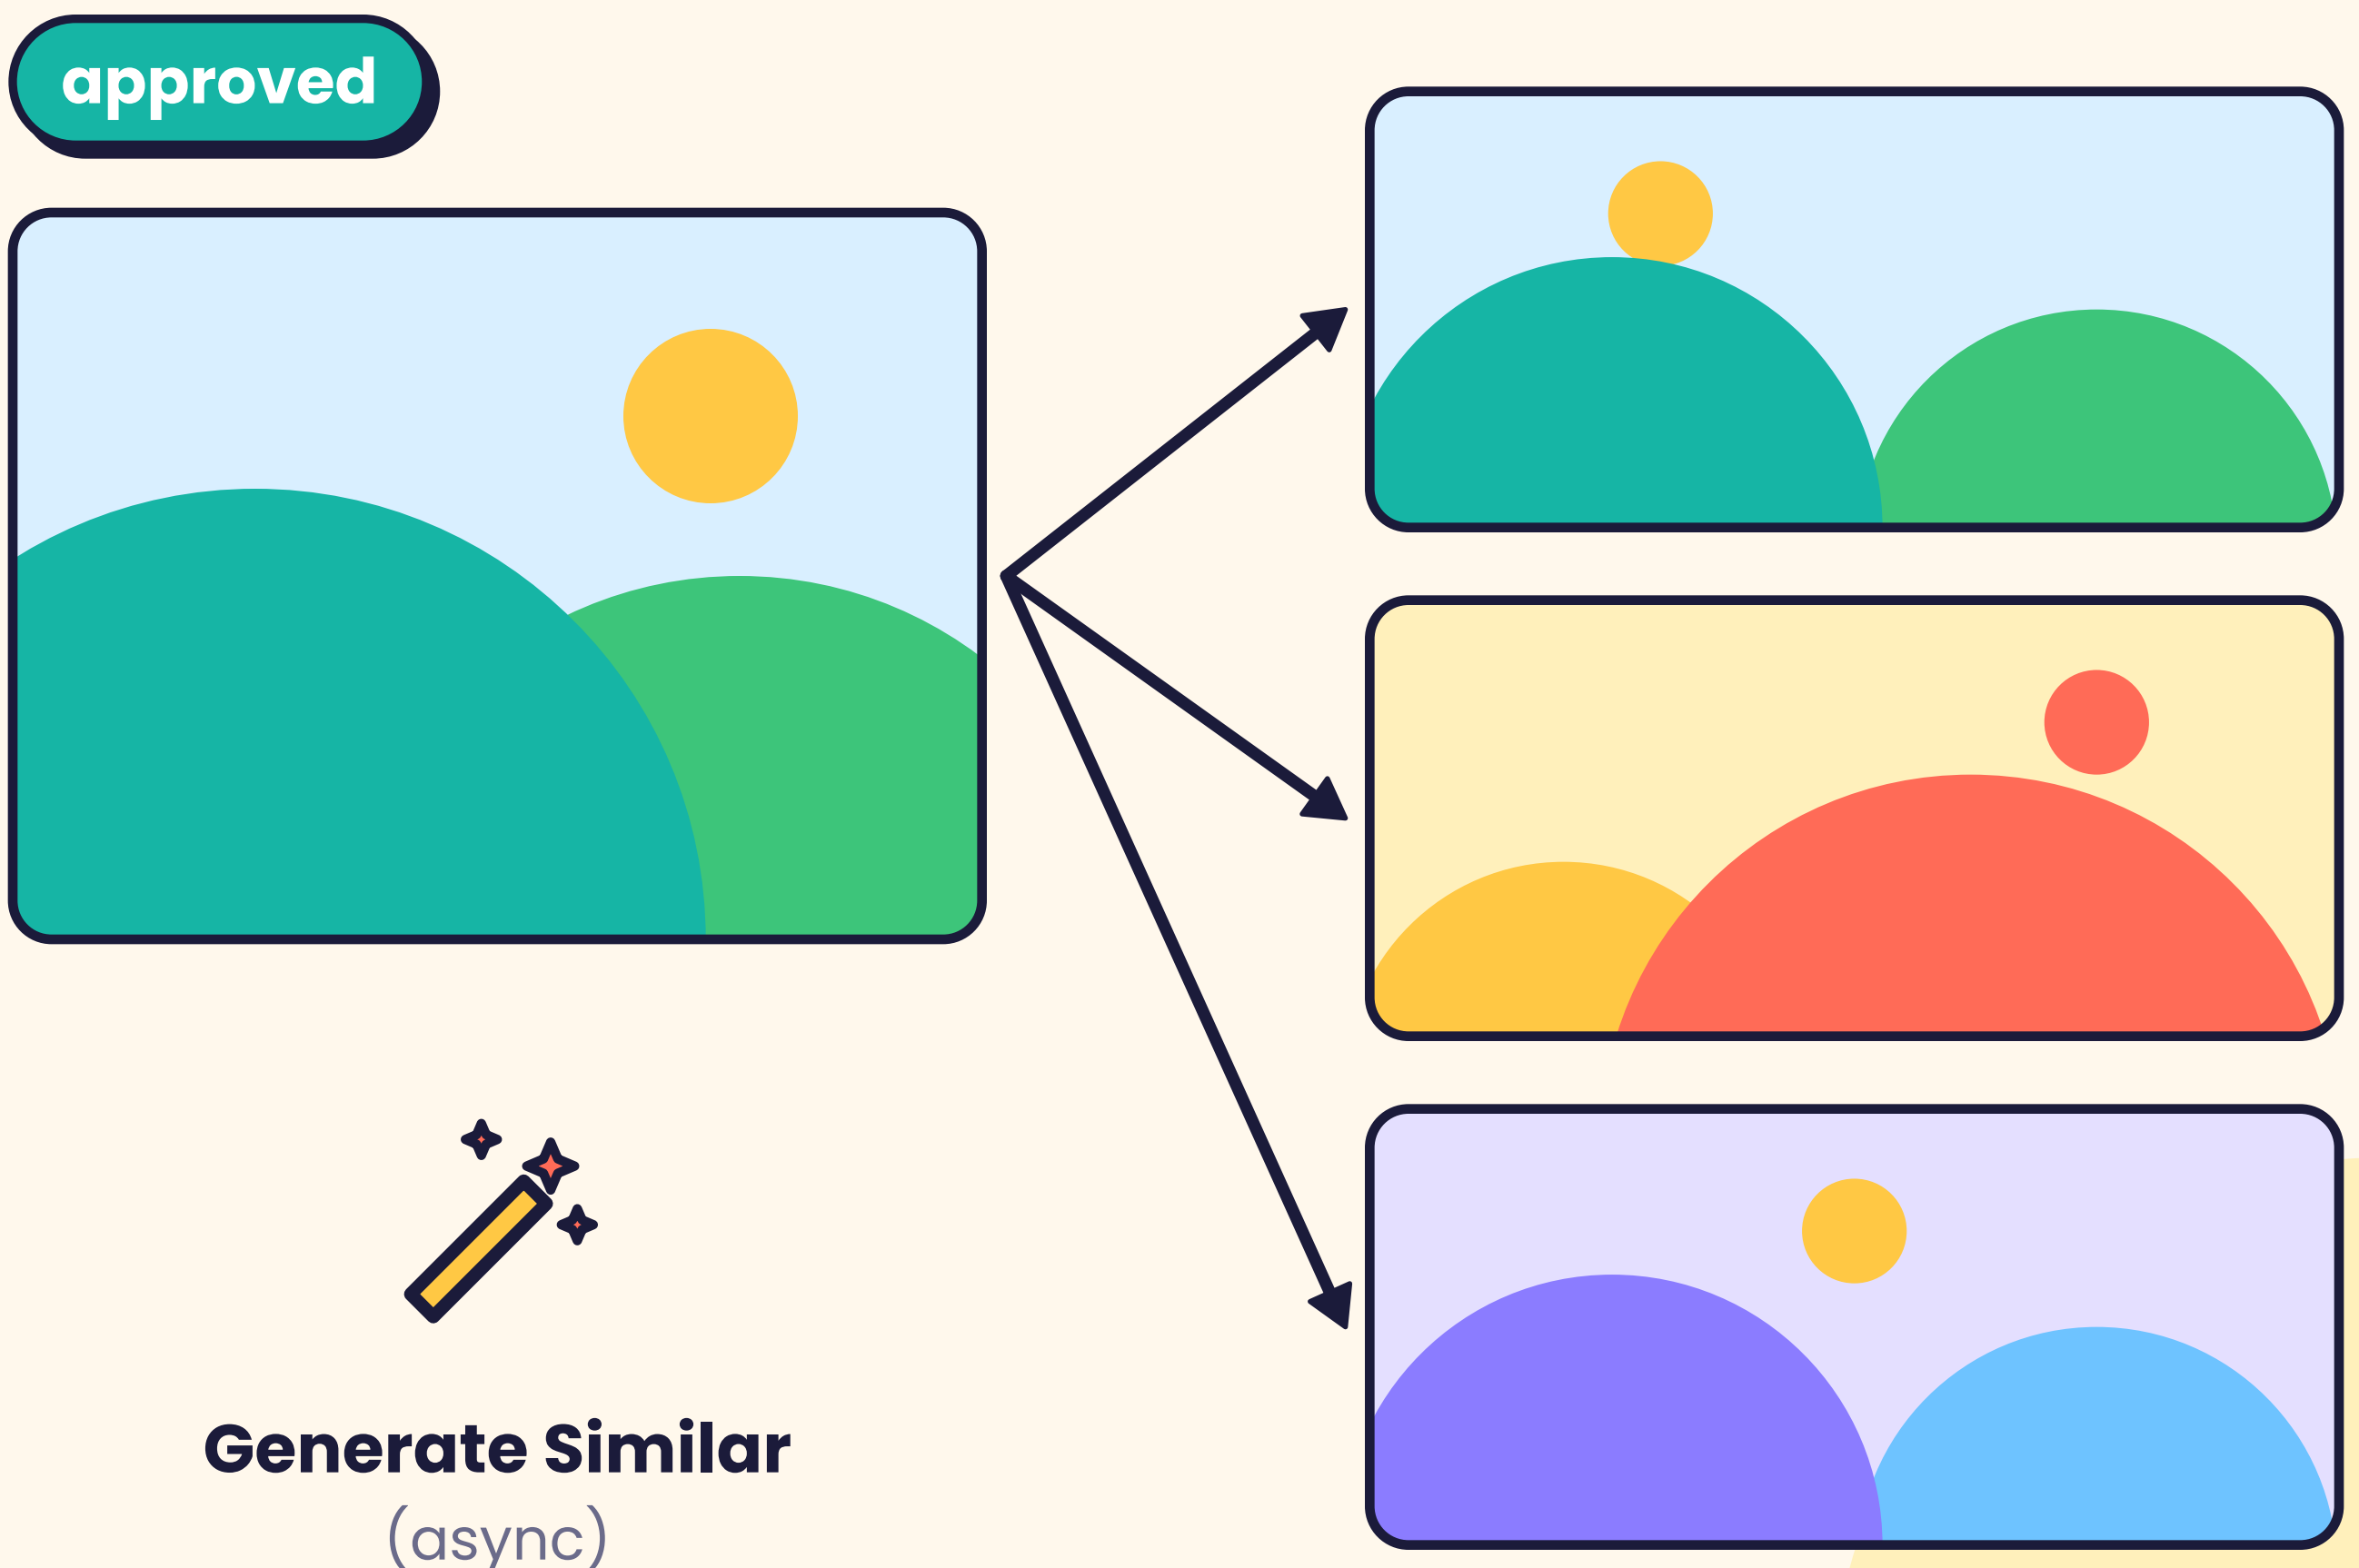

Variations of an image you already like, instead of re-prompting from scratch.

4 Upload once, run in parallel

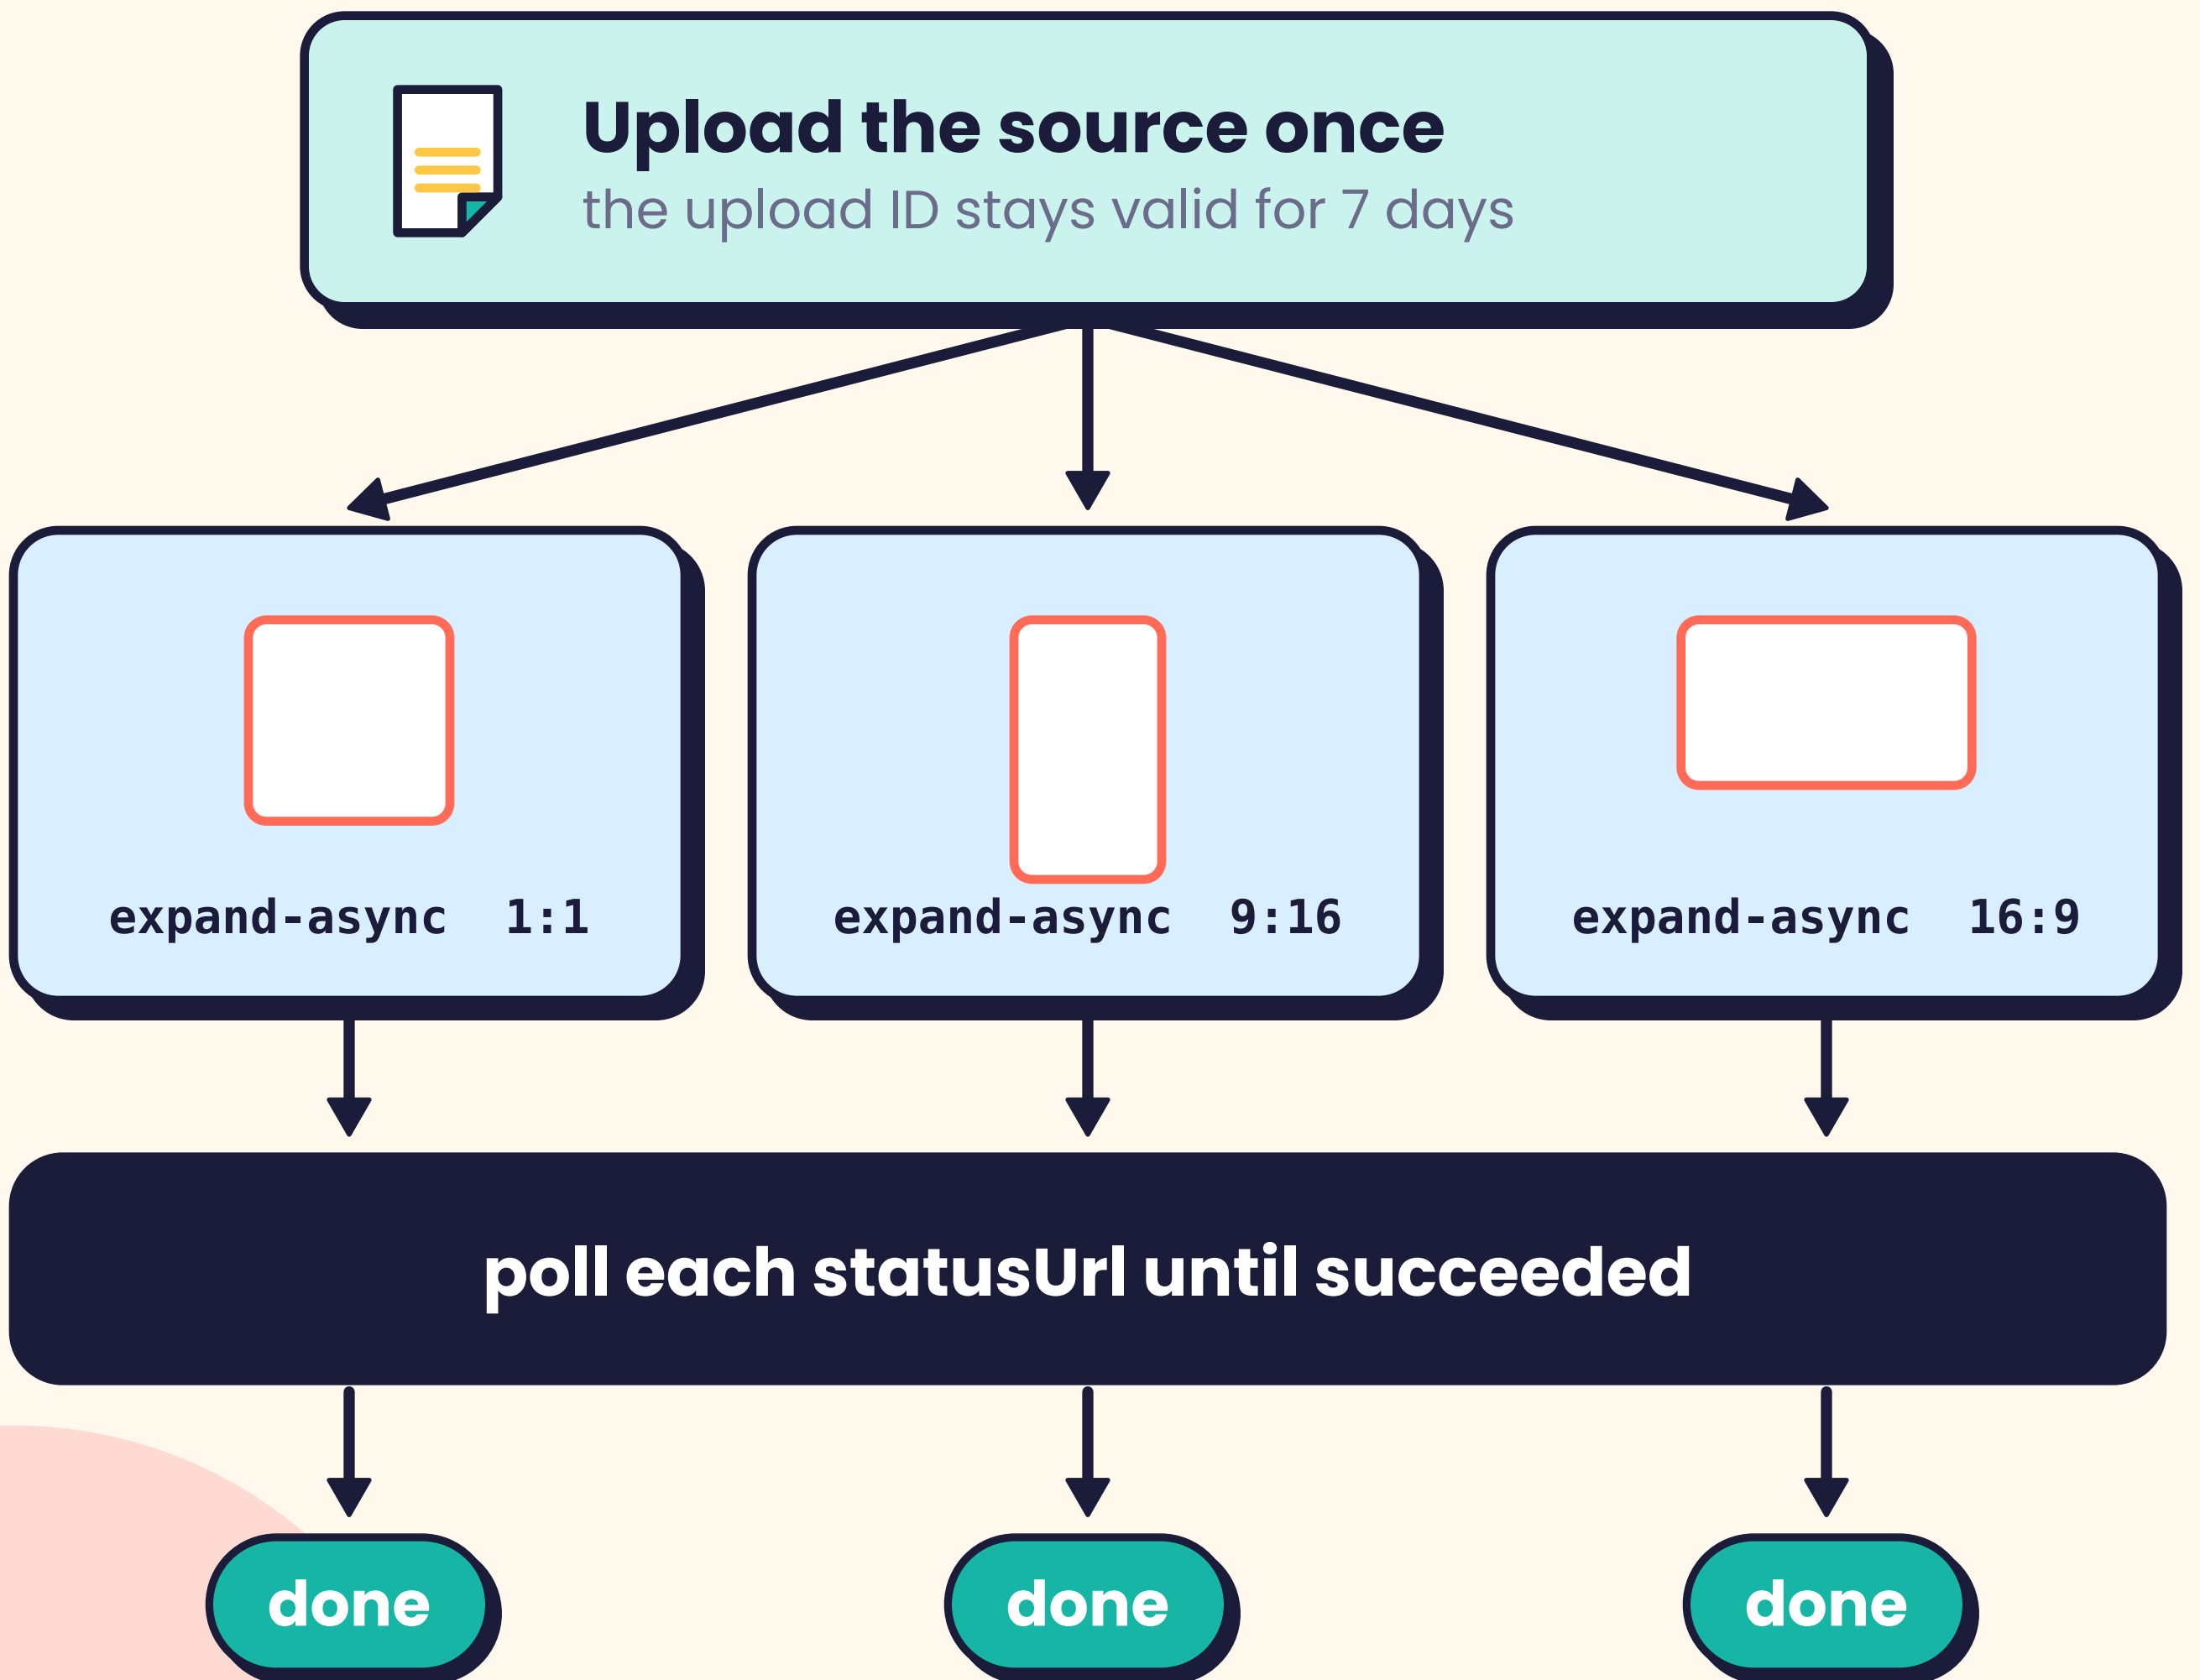

5 Test one mask first

Before you queue thousands.




1 Run one image end to end



2 Check which area changed



3 Check edges and lighting



4 Then queue the batch



What's your biggest adaptation job?

Answer in the comments. I read every one.

Resizing

Backgrounds

Variants

Something else



Next: custom models, and the step that makes them callable.