

Practical: 04

Aim: Use npm / yarn / pip to install and manage packages

Code:

```
C:\Users\gadhv>node -v
```

```
v22.13.0
```

```
C:\Users\gadhv>npm -v
```

```
10.9.2
```

```
C:\Users\gadhv>mkdir npm-lab
```

```
C:\Users\gadhv>cd m
```

The system cannot find the path specified.

```
C:\Users\gadhv>cd npm-lab
```

```
C:\Users\gadhv\npm-lab>npm init -y
```

Wrote to C:\Users\gadhv\npm-lab\package.json:

```
{
  "name": "npm-lab",
  "version": "1.0.0",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC",
  "description": ""}
```

```
C:\Users\gadhv\npm-lab>npm install express
added 65 packages, and audited 66 packages in 6s
22 packages are looking for funding
  run `npm fund` for details
found 0 vulnerabilities

C:\Users\gadhv\npm-lab>npm install axios
added 11 packages, and audited 77 packages in 4s
24 packages are looking for funding
  run `npm fund` for details
found 0 vulnerabilities

C:\Users\gadhv\npm-lab>npm install nodemon --save-dev
added 26 packages, and audited 103 packages in 5s
29 packages are looking for funding
  run `npm fund` for details
found 0 vulnerabilities

C:\Users\gadhv\npm-lab>npm list
npm-lab@1.0.0 C:\Users\gadhv\npm-lab
+-- axios@1.13.5
+-- express@5.2.1
`-- nodemon@3.1.14

C:\Users\gadhv\npm-lab>node index.js
Server running at http://localhost:3000
^C

C:\Users\gadhv\npm-lab>npm run dev
> npm-lab@1.0.0 dev
> nodemon index.js
[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
```

```
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting `node index.js`
Server running at http://localhost:3000
Terminate batch job (Y/N)? Y
```

```
C:\Users\gadhv\npm-lab>npm run start
> npm-lab@1.0.0 start
> node index.js
Server running at http://localhost:3000
Terminate batch job (Y/N)? Y
```

```
C:\Users\gadhv\npm-lab>npm run dev
> npm-lab@1.0.0 dev
> nodemon index.js
```

```
[nodemon] 3.1.14
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting `node index.js`
Server running at http://localhost:3000
[nodemon] restarting due to changes...
[nodemon] restarting due to changes...
[nodemon] starting `node index.js`
Server running at http://localhost:3000
[nodemon] restarting due to changes...
[nodemon] starting `node index.js`
Server running at http://localhost:3000
```

```
[nodemon] restarting due to changes...
```

```
[nodemon] starting `node index.js`
```

```
Server running at http://localhost:3000
```

```
http://localhost:3000http://localhost:3000Terminate batch job (Y/N)? Y
```

```
C:\Users\gadhv\npm-lab>npm install
```

```
added 102 packages, and audited 103 packages in 6s
```

```
29 packages are looking for funding
```

```
  run `npm fund` for details
```

```
found 0 vulnerabilities
```

```
C:\Users\gadhv\npm-lab>notepad .gitignore
```

```
C:\Users\gadhv\npm-lab>dir
```

```
Volume in drive C is Windows
```

```
Volume Serial Number is BAE4-F5CA
```

```
Directory of C:\Users\gadhv\npm-lab
```

24-02-2026	08:33	<DIR>	.
24-02-2026	08:09	<DIR>	..
24-02-2026	08:33	13	.gitignore
24-02-2026	08:29	603	index.js
24-02-2026	08:30	<DIR>	node_modules
24-02-2026	08:30	45,610	package-lock.json
24-02-2026	08:24	414	package.json
		4 File(s)	46,640 bytes
		3 Dir(s)	92,482,560,000 bytes free

```
C:\Users\gadhv\npm-lab>git remote add origin https://github.com/Pushprajgadhvi/OST-PRAC.git
```

```
C:\Users\gadhv\npm-lab>git push -u origin main
```

```
To https://github.com/Pushprajgadhvi/OST-PRAC.git
```

```
! [rejected]          main -> main (fetch first)
```

```
error: failed to push some refs to 'https://github.com/Pushprajgadhvi/OST-PRAC.git'
```

```
hint: Updates were rejected because the remote contains work that you do not
```

```
hint: have locally. This is usually caused by another repository pushing to
```

```
hint: the same ref. If you want to integrate the remote changes, use
```

```
hint: 'git pull' before pushing again.
```

```
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
```

```
C:\Users\gadhv\npm-lab>git remote -v
```

```
origin https://github.com/Pushprajgadhvi/OST-PRAC.git (fetch)
```

```
origin https://github.com/Pushprajgadhvi/OST-PRAC.git (push)
```

```
C:\Users\gadhv\npm-lab>git pull origin main --allow-unrelated-histories
```

```
remote: Enumerating objects: 26, done.
```

```
remote: Counting objects: 100% (26/26), done.
```

```
remote: Compressing objects: 100% (19/19), done.
```

```
remote: Total 26 (delta 5), reused 10 (delta 1), pack-reused 0 (from 0)
```

```
Unpacking objects: 100% (26/26), 2.14 MiB | 303.00 KiB/s, done.
```

```
From https://github.com/Pushprajgadhvi/OST-PRAC
```

```
* branch          main          -> FETCH_HEAD
```

```
* [new branch]     main          -> origin/main
```

```
Merge made by the 'ort' strategy.
```

```
01CE0618 - Open Source Technologies Syllabus.pdf | 5757 ++++++
```

```
License.docx | Bin 0 -> 19831 bytes
```

```
README.md | 2 +
```

```

abc.html | 4 +
prac 1-2.pdf | Bin 0 -> 1450683 bytes
prac 3.pdf | Bin 0 -> 827787 bytes
sample.txt | 2 +

```

7 files changed, 5765 insertions(+)

create mode 100644 01CE0618 - Open Source Technologies Syllabus.pdf

create mode 100644 License.docx

create mode 100644 README.md

create mode 100644 abc.html

create mode 100644 prac 1-2.pdf

create mode 100644 prac 3.pdf

create mode 100644 sample.txt

C:\Users\gadhv\npm-lab>git push -u origin main

Enumerating objects: 9, done.

Counting objects: 100% (9/9), done.

Delta compression using up to 12 threads

Compressing objects: 100% (7/7), done.

Writing objects: 100% (8/8), 12.57 KiB | 1.40 MiB/s, done.

Total 8 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)


remote: Resolving deltas: 100% (2/2), completed with 1 local object.

To https://github.com/Pushprajgadhvi/OST-PRAC.git

0029fd0..94b15bd main -> main

branch 'main' set up to track 'origin/main'.


Output:

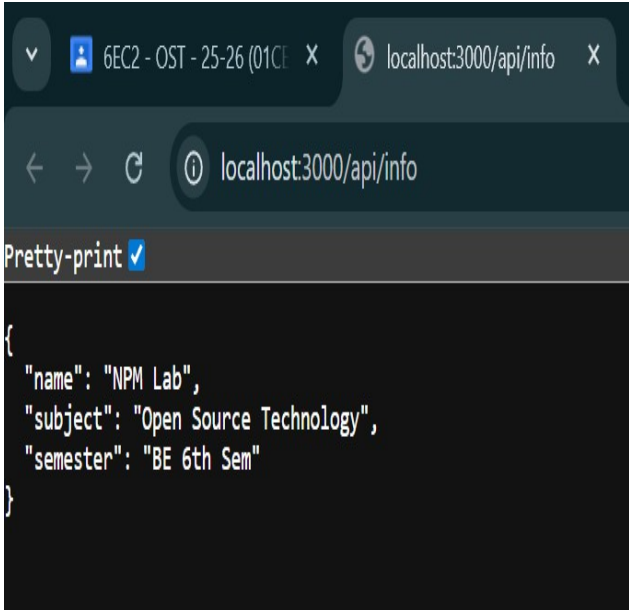

```

{
  "name": "NPM Lab",
  "subject": "Open Source Technology",
  "semester": "BE 6th Sem"
}


```

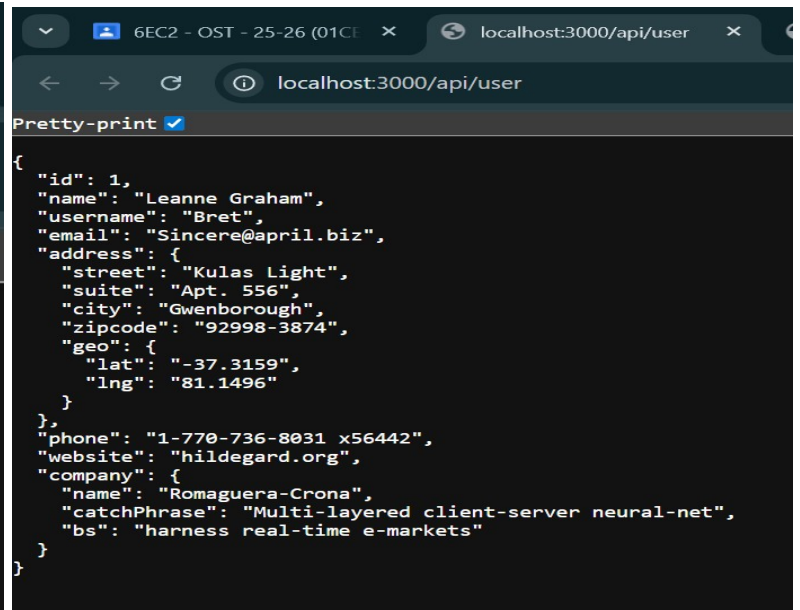


```

{
  "id": 1,
  "name": "Leanne Graham",
  "username": "Bret",
  "email": "Sincere@april.biz",
  "address": {
    "street": "Kulas Light",
    "suite": "Apt. 556",
    "city": "Gwenborough",
    "zipcode": "92998-3874",
    "geo": {
      "lat": "-37.3159",
      "lng": "81.1496"
    }
  },
  "phone": "1-770-736-8031 x56442",
  "website": "hildegard.org",
  "company": {
    "name": "Romaguera-Crona",
    "catchPhrase": "Multi-layered client-server neural-net",
    "bs": "harness real-time e-markets"
  }
}

```

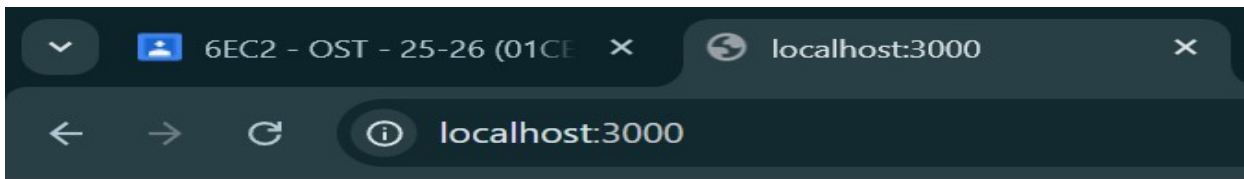

Hello Open Source Lab

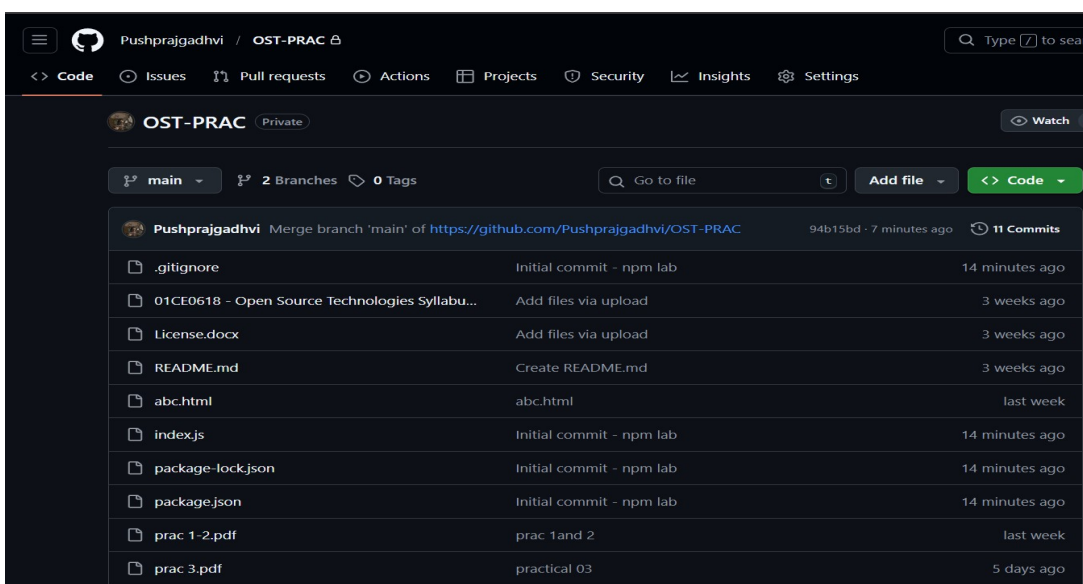

Practical: 05

Aim: Deploy a simple application using Nginx / Apache

Code:

```
C:\Users\gadhv>cd C:\Users\gadhv\npm-lab
```

```
C:\Users\gadhv\npm-lab>node index.js
```

Server running at <http://localhost:3000>

Nginx is runnnig

```
C:\Users\gadhv>cd C:\nginx-1.28.2\nginx-1.28.2
```

```
C:\nginx-1.28.2\nginx-1.28.2>nginx -t
```

```
nginx: [emerg] unknown directive "ifY" in C:\nginx-1.28.2\nginx-1.28.2/conf/nginx.conf:2
```

```
nginx: configuration file C:\nginx-1.28.2\nginx-1.28.2/conf/nginx.conf test failed
```


```
C:\nginx-1.28.2\nginx-1.28.2>nginx -t
```

```
nginx: the configuration file C:\nginx-1.28.2\nginx-1.28.2/conf/nginx.conf syntax is ok
```

```
nginx: configuration file C:\nginx-1.28.2\nginx-1.28.2/conf/nginx.conf test is successful
```

```
C:\nginx-1.28.2\nginx-1.28.2>nginx
```

Output:

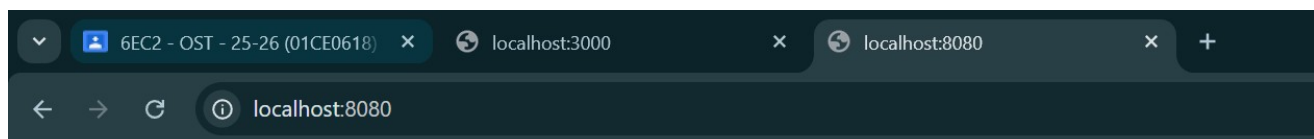

Hello Open Source Lab

