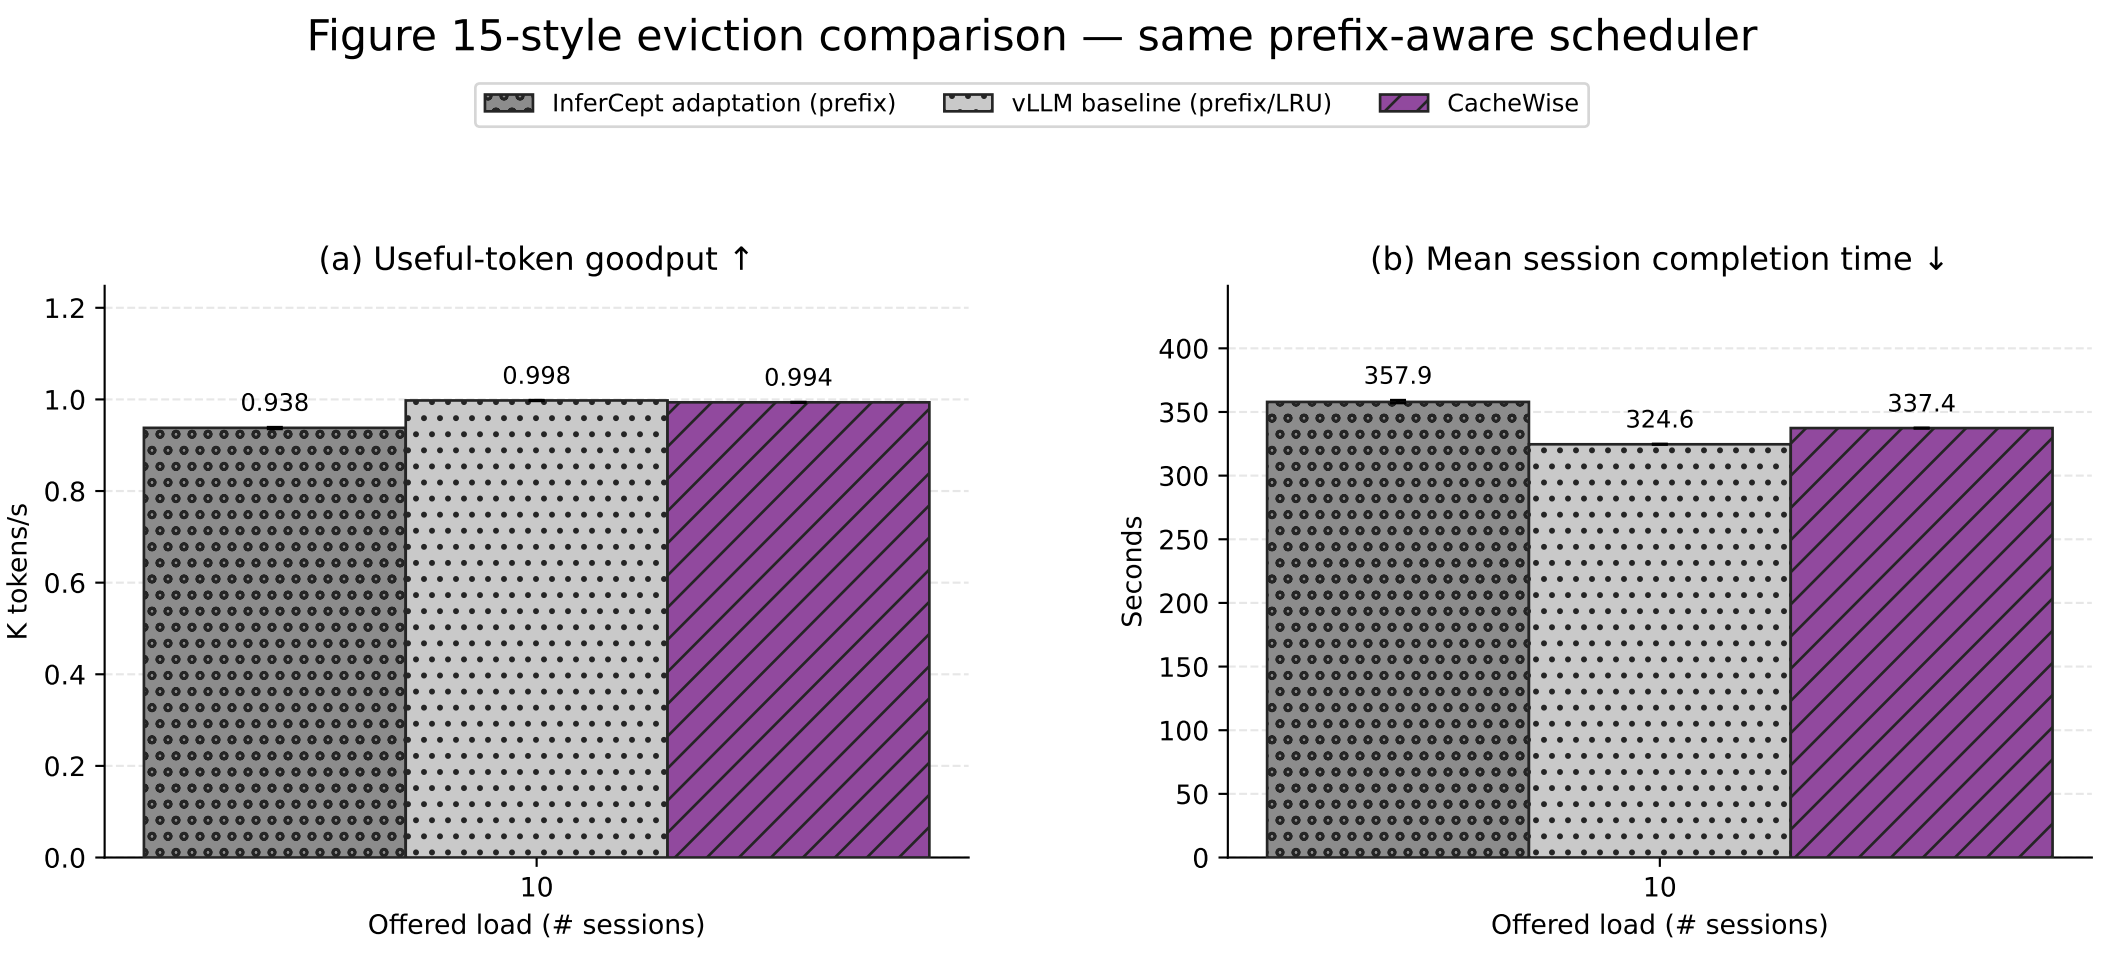


N=10 only · Qwen2.5-Coder-14B-Instruct · one RTX Pro 6000 · 3 repeats per policy
Bars average per-run metrics; whiskers show observed repeat ranges, not confidence intervals.
Useful tokens = new prompt tokens + generated tokens, counted once per segment; rates use whole-run elapsed time.

Aging disabled in all cases; CacheWise uses tool-name prediction. InferCept adaptation has no swap; oracle not measured.