EECS 484 Midterm Exam #3

(Note: This particular sample contains problems on indexing, but that topic is NOT in scope for the midterm)

Question 1 - Databases are Fun! (8 points)

Name the type of schema (physical, conceptual, or external) that is considered in each of the following scenarios:

A. The sch	nema a user se	es on Fakebook whe	n editing their profile. (1 point)	
B. The bi	narv files stor	ed in Fakebook's pri	vate server with all users' personal i	nfo. (1 point)
	-: <u>j</u>			
C. The sc	hema you see	when creating a new	table in the Fakebook SQL databas	se. (1 point)
		•		,
Using the follo	•	•	set) of the database of a restaurant	in a theme
	DishID	DishName	Price AvgRating]
	21341	Krabby Patty	2.99 10]
	34563585	Spinach Puffs	5.50 7]
	23	Ratatouille	27.40 8	
	3287	Butterbeer	1.99 7	
	123534	Lembas Bread	3.7 3]
	-		<u> </u>	-
D. List all	single attribut	es that are definitel y	y not candidate keys. Why are these	e attributes
definite points)	-	ate keys? If all attrib	utes could be candidate keys, expla	in why. (2
points)	1			

E. Which single attribute is **definitely** a candidate key? Why? If there are no definite

	candidate keys, explain why. (2 points)
r -	
F. 1	True or False, you can ALWAYS decompose any relation into a set of relations that are
	all in 3NF or all in BCNF? (1 point)

Question 2 - Sahil Towers (22 points)

condidate keye evalein why (2 points)

Thanks to its recent success, Sahil Towers[™] is planning on expanding worldwide to bring college students affordable and aesthetic housing. To help with this, you've been asked to develop a database for the company.


Develop an ER diagram the reflects the constraints below:

- Each apartment building is uniquely identified by its address. We also keep track of the number of amenities of each apartment building.
- An apartment building may have at most one cat that lives in its lobby \circ Each cat has a unique name. They also have a breed, an age, and a colour. \circ Each apartment building can have up to one cat and each cat can live in a single
 - apartment building. Unfortunately, not every cat is in a Sahil Apartment Building
- Each apartment building has at least one room in it
 - These rooms are uniquely identified by a combination of the room number and the apartment building's address. Each room has a number of beds.
 - A room cannot exist without the single apartment building it is located in
- Each apartment building must be located in exactly one city
 - The city has a unique city ID tracked by the Sahil Towers system, a name, and a country it is located in.
 - Each city may have at most one apartment building
- Some cities host summits
 - \circ Each summit has a unique name that does not change from year to year. \circ When a city hosts a summit, we keep track of which year it was hosted in and how many people attended the summit. A city may not hold the same summit multiple times.

You may draw your ER diagram in the space below or draw it out on a separate piece of paper and submit it with your exam.

Question 3 - ER Diagrams are Abstract Art (5 points)

Determine whether the following statements about the given ER Diagram are true or false

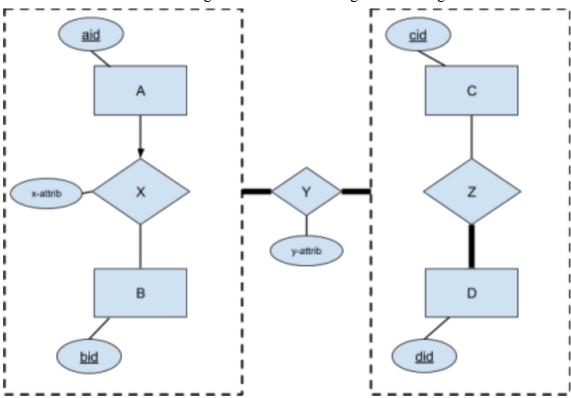


- A. The set of attributes (cid, did) is a candidate key for relationship Z. (1 point)
- B. Because every instance of relationship Z participates in Y, and records in C participate in relationship Z, every record in C participates in relationship Y. (1 point)
- C. Two instances of relationship X *can't* have the same value for x-attrib. (1 point)
- D. aid is a candidate key for the relationship X. (1 point)

E. The set of attributes (aid, bid, cid, did) is a candidate key for relationship Y. (1 point)
Question 4 - A Night at the Movies (22 points)
Consider a database consisting of the following tables. Primary keys are underlined and
attributes with the same name are foreign keys. Assume that none of the attributes are NULLs.
Movies(MovieID, MovieName, MovieYear)
Actors(ActorID, FirstName, LastName)
Castings(MovieID, ActorID)
Ratings(ReviewerID, MovieID, Rating)
Reviewers(<u>ReviewerID</u> , UserName)
A. Write a SQL query that finds all movie names of movies with at least 1 rating greater than or equal to 7.0 and are released after the year 2013. Results should not include duplicates and should be ordered by MovieName in ascending order. (4 points)
L

B. Write a SQL query that finds all the MovieIDs of the movies that have more than 5 actors acting in it. (3 points)

	 en at least 10
•	

8.0 or above. Alias the column for average rating with 'AvgRating'. (4 points)

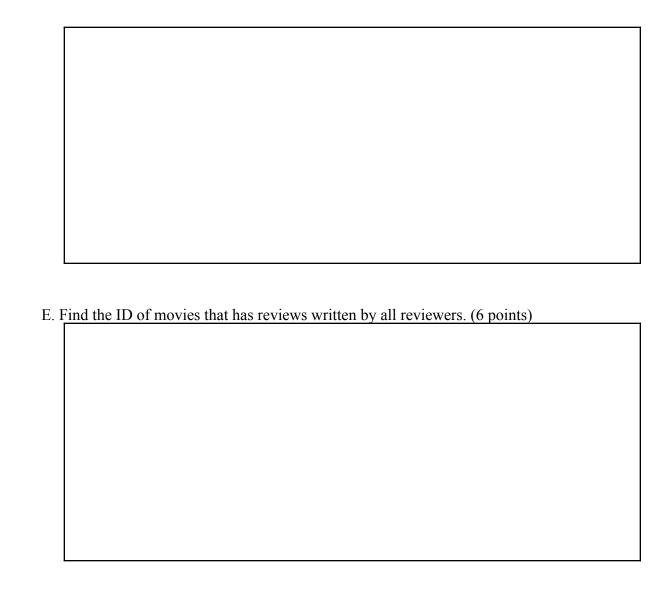

Question 5 - The 484 Fruit Stand (18 points)


Use the following schema for this question. Primary keys are underlined and attributes with the same name are foreign keys

StaffMember(<u>Uniqname</u>, FirstName, LastName, Role, CityID)
City(<u>CityID</u>, CityName, StateOrProvince, Country)
Fruit(<u>FruitID</u>, Name, VitaminC)
Enjoys(<u>Uniqname</u>, <u>FruitID</u>)

Note: The VitaminC attribute of the Fruit table represents the milligrams of vitamin C that the fruit contains. The CityID field of the StaffMember table refers to the hometown city of staff members. The Enjoys table stores data on which staff members enjoy which fruits.

in	the above schema, write relational algebra statements for the following statements: A. d the first and last names of all staff members whose hometown city is in the country in and who enjoy the fruit whose name is "durian". (5 points)
•	
	Find the name and country of all cities that are NOT a hometown of any staff member whose role is "GSI". (4 points)
	Find the uniquames of all staff members who enjoy the fruit named 'Mango' or are from the state of 'Ohio'. (4 points)

D. Find the first names of all the staff members that are not from the state of 'Michigan' and enjoy all the fruits in the database. (5 points)

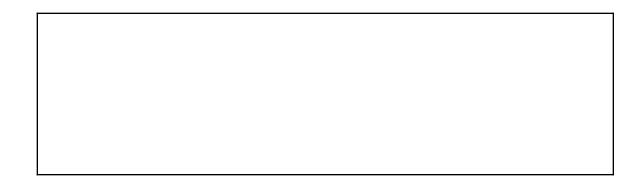

Question 6 - The Quest for a Normal Table (12 points)

Given a relation R(A,B,C,D,X,Y,Z) with the following set of functional dependencies, circle the option that answers each of the following questions.

$$\{X \rightarrow Y, Y \rightarrow Z, A \rightarrow B, A \rightarrow CD\}$$

- A. Use Armstrong's inference axioms (reflexibility, augmentation, transitivity, union, decomposition) to determine which functional dependencies CANNOT be derived. (3 points)
 - a. $AY \rightarrow AZ$
 - b. $X \rightarrow Z$
 - $c. A \rightarrow D$
 - $d. X \rightarrow A$
- B. Is this relation with columns (A, B, C, D, X, Y, Z) in 3NF form? In BCNF form? (3 points)
 - a. Both 3NF and BCNF
 - b. In 3NF but not BCNF
 - c. In BCNF but not 3NF
 - d. Neither in 3NF or BCNF
- C. If we were to break this relation into two relations, (X, Y, Z) and (A, B, C, D), which of these two relations would be in BCNF form? (3 points)
 - a. Both (X, Y, Z) and (A, B, C, D)
 - b. Only (X, Y, Z)
 - c. Only (A, B, C, D)
 - d. Neither
- D. Which of the following decompositions of the original relation are lossless join

decompositions? (3 points)

- a. (A,B,C,D,X) and (X,Y,Z)
- b. (A,B,C,D,Y) and (Y,X,Z)
- c. (A,B,C,D) and (D,X,Y,Z)
- d. Choices A and B
- e. Choices A and C

Question 7 - The Fastest Index (3 points)

In a table with T1 with 4 attributes <Tid, Name, Age, Gender>, Tid is the primary key and a clustered index is created on attribute Name. We want to create another index on the table. Circle all of the types of indices that are able to be created. There may be 1 or more

- a. An unclustered index on <Tid, Gender> using Alternative 2.
- b. A clustered index on <Tid, Name> using Alternative 1.
- c. A clustered index on <Age> using Alternative 3.
- d. An unclustered index on <Name> using Alternative 3.
- e. An unclustered index on <Tid, Age> using Alternative 1.
- f. A clustered index on <Gender> using Alternative 2.