

Decomposition

Decomposing an object helps to effectively test the entire functional part by dividing, in my example, the search results page into separate objects, parameters, and values.

For example, for the search results page, I've defined the following objects:

1. Search edit

Parameters: edit location, date from and to, additional settings etc.

Values: enter text, enter date, choose additional options etc.

2. Sort

Parameters: sorting criteria

Values: best match, reviewed, lowest price, distance etc.

3. Filters

Parameters: budget, properties etc.


Values: selection options, customization filters etc.

4. Product card

Parameters: product information, map, reviews, interaction buttons etc.

Values: open card, open image, open map etc.

For an example of the decomposition of a search results page, you can learn more about [MIRO](#)

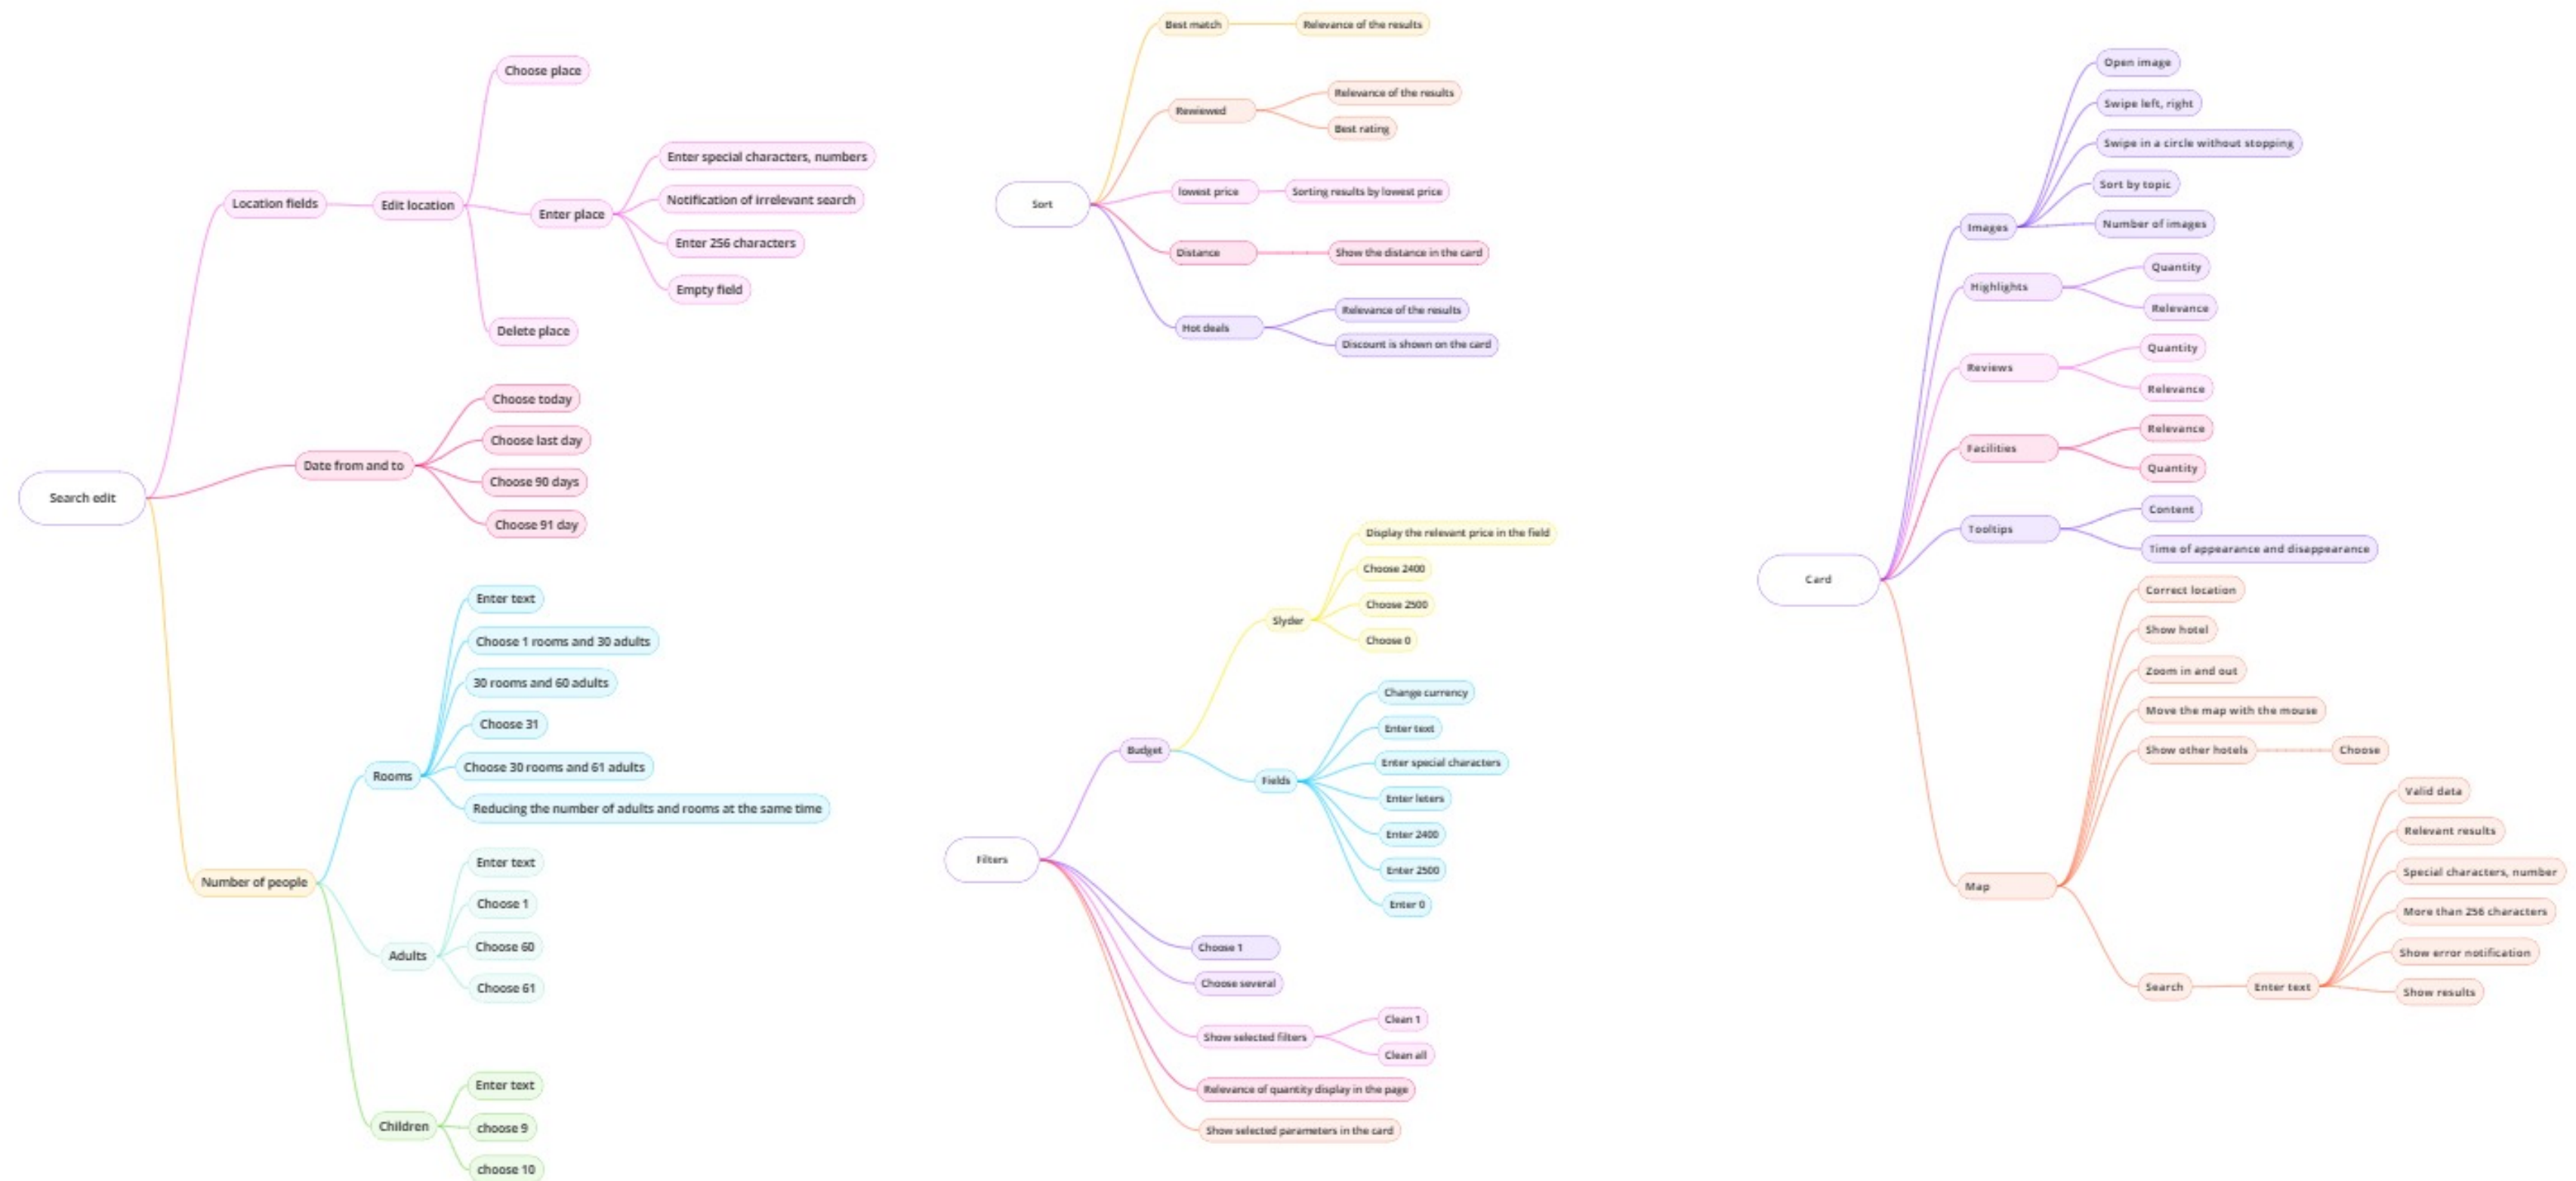

Thanks for your attention!