CRM.AlMohtaref.Api (Presentation Layer)

Program.cs

<<static>>
Program

Middlewares

ExceptionHandlingMiddleware

ErrorDto

Controllers

<<ApiController>>
AuthController

<<ApiController>>
LookupsController

<<ApiController>>
ContactsController

<<ApiController>>
CampaignsController

<<ApiController>>
UsersController

Contracts (Request)

<<FromQuery>>
PagedRequest

<<FromBody>>
LoginRequest

<<FromQuery>>
GetLookupsRequest

<<FromQuery>>
GetContactsRequest

<<FromQuery>>
GetUsersRequest

<<FromBody>>
CreateUserRequest

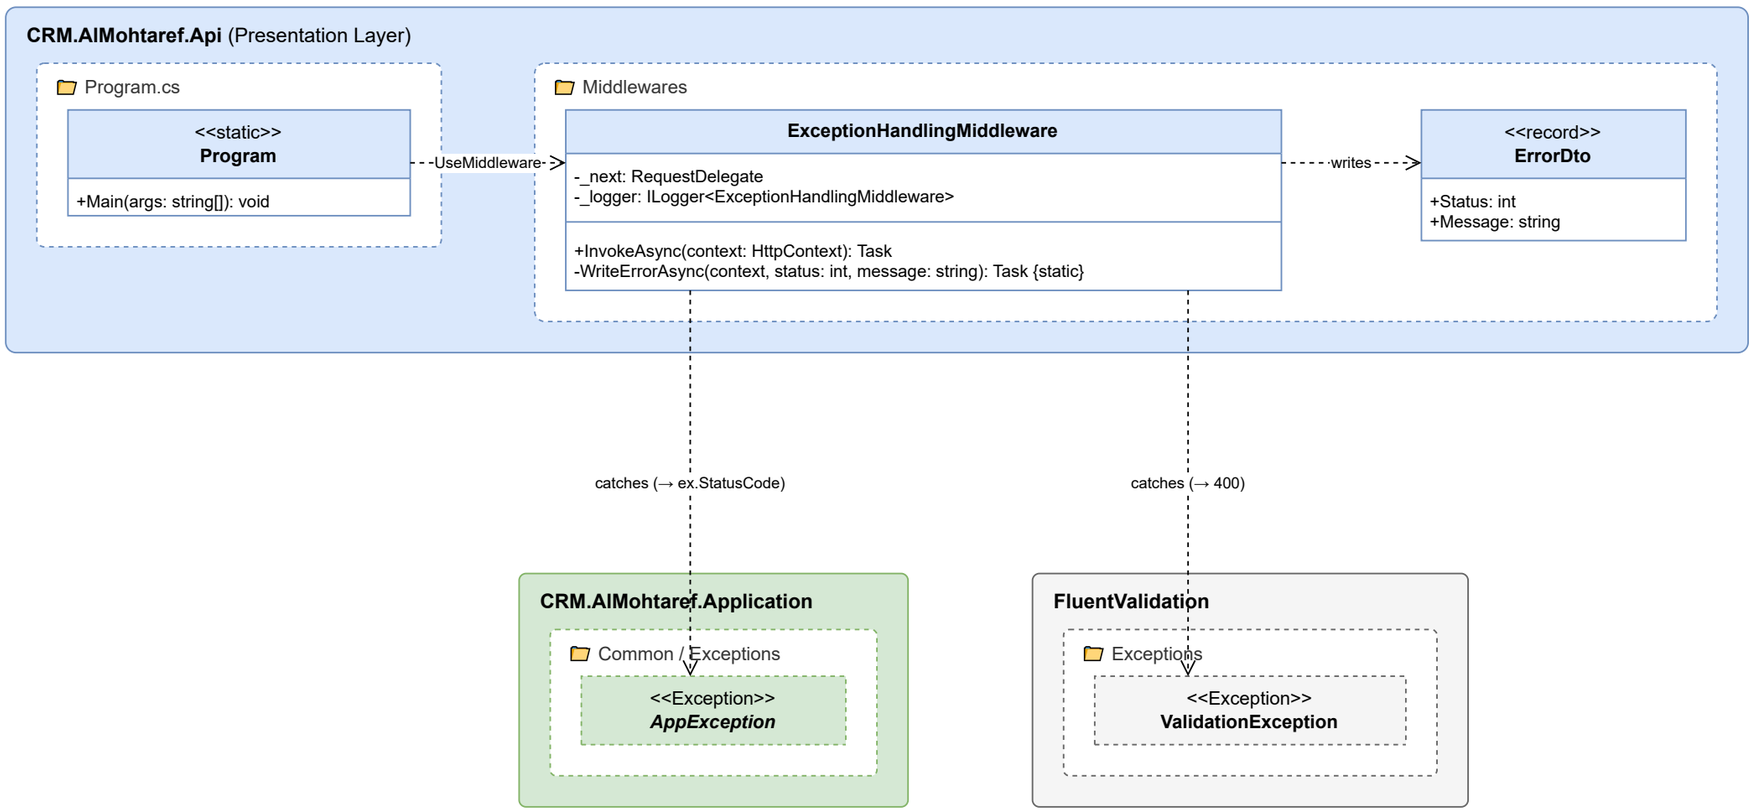
<<FromBody>>
UpdateUserRequest

<<FromBody>>
PermissionRequest

<<FromBody>>
UpdateCampaignRequest

<<FromBody>>
UpdateQuestionRequest

<<FromBody>>
QuestionOptionRequest


CRM.AlMohtaref.Api (Presentation Layer)
Program.cs
<<static>>
Program
+Main(args: string[]): void
UseMiddleware
Middlewares
ExceptionHandlingMiddleware
-_next: RequestDelegate
-_logger: ILogger<ExceptionHandlingMiddleware>
+InvokeAsync(context: HttpContext): Task
-WriteErrorAsync(context, status: int, message: string): Task {static}
writes
<<record>>
ErrorDto
+Status: int
+Message: string
catches (→ ex.StatusCode)
catches (→ 400)
CRM.AlMohtaref.Application
Common / Exceptions
<<Exception>>
AppException
FluentValidation
Exceptions
<<Exception>>
ValidationException

CRM.AlMohtaref.Api (Presentation Layer)

Contracts (Request)

<<FromQuery>>
GetContactsRequest

+CampaignTitle: string?
+TrackId: Guid?
+LeadStatusId: Guid?
+TagIds: List<Guid>?
+StudentName: string?
+ContactName: string?
+PhoneNumber: string?

+ToQuery(): GetContactsQuery

<<FromQuery>>
PagedRequest

+PageNumber: int = 1

<<FromQuery>>
GetUsersRequest

+Name: string?
+AccountName: string?
+Email: string?
+IsActive: bool?
+RoleId: Guid?
+DepartmentId: Guid?

+ToQuery(): GetUsersQuery

<<FromQuery>>
GetLookupsRequest

+Include: List<LookupType>?

+ToQuery(): GetLookupsQuery

<<FromBody>>
LoginRequest

+AccountName: string
+Password: string

+ToCommand(): LoginCommand

<<FromBody>>
UpdateCampaignRequest

+Title: string
+Description: string
+StatusId: Guid
+TrackId: Guid
+Url: string
+Budget: decimal
+PlatformIds: List<Guid>

+ToCommand(id: Guid): UpdateCampaignCommand

<<FromBody>>
CreateUserRequest

+AccountName: string
+FullName: string
+Email: string
+Password: string
+Permissions: List<PermissionRequest>?

+ToCommand(): CreateUserCommand

Permissions

<<FromBody>>
UpdateUserRequest

+AccountName: string
+FullName: string
+Email: string
+IsActive: bool?
+Permissions: List<PermissionRequest>?

+ToCommand(id: Guid): UpdateUserCommand

Permissions

<<FromBody>>
QuestionOptionRequest

+OptionText: string
+TagIds: List<Guid>

+ToCommand(): QuestionOptionCommand

Options

<<FromBody>>
UpdateQuestionRequest

+Type: QuestionType
+Target: QuestionTarget
+FieldId: Guid?
+Options: List<QuestionOptionRequest>?

+ToCommand(campaignId: Guid, questionId: Guid): UpdateQuestionCommand

<<FromBody>>
PermissionRequest

+RoleId: Guid
+DepartmentId: Guid

+ToCommand(): PermissionCommand

Type

Target

CRM.AlMohtaref.Domain

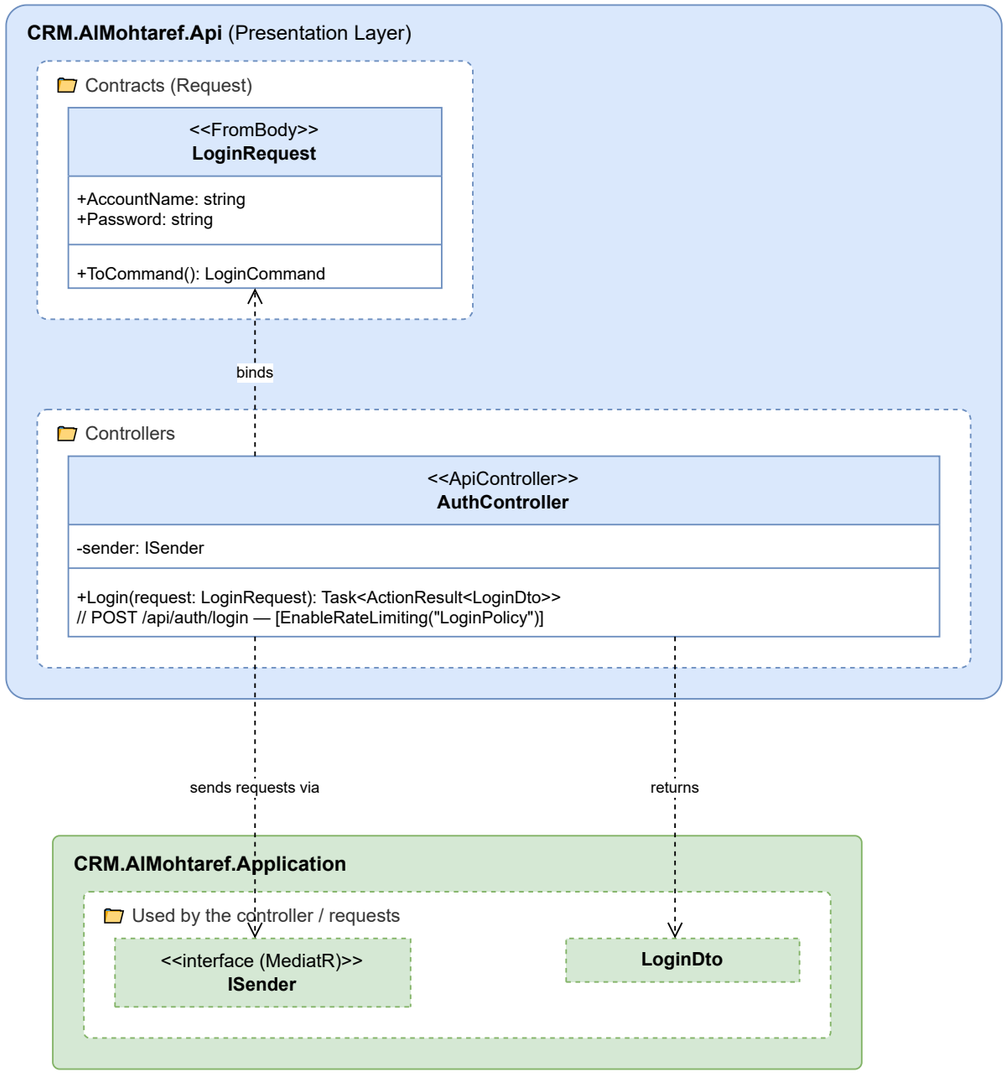
Enums

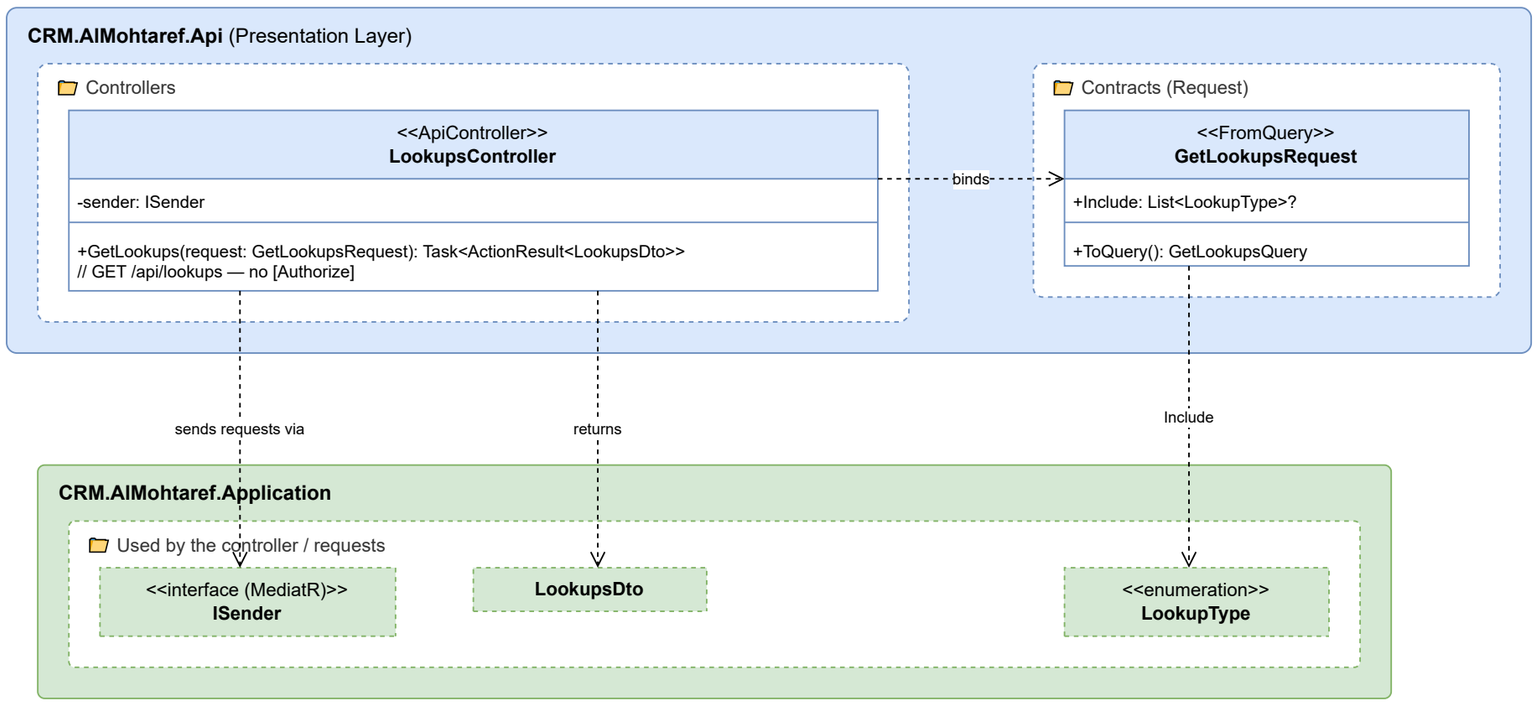
<<enumeration>>
QuestionType

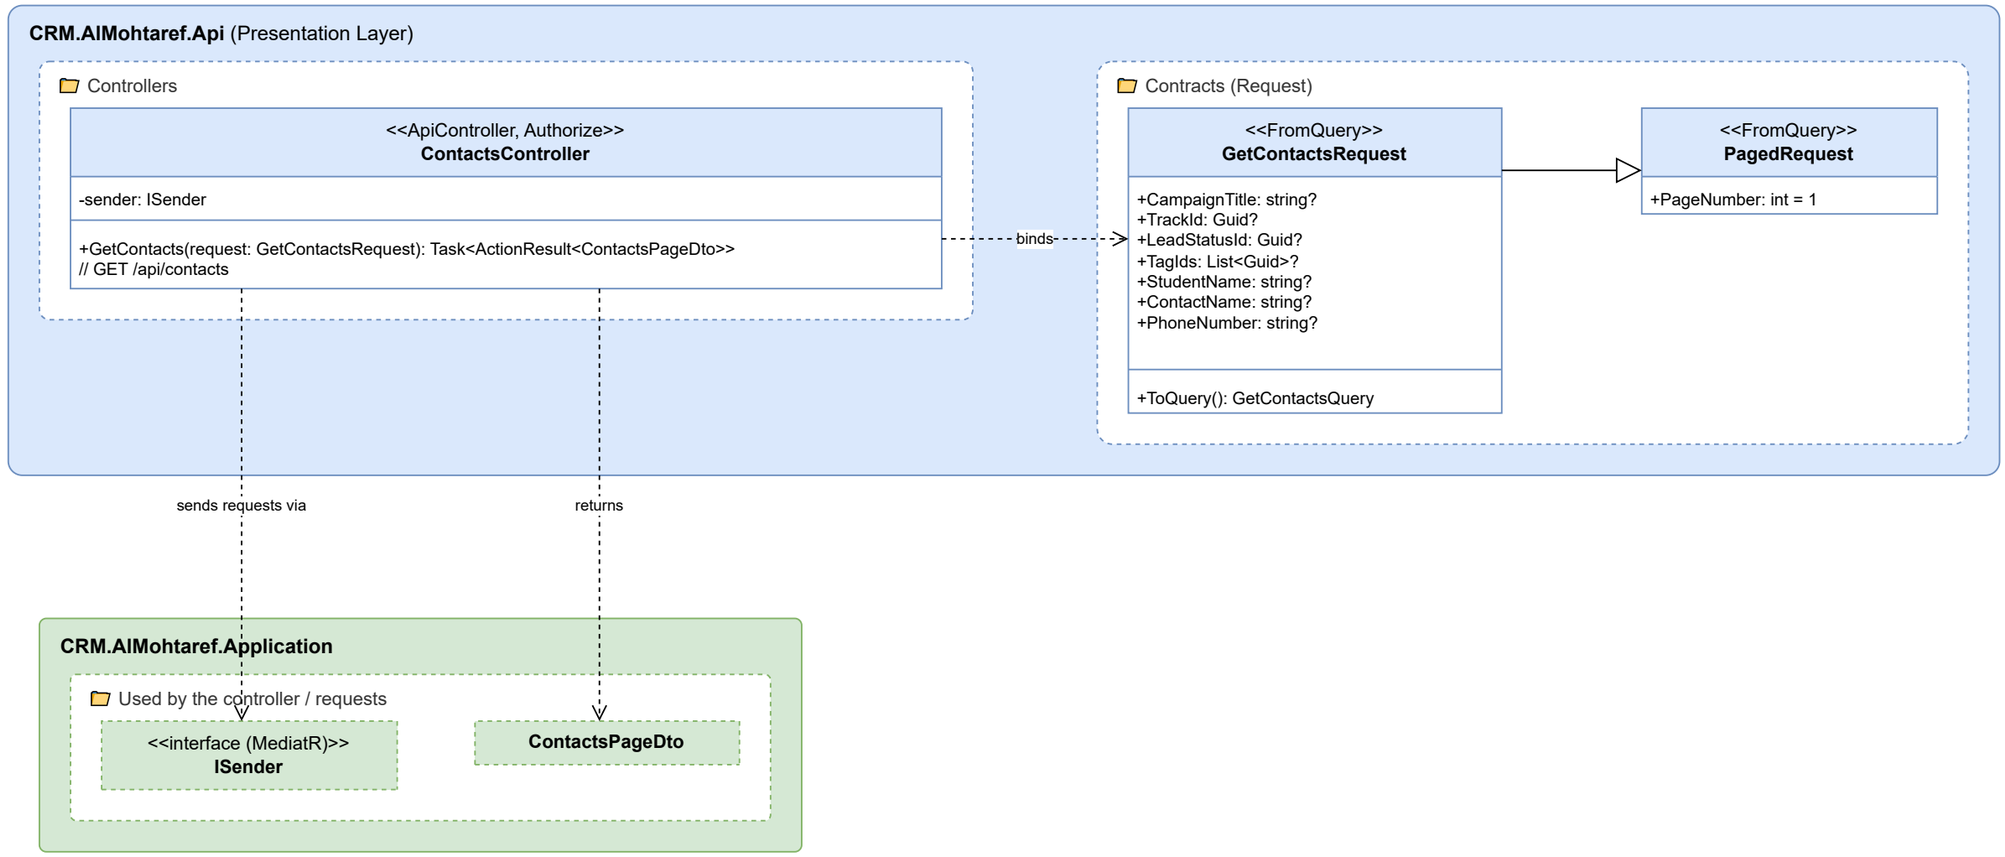
Text = 1
Choice = 2
MultipleChoice = 3
Boolean = 4

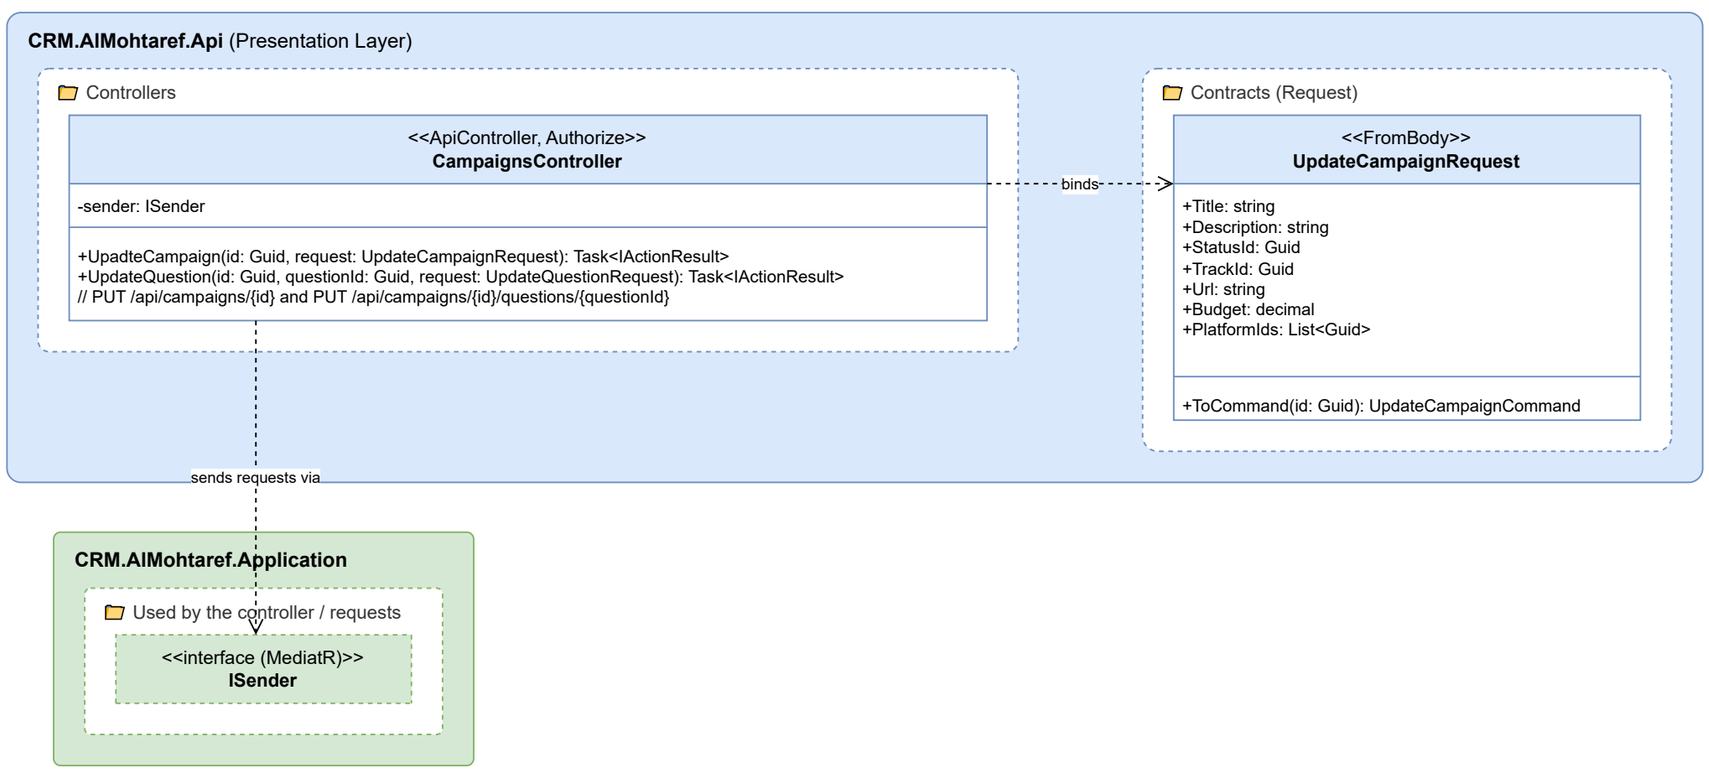
<<enumeration>>
QuestionTarget

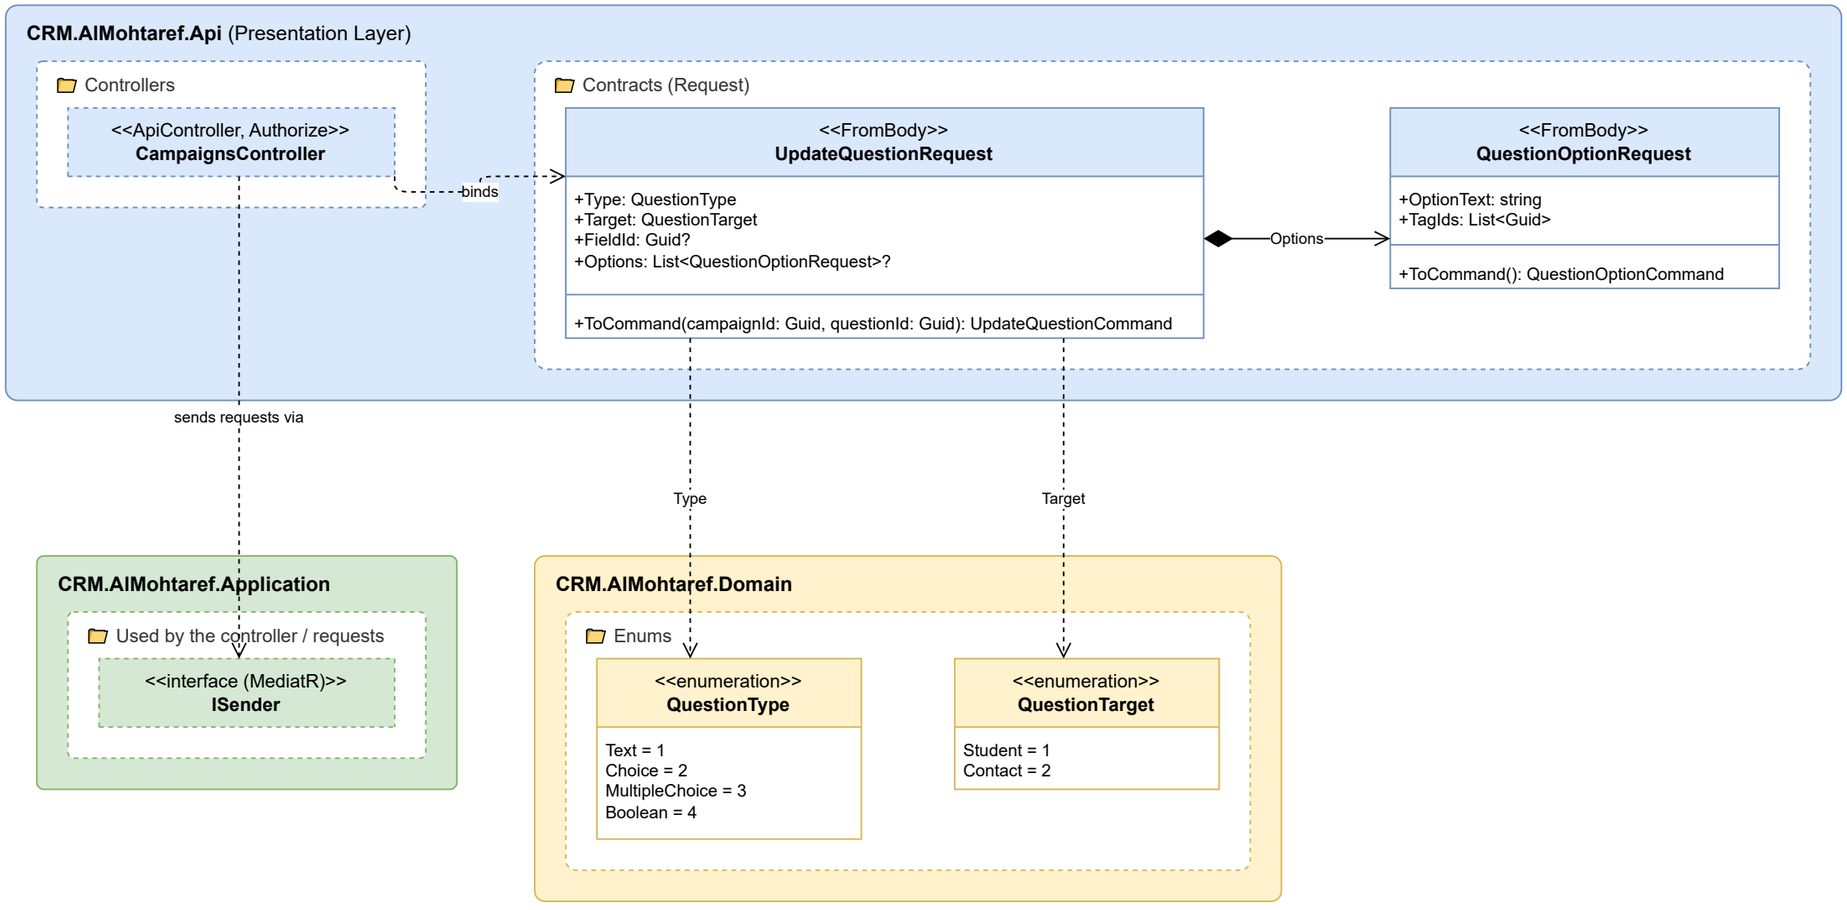
Student = 1
Contact = 2


CRM.AlMohtaref.Api (Presentation Layer)
Contracts (Request)
<<FromBody>>
LoginRequest
+AccountName: string
+Password: string
+ToCommand(): LoginCommand
binds
Controllers
<<ApiController>>
AuthController
-sender: ISender
+Login(request: LoginRequest): Task<ActionResult<LoginDto>>
// POST /api/auth/login — [EnableRateLimiting("LoginPolicy")]
sends requests via
returns
CRM.AlMohtaref.Application
Used by the controller / requests
<<interface (MediatR)>>
ISender
LoginDto


CRM.AlMohtaref.Api (Presentation Layer)
Controllers
<<ApiController>>
LookupsController
-sender: ISender
+GetLookups(request: GetLookupsRequest): Task<ActionResult<LookupsDto>>
// GET /api/lookups — no [Authorize]
binds
Contracts (Request)
<<FromQuery>>
GetLookupsRequest
+Include: List<LookupType>?
+ToQuery(): GetLookupsQuery
sends requests via
returns
Include
CRM.AlMohtaref.Application
Used by the controller / requests
<<interface (MediatR)>>
ISender
LookupsDto
<<enumeration>>
LookupType


CRM.AlMohtaref.Api (Presentation Layer)
Controllers
<<ApiController, Authorize>>
ContactsController
-sender: ISender
+GetContacts(request: GetContactsRequest): Task<ActionResult<ContactsPageDto>>
// GET /api/contacts
binds
Contracts (Request)
<<FromQuery>>
GetContactsRequest
+CampaignTitle: string?
+TrackId: Guid?
+LeadStatusId: Guid?
+TagIds: List<Guid>?
+StudentName: string?
+ContactName: string?
+PhoneNumber: string?
+ToQuery(): GetContactsQuery
<<FromQuery>>
PagedRequest
+PageNumber: int = 1
sends requests via
returns
CRM.AlMohtaref.Application
Used by the controller / requests
<<interface (MediatR)>>
ISender
ContactsPageDto


CRM.AlMohtaref.Api (Presentation Layer)
Controllers
<<ApiController, Authorize>>
CampaignsController
-sender: ISender
+UpadteCampaign(id: Guid, request: UpdateCampaignRequest): Task<IActionResult>
+UpdateQuestion(id: Guid, questionId: Guid, request: UpdateQuestionRequest): Task<IActionResult>
// PUT /api/campaigns/{id} and PUT /api/campaigns/{id}/questions/{questionId}
binds
Contracts (Request)
<<FromBody>>
UpdateCampaignRequest
+Title: string
+Description: string
+StatusId: Guid
+TrackId: Guid
+Url: string
+Budget: decimal
+PlatformIds: List<Guid>
+ToCommand(id: Guid): UpdateCampaignCommand
sends requests via
CRM.AlMohtaref.Application
Used by the controller / requests
<<interface (MediatR)>>
ISender


CRM.AlMohtaref.Api (Presentation Layer)
Controllers
<<ApiController, Authorize>>
CampaignsController
binds
Contracts (Request)
<<FromBody>>
UpdateQuestionRequest
+Type: QuestionType
+Target: QuestionTarget
+FieldId: Guid?
+Options: List<QuestionOptionRequest>?
+ToCommand(campaignId: Guid, questionId: Guid): UpdateQuestionCommand
Options
<<FromBody>>
QuestionOptionRequest
+OptionText: string
+TagIds: List<Guid>
+ToCommand(): QuestionOptionCommand
sends requests via
Type
Target
CRM.AlMohtaref.Application
Used by the controller / requests
<<interface (MediatR)>>
ISender
CRM.AlMohtaref.Domain
Enums
<<enumeration>>
QuestionType
Text = 1
Choice = 2
MultipleChoice = 3
Boolean = 4
<<enumeration>>
QuestionTarget
Student = 1
Contact = 2

CRM.AlMohtaref.Api (Presentation Layer)

Contracts (Request)

<<FromBody>>
PermissionRequest

+RoleId: Guid
+DepartmentId: Guid

+ToCommand(): PermissionCommand

Permissions

<<FromBody>>
CreateUserRequest

+AccountName: string
+FullName: string
+Email: string
+Password: string
+Permissions: List<PermissionRequest>?

+ToCommand(): CreateUserCommand

Permissions

<<FromBody>>
UpdateUserRequest

+AccountName: string
+FullName: string
+Email: string
+IsActive: bool?
+Permissions: List<PermissionRequest>?

+ToCommand(id: Guid): UpdateUserCommand

<<FromQuery>>
GetUsersRequest

+Name: string?
+AccountName: string?
+Email: string?
+IsActive: bool?
+RoleId: Guid?
+DepartmentId: Guid?

+ToQuery(): GetUsersQuery

<<FromQuery>>
PagedRequest

+PageNumber: int = 1

binds

binds

binds

Controllers

<<ApiController, Authorize>>
UsersController

-sender: ISender

+AddUser(request: CreateUserRequest): Task<ActionResult<int>>
+GetUsers(request: GetUsersRequest): Task<ActionResult<UsersPageDto>>
+GetUser(id: Guid): Task<ActionResult<UserDetailDto>>
+UpdateUser(id: Guid, request: UpdateUserRequest): Task<IActionResult>

sends requests via

returns

returns

CRM.AlMohtaref.Application

Used by the controller / requests

<<interface (MediatR)>>
ISender

UsersPageDto

UserDetailDto