

---

# **QGEP Documentation**

*Version 0.5*

**The QGEP Project/OPENGIS.ch**

08 April 2016



<b>1</b>	<b>Contents</b>	<b>3</b>
1.1	QGEF Installation Guide . . . . .	3
1.2	QGEF User Guide . . . . .	7
1.3	Admin Guide . . . . .	11
<b>2</b>	<b>Indices and tables</b>	<b>17</b>



QGEP is a wastewater management module for QGIS based on SIA 405 (Leitungskataster) and VSA-DSS (GEP) and developed closely to the QGIS application.

This document can also be downloaded as a single PDF document : QGEP.pdf .



---

## Contents

---

### 1.1 QGEP Installation Guide

This will guide you through the setup of required applications and services to get your system ready for running QGEP.

---

**Note :** You also have the option of downloading a *Demo Virtual Machine* that has a working QGEP demo.

---

#### 1.1.1 Setup database server

If you expect to access the data from several different workstations, you can install the database on a network accessible server. If it is just a single desktop you are working on, this can be installed on the same machine.

##### Required Software

###### Server installation

- Install PostgreSQL (>=9.3)
  - [Windows download page](#)
- Install PostGIS (>=2.1)

---

**Note :** In a single desktop environment (no network database server) you can setup your database to trust local connections.

This way, the database won't ask for a password if you're connecting from your local workstation while no password is written anywhere. You even can do with no database password at all.

This can be done by editing the database access configuration file [pg\\_hba.conf](#) and set the auth-options from md5 to trust. A database service reload is required to activate changes.

---

#### 1.1.2 Database initialization

You can use *pgAdmin* to access and manage the database server.

---

**Note :** By clicking the link you can learn how to *Install pgAdmin*

---

##### Process

In pgAdminIII

- Connect to the database server
- Create a new group role (preferably named *qgep*, but you are free to choose)
- Create a new login role (*qgepuser* for example) and make it a member of the *qgep* group

You can do this graphically or by simply opening a pgAdminIII *SQL query* window and type the following :

```
CREATE GROUP qgep;  
CREATE ROLE qgepuser LOGIN;  
GRANT qgep TO qgepuser;
```

- Create a new database (preferably named *qgep*, but you are free to choose)
  - Change to this database
- Create a new schema with the name *qgep*
- Open an *SQL query* Window and create the extensions (if they're not created yet)
  - `CREATE EXTENSION hstore;`
  - `CREATE EXTENSION postgis;`
- Download demo data
  - [https://github.com/QGEP/data/raw/demodata/qgep\\_demodata.backup](https://github.com/QGEP/data/raw/demodata/qgep_demodata.backup)
- Right click the *qgep* schema
  - Click *Restore*
  - Load your download of *qgep.backup*
  - Restore Options #2 : Activate *Clean before restore*
  - Click *Restore*
  - Click *Cancel*
- Right click the database and click *Refresh*
- Update privileges for the database
  - Right click the *qgep* schema
  - Properties -> Privileges Tab > Grant USAGE to group *qgep*. You can also do this as a query : `GRANT USAGE ON SCHEMA qgep TO GROUP qgep;`
  - Click *Grant Wizard...*
  - Selection, click *Check All*
  - Privileges
    - Group *qgep*
    - Choose *ALL*

### 1.1.3 Configuration du poste de travail

#### Configuration de la base de données

To tell a workstation, where the database is (on the local system or on a network server) you will have to create some files initially on every device on which you will have QGIS/QGEP running. It is not required to do that on the server itself.

Ces étapes dépendent de votre système d'exploitation.

#### Windows

Créer un nouveau dossier où vous souhaitez enregistrer la configuration. Par exemple `pgconfig` dans vos documents. Ce dossier sera connu sous le nom de `PGSYSCONFDIR` dans ce guide.

Configurer la variable d'environnement `PGSYSCONFDIR` pour pointer sur le chemin de `PGSYSCONFDIR`

Dans ce dossier, vous trouverez deux fichiers

- `pg_service.conf`
- `pgpass` (si vous ne souhaitez pas entre le mot de passe à chaque connexion)

**Attention :** On Windows, you need to save `pg_service.conf` in Unix format in order to work. One way to do it is to open it with `Notepad++` and Edit --> EOL Conversion --> UNIX Format --> File save.



## Linux

Sous Linux, vous pourrez placer les fichiers `.pg_service.conf` et `.pgpass` sous le dossier home (habituellement `/home/[username]`)

## Tous les systèmes

Placer les lignes suivantes dans le fichier `pg_service.conf` ou `.pg_service.conf`. Vous devrez peut-être apporter des modifications selon votre configuration.

```
[pg_qgep]
host=localhost
port=5432
dbname=qgep
user=qgepuser
```

Pour enregistrer le mot de passe sur votre système, vous pouvez utiliser le fichier `pgpass`.

```
localhost:5432:*:qgepuser:password
```

**Note :** Si la base de données n'est pas sur votre poste local, remplacer toutes les occurrences de `localhost` par l'adresse réseau du serveur de base de données.

---

## Installer QGIS

- Version minimum requise : 2.10
- Nous vous recommandons l'utilisation des versions de développements de QGIS (appelées `qgis-dev` sous Windows). Elles offriront une meilleure expérience utilisateur avec QGEP.

## Installer le plugin QGEP

- Ouvrir QGIS
- Go to Plugins (position 1 in the image below)
  - Manage and Install Plugins
- Settings (position 3)
  - Ajouter...
  - Nom : QGEP
  - URL : <https://raw.githubusercontent.com/QGEP/repository/master/plugins.xml>
  - Enable *Show also experimental plugins* (position 2)

Activate the plugin (see image below) :

- Tous
  - Chercher *QGEP*
  - Cocher la case à côté

## Installation du projet de démo

- Download <https://github.com/QGEP/data/archive/demodata.zip>
- Extraire le fichier
- Restore the file `qgep_demodata.backup` with pgAdminIII
- Open `project/qgep_en.qgs` with QGIS

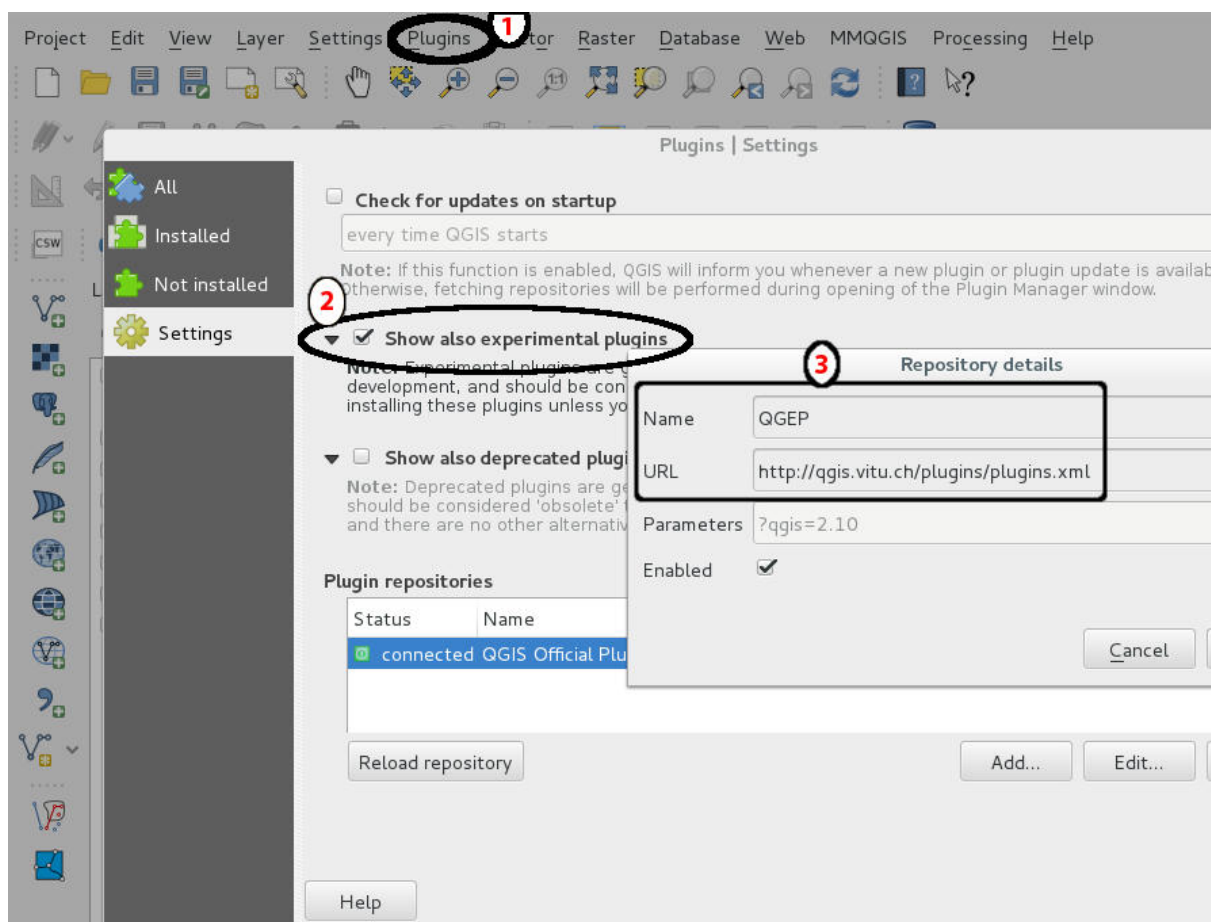


Fig. 1.1 – Add the plugin repo

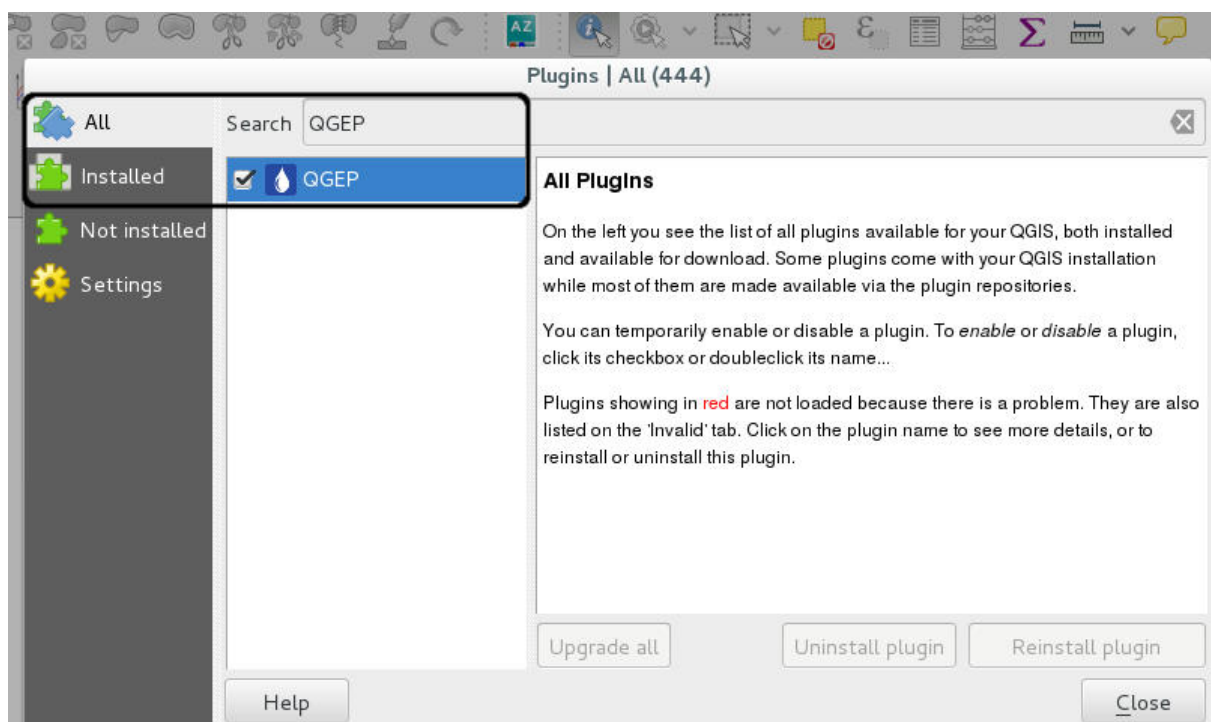


Fig. 1.2 – Add the QGEP plugin

## 1.2 QGEP User Guide

This represents a guide on how to collect data in QGEP (digitizing), edit existing data and use various tools like length profile, network following and plan plotting.

### 1.2.1 Digitizing in QGEP

This represents a guide on how to correctly collect and digitize data of sewer networks including building the topology.

#### Data entry

There are basically two ways :


- Data entry by constructing or digitizing in the QGEP GIS itself
- Data entry in an external program or software and then importing the position and/or technical data into QGEP e.g. :
  - coordinates from manholes from measurement
  - position and/or technical data from another GIS or CAD system
  - using data from the surveyor (e.g. property boundaries) as a basis for defining catchment borders
  - other

Data entry in QGEP needs some understanding of the underlaying data model VSA-DSS, but is supported with some great data collecting wizards and forms that link the different tables correctly together.

#### General

Allgemein : Reihenfolge (Schacht - Kanal, Erfassungsgrundsätze)

Link : add [link](#)

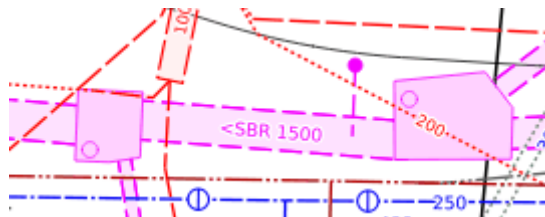

(take more from GEPView-Howto 1.2. Chapter 3)

#### Digitizing Waste water structures

QGEP has a wizard to correctly collect manholes and special structures.

TO DO : Explain how it works

#### General

Allgemein : Abwasserbauwerk-Bauwerksteil-Abwassernetzelement Allgemein : Wizard und Eingabemaske mit wichtigsten Feldern / Subtabellen Bezeichnung : Default, Unique, ... Schacht (Deckel) und Abwasserknoten beim Normschacht / beim Spezialbauwerk

Digitalisierwerkzeuge Abwasserbauwerk Geometrie für Spezialbauwerke evtl. weitere Verknüpfungen erstellen


## Title

### Subtitle

- List
- Subpoint

Link : add [link](#)

Add some screen shots

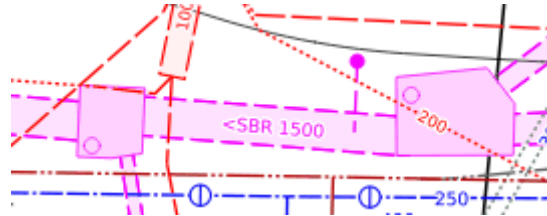

...

(take more from GEPView-Howto 1.2. Chapter 4.1)

## Digitizing Waste channels

QGEP has a wizard to correctly build channels and connect them to the manholes / special structures and build up the topology for waste water nodes and reaches.

TO DO : Explain how it works

### General

- Kanal/Haltung (Digitalisierrichtung, Schnappen)
- Weitere verknüpfte : Eigentümer, Rohrprofil, Hydraulische Geometrie, Hydraulische Einbauten
- evtl. Verknüpfungen erfassen


## Title

### Subtitle

- List
- Subpoint

Link : add [link](#)

Add some screen shots

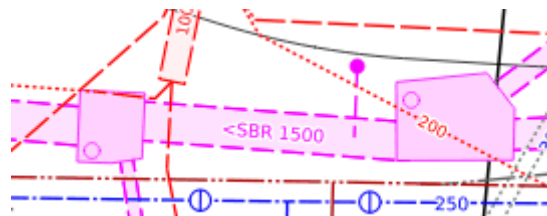

...

(take more from GEPView-Howto 1.2. Chapter 4.2)

## Deleting objects

TO DO : Explain how it works


## Title

### Subtitle

- List
- Subpoint

Link : add [link](#)

Add some screen shots

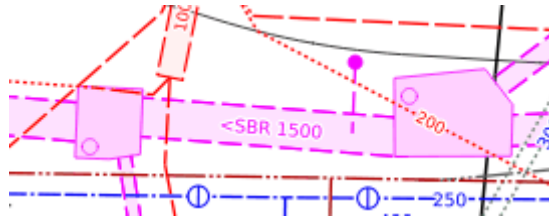

...

## 1.2.2 Editing of existing data

This represents a guide on how to edit existing data in QGEP.

TO DO : Explain how it works

### General

- Attribute ändern
- Verknüpfungen ändern
- Subklasse eines Abwasserbauwerkes ändern (ObjektID ändert dann auch !)
- Kanäle unterteilen


## Title

### Subtitle

- List
- Subpoint

Link : add [link](#)

Add some screen shots

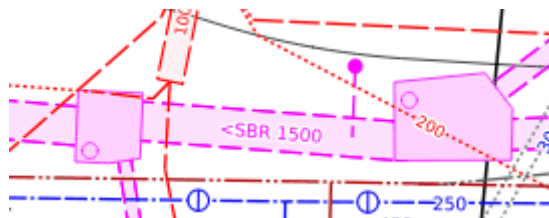

## 1.2.3 Length profiles

This represents a guide on how to choose a section and display a length profile.

TO DO : Explain how it works


## Title

## Subtitle

- List
- Subpoint

Link : add [link](#)

Add some screen shots

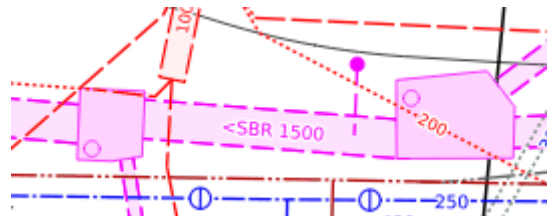

## 1.2.4 Network following tools

This represents a guide on how to use the network following tools in QGEP.

TO DO : Explain how it works


## Title

## Subtitle

- List
- Subpoint

Link : add [link](#)

Add some screen shots

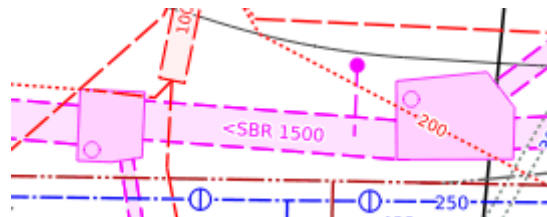

## 1.2.5 Plan plotting

This represents a guide on how to do plan plotting in QGEP.

TO DO : Explain how it works

## General

- Titelblatt und Legende
- Rahmenpläne erstellen / verwalten / drucken


Title

Subtitle

- List
- Subpoint

Link : add [link](#)

Add some screen shots

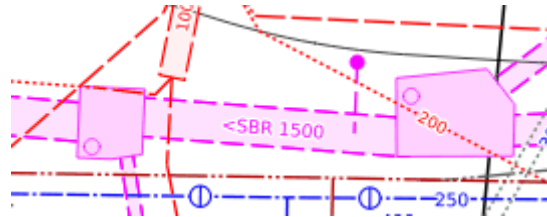

## 1.3 Admin Guide

This represents a guide on how to collect data in QGEF (digitizing), edit existing data and use various tools like length profile, network following and plan plotting.

### 1.3.1 pgAdmin

PgAdminIII is a Desktop tool that permits to access and manage the database server. This chapter represents a guide on how to do basic PostgreSQL management using pgAdmin.

#### Install pgAdmin

##### Windows

pgAdmin should be automatically installed if you used the EnterpriseDB installer.

##### Linux

**Debian/Ubuntu based distros** You can install pgAdmin by running the following command :

```
sudo apt-get install pgadmin3
```

**Fedora based distros** `sudo yum install pgadmin3`

**Suse based distros** `sudo zypper install pgadmin3`

---

**Note :** All the commands presented above assume that you are logged in as a user with `sudo` (admin) privileges. On certain systems it may be required to use the command `su` to become the *root* user and then issue the above command without the `sudo` prefix.

---

## Using Pgadmin

### SQL query

```
.. figure:: images/001_roles.jpeg
```

#### Running SQL commands in PgAdminIII

---

**Note :**

- Clicking the highlighted icon at location 1 opens the SQL Window. The SQL icon is active only when you're connected to a database.
  - Clicking the icon at 2 runs the written SQL commands.
- 

### Database dump

---

**Note :**

- Open pgAdminIII and connect to the database
  - Right click the Schema that you want to backup (in the tree structure below “Schemas”)
  - Enter the filename where the dump should be stored
  - Check the following options
- 

```
.. figure:: images/Screenshot-from-2015-01-22-102152.png
.. figure:: images/Screenshot-from-2015-01-22-102155.png
.. figure:: images/Screenshot-from-2015-01-22-102159.png
.. figure:: images/Screenshot-from-2015-01-22-102218.png
```

---

**Note :**

- After running the process, the exit code 0 indicates that everything went ok
- 

```
.. figure:: images/Screenshot-from-2015-01-22-102222.png
```

## 1.3.2 Demo Virtual Machine

This represents a guide on how to download and install a virtual machine (VM) that has a working QGEP installation with a preinstalled demo dataset.

### About

The VM is based on Debian Jessie with Cinnamon Desktop.

Installed software :

- PostgreSQL 9.4.4 with Postgis 2.1.7
- QGIS Master 2.11

Settings that are changed from a default software install :

- `pg_hba.conf` has **trust** for local connections
  - QGIS is setup with [multithreaded rendering enabled](#)
  - QGIS is setup with [postgres server side expression compiler enabled](#)
- 

**Note :** The users `web` and `root` have the password `qgis`

---

**Note :** If you decide to use the VM in production, it is recommended to :

- change the passwords
  - regenerate the ssh keys by running in a terminal `sudo rm /etc/ssh/ssh_host_* && sudo dpkg-reconfigure openssh-server`
-



## Install

### Download

Download the vm from [here](#)

---

**Note :** The size of the VM is around 2GB compressed and around 7GB uncompressed.

---

### Extract

The virtual disk is archived using XZ compression.

To extract the archive :

- **Windows :** you can use [7-Zip](#) to extract the archive.
- **Linux :** cd to the download directory and run `xz -d qgisplatform.vdi.xz`

You can run the VM as you would do with any VirtualBox VM.

---

**Note :** As the VM is based on Linux it is fairly simple to convert the image to a raw disk and put it on a USB stick (minimum 8GB) or a faster storage. This would enable you to run the app without the virtualization penalty and enjoy the full speed of your hardware.

---

## QGIS Server

The VM has working installations of [QGIS Server](#) and [QGIS Web Client \(QWC\)](#).

### Access the Web Services

The Apache server is setup to respond to requests pointing to the `http://qgisplatform.demo`. Accessing the above link with the Internet Browser of the VM will take you to the starting page of QWC depicted in the above image.

If you want to access the web services outside the VM, you need to edit the `hosts` file on your machine and point `qgisplatform.demo` to the IP of the VM.

---

**Note :** If you've setup the VM with the network adapter in NAT mode only the VM host will be able to access the services. If you want all the devices on your LAN to do it, you need to setup the network adapter in bridge mode.

---

## 1.3.3 Data import

This represents a guide on how to import data into QGEP.

- INTERLIS
- dxf
- Shape
- Text
- MOUSE / MikeUrban
- other

TO DO : Explain how it works

### Title

### Subtitle

- List


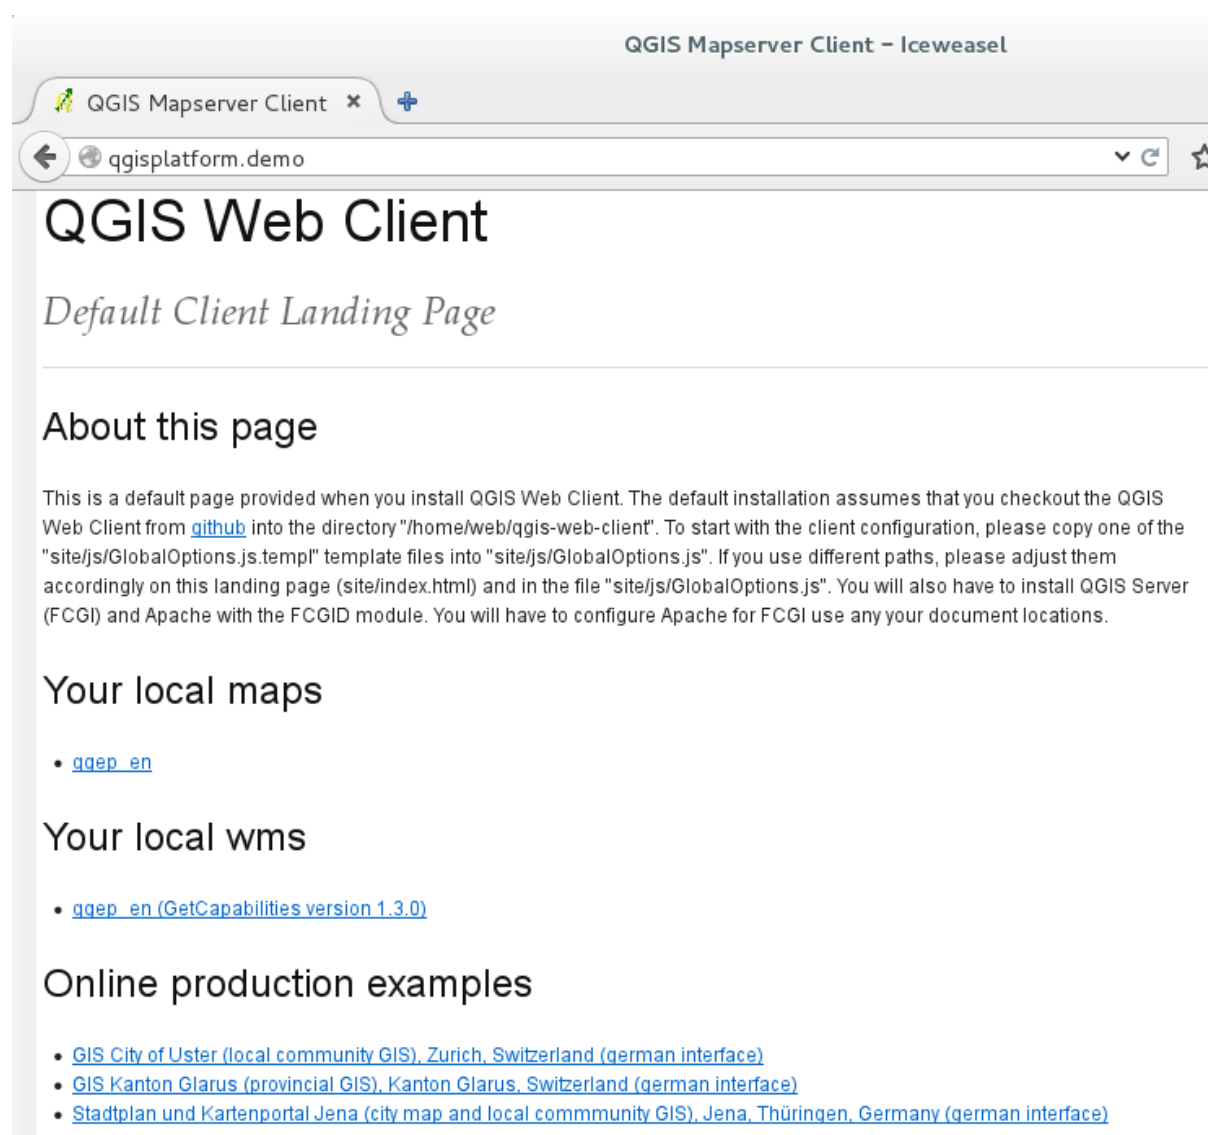


Fig. 1.3 – QGIS Web client starting page

- Subpoint

Link : add [link](#)

Add some screen shots

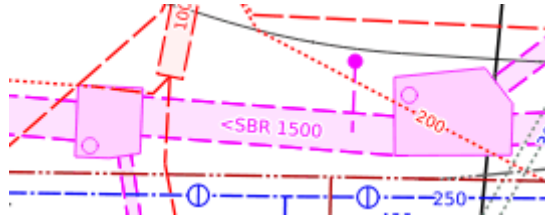

### 1.3.4 Data export

This represents a guide on how to export data from QGEP.

TO DO : Explain how it works

- INTERLIS
- dxf
- Shape
- MOUSE / MikeUrban
- other


#### Title

#### Subtitle

- List
- Subpoint

Link : add [link](#)

Add some screen shots

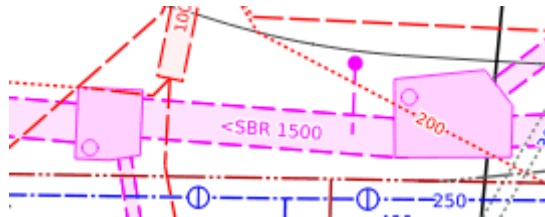



---

## Indices and tables

---

- `genindex`
- `search`