
Plotting Symbols


Use the **pch=** option to specify symbols to use when plotting points. For symbols 21 through 25, specify border color (col=) and fill color (bg=).

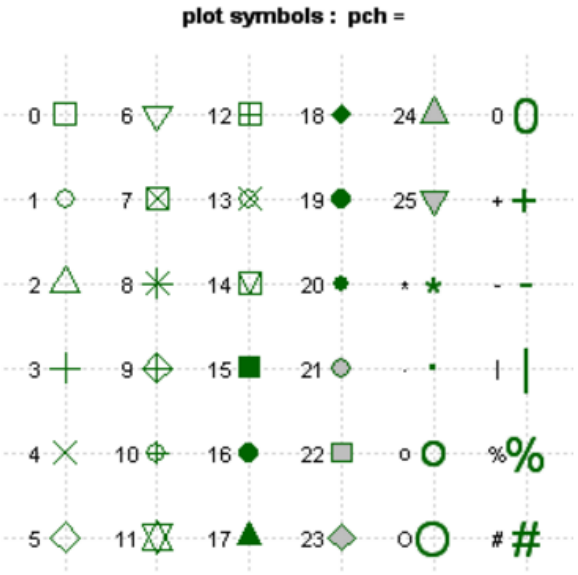

Lines

You can change lines using the following options. This is particularly useful for reference lines, axes, and fit lines.

option	description
lty	line type. see the chart below.
lwd	line width relative to the default (default=1). 2 is twice as wide.

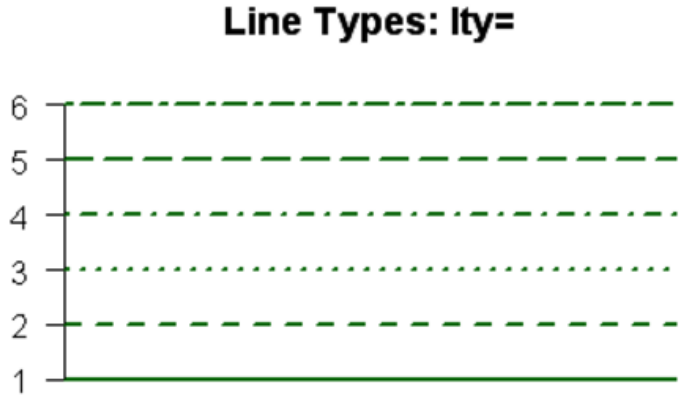

Colors

Options that specify colors include the following.

option	description
col	Default plotting color. Some functions (e.g. lines) accept a vector of values that are recycled.
col.axis	color for axis annotation
col.lab	color for x and y labels
col.main	color for titles
col.sub	color for subtitles
fg	plot foreground color (axes, boxes - also sets col= to same)
bg	plot background color

You can specify colors in **R** by index, name, hexadecimal, or RGB.
For example **col=1**, **col="white"**, and **col="#FFFFFF"** are equivalent.

The following chart was produced with code developed by Earl F. Glynn. See his **Color Chart** for all the details you would ever need about using colors in **R**.

