

CLup - Customer Line-up

DD Design Document

Andrea Franchini(10560276)
Ian Di Dio Lavore (10580652)
Luigi Fusco(10601210)



xx-xx-2020

Contents

1	Introduction	2
1.1	Purpose	2
1.2	Scope	2
1.3	Definitions, Acronyms, Abbreviations	2
1.3.1	Definitions	2
1.3.2	Acronyms	3
1.3.3	Abbreviations	3
1.4	Revision History	3
1.5	Reference Documents	3
1.6	Document Structure	3
2	Architectural Design	4
2.1	Overview	4
2.2	Component View	5
2.2.1	App Components	5
2.2.2	Application Server Components	5
2.2.3	Data Components	6
2.3	Deployment View	7
2.4	Runtime View	9
2.5	Component Interfaces	11
2.6	Selected Architectural Styles and Patterns	11
2.6.1	Architectural Styles	11
2.6.2	Patterns	12
2.7	Other Design Decisions	12
3	User Interface Design	13
4	Requirements Traceability	14
5	Implementation, Integration and Test Plan	15
6	Effort Spent	16
7	References	17

1 Introduction

1.1 Purpose

The purpose of this document is to give a more detailed view of the *Customers Line-up* system presented in the RASD, explaining architecture, components, processes and algorithms that will satisfy the RASD requirements.

Because of its technical nature, it's aimed towards the software development team. It also includes instructions regarding the implementation, integration and testing plan.

1.2 Scope

Customers Line-Up (CLup) is a system that allows supermarket managers to regulate the influx of people inside physical stores and reduce the time spent in queue by customers.

The idea of CLup is being more akin to an open-source framework that can be adopted and improved modularly, rather than it being a closed-source product.

In particular, CLup allows customers to search and then reserve a visit to a store, either at a specific time or as soon as possible, and get notified, if possible, when it's their turn or if there's been a delay in the schedule.

Additionally, CLup aims to provide:

- access to the service via mobile app or website
- physical alternatives for people that do not have Internet access
- book a visit, notifying customers of any change in the schedule
- restrict the store selection by using filters
- suggest alternative stores and/or time frames
- monitor and dynamically restrict the amount of people allowed in a store
- track the time spent in the store by customers to provide better estimate of waiting times

1.3 Definitions, Acronyms, Abbreviations

1.3.1 Definitions

- *User* (also *Customer* or *Visitor*): A person that uses the system to shop at a store.
- *Registered User*: A User that has registered an Account within the System.
- *System Manager*: A stakeholder (owner, employee, manager etc.) of the Store chain that can tweak the parameters of the System and access informations and statistics.
- *Account*: A reference to a specific User in the System, that allows to track the User across multiple visits.
- *Reservation* (or *Booking*): Arrangement made between a User and the System in which the System shall grant the User access to Store at the arranged time.
- *Visit*: The time frame in which the User enters the store, shops and exits.
- *Time slot*: The time at which a Customer with a Reservation is expected arrive at the store.
- *Store*: Any physical location (e.g.: building) where it is possible to utilize the System.
- *Totem*: A physical device with a touchscreen display and an attached printer that allows Customers to join the Virtual Queue.
- *Virtual Queue*: the virtual equivalent of a physical queue in front of the store, regulating the access of people by ordering them.
- *Web App*: A web application, consisting of a back-end and a front-end accessible from a web browser.
- *Line*: Synonym for *queue*.

1.3.2 Acronyms

- CLup: Customer Line-up
- RASD: Requirement Analysis and Specification Document
- API: Application Programming Interface
- REST: REpresentational State Transfers
- DB: Database
- DBMS: Database Management System
- GPS: Global Positioning System
- MVC: Model-View-Controller (a design pattern)

1.3.3 Abbreviations

- [Gn]: n-goal.
- [Dn]: n-domain assumption.
- [Rn]: n-functional requirement.

1.4 Revision History

1.5 Reference Documents

- Problem Specification Document: "Assignment AY 2020-21.pdf"

1.6 Document Structure

The first chapter gives an introduction of the design document and presents to the reader explanations for most of the acronyms and technical language that they'll encounter later in the document.

The second chapter is about the architecture of the system, explaining the most important components, interfaces, patterns as well as deployment and runtime aspects of the system.

The third chapter explains the connection between the UI presented in the RASD and the components presented in this document.

The fourth chapter maps the requirements that have been defined in the RASD to the design elements defined in this document.

The fifth chapter shows the order in which the subcomponents of the system will be implemented as well as the order in which subcomponents will be integrated and how to test the integration.

2 Architectural Design

2.1 Overview

To ensure high maintainability, scalability and security, the service is structured according to the well-established three-tier architecture. Figure 1 shows how the tiers are divided, and what are the relations between key components of the system.

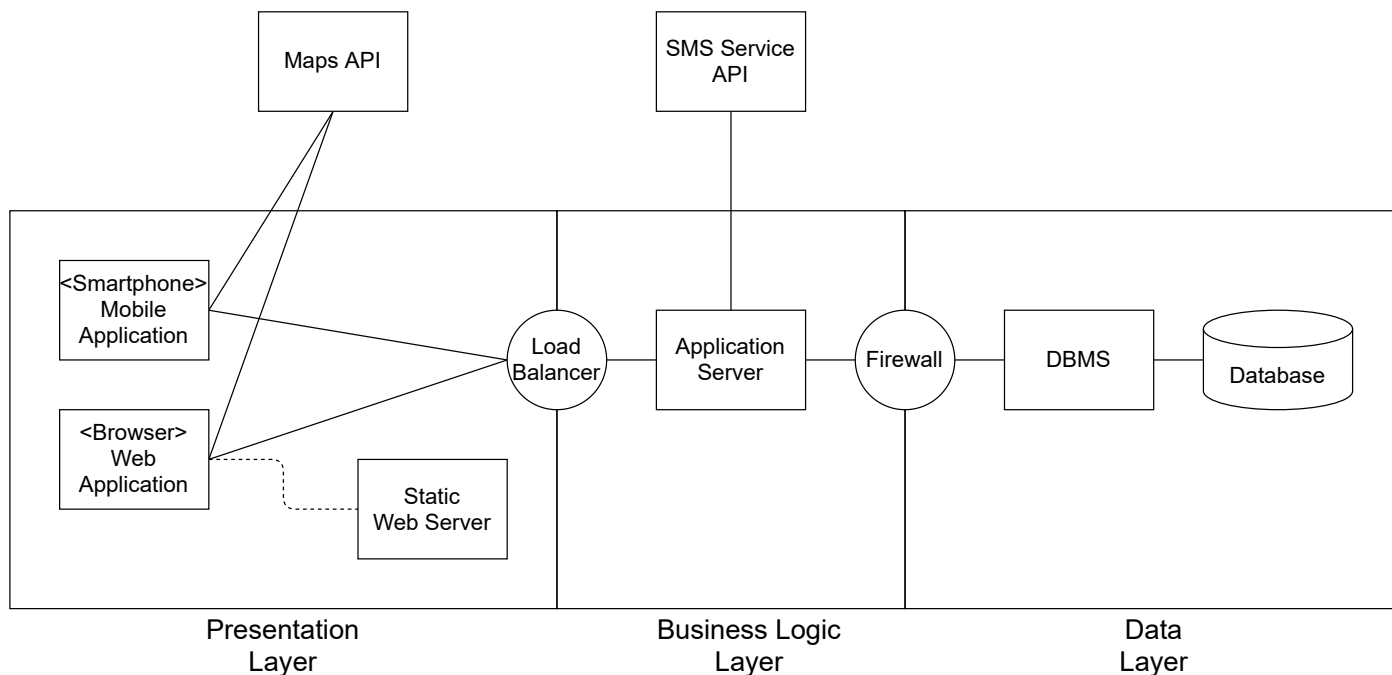


Figure 1: Overall architecture of the System

The main components are the following:

- **Mobile Application** The application is installed on the user's device through its store platform service. The application allows the user to interact with the service and receive notifications from the server.
- **Web Application** The web application allows users to access the same services available on the mobile app through any device, but it's not guaranteed that it can receive notifications. In addition to that, store managers may access a dedicated panel to configure additional parameters.
- **Static Web Server** It serves the client's browser a bundle that contains the web application code (compressed HTML and JS). It has no ties with the application server.
- **Application Server** It's the main backend component of the service, and contains the logic to process requests made against its API from the clients.
- **Database** It's the component that manages the connection to the database.
- **External Services** These services provides functionalities that the service can't provide by itself without additional infrastructure. They include a *SMS Service* to send messages to users and a *Maps API* to visualize the location of the store on the user's device.

2.2 Component View

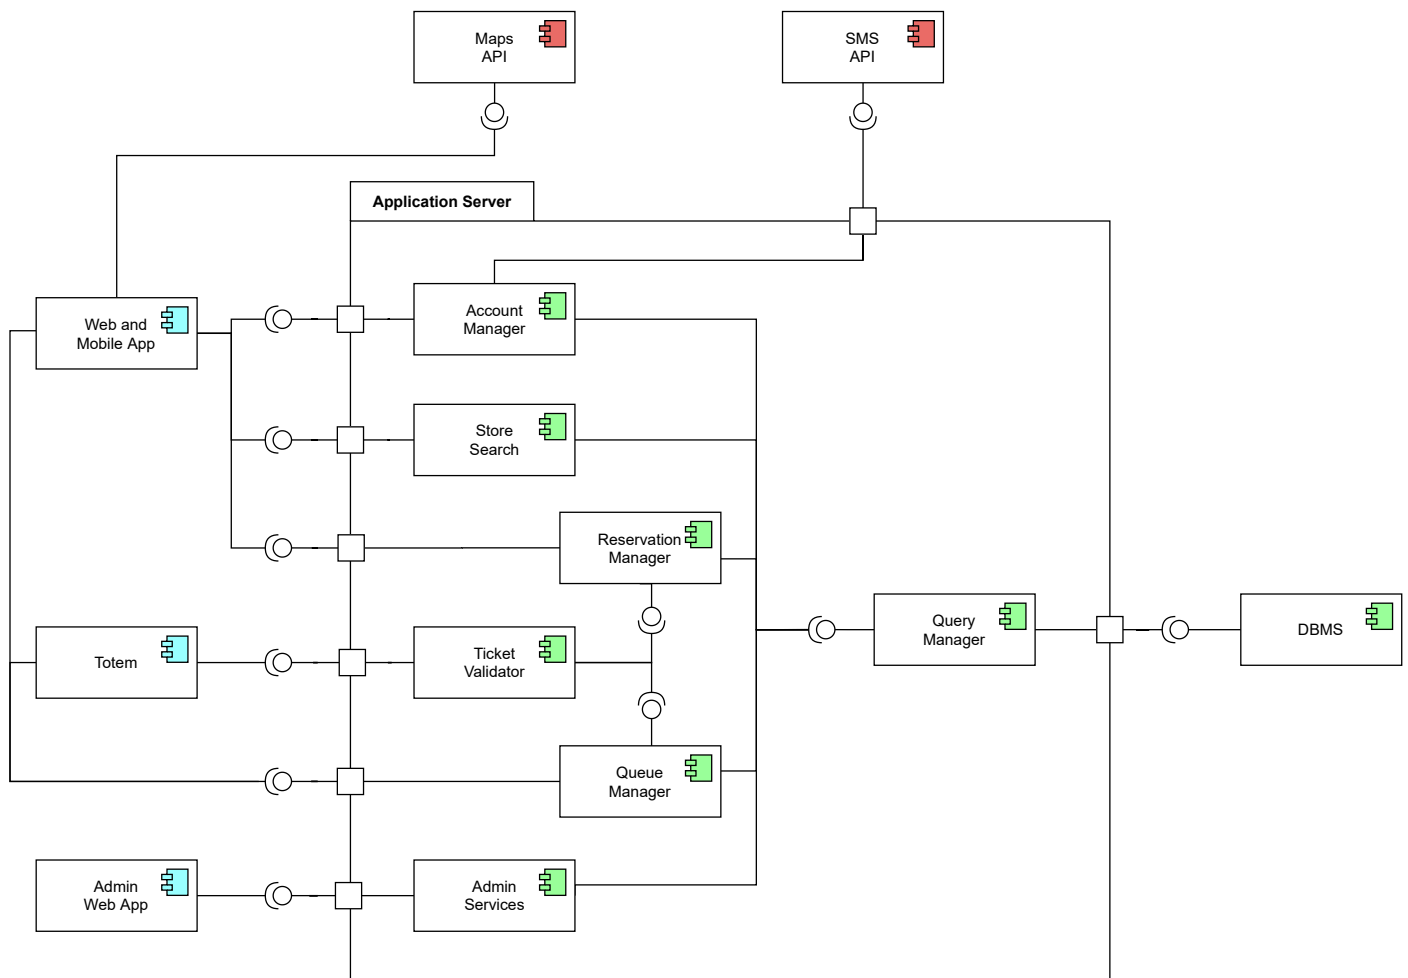


Figure 2: Global Component Diagram of the System

2.2.1 App Components

The application component makes up the entire frontend logic of the system. The role of the application component is to interface the user with the application server API, rendering interfaces and requesting data upon requests. As the entire UI is encoded in the application component, only a minimum amount of data will be passed between frontend and backend, reducing useless and repetitive traffic. The application component is divided in three main subcomponents, each targeted at a different type of user:

- **Web and Mobile App** are targeted at the user. They contain all the logic required to request and display information about stores, reservation, and queues. They are united in a single component as they will share most of the code and will use the same exact API
- **Totem** will be deployed in the totems inside the store. They require a more limited set of functionalities compared to the user components (namely, the possibility of joining the queue). Additionally, it will send request to the Application Server in order to validate tickets. On the UX side, it will contain the functionality needed to print tickets and to display the current status of the queue.
- **Admin Web App** is intended for internal use only. It is the platform through which the store managers will add, remove and manage the stores. It will connect to a different API than the other two components in order to separate the functionalities and the responsibilities as much as possible.

2.2.2 Application Server Components

The Application Server Components contain all the business logic needed to provide the functionalities of the application, communicating with the DBMS when needed and responding to queries sent by the App Components. Its structure is loosely coupled, with only few components relying on the services offered by other components. The Application Server Components are:

- **Account Manager** handles everything related to user accounts. In particular it will offer functionalities related to creating new accounts, logging in, and setting preferences and notifications. When creating an account it will communicate with an external **SMS API** in order to send confirmation codes. **add something related to notifications!**

- **Store Search** will provide functionalities related to searching stores at specific locations and with filters that will be set by the user
- **Reservation Manager**
- **Queue Manager**
- **Ticket Validator**
- **Account Admin Services**
- **Query Manager**

2.2.3 Data Components

The Data layer is composed of a relational database, and its associated DBMS will have the duty of processing and executing parallel requests.

Users and Admins will be stored in different tables. Users can set up Free Timeslots Notifications, in order to be notified when a Timeslot at a specific day in a specific time range is made available for one of the favorite stores. Users have an association with their Tickets, which include both Queue Tickets and Reservation Tickets. In order to preserve the history of Users and for making data analytics possible, Tickets are never deleted, but instead are associated with a status indicating if they are currently active or already used. Each Admin manages a number of Stores, having the power of changing their capacity or all details about their associated Timeslots. Timeslots refer to a specific weekday and have an associated time. In order to keep consistency with Reservation Tickets, Timeslots are immutable and never modified. Their status is instead set to inactive, and another Timeslot is created whenever a change has to be made.



Figure 3: Data Base main structure

2.3 Deployment View

Our system is composed of two independent components: a completely static webserver will be the access point where the client devices will fetch the one-page application, while the application server will offer the APIs to make it work. For this reason we decided to use two different solutions.

The static webserver will make use of Cloudflare's content delivery network, in order to guarantee immediate response thanks to its edge location caches and reverse proxies.

The application server, composed of a business logic and a data tier, will be hosted on Amazon Web Services, making for easy scalability, replication, and load balancing.

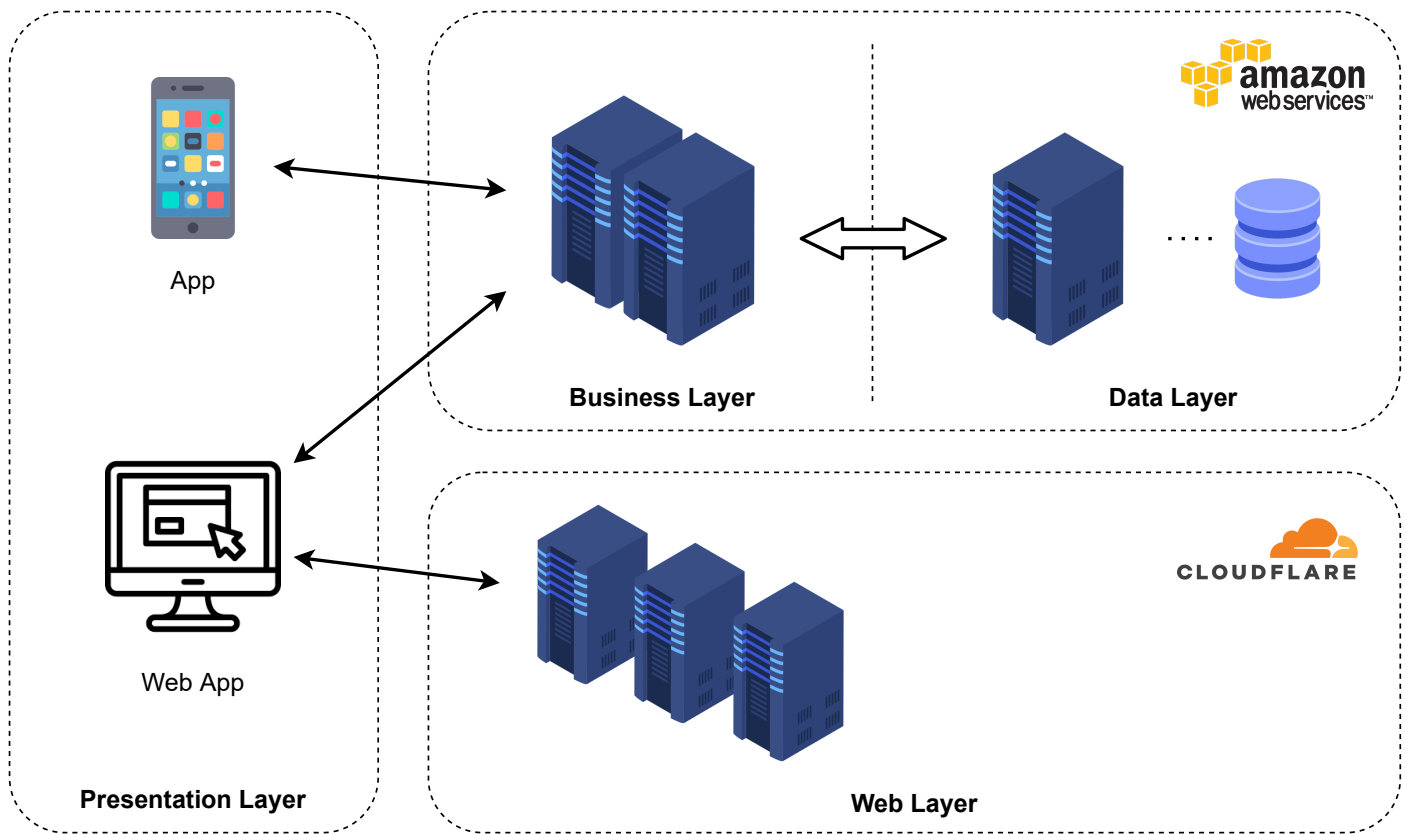


Figure 4: Deployment View

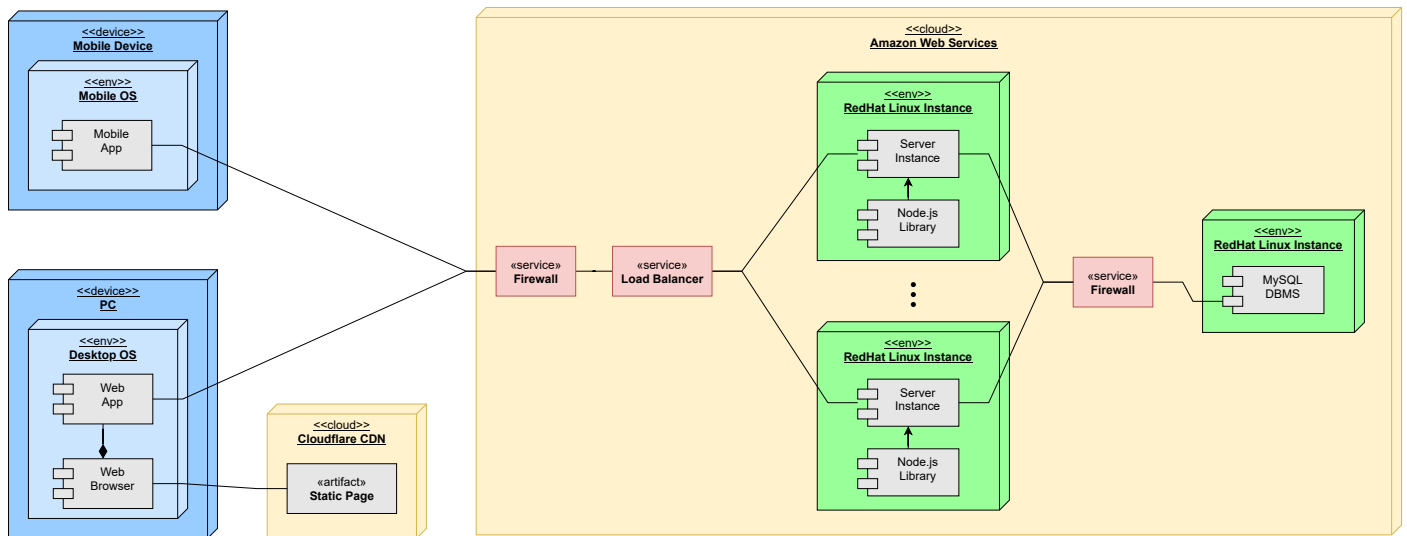


Figure 5: Deployment Structure

2.4 Runtime View

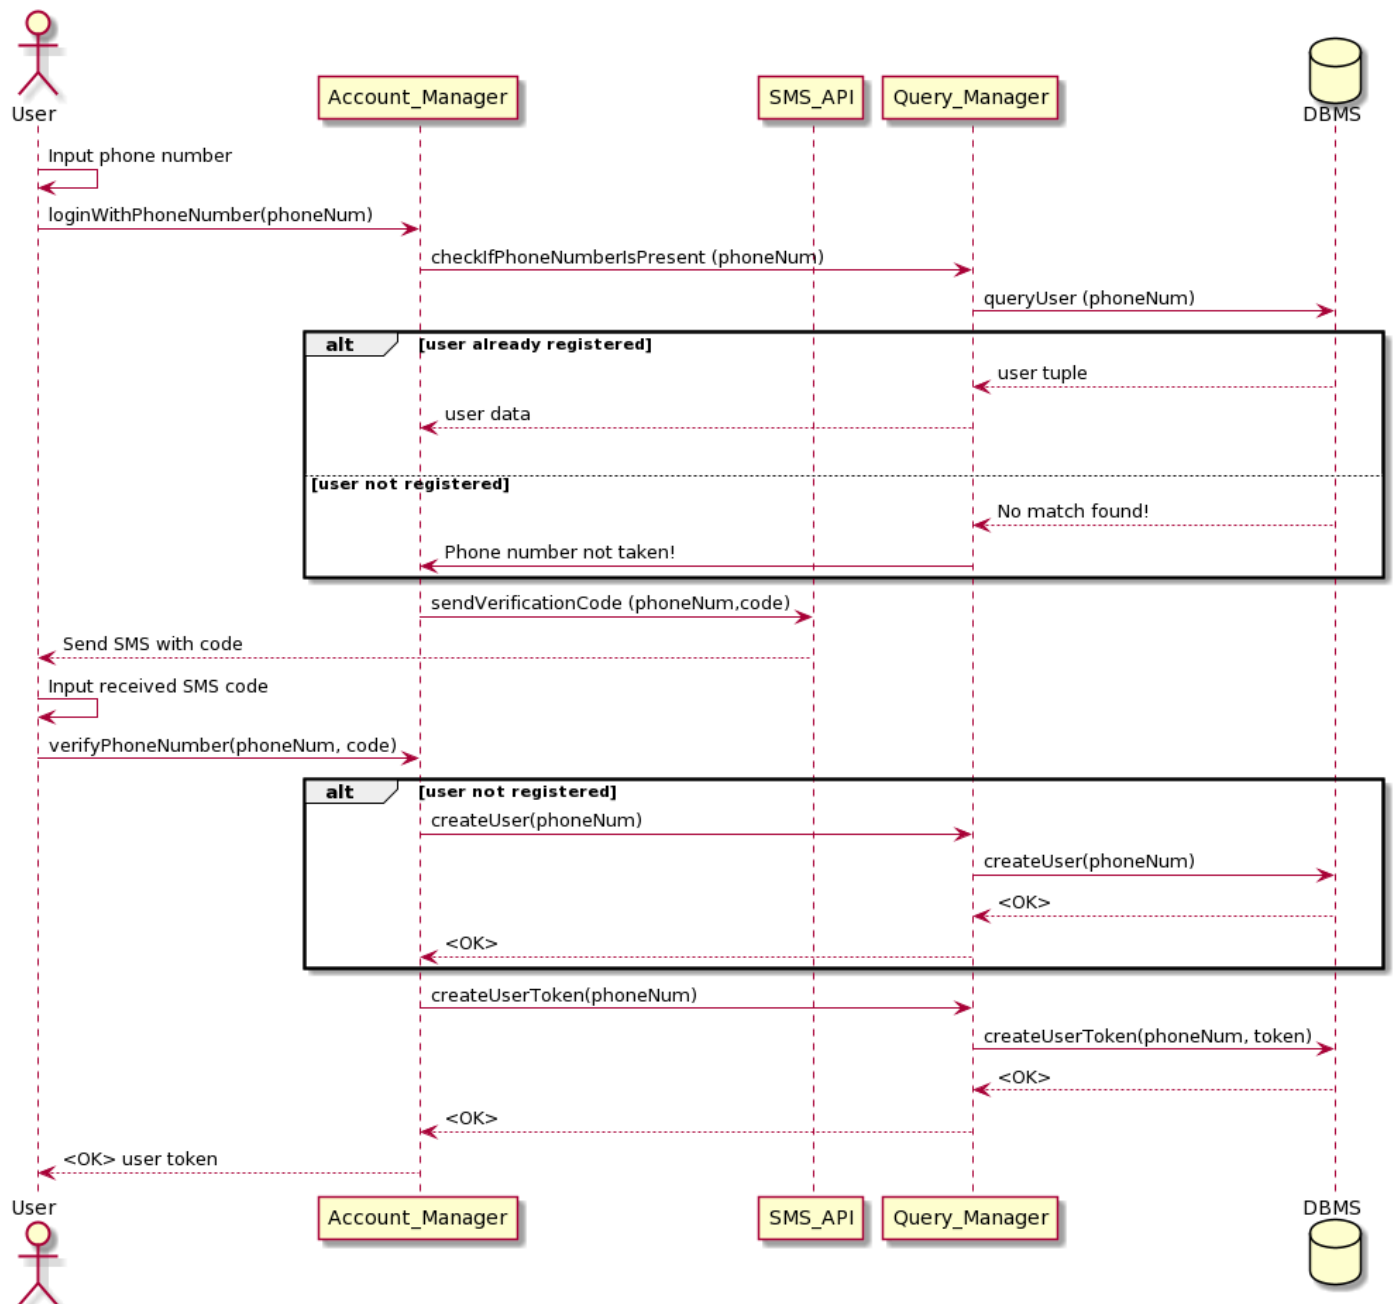


Figure 6: User Login

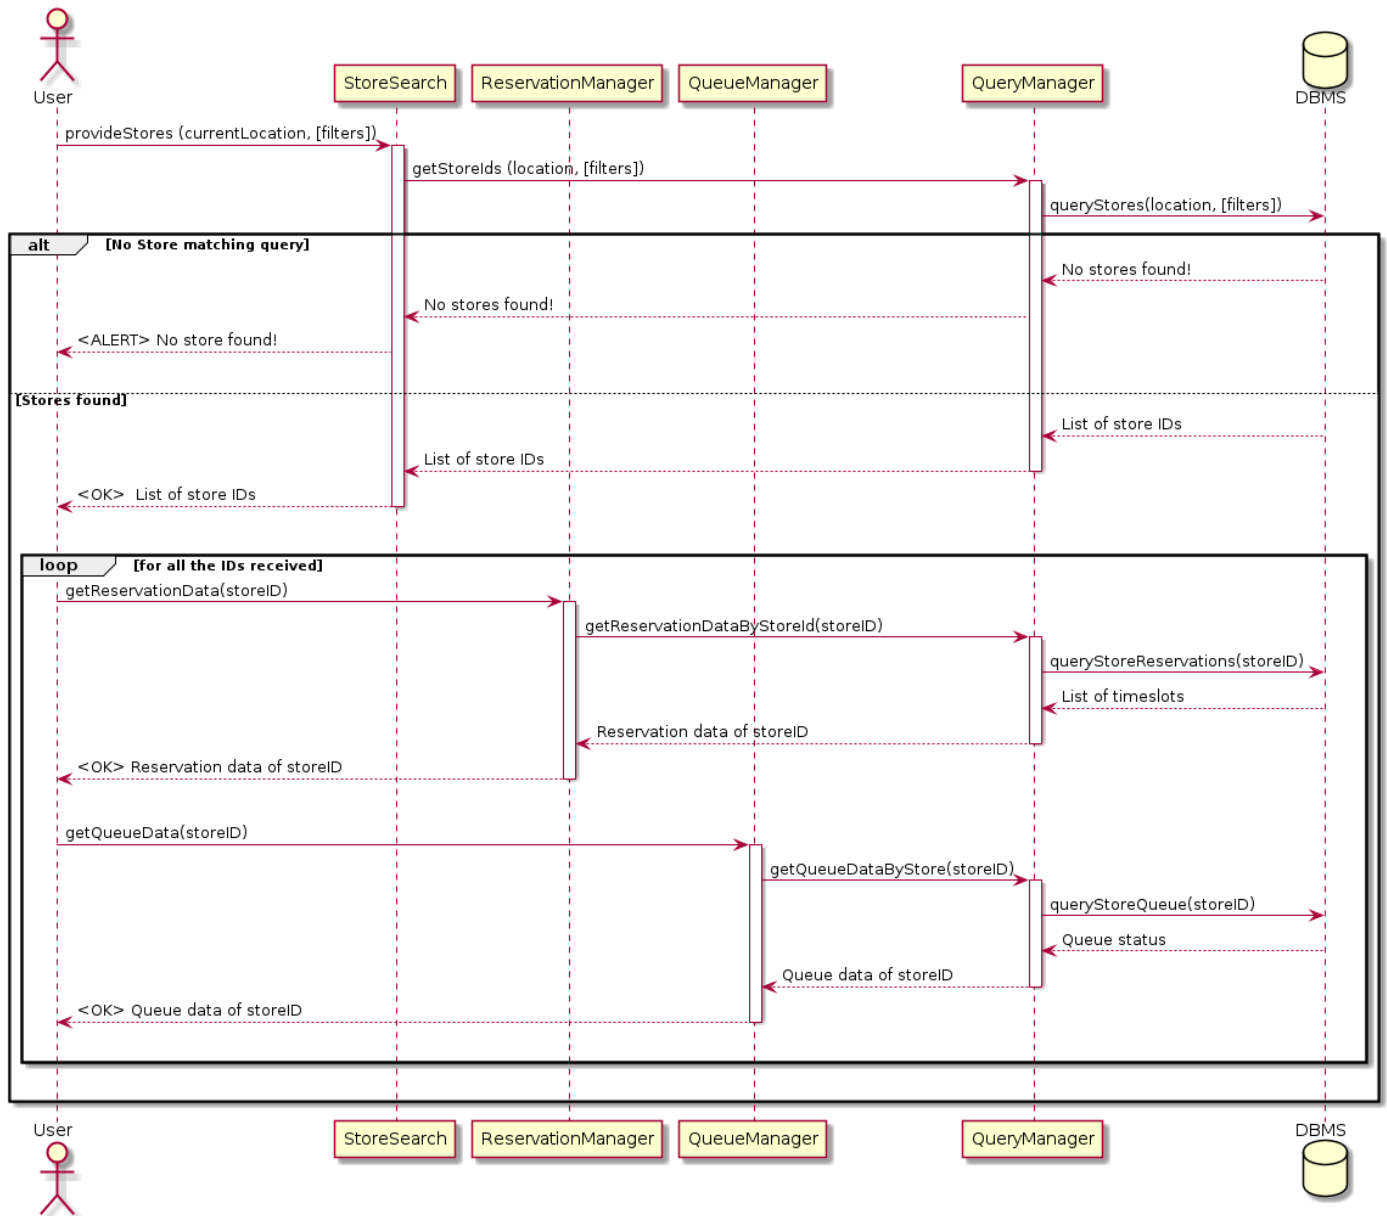


Figure 7: Store search

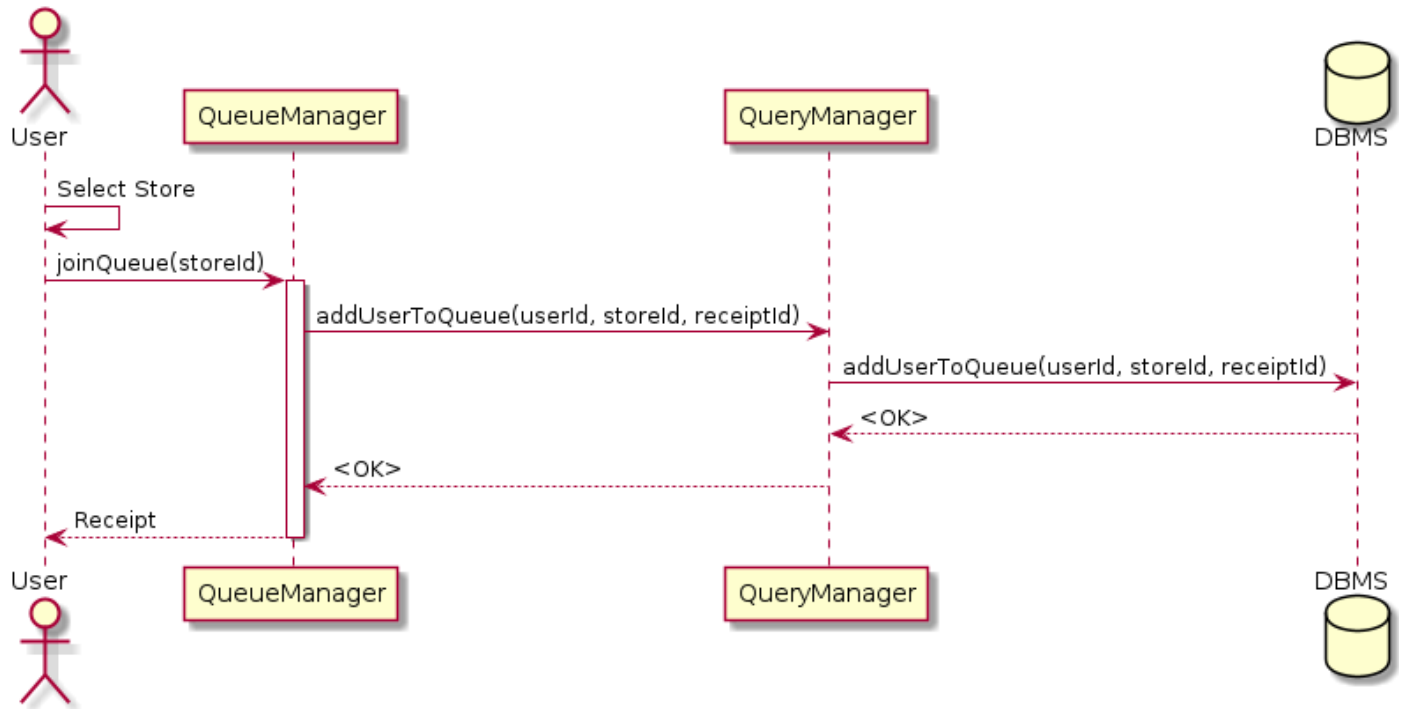


Figure 8: User joins queue

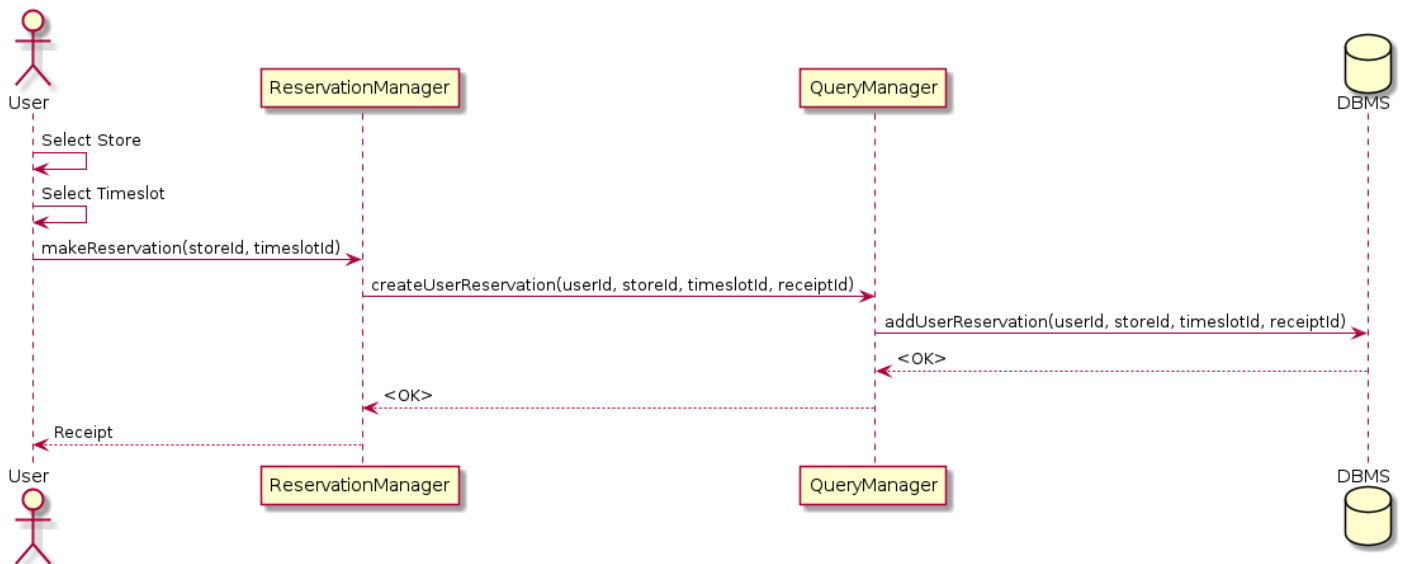


Figure 9: User makes a reservation

2.5 Component Interfaces

2.6 Selected Architectural Styles and Patterns

2.6.1 Architectural Styles

Thick Client The main characteristic of thick clients is offering a wide variety of functionalities independent from the central server. The main advantages it offers are greater decoupling of frontend and backend and a reduced computational effort on the application server. Recent years have seen a rise in the adoption of single page application, with the advent of rich framework which allow to write code that can be run both in an app and in the browser. This allows developers to reuse great part of code across a large number of devices, all using the same API offered by the backend. The one page application will be served by a dedicated static webserver, which logically separate from the rest of the system.

REST API REST is an architectural style centered around the definition of a uniform and predefined set of stateless operations defined on top of the HTTP protocol. Its main advantages are simplicity, scalability and modifiability.

Three layer architecture Separating presentation, business, and data layers offers great flexibility, maintainability and scalability. This combined with a thick client means that the only communication between the client and the server goes through a

predefined API, without having to worry about eachother's internal representation.

2.6.2 Patterns

2.7 Other Design Decisions

3 User Interface Design

4 Requirements Traceability

5 Implementation, Integration and Test Plan

6 Effort Spent

7 References