

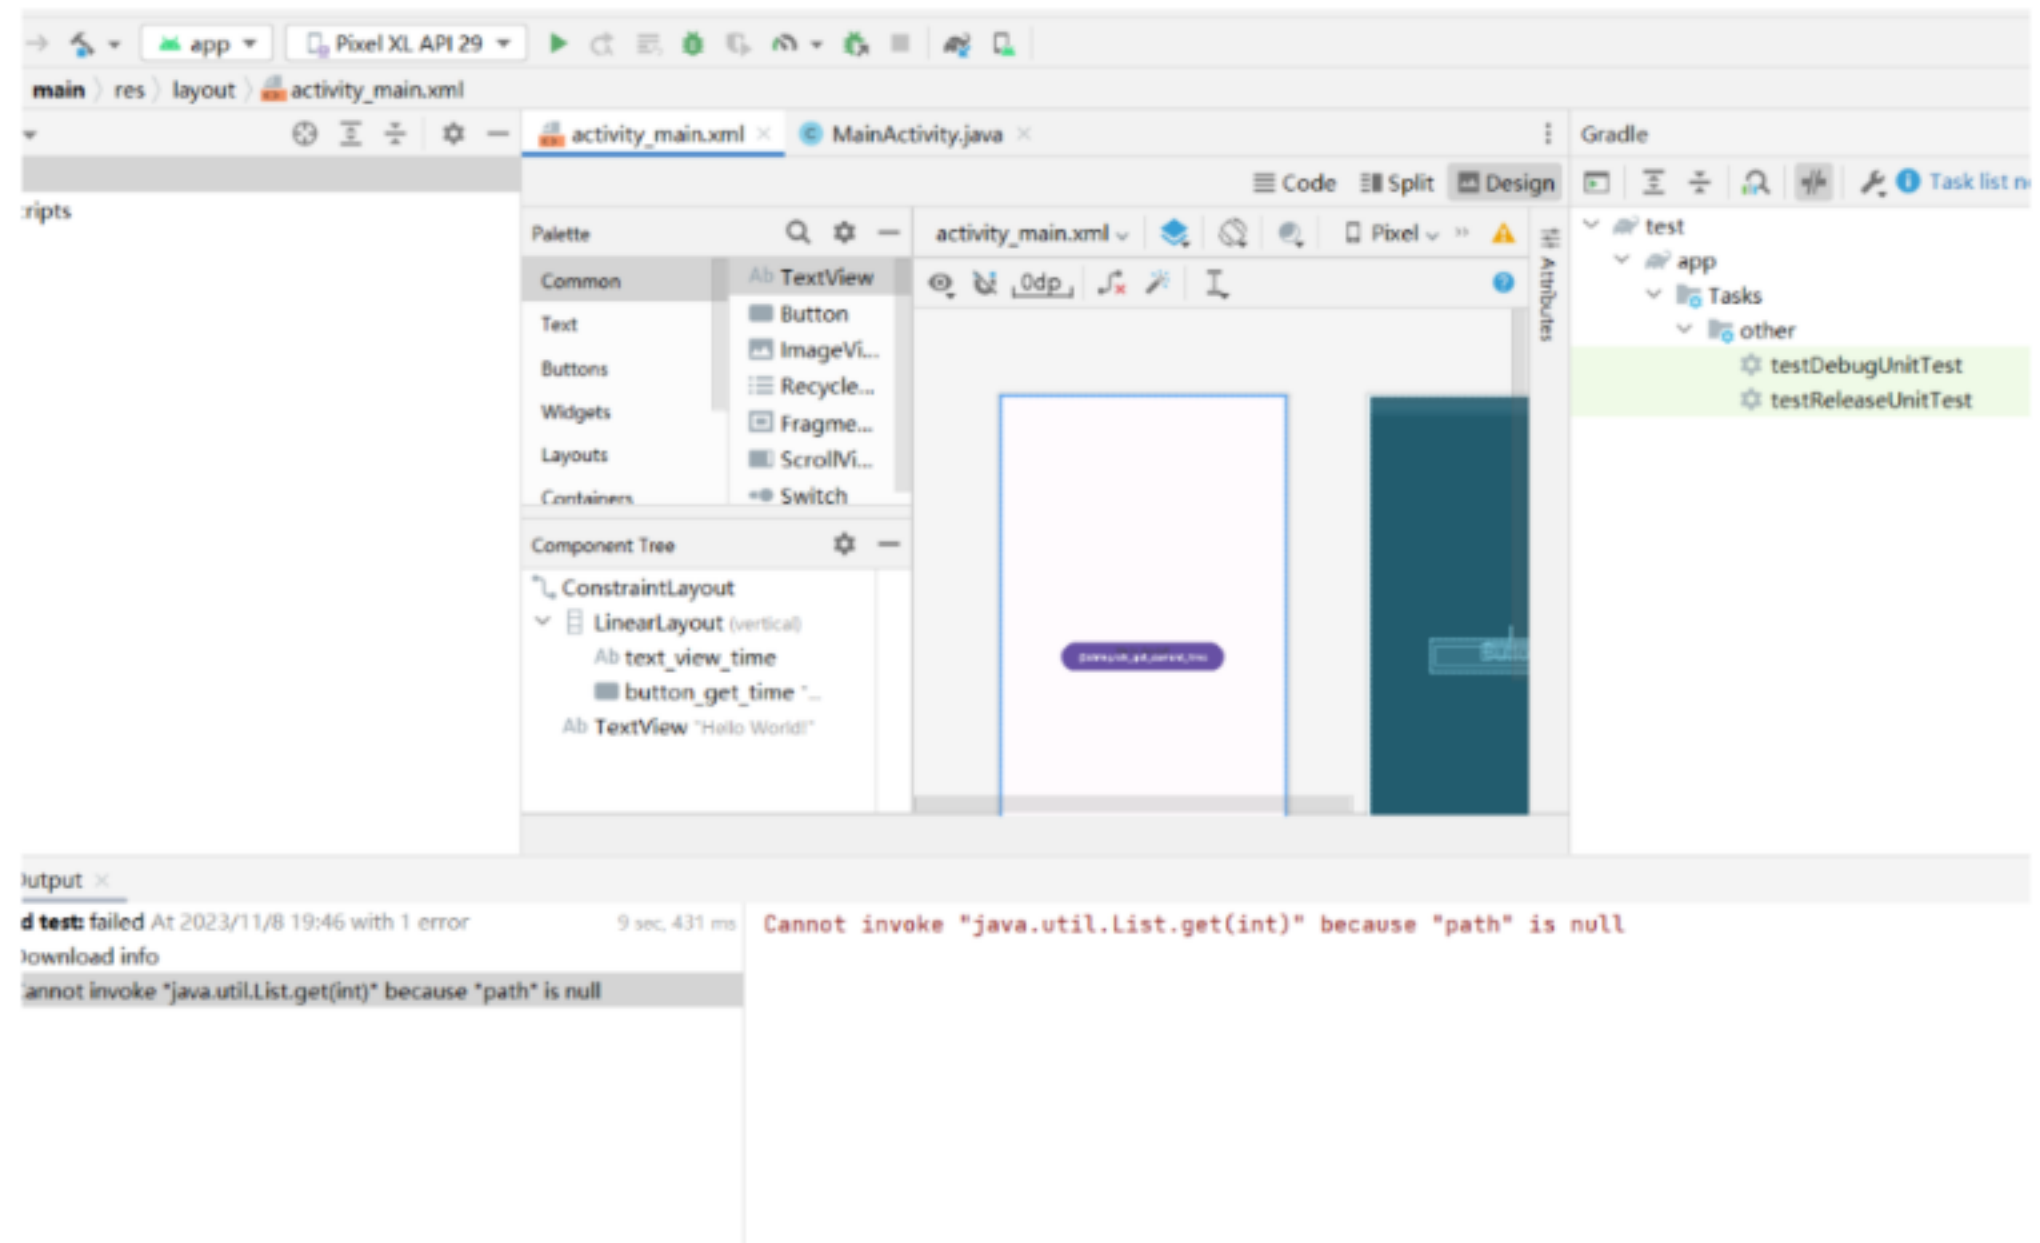


## 作业一：

1. 下载最新版本的 Android Studio, 安装后如果需要更新 Gradle, 则将其更新到最新版本。

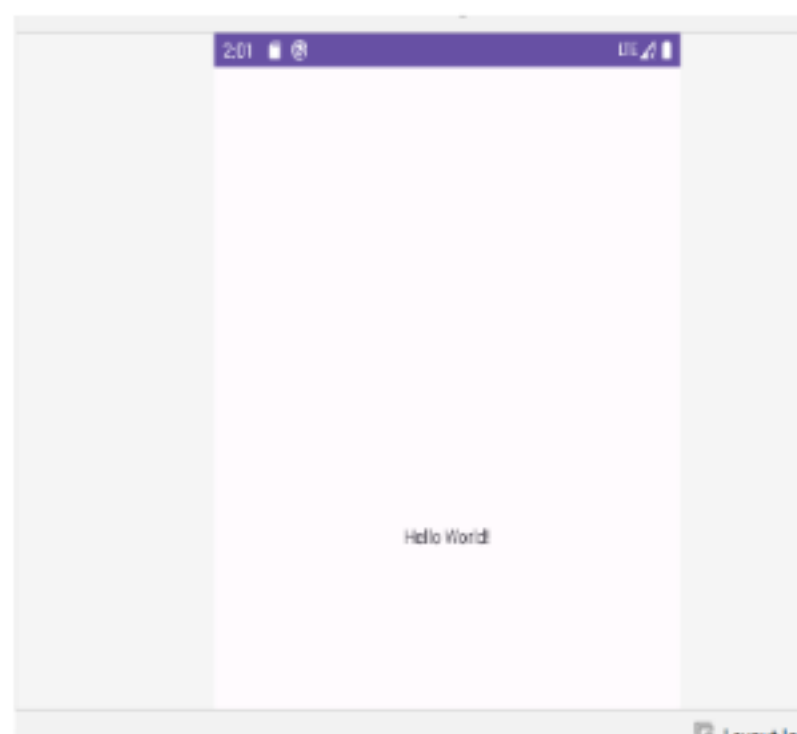

2. 创建一个任意类型的手机 App 工程, 分别使用虚拟设备和物理设备运行。

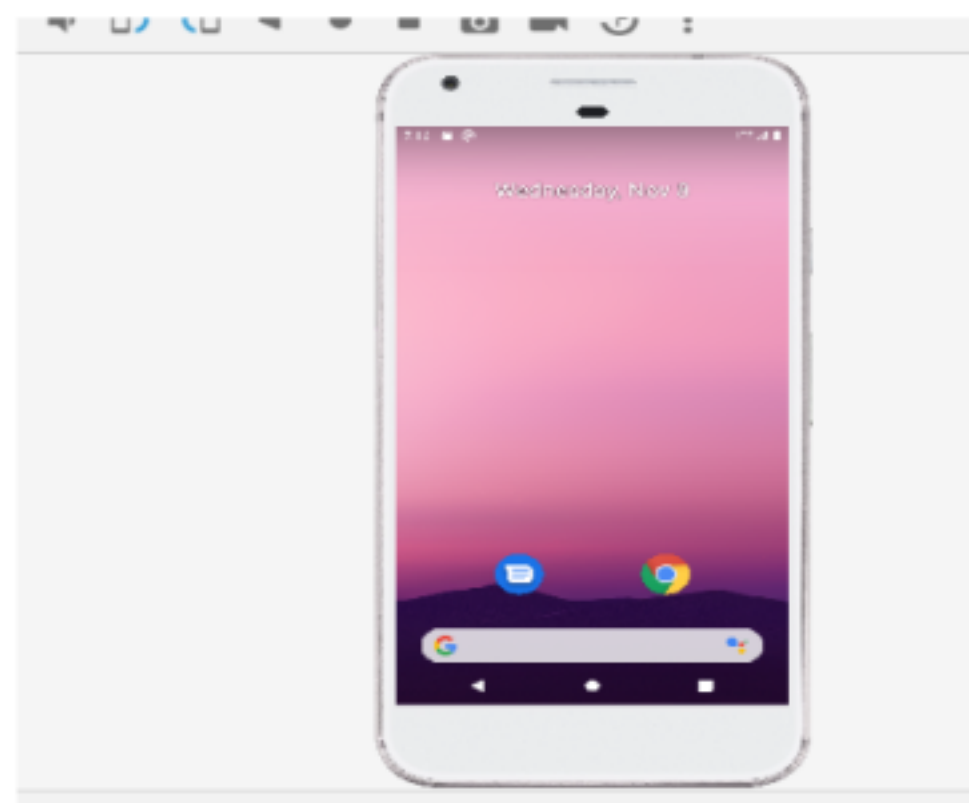

## 作业 2

### 主要代码：

```
<LinearLayout

    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical">

    <TextView
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="请选择你的兴趣爱好： "
        tools:ignore="HardcodedText" />

    <CheckBox
        android:id="@+id/check_box1"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="读书" />

    <CheckBox
        android:id="@+id/check_box2"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="看报" />

    <CheckBox
        android:id="@+id/check_box3"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="看电视" />

    <CheckBox
        android:id="@+id/check_box4"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="玩游戏" />

    <Button
        android:id="@+id/button_submit"
```


```
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="确定" />
```

```
    <TextView
        android:id="@+id/text_view_result"
        android:layout_width="match_parent"
        android:layout_height="wrap_content" />
```

```
</LinearLayout>
```

```
</androidx.constraintlayout.widget.ConstraintLayout>
```

1.

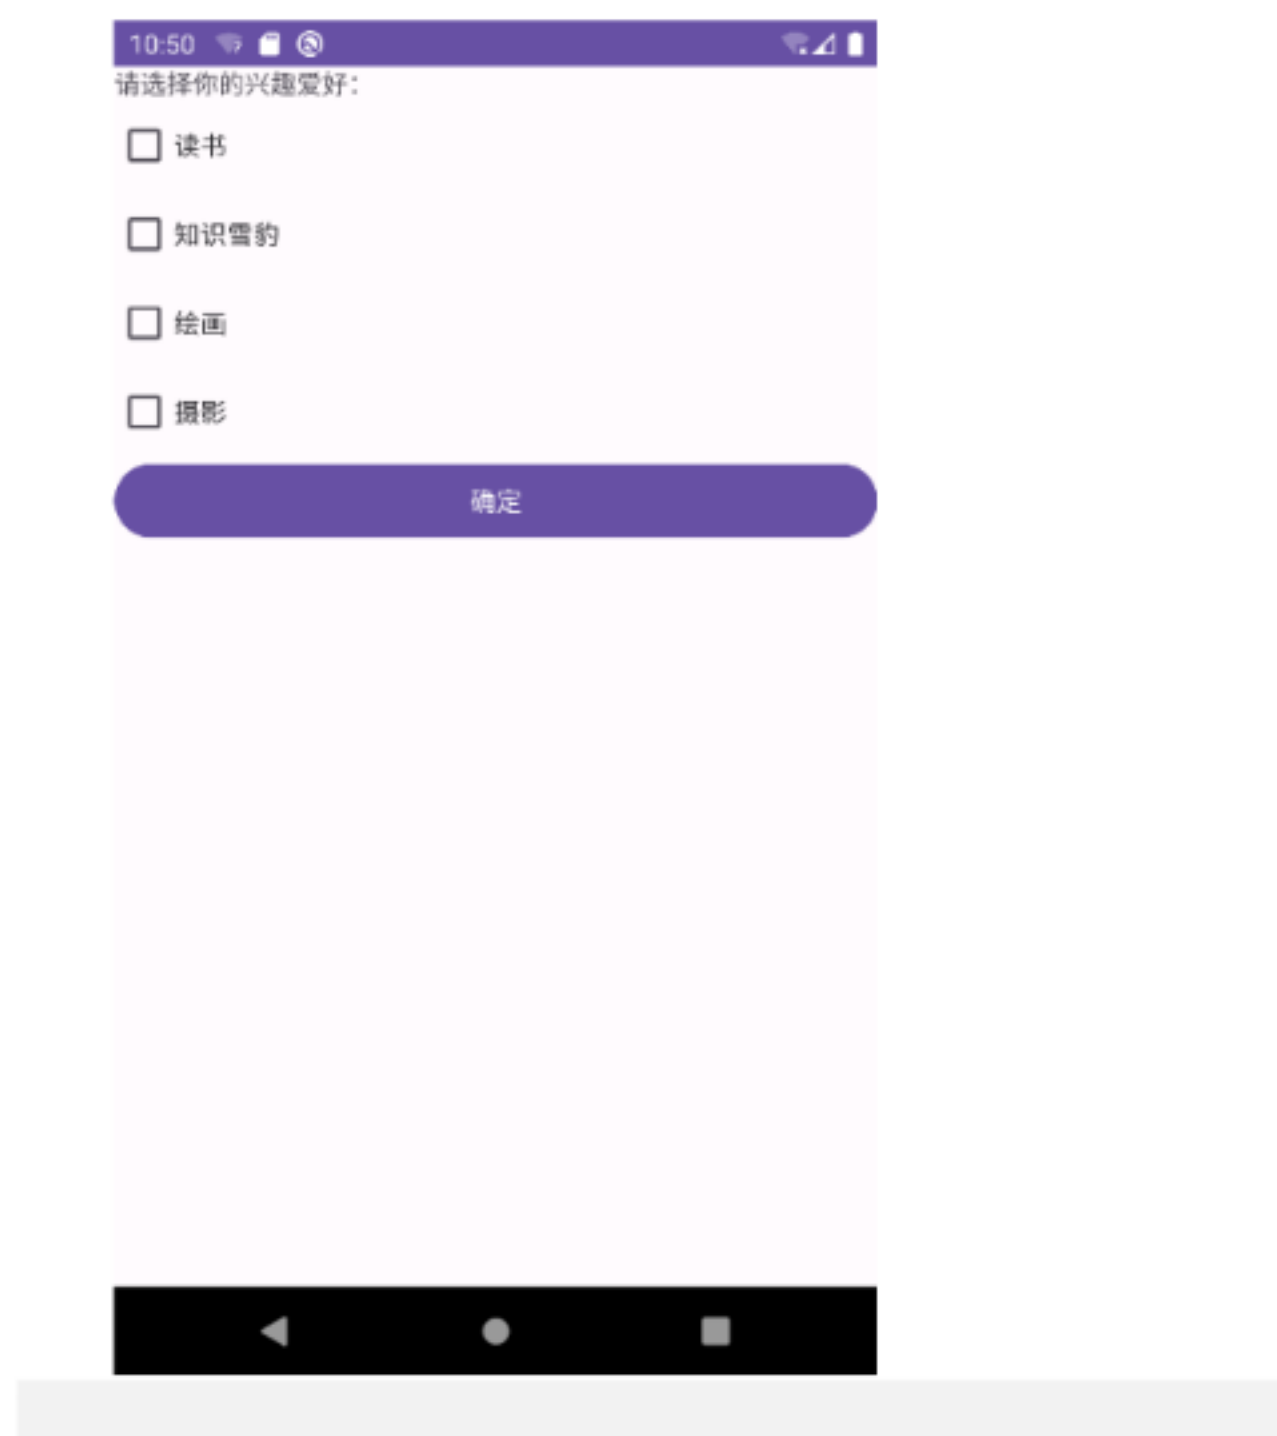

```
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_main);
    final DatePicker datePicker = findViewById(R.id.date_picker);
    datePicker.updateDate(2021, 0, 1);
    datePicker.setOnDateChangeListener((view, year, monthOfYear,
    dayOfMonth) -> {
        Calendar calendar = Calendar.getInstance();
        calendar.set(year, monthOfYear, dayOfMonth);
        @SuppressWarnings("SimpleDateFormat") SimpleDateFormat
        simpleDateFormat = new SimpleDateFormat("yyyy 年 MM 月 dd 日");
        Toast.makeText(getApplicationContext(), "当前选择时间: " +
```




```

simpleDateFormat.format(calendar.getTime()),
Toast.LENGTH_SHORT).show();
});
Button button1 = findViewById(R.id.button1);
button1.setOnClickListener(v -> {
    datePicker.updateDate(2020, 0, 1);
    Toast.makeText(getApplicationContext(), "已经到恢复默认起始时
间!", Toast.LENGTH_LONG).show();
});
Button button2 = findViewById(R.id.button2);
button2.setOnClickListener(v -> {
    Calendar calendar = Calendar.getInstance();
    calendar.set(datePicker.getYear(), datePicker.getMonth(),
datePicker.getDayOfMonth());
    @SuppressWarnings("SimpleDateFormat") SimpleDateFormat
simpleDateFormat = new SimpleDateFormat("yyyy 年 MM 月 dd 日");
    Toast.makeText(getApplicationContext(), "你的生日是: " +
simpleDateFormat.format(calendar.getTime()),
Toast.LENGTH_SHORT).show();
});

```

2.

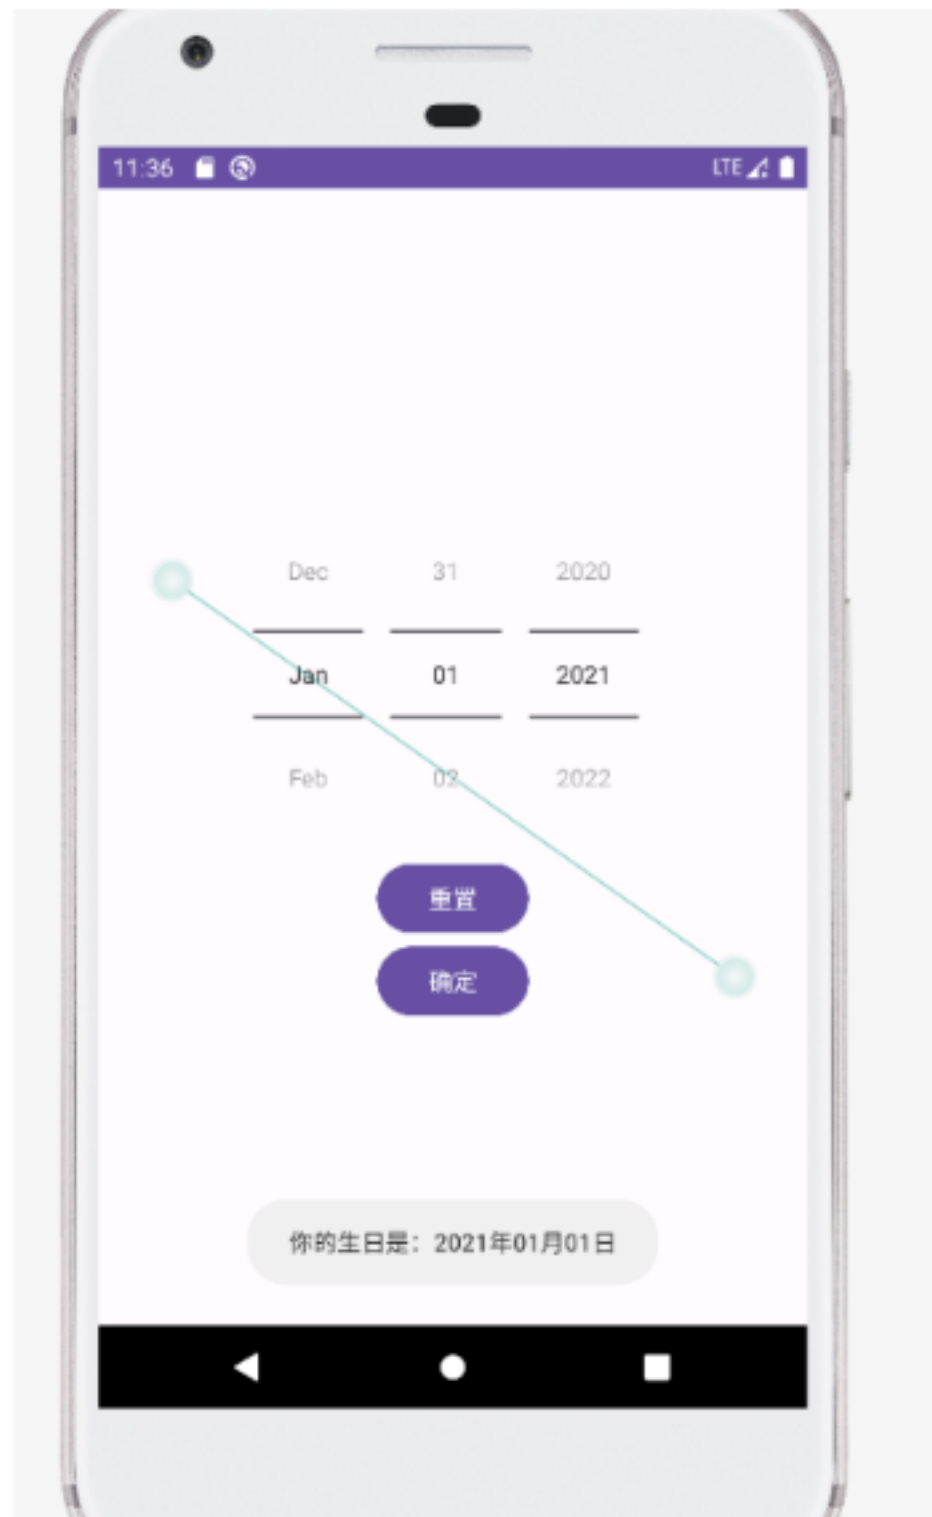

## 作业三

### 1. <!--第 1 列-->

```

<TextView
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="账号" />
<!--第 2 列-->
<EditText
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:ems="10"
    android:inputType="textPersonName" />
</TableRow>
<!--第 2 行-->
<TableRow>
    <!--第 1 列-->
    <TextView
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:text="密码" />

```



```

<!--第 2 列-->
<EditText
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:ems="10"
    android:inputType="textPassword" />
<!--第 3 列-->
<TextView
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="忘记密码" />
</TableRow>
<!--第 3 行-->
<TableRow>
    <!--第 2 列-->
    <TextView
        android:id="@+id/textView4"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_column="1"
        android:gravity="end"
        android:text="注册账号" />
</TableRow>
<!--第 4 行-->
<TableRow>
    <!--第 1 列和第 2 列合并-->
    <Button
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_span="2"
        android:text="登录" />
</TableRow>


<TableRow
    android:layout_width="match_parent"
    android:layout_height="match_parent" />

<TableRow
    android:layout_width="match_parent"
    android:layout_height="match_parent" />

<TableRow
    android:layout_width="match_parent"
    android:layout_height="match_parent" />

```

```
<TableRow  
    android:layout_width="match_parent"  
    android:layout_height="match_parent" />
```

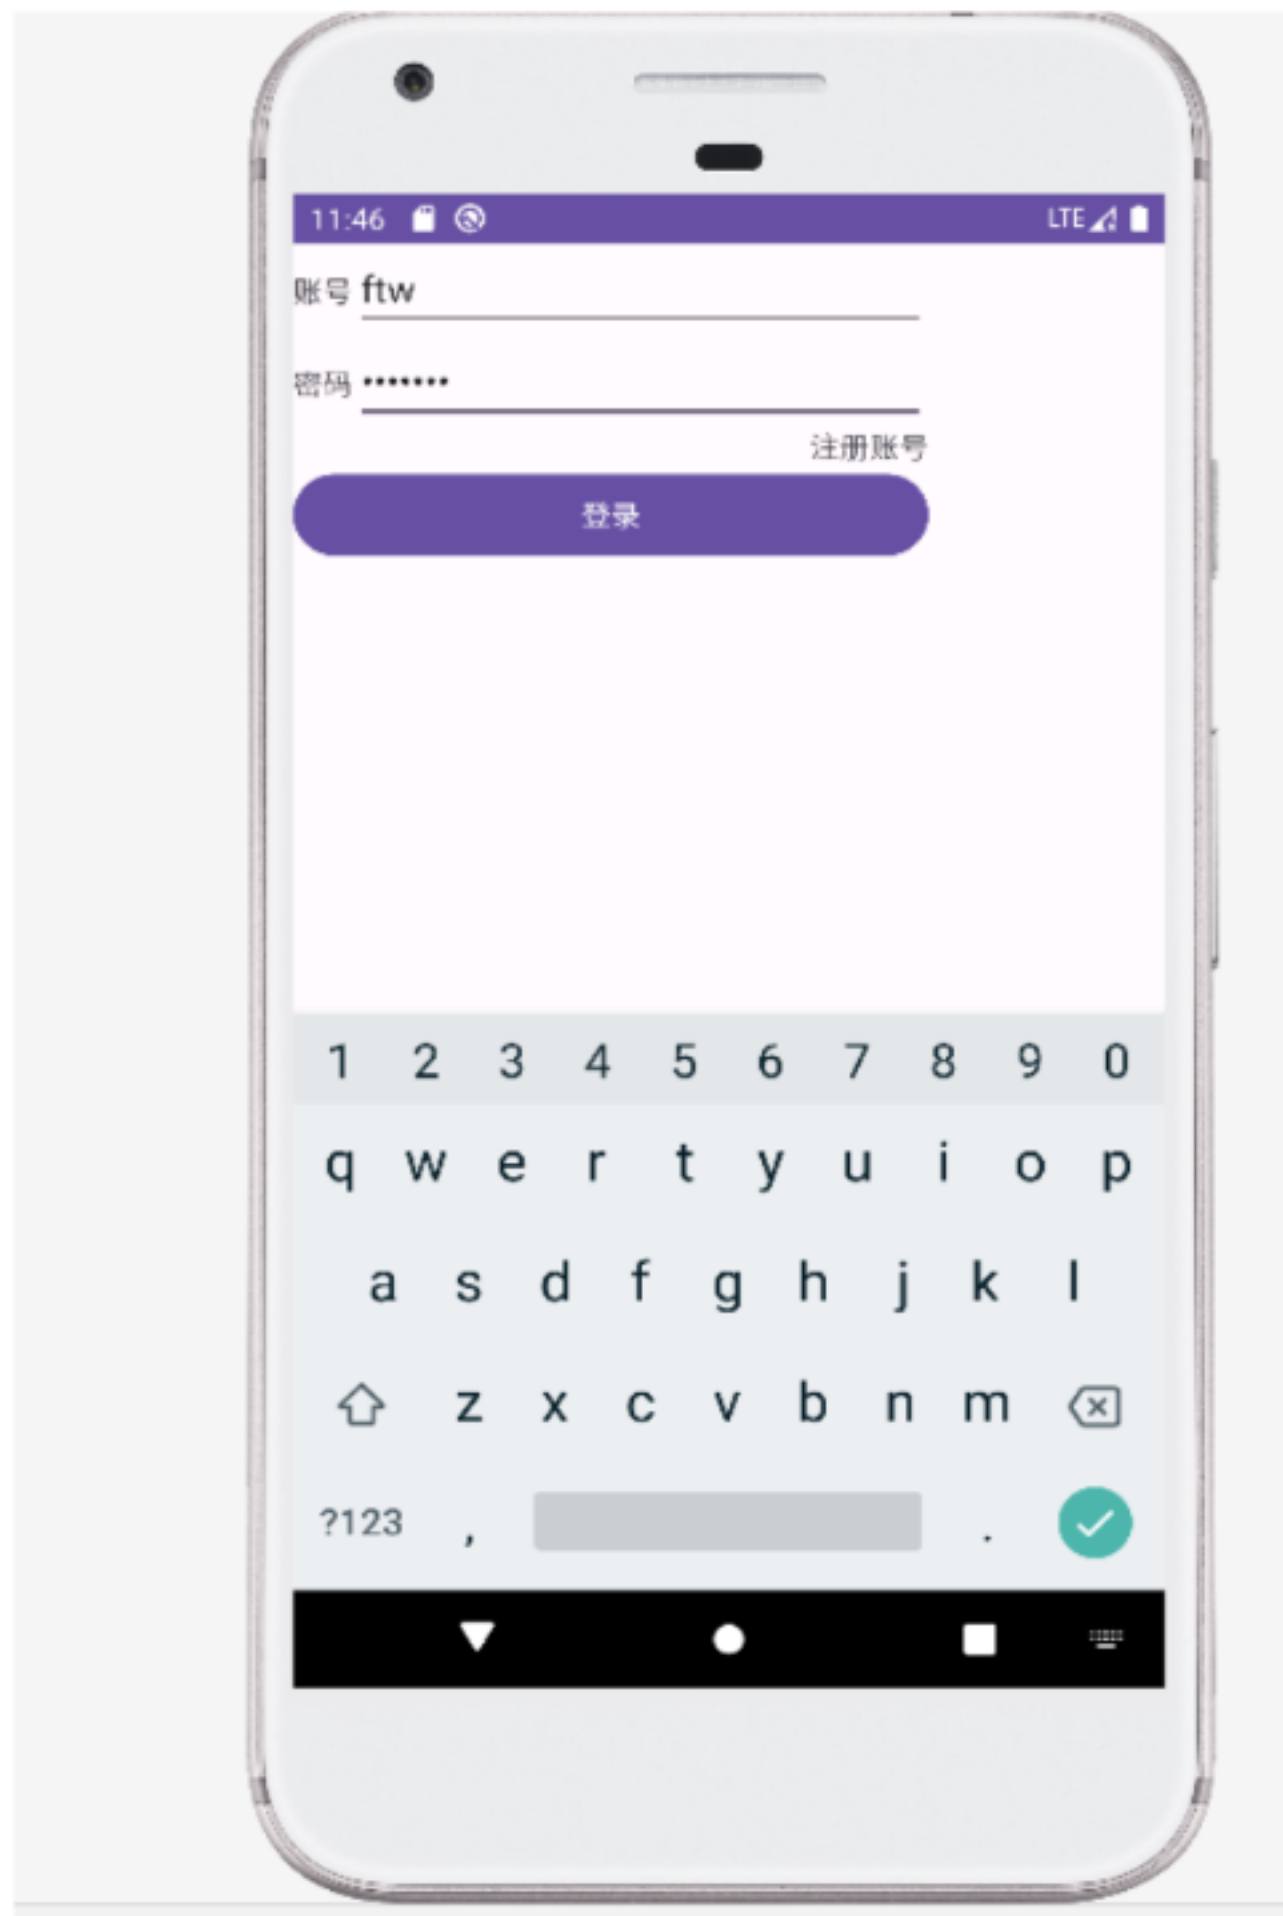

#### 作业四：

```
protected void onCreate(Bundle savedInstanceState) {  
    super.onCreate(savedInstanceState);  
    setContentView(R.layout.activity_main);  
    //通过布局文件获取子视图  
    View view3 = View.inflate(MainActivity.this,  
R.layout.view_flipper_page3, null);  
    //创建图片视图作为子视图  
    ImageView imageView4 = new ImageView(this);  
    imageView4.setAdjustViewBounds(true);
```

```

imageView4.setImageResource(R.mipmap.img_9546);
//设置翻转视图
mViewFlipper = findViewById(R.id.view_flipper);
mViewFlipper.addView(imageView4);
mViewFlipper.addView(view3,2);
mViewFlipper.startFlipping();
mViewFlipper.setOnClickListener(v ->
Toast.makeText(MainActivity.this, "当前显示的子视图索引号为
"+mViewFlipper.getDisplayedChild(), Toast.LENGTH_SHORT).show());
//开始按钮
Button startBtn = findViewById(R.id.button_start);
startBtn.setOnClickListener(v -> mViewFlipper.startFlipping());
//停止按钮
Button stopBtn = findViewById(R.id.button_stop);
stopBtn.setOnClickListener(v -> mViewFlipper.stopFlipping());
//上一页按钮
Button previousBtn = findViewById(R.id.button_previous);
previousBtn.setOnClickListener(v -> mViewFlipper.showPrevious());
//下一页按钮
Button nextBtn = findViewById(R.id.button_next);
nextBtn.setOnClickListener(v -> mViewFlipper.showNext());
}

```





## 作业五：



### 主要代码：

```
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_main);
    name = this.findViewById(R.id.name);           //用户名输入框
    pwd = this.findViewById(R.id.pwd);             //密码输入框
    btnlogin = this.findViewById(R.id.login);       //登录按钮
    btnreg = this.findViewById(R.id.reg);           //注册按钮
    sp1 =
this.getSharedPreferences("userinfo",this.MODE_PRIVATE);
    sp2 =
this.getSharedPreferences("username",this.MODE_PRIVATE);

    name.setText(sp1.getString("usname",null));
    pwd.setText(sp1.getString("uspwd",null));
    mysql = new Mysql(this,"Userinfo",null,1);     //建数据库或者
取数据库
    db = mysql.getReadableDatabase();
    btnlogin.setOnClickListener(new View.OnClickListener() {
//登录事件
```

```

        @Override
        public void onClick(View v) {
            String username = name.getText().toString();
            String password = pwd.getText().toString();
            //获取用户输入的用户名和密码
            //查询用户名和密码相同的数据
            Cursor cursor = db.query("logins",new
String[]{"usname","uspwd"}," usname=? and uspwd=?",new
String[]{username,password},null,null,null);

            int flag = cursor.getCount();
            //查询出来的记录项的条数，若没有该用户则为 0 条
            if(flag!=0){
                //若查询出的记录不为 0，则进行跳转操作
                Intent intent = new Intent();
                intent.setClass(MainActivity.this,Welcome.class);
                //设置页面跳转
                SharedPreferences.Editor editor = sp2.edit();
                cursor.moveToFirst();
                //将光标移动到 position 为 0 的位置，默认位置为-1
                String loginname = cursor.getString(0);
                editor.putString("Loginname",loginname);
                editor.commit();
                //将用户名存到 SharedPreferences 中
                startActivity(intent);
            }
            else{
                Toast.makeText(MainActivity.this,"用户名或密码错
误!",Toast.LENGTH_LONG).show(); //提示用户信息错误或没
有账号
            }
        }
    });

    btnreg.setOnClickListener(new View.OnClickListener() {
        //注册事件
        @Override
        public void onClick(View v) {

            Intent intent = new Intent();
            intent.setClass(MainActivity.this,Register.class);
            //跳转到注册页面
            startActivity(intent);
        }
    });

```

```

        Toast.makeText(MainActivity.this, "前往注册!",
            Toast.LENGTH_SHORT).show();
    }
});
}
}
}

```

## 作业 6:



主要代码:

```

public class MyBroadcastReceivers1 extends BroadcastReceiver {
    private static final String TAG = "MyBroadcastReceiver";
    @Override
    public void onReceive(Context context, Intent intent) {
        Log.d(TAG, "-----Receivers1-----");
        Log.d(TAG, "Action: " + intent.getAction());
        Log.d(TAG, "URI: " + intent.toUri(Intent.URL_INTENT_SCHEME));
        Log.d(TAG, "自定义广播的 info: " + intent.getStringExtra("info"));
    }
}

public class MyBroadcastReceivers2 extends BroadcastReceiver {
    private static final String TAG = "MyBroadcastReceiver";
    @Override
    public void onReceive(Context context, Intent intent) {
        Log.d(TAG, "-----Receivers2-----");
    }
}

```




```

        Log.d(TAG, "Action: " + intent.getAction());
        Log.d(TAG, "URI: " + intent.toUri(Intent.URL_INTENT_SCHEME));
        Log.d(TAG, "自定义广播的 info: " + intent.getStringExtra("info"));
        if(intent.getBooleanExtra("stop",false)){
            abortBroadcast();
        }
    }
}
}

```

## 作业七：

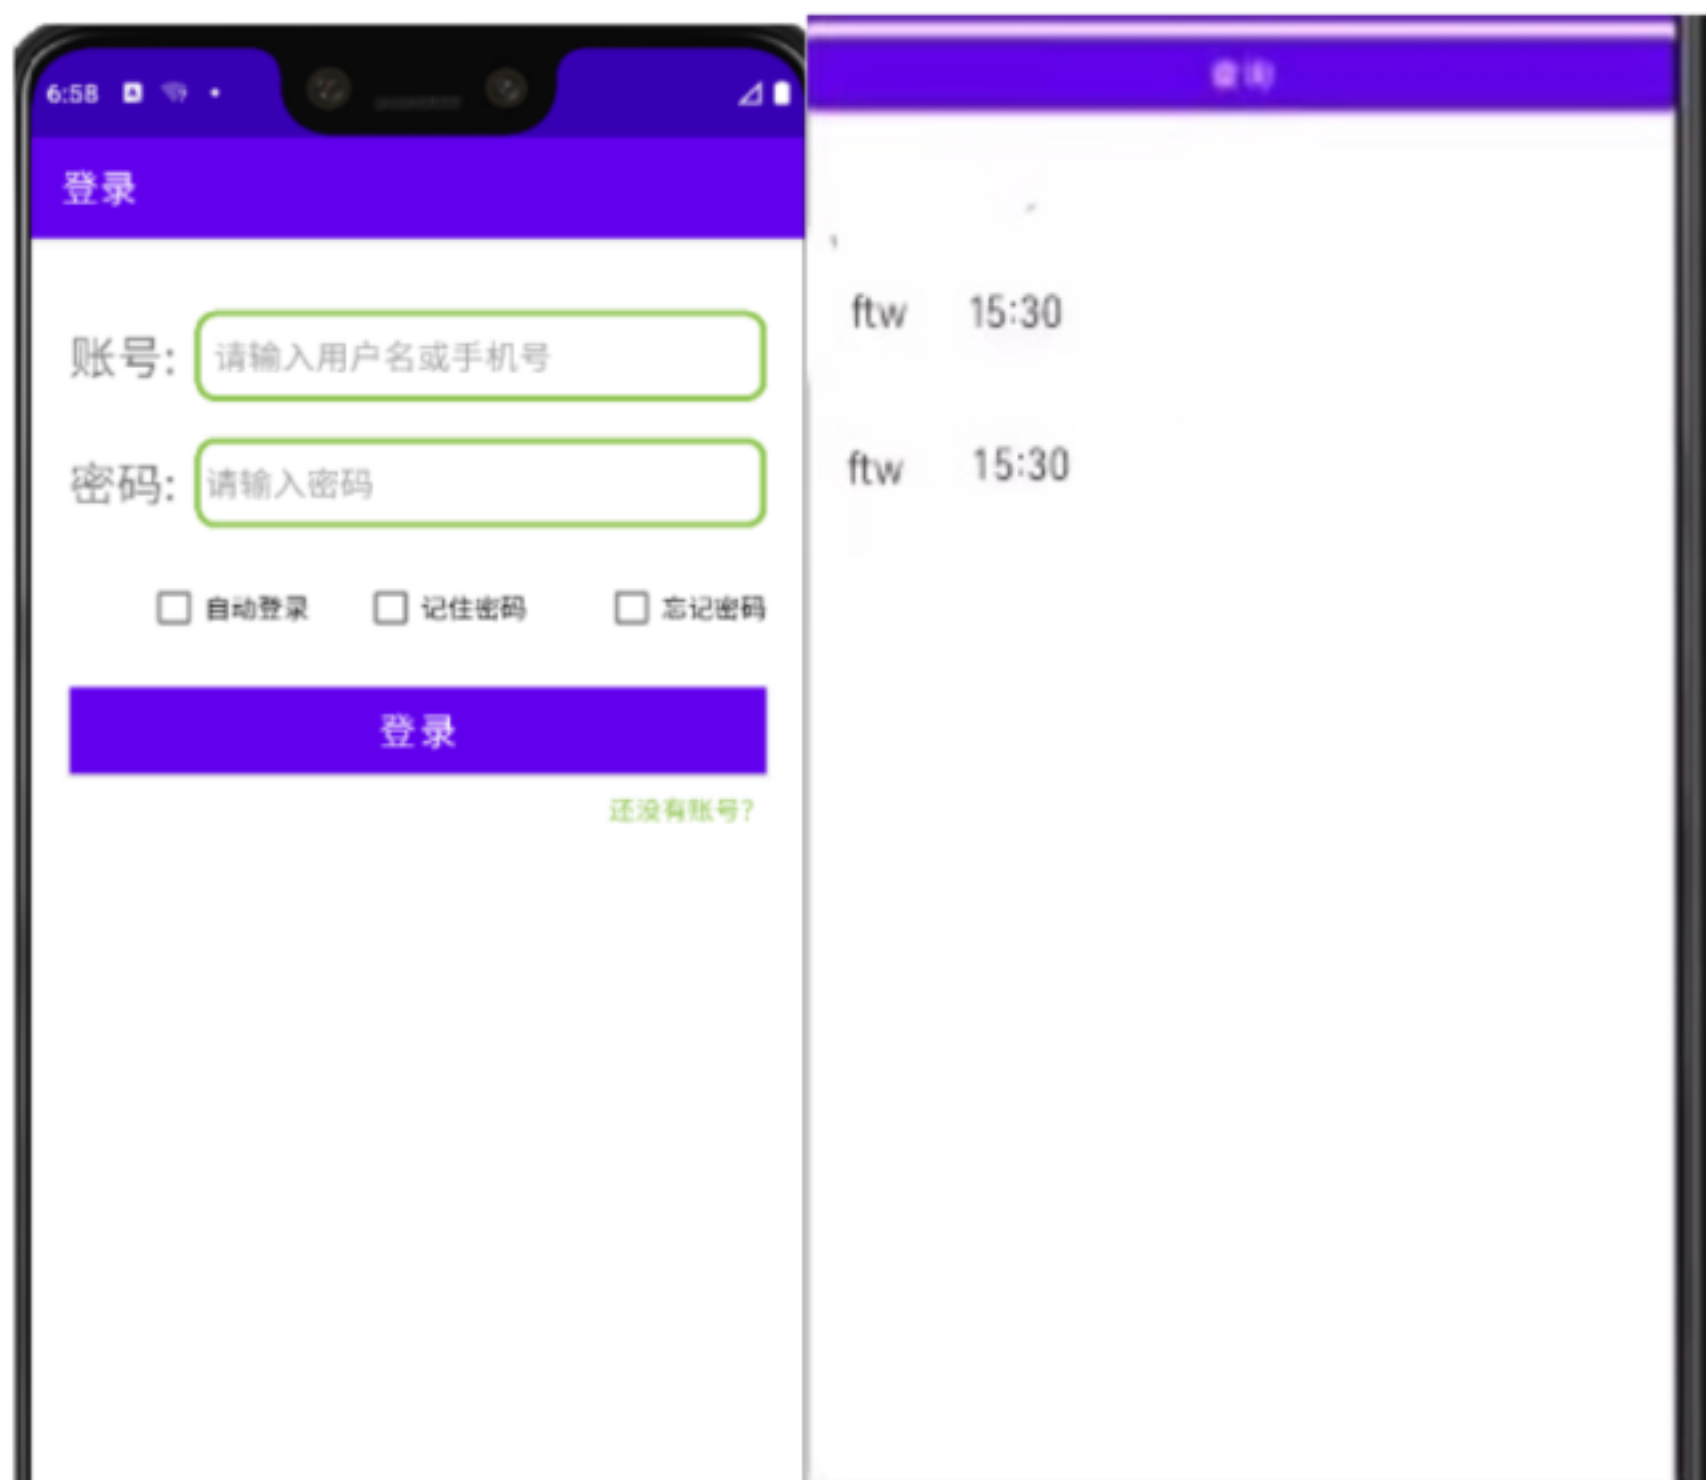

### 主要代码：

1、使用 SQLite 实现记录登录时间的功能，并且能够查询登录的历史记录。

部分关键代码：

//数据库

```

static final String CREATE_SQL[] = {"CREATE TABLE news (" +
    "_id INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT," +
    "title varchar," +
    "content varchar," +
    "keyword varchar," +
    "category varchar," +

```



```

"author INTEGER," +
"publish_time varchar" +")",
"CREATE TABLE user (" + "_id INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT,"
+
"name varchar," +
"password varchar," +
"email varchar," +
"phone varchar," +
"address varchar" +")",
"INSERT INTO user VALUES (1,'dyy',123,123,'沈阳')",
"INSERT INTO user VALUES (2,'dyy2',123,123,'北京')";
public SQLiteDBHelper(@Nullable Context context, @Nullable String name, int
version) {
super(context, name, null, version);}
@Override
public void onCreate(SQLiteDatabase db) {Log.i("sqlite_____", "create Database");for
(int i = 0; i <
CREATE_SQL.length; i++) {db.execSQL(CREATE_SQL[i]);}Log.i("sqlite_____",
"Finished Database");}
//登录
public class SQLiteLoginActivity extends AppCompatActivity {
SQLiteDBHelper dbHelper;
EditText etUsername;
EditText etPassword;
@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(R.layout.activity_sqlite_login);
dbHelper = new SQLiteDBHelper(this,"sqlite.db",1);
etUsername = findViewById(R.id.etUsername);
etPassword = findViewById(R.id.etPassword);}
public void onClick(View view) {
String username = etUsername.getText().toString();
String password = etPassword.getText().toString();Cursor cursor =
db.query("user",new
String[]{"name","password"}, "name=?",new String[]{username},null,null,null,"0,1");
if(cursor.moveToNext()) {
String dbPassword = cursor.getString(cursor.getColumnIndex("password"));
cursor.close();if(password.equals(dbPassword)) {Intent intent = new Intent(this,
SQLiteListActivity.class);
startActivity(intent);return;}}cursor.close();
Toast.makeText(this,"输入信息有误! ",Toast.LENGTH_LONG).show();}
@Override
public void onDestroy() {

```

```

super.onDestroy();
dbHelper.close();}
//登陆成功跳转
ListView listView01;
SQLiteDBHelper dbHelper;
@Override
protected void onCreate(Bundle savedInstanceState) {
super.onCreate(savedInstanceState);
setContentView(R.layout.activity_sqlite_list);
Toast.makeText(this,"登录成功 ",Toast.LENGTH_LONG).show();
listView01 = findViewById(R.id.listView01);
dbHelper = new SQLiteDBHelper(this,"sqlite.db",1);
SQLiteDatabase db = dbHelper.getReadableDatabase();
Cursor cursor = db.query("user",new String[]{"_id","name"},null,null,null,null,null,null);
SimpleCursorAdapter adapter = new SimpleCursorAdapter(this,
android.R.layout.simple_list_item_1,cursor,new String[]{"_id","name"},
new int[]{android.R.id.text1,android.R.id.text1},);
listView01.setAdapter(adapter); }

```

## 第八章：

第八章作业：



## 1、使用 Camera2 实现定时拍照的功能。

部分关键代码：

```
private static final int CAMERA_ID = 0;
private static final int CAMERA_ID = 1;
private static final String TAG = MainActivity.class.getSimpleName();
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_main); }
protected void onPause() {
    super.onPause(); stopPreview(); }
private void startPreview(){if (mCamera != null || !mIsSurfaceCreated) { Log.d(TAG,
"sta
rtPreview will return"); return; }
mCamera = Camera.open(CAMERA_ID);
Camera.Parameters parameters = mCamera.getParameters();
int width = getResources().getDisplayMetrics().widthPixels;
int height = getResources().getDisplayMetrics().heightPixels;
Camera.Size size = getBestPreviewSize(width, height, parameters);
if (size != null) {parameters.setPreviewSize(size.width, size.height);
parameters.setPictureSize(size.width, size.height); }
parameters.setFocusMode(Camera.Parameters.FOCUS_MODE_AUTO);
parameters.setPreviewFrameRate(20);
mCamera.setDisplayOrientation(90);
mCamera.setParameters(parameters);
try {mCamera.setPreviewDisplay(mHolder); } catch (Exception e) {
    Log.d(TAG, e.getMessage()); } mCamera.startPreview(); } } }
private Camera.Size getBestPreviewSize(int width, int height,
Camera.Parameters parameters) { Camera.Size result = null;
for (Camera.Size size : parameters.getSupportedPreviewSizes()) {
    if (size.width <= width && size.height <= height) {
        if (result == null) { result = size; } else {
            int resultArea = result.width * result.height;
            int newArea = size.width * size.height;
            if (newArea > resultArea) { result = size; } } } } return result; }
public void onClick(View v) { switch (v.getId()) { case R.id.start:
    if (!mIsTimerRunning){ mIsTimerRunning = true; mHandler.post(timerRunnable);}
    break;}
    private Runnable timerRunnable = new Runnable() {
        public void run() { if (mCurrentTimer > 0) {
            mTvCountDown.setText(mCurrentTimer + ""); mCurrentTimer--;
            mHandler.postDelayed(timerRunnable, 1000); } else {
                mTvCountDown.setText("");
                mCamera.takePicture(null, null, null, MainActivity.this); playSound();
                mIsTimerRunning = false; mCurrentTimer = 10; } } } }
```



```
public void onPictureTaken(byte[] data, Camera camera) {try { FileOutputStream fos  
= new FileOutputStream(new File (Environment.getExternalStorageSt  
orageDirectory() + File.separator + System.currentTimeMillis() + ".png"));  
}
```