

第七章作业

p213 7.2:

使用 SQLite 实现记录登录时间的功能，并且能够查询登录的历史记录。

截图：



The screenshot shows a mobile application interface titled "NewSQLite". It features a login form with two input fields: "用户名" (Username) and "密码" (Password). Below the password field is a button labeled "奥利给" (Oli Gei), which is a common internet meme. The interface is simple and uses a light gray background with a teal header.

NewSQLite


admin

zhangsan

lisi

wangwu

登录成功,奥利给！

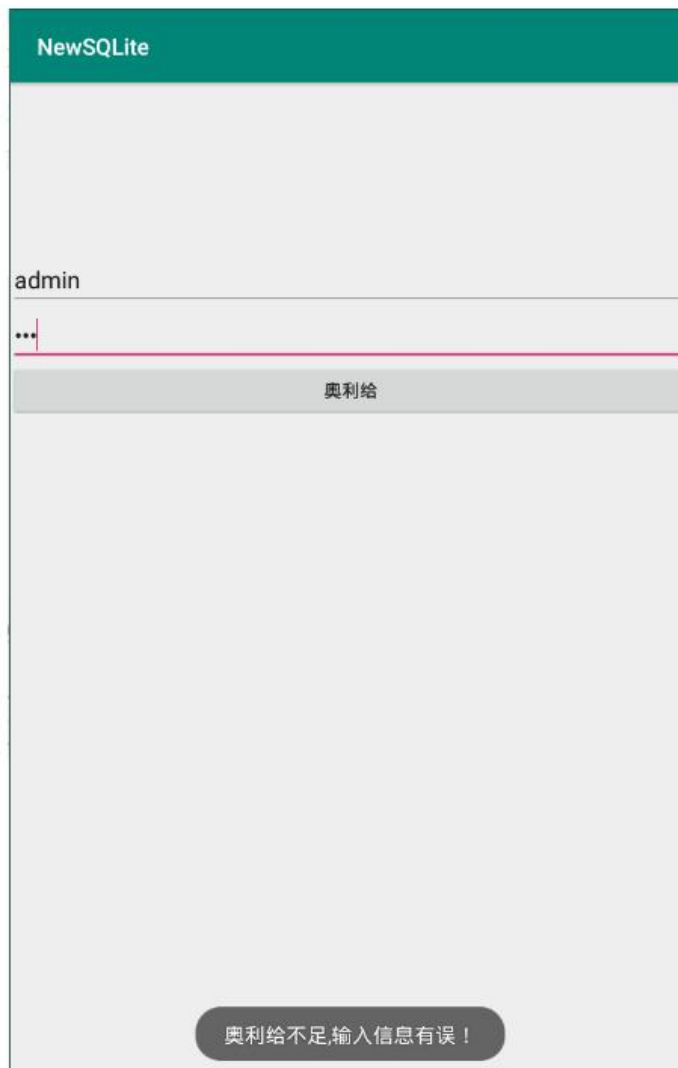

代码

```
public class ContactSQLiteOpenHelper extends SQLiteOpenHelper {
    static String name="user.db";
    static int dbVersion=1;
    public ContactSQLiteOpenHelper(Context context) {
        super(context, name, null, dbVersion);
    }
    @Override
    public void onCreate(SQLiteDatabase db) {
        String sql="create table user(id integer primary key
autoincrement,username varchar(20),password varchar(20),time
varchar(25))";
        db.execSQL(sql);
    }
}

public class SQLiteLoginActivity extends AppCompatActivity {

    SQLiteDBHelper dbHelper;
```

```

EditText etUsername;
EditText etPassword;

@Override
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_sqlite_login);

    // 创建 SQLiteDBHelper 对象,利用构造方法进行初始化赋值
    dbHelper = new SQLiteDBHelper(this,"sqlite.db",1);

    // 通过 id 找到 布局管理器中的 相关属性
    etUsername = findViewById(R.id.etUsername);
    etPassword = findViewById(R.id.etPassword);

}

// 当用户点击提交按钮时,就会到这里(单击事件)
public void onClick(View view) {

    // 获取用户的用户名和密码进行验证
    String username = etUsername.getText().toString();
    String password = etPassword.getText().toString();

    SQLiteDatabase db = dbHelper.getReadableDatabase();

    Cursor cursor = db.query("user",new String[]{"name","password"}, "name=?",new
String[]{username},null,null,null,"0,1");

    // 游标移动进行校验
    if(cursor.moveToNext()) {
        // 从数据库获取密码进行校验
        String dbPassword = cursor.getString(cursor.getColumnIndex("password"));
        // 关闭游标
        cursor.close();
        if(password.equals(dbPassword)) {
            // 校验成功则跳转到 SQLiteListActivity
            Intent intent = new Intent(this, SQLiteListActivity.class);
            // 启动

```

```

        startActivity(intent);
        return;
    }

}

// 跳转失败也要进行关闭
cursor.close();
// 跳转失败就提示用户相关的错误信息
Toast.makeText(this,"奥利给不足,输入信息有误!",Toast.LENGTH_LONG).show();

}

@Override
public void onDestroy() {
    super.onDestroy();
    dbHelper.close();
}
}

public class SQLiteListActivity extends AppCompatActivity {

    ListView listView01;
    SQLiteDBHelper dbHelper;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_sqlite_list);

        // 提示信息
        Toast.makeText(this,"登录成功,奥利给!",Toast.LENGTH_LONG).show();

        listView01 = findViewById(R.id.listView01);

        // 创建 SQLiteDBHelper 对象,利用构造方法进行初始化赋值
        dbHelper = new SQLiteDBHelper(this,"sqlite.db",1);

        // 通过 id 找到 布局管理器中的 相关属性
        SQLiteDatabase db = dbHelper.getReadableDatabase();

        Cursor cursor = db.query("user",new String[]{"_id","name"},null,null,null,null,null,null);

        // 适配器,利用适配器进行填充信息,相对于数组来说更加灵活,动态化(为这种设计

```

点赞)

```
SimpleCursorAdapter adapter = new SimpleCursorAdapter(
    this,
    android.R.layout.simple_list_item_1,
    cursor,
    new String[]{"_id", "name"},
    new int[]{android.R.id.text1, android.R.id.text1},
    0
);
listView01.setAdapter(adapter);
}

/**
 * 关闭 dbHelper.
 */
@Override
protected void onDestroy() {
    super.onDestroy();
    dbHelper.close();
}
}
```