


第六章作业

p176 6.3:

通过广播接收器实现两个 App 之间通过自定义广播进行数据通信。

截图:


广播发送界面

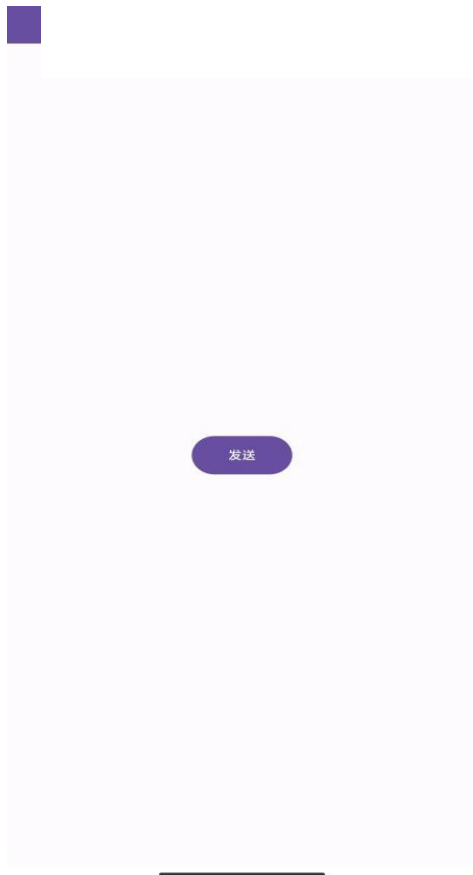

广播接收界面



发送成功

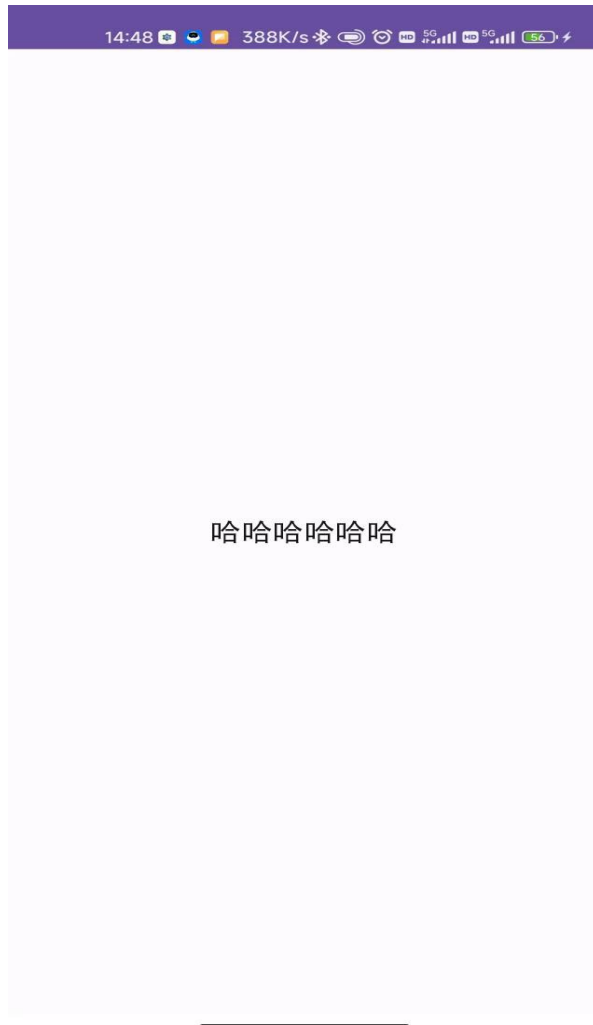

代码部分：

本次代码是在老师 605、606 的代码基础上进行改写的，下面说一下代码的逻辑要求是两个 APP 之间进行通信。以 606 的 MainActivity 进行发送广播，代码如下，由于是进行两个 APP 之间的通信，所以核心代码是：

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools">

    <application
        android:allowBackup="true"
        android:dataExtractionRules="@xml/data_extraction_rules"
        android:fullBackupContent="@xml/backup_rules"
        android:icon="@mipmap/ic_launcher"
        android:label="@string/app_name"
```

```

        android:roundIcon="@mipmap/ic_launcher_round"
        android:supportsRtl="true"
        android:theme="@style/Theme.Study2"
        tools:targetApi="31">
        <activity
            android:name=".MainActivity"
            android:exported="true">
            <intent-filter>
                <action android:name="android.intent.action.MAIN" />

                <category android:name="android.intent.category.LAUNCHER" />
            </intent-filter>

        </activity>
    </application>

</manifest>

public class MainActivity extends AppCompatActivity {
    EatReceiver eatReceiver;
    @SuppressWarnings("StaticFieldLeak")
    static TextView textView;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        //动态注册广播接收器
        IntentFilter intentFilter = new
IntentFilter("android.intent.action.WuHu");
        EatReceiver eatReceiver = new EatReceiver();
        registerReceiver(eatReceiver, intentFilter);
        //文本框
        textView = findViewById(R.id.textView);
    }

    public static class EatReceiver extends BroadcastReceiver {
        @Override
        public void onReceive(Context context, Intent intent) {
            textView.setText("哈哈哈哈哈");
        }
    }
}

```