

第一章作业

我安装的程序为

Android Studio

Android Studio



Dev C++

运行虚拟机



第二章作业

运行截图：

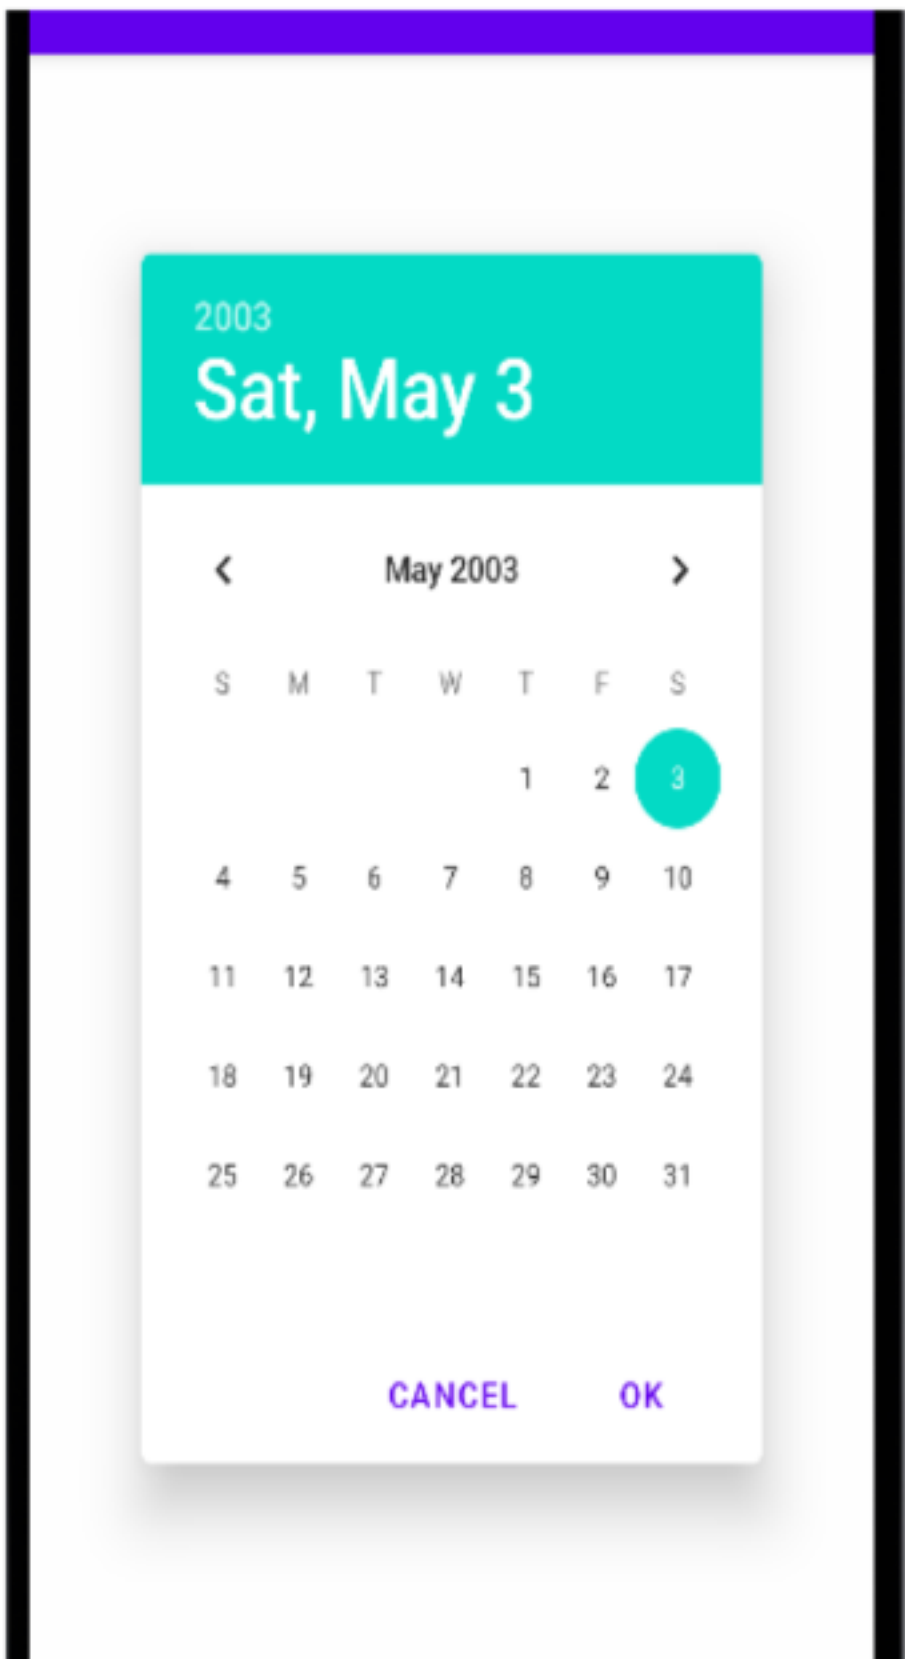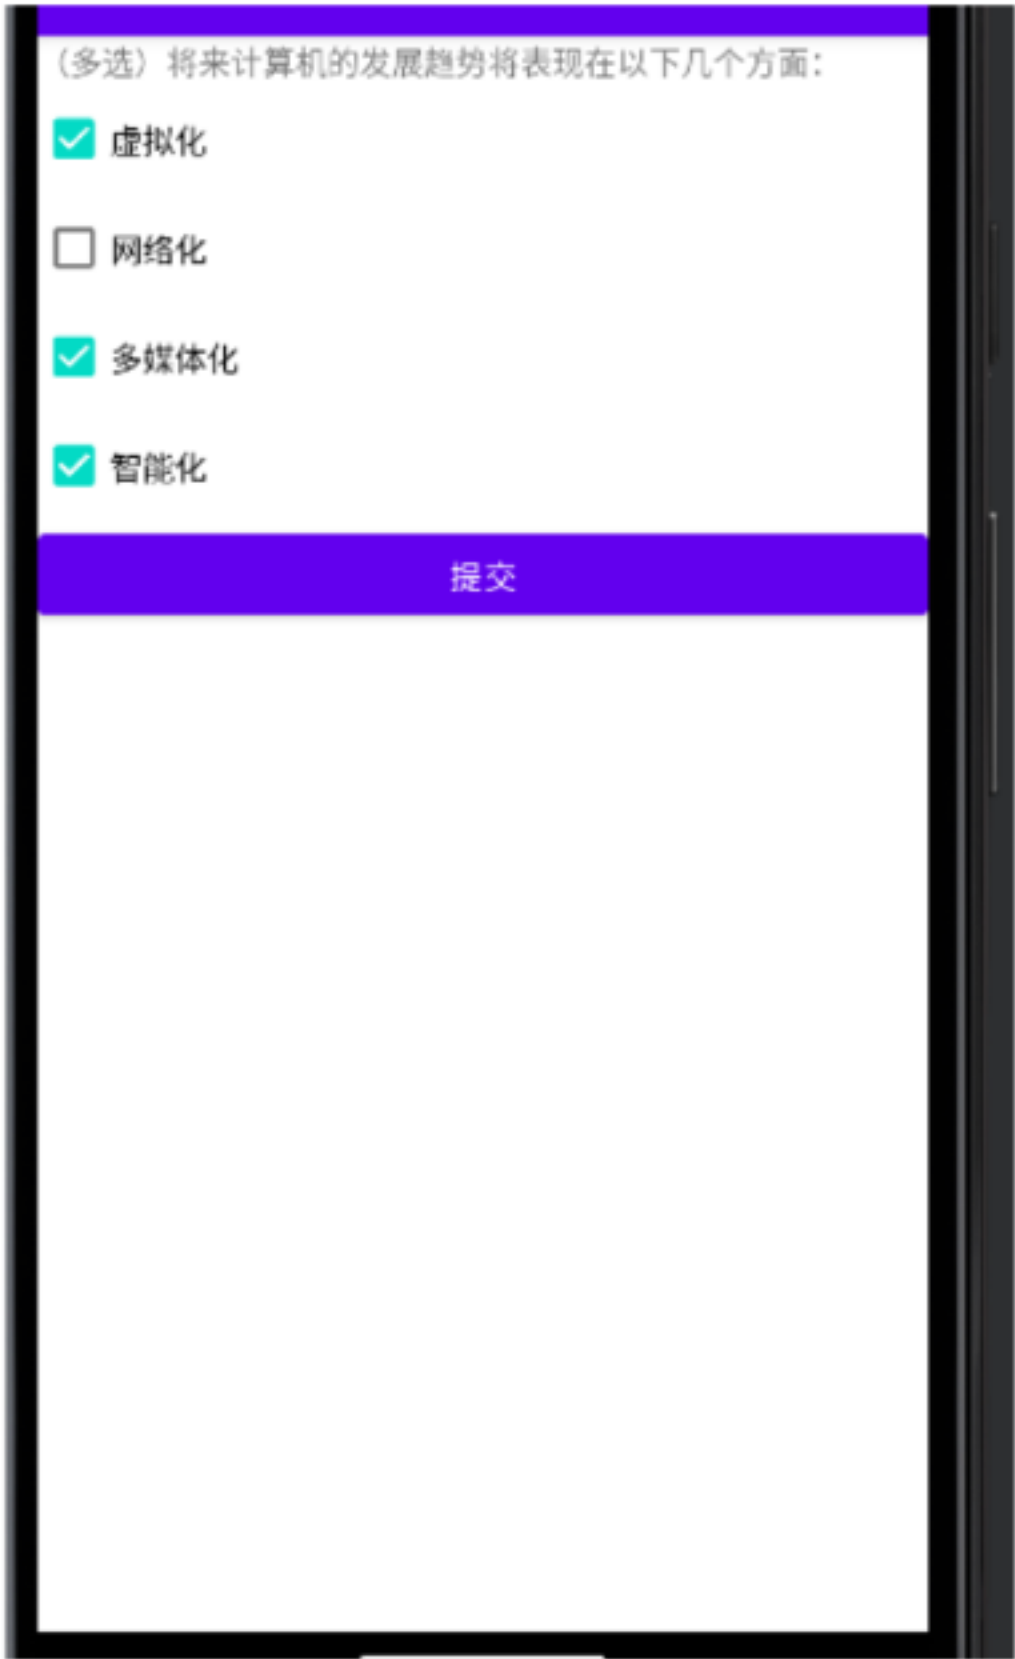

代码：

```
package com.example.myapplication.Activity;

import androidx.appcompat.app.AppCompatActivity;
import android.content.Intent;

import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.CheckBox;

import com.example.myapplication.R;
```

```

public class MainActivity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        Button bt1=findViewById(R.id.button1);
        bt1.setOnClickListener(
            new View.OnClickListener() {
                @Override
                public void onClick(View view) {
                    Intent intent = new
Intent(MainActivity.this,MainActivity2.class);
                    startActivity(intent);
                }
            }
        );
        Button bt2=findViewById(R.id.button2);
        bt2.setOnClickListener(
            new View.OnClickListener() {
                @Override
                public void onClick(View view) {
                    Intent intent = new
Intent(MainActivity.this,MainActivity3.class);
                    startActivity(intent);
                }
            }
        );
    }
    Button btn1=findViewById(R.id.button0);
    btn1.setOnClickListener(view) {
        StringBuilder sb1=new StringBuilder();
        if( ((CheckBox)(findViewById(R.id.checkBox1))).isChecked()) {
            sb1.append(((CheckBox)(findViewById(R.id.checkBox1))).getText());
            sb1.append(";");
        }
        if( ((CheckBox)(findViewById(R.id.checkBox2))).isChecked()) {
            sb1.append(((CheckBox)(findViewById(R.id.checkBox2))).getText());
            sb1.append(";");
        }
        if( ((CheckBox)(findViewById(R.id.checkBox3))).isChecked()) {
            sb1.append(((CheckBox)(findViewById(R.id.checkBox3))).getText());
            sb1.append(";");
        }
    }
}

```



```
        if( ((CheckBox)(findViewById(R.id.checkBox4))).isChecked()) {  
            sb1.append(((CheckBox)(findViewById(R.id.checkBox4))).getText());  
            sb1.append(";");  
        }  
        ((EditText)findViewById(R.id.s0)).setText(sb1);  
    };  
}
```

第三章作业

7:18 LTE

test06

用户名:

bxy

密码:

确认密码:

注册

7:20 LTE

test06

用户名: bxy

密 码: ***

登录 注册



欢迎! bxy

第四章作业



代码：

```
<manifest
xmlns:android="http://schemas.android.com/apk/res/android"xmlns:tools="http://schemas.android.com/tools">
    <application
        android:allowBackup="true"
        android:dataExtractionRules="@xml/dataextraction_rules"android:fullBackupContent="@xml/backup_rules"android:icon="@mipmap/ic_launcher"android:label="@string/app_name"
        android:roundIcon="@mipmap/ic_launcher_round"android:supportsRtl="true"android:theme="@style/Theme_4003"tools:targetApi="31">
        <activity
            android:name=".MainActivity"
```



```

        android:exported="true">
        <intent-filter>
        <action android:name="android.intent.action.MAIN" />
        <category android:name="android.intent.category.LAUNCHER"/>
    </intent-filter>
    </activity>
</application>

public class MainActivity extends AppCompatActivity {
    10 usages
    private ViewFlipper mViewFlipper;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        //通过布局文件获取了视图
        View view3 = View.inflate( context: MainActivity.this,
R.layout.view_flipper_page3.root: null)
        //创建图片视图作为子视图
        ImageView imageView4 = new ImageView( context: this);
        imageView4.setAdjustViewBounds(true);
        imageView4.setImageResource(R.mipmap.img_9546);
        1/设置阳转视区
        mViewFlipper = findViewById(R.id.view_flipper);
        mViewFlipper.addView(imageView4);
        mViewFlipper.addView(view3, index: 2);
        mViewFlipper.startFlipping();
        mViewFlipper.setOnClickListener( -》 Toast.makeText( context: MainActivity.this,
text "当 m 显示的机 M 索为"+mViewFlipper.getDisplayedchild()
        //开始按钮
        Button startBtn = findViewById(R.id.button_start);
        startBtn.setOnClickListener(v -> mViewFlipper.startFlipping());
        //停止按钮
        Button stopBtn = findViewById(R.id.button_stop);
        stopBtn.setOnClickListener(v -> mViewFlipper.startFlipping());
        //停止按钮
        Button stopBtn = findViewById(R.id.button_stop);
        stopBtn.setOnClickListener(v -> mViewFlipper.stopFlipping());
        //上一页按钮
        Button previousBtn = findViewById(R.id.button_previous);
        previousBtn.setOnClickListener(v -> mViewFlipper.showPrevious());
        //下一页按钮
        Button nextBtn = findViewById(R.id.button_next);
        nextBtn.setOnClickListener(v -> mViewFlipper.showNext());
    }
}

```

```

<androidx.constraintlayout.widget.ConstraintLayout
xmlns:android="http://schemas.android.com/apk/res-auto" android:layout
width="match_parent" android:layout_height="match_parent">
<LinearLayout
android:layout_width="wrap_content" android:layout_height="wrap_content" android:ori
entation="vertical">
<ImageView
android:layout_width="wrap_content" android:layout_height="wrap_content" android:adj
ustViewBounds="true" app:srcCompat="@mipmap/img1656" /></LinearLayout>
</androidx.constraintlayout.widget.ConstraintLayout>

```

第五章作业

代码部分：

```

public class MainActivity extends AppCompatActivity {
    private EditText edtUsername;
    private EditText edtPassword;
    private Button btnLogin;
    private Button btnCancel;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        edtUsername=findViewById(R.id.et_user_name);
        edtPassword=findViewById(R.id.et_psw);
        Button bt2=findViewById(R.id.btn_login);
        Button bt1=findViewById(R.id.tv_register);
        bt1.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                Intent intent =new Intent(MainActivity.this,RegisterActivity.class);
                startActivity(intent);
            }
        });
        bt2.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                String strUsername = edtUsername.getText().toString().trim();
                String strPassword = edtPassword.getText().toString().trim();
            }
        });
    }
}

```



```

        if (strUsername.equals("admin") && strPassword.equals("admin")) {
            Toast.makeText(MainActivity.this,
                "用户名和密码正确!", Toast.LENGTH_SHORT).show();
            Intent intent =new Intent(MainActivity.this,MainActivity2.class);
            intent.putExtra("Username",strUsername);
            intent.putExtra("Password",strPassword);
            startActivity(intent);
        }
    }
}
});
}
}
}

```

```

        } else {
            Toast.makeText(MainActivity.this,
                "用户名或密码错误请重试!", Toast.LENGTH_SHORT).show();
        }
    }
}
});
}
}
}

```

个人主页后端业务代码：

```

public class MainActivity2 extends AppCompatActivity {
    private TextView tvMessage;

```

```

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main2);
        tvMessage=findViewById(R.id.et_username);
        Intent intent =getIntent();
        if(intent!=null){
            String username = intent.getStringExtra("Username");
            String password = intent.getStringExtra("Password");
            String message = "登录成功!\n 用户:" + username + "\n 密码:" + password;
            tvMessage.setText(message);
        }
        Button btn=findViewById(R.id.btn_quit);
        btn.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                finish();
            }
        });
    }
}
}
}
}

```

登陆界面前端代码：

```
<LinearLayout
    xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:background="@drawable/login_bg"
    android:orientation="vertical">
    <!--标题栏-->
    <include layout="@layout/main_title_bar"></include>
    <!--显示头像，记得加入 id iv_head -->
    <ImageView
        android:id="@+id/iv_head"
        android:layout_width="70dp"
        android:layout_height="70dp"
        android:layout_marginTop="25dp"
        android:layout_gravity="center_horizontal"
        android:background="@drawable/default_icon"/>
    <!--输入框-->
    <EditText
        android:id="@+id/et_user_name"
        android:layout_width="fill_parent"
        android:layout_height="48dp"
        android:layout_marginTop="35dp"
        android:layout_marginLeft="35dp"
        android:layout_marginRight="35dp"
        android:layout_gravity="center_horizontal"
        android:drawableLeft="@drawable/user_name_icon"
        android:drawablePadding="10dp"
        android:paddingLeft="8dp"
        android:gravity="center_vertical"
        android:hint="请输入用户名"
        android:singleLine="true"
        android:textColor="#000000"
        android:textColorHint="#a3a3a3"
        android:textSize="14sp"/>
    <!--输入框-->
    <EditText
        android:id="@+id/et_psw"
        android:layout_width="fill_parent"
```

```

        android:layout_height="48dp"
        android:layout_gravity="center_horizontal"
        android:layout_marginLeft="35dp"
        android:layout_marginRight="35dp"
        android:drawableLeft="@drawable/psw_icon"
        android:drawablePadding="10dp"
        android:paddingLeft="8dp"
        android:gravity="center_vertical"
        android:hint="请输入密码"
        android:inputType="textPassword"
        android:singleLine="true"
        android:textColor="#000000"
        android:textColorHint="#a3a3a3"
        android:textSize="14sp"/>
    <!-- 按钮 -->
    <Button
        android:id="@+id/btn_login"
        android:layout_width="fill_parent"
        android:layout_height="40dp"
        android:layout_marginTop="15dp"
        android:layout_marginLeft="35dp"
        android:layout_marginRight="35dp"
        android:layout_gravity="center_horizontal"
        android:background="@drawable/register_selector"
        android:text="登 录"
        android:textColor="@android:color/white"
        android:textSize="18sp"/>
    <!-- 显示 tv_register , find_psw -->
    <LinearLayout
        android:layout_width="fill_parent"
        android:layout_height="fill_parent"
        android:layout_marginTop="8dp"
        android:layout_marginLeft="35dp"
        android:layout_marginRight="35dp"
        android:gravity="center_horizontal"
        android:orientation="horizontal">
        <Button
            android:id="@+id/tv_register"
            android:layout_width="0dp"
            android:layout_height="wrap_content"
            android:layout_weight="1"
            android:gravity="center_horizontal"
            android:padding="8dp"
            android:text="立即注册"

```



```
        android:textColor="@android:color/white"
        android:textSize="14sp" />
    <!-- layout_weight="1" layout_width="0dp"实现均分效果-->
    <Button
        android:id="@+id/tv_find_psw"
        android:layout_width="0dp"
        android:layout_height="wrap_content"
        android:layout_weight="1"
        android:gravity="center_horizontal"
        android:padding="8dp"
        android:text="找回密码?"
        android:textColor="@android:color/white"
        android:textSize="14sp" />
    </LinearLayout>
</LinearLayout>
```

截图：

用户名:

密 码:

登录 注册

密 码:

登录 注册

第六章作业

代码部分:

```
<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:tools="http://schemas.android.com/tools">
```

```
    <application
        android:allowBackup="true"
        android:dataExtractionRules="@xml/data_extraction_rules"
        android:fullBackupContent="@xml/backup_rules"
        android:icon="@mipmap/ic_launcher"
        android:label="@string/app_name"
        android:roundIcon="@mipmap/ic_launcher_round"
```



```

        android:supportRtl="true"
        android:theme="@style/Theme.Study2"
        tools:targetApi="31">
        <activity
            android:name=".MainActivity"
            android:exported="true">
            <intent-filter>
                <action android:name="android.intent.action.MAIN" />

                <category android:name="android.intent.category.LAUNCHER"
            />
            </intent-filter>
        </activity>
    </application>

</manifest>

```

```

public class MainActivity extends AppCompatActivity {
    EatReceiver eatReceiver;
    @SuppressWarnings("StaticFieldLeak")
    static TextView textView;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        //动态注册广播接收器
        IntentFilter intentFilter = new IntentFilter("android.intent.action.WuHu");
        EatReceiver eatReceiver = new EatReceiver();
        registerReceiver(eatReceiver,intentFilter);
        //文本框
        textView = findViewById(R.id.textView);
    }
}

```

```


public static class EatReceiver extends BroadcastReceiver {
    @Override
    public void onReceive(Context context, Intent intent) {
        textView.setText("哈哈哈哈哈");
    }
}

```

通过广播接收器实现两个 App 之间通过自定义广播进行数据通信。

截图：

发送与接收

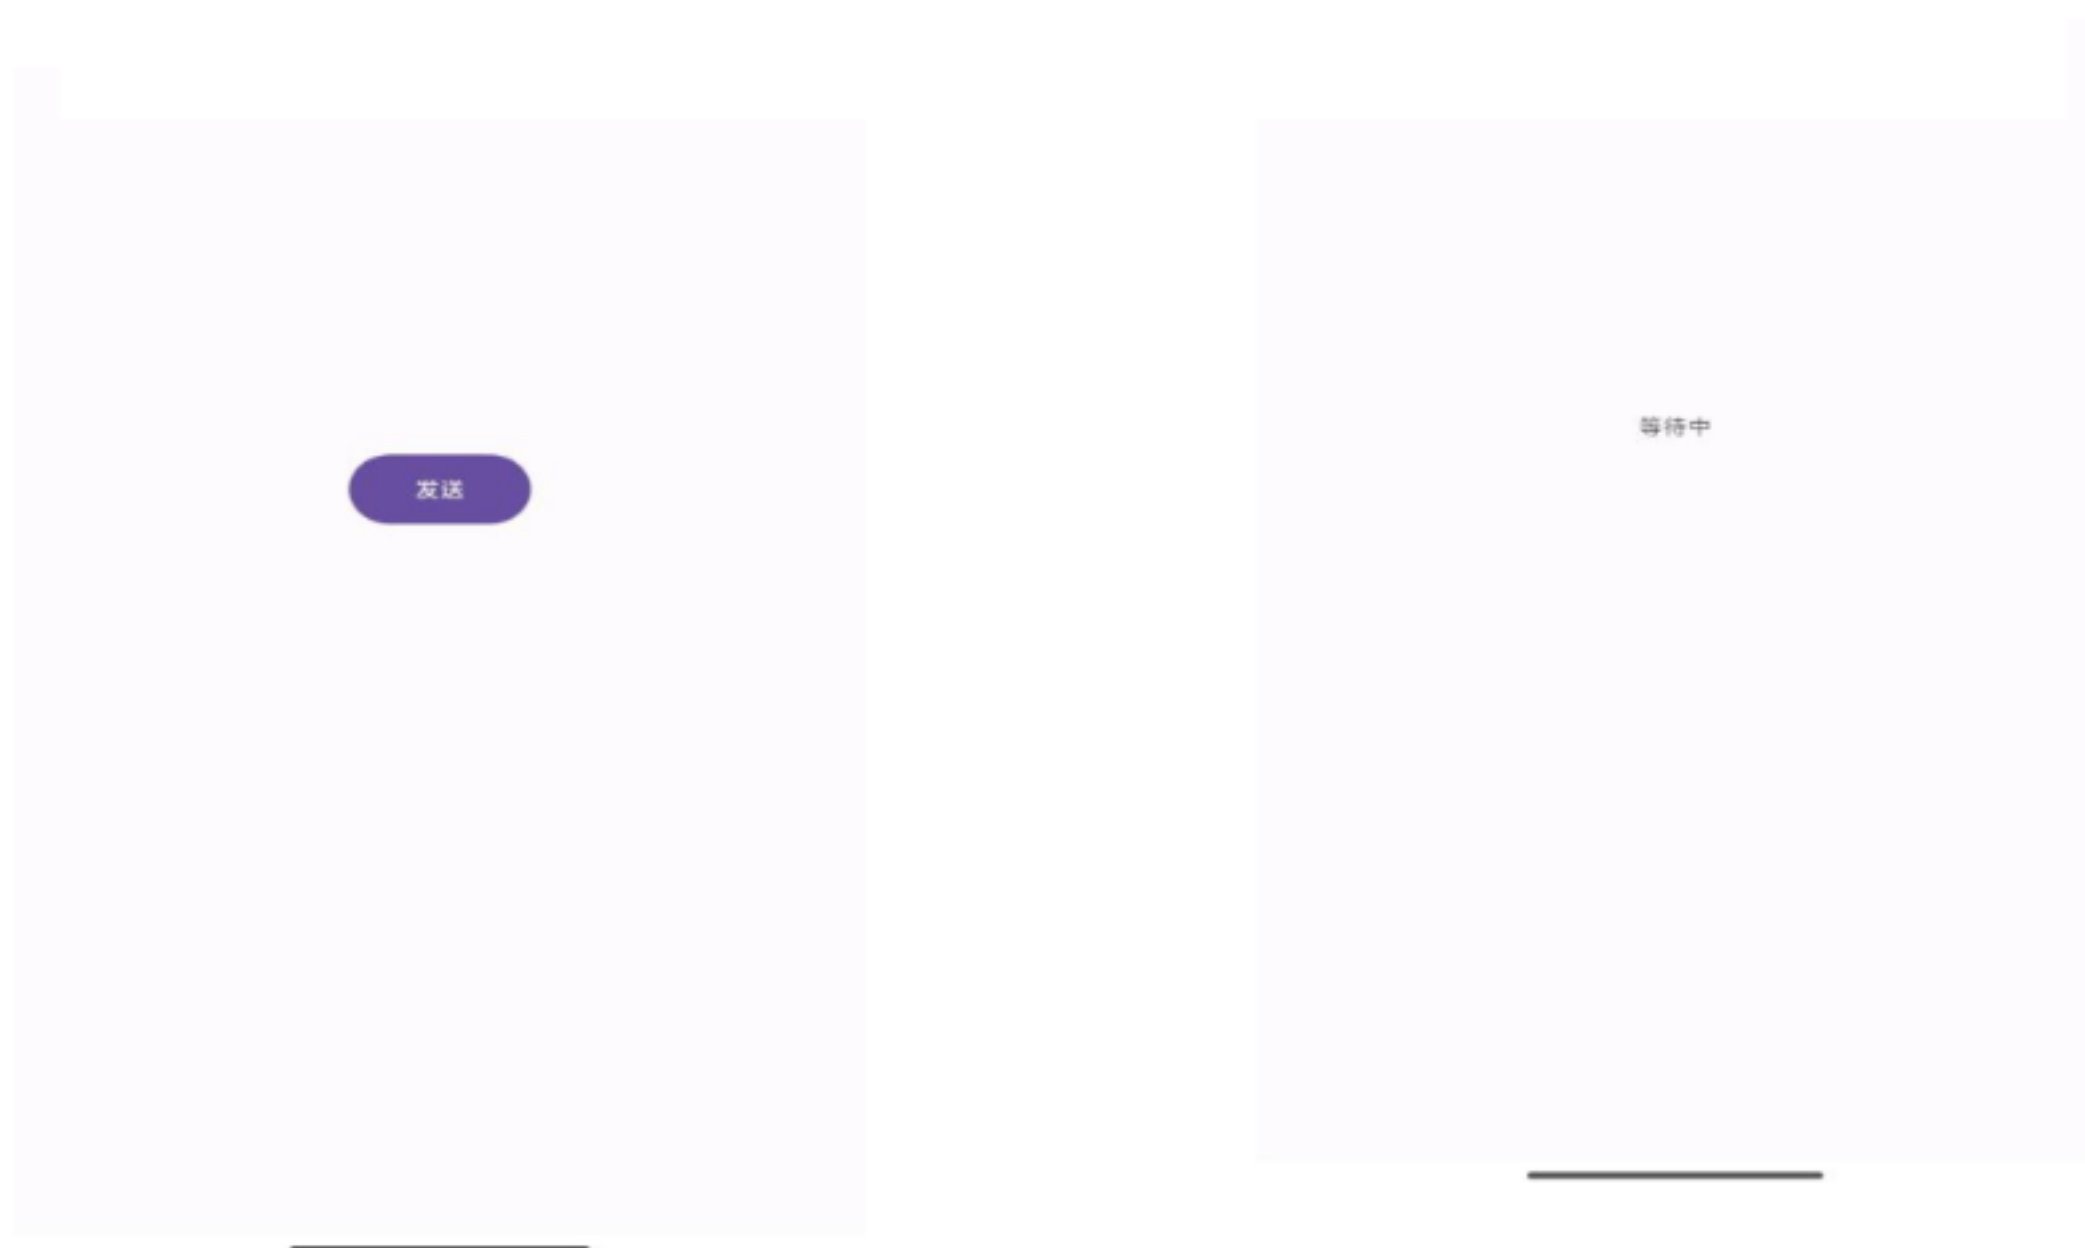

发送成功



第七章作业

代码：

```
public class ContactSQLiteOpenHelper extends SQLiteOpenHelper {  
    static String name="user.db";  
    static int dbVersion=1;  
    public ContactSQLiteOpenHelper(Context context){  
        super(context, name, null, dbVersion);  
    }  
    @Override  
    public void onCreate(SQLiteDatabase db) {
```



```
String sql="create table user(id integer primary key autoincrement,username  
varchar(20),password varchar(20),time varchar(25))";
```

```
db.execSQL(sql);
```

```
}
```

```
}
```

```
public class SQLiteLoginActivity extends AppCompatActivity {
```

```
    SQLiteDBHelper dbHelper;
```

```
    EditText etUsername;
```

```
    EditText etPassword;
```

```
    @Override
```

```
    protected void onCreate(Bundle savedInstanceState) {
```

```
        super.onCreate(savedInstanceState);
```

```
        setContentView(R.layout.activity_sqlite_login);
```

```
        // 创建 SQLiteDBHelper 对象,利用构造方法进行初始化赋值
```

```
        dbHelper = new SQLiteDBHelper(this,"sqlite.db",1);
```

```
        // 通过 id 找到 布局管理器中的 相关属性
```

```
        etUsername = findViewById(R.id.etUsername);
```

```
        etPassword = findViewById(R.id.etPassword);
```

```
    }
```

```
        // 当用户点击提交按钮时,就会到这里(单击事件)
```

```
        public void onClick(View view) {
```

```
            // 获取用户的用户名和密码进行验证
```

```
            String username = etUsername.getText().toString();
```

```
            String password = etPassword.getText().toString();
```

```
            SQLiteDatabase db = dbHelper.getReadableDatabase();
```

```
            Cursor cursor = db.query("user",new String[]{"name","password"},  
"name=?",new String[]{username},null,null,null,"0,1");
```

```
            // 游标移动进行校验
```

```
            if(cursor.moveToNext()) {
```



```

        // 从数据库获取密码进行校验
        String dbPassword = cursor.getString(cursor.getColumnIndex("password"));
        // 关闭游标
        cursor.close();
        if(password.equals(dbPassword)) {
            // 校验成功则跳转到 SQLiteListActivity
            Intent intent = new Intent(this, SQLiteListActivity.class);
            // 启动
            startActivity(intent);
            return;
        }
    }
}

```

```

    }
}

```

```

        // 跳转失败也要进行关闭
        cursor.close();
        // 跳转失败就提示用户相关的错误信息
        Toast.makeText(this, "奥利给不足,输入信息有误!",
            Toast.LENGTH_LONG).show();
    }
}

```

```

    }
}

```

```

    @Override
    public void onDestroy() {
        super.onDestroy();
        dbHelper.close();
    }
}

```

```

public class SQLiteListActivity extends AppCompatActivity {

```

```

    ListView listView01;
    SQLiteDBHelper dbHelper;

```

```

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_sqlite_list);
    }

```

```

        // 提示信息
        Toast.makeText(this, "登录成功,奥利给! ", Toast.LENGTH_LONG).show();
    }

```

```

    listView01 = findViewById(R.id.listView01);
}

```

```

        // 创建 SQLiteDatabaseHelper 对象,利用构造方法进行初始化赋值
        dbHelper = new SQLiteDatabaseHelper(this,"sqlite.db",1);

        // 通过 id 找到 布局管理器中的 相关属性
        SQLiteDatabase db = dbHelper.getReadableDatabase();

        Cursor cursor = db.query("user",new
String[]{"_id","name"},null,null,null,null,null);

        // 适配器,利用适配器进行填充信息,相对于数组来说更加灵活,动态化(为这
种设计点赞)
        SimpleCursorAdapter adapter = new SimpleCursorAdapter(
        this,
        android.R.layout.simple_list_item_1,
        cursor,
        new String[]{"_id","name"},
        new int[]{android.R.id.text1,android.R.id.text1},
        0
        );
        listView01.setAdapter(adapter);
    }

    /**
     * 关闭 dbHelper.
     */
    @Override
    protected void onDestroy() {
        super.onDestroy();
        dbHelper.close();
    }

}

```

截图：

NewSQLite

用户名

密码

奥利给

admin
zhangsan
lisi
wangwu

admin

...

奥利给

奥利给不足,输入信息有误！

第八章作业


使用 Camera2 实现定时拍照的功能

截图：

界面



拍照界面

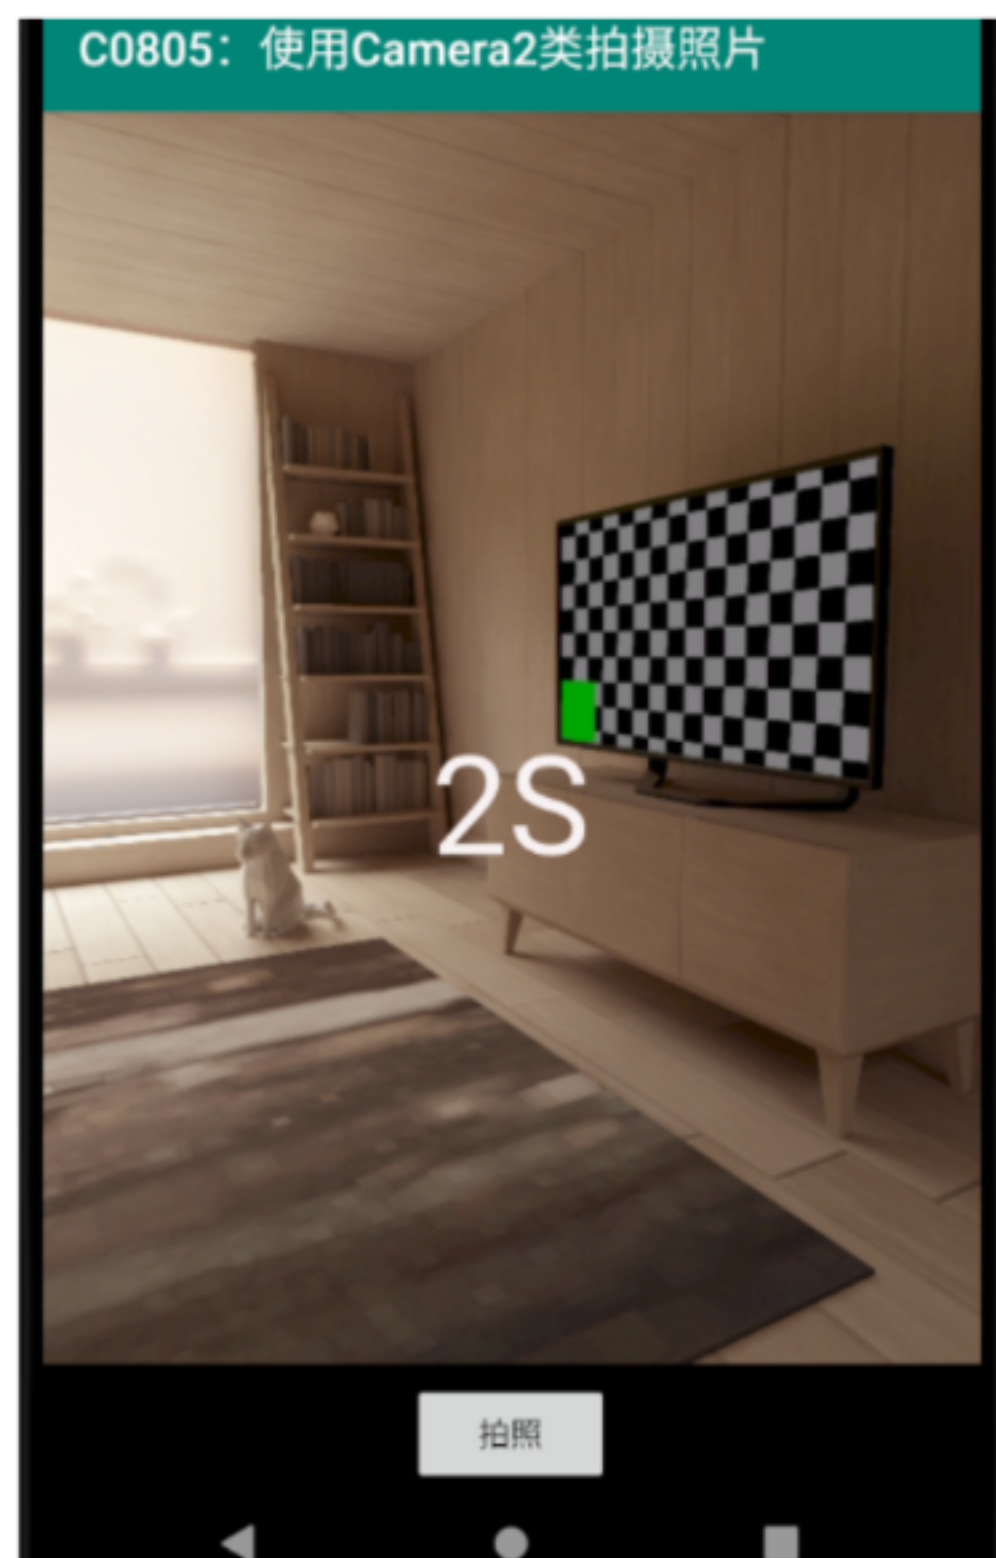

代码部分：

```
<TextView
    android:id="@+id/show_time"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_gravity="center"
    android:text=""
    android:textColor="#F8F2F2"
    android:textSize="60sp"/>
后端的核心代码部分是：
TextView tv = findViewById(R.id.show_time);
CountDownTimer cdt = new CountDownTimer(5000, 1000)//参数 1： 计时总时
间， 参数 2： 每次扣除时间数
{
    int timer = 5;
    @Override
    public void onTick(long millisUntilFinished)
    {
        tv.setText(timer + "S");
        timer--;
        //定时时间到执行动作；
    }
}

@Override
public void onFinish() {
    tv.setText("");
    takePhoto();
}

};
cdt.start();
```