


作业一：

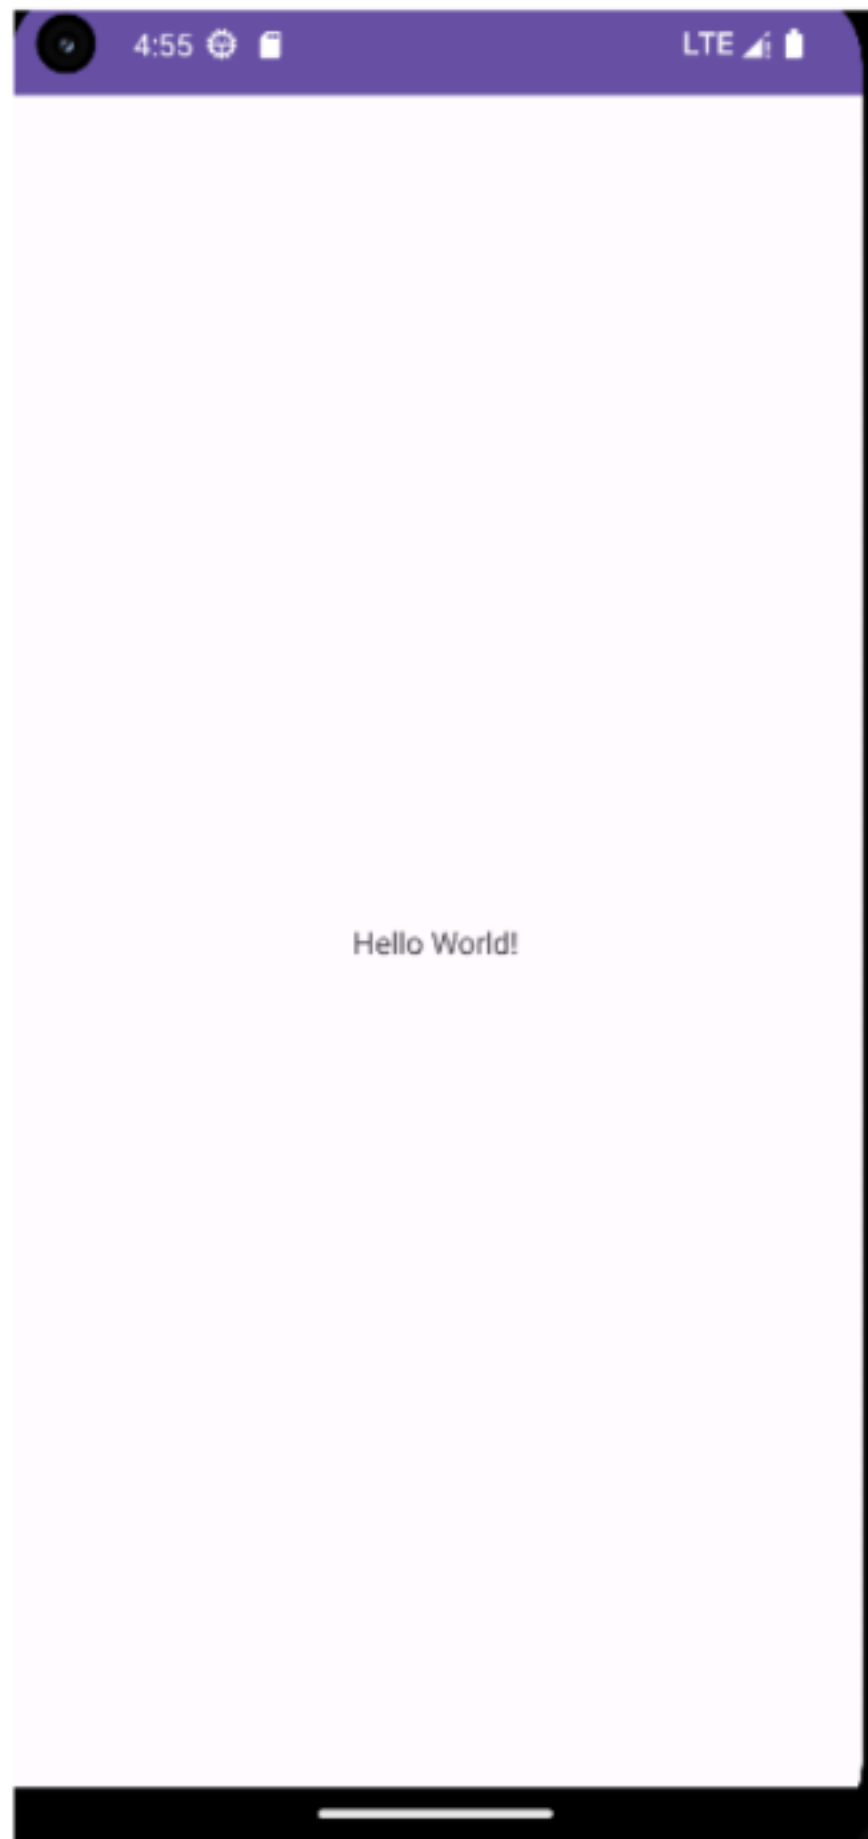

作业 2

主要代码：

1.

```
<LinearLayout  
    android:layout_width="match_parent"  
    android:layout_height="match_parent"  
    android:orientation="vertical">  
  
    <TextView  
        android:layout_width="match_parent"  
        android:layout_height="wrap_content"  
        android:text="请选择你的兴趣爱好："
```

```

        tools:ignore="HardcodedText" />

<CheckBox
    android:id="@+id/check_box1"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="读书" />

<CheckBox
    android:id="@+id/check_box2"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="看报" />

<CheckBox
    android:id="@+id/check_box3"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="看电视" />

<CheckBox
    android:id="@+id/check_box4"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="玩游戏" />

<Button
    android:id="@+id/button_submit"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:text="确定" />

<TextView
    android:id="@+id/text_view_result"
    android:layout_width="match_parent"
    android:layout_height="wrap_content" />
</LinearLayout>
</androidx.constraintlayout.widget.ConstraintLayout>
1.

```

请选择你的兴趣爱好:

☐ 读书

☐ 知识雪豹

☐ 绘画

☐ 摄影

确定

2.

```
import androidx.appcompat.app.AppCompatActivity;
import android.content.Intent;

import android.os.Bundle;
import android.view.View;
import android.widget.Button;

public class MainActivity extends AppCompatActivity {

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        Button bt1=findViewById(R.id.button1);
        bt1.setOnClickListener(
            new View.OnClickListener() {
                @Override
                public void onClick(View view) {
                    Intent intent = new
Intent(MainActivity.this,MainActivity2.class);
                    startActivity(intent);
                }
            }
        );
        Button bt2=findViewById(R.id.button2);
        bt2.setOnClickListener(
            new View.OnClickListener() {
                @Override
                public void onClick(View view) {
                    Intent intent = new
```




```

Intent(MainActivity.this,MainActivity3.class);
                startActivity(intent);
            }
        }
    );
}

Button btn1=findViewById(R.id.button0);
btn1.setOnClickListener(view -> {
    StringBuilder sb1=new StringBuilder();
    if( ((CheckBox)findViewById(R.id.checkBox1)).isChecked() ) {
        sb1.append(((CheckBox)findViewById(R.id.checkBox1)).getText());
        sb1.append(";");
    }
    if( ((CheckBox)findViewById(R.id.checkBox2)).isChecked() ) {
        sb1.append(((CheckBox)findViewById(R.id.checkBox2)).getText());
        sb1.append(";");
    }
    if( ((CheckBox)findViewById(R.id.checkBox3)).isChecked() ) {
        sb1.append(((CheckBox)findViewById(R.id.checkBox3)).getText());
        sb1.append(";");
    }
    if( ((CheckBox)findViewById(R.id.checkBox4)).isChecked() ) {
        sb1.append(((CheckBox)findViewById(R.id.checkBox4)).getText());
        sb1.append(";");
    }
    ((EditText)findViewById(R.id.s0)).setText(sb1);
});
}

```

2.

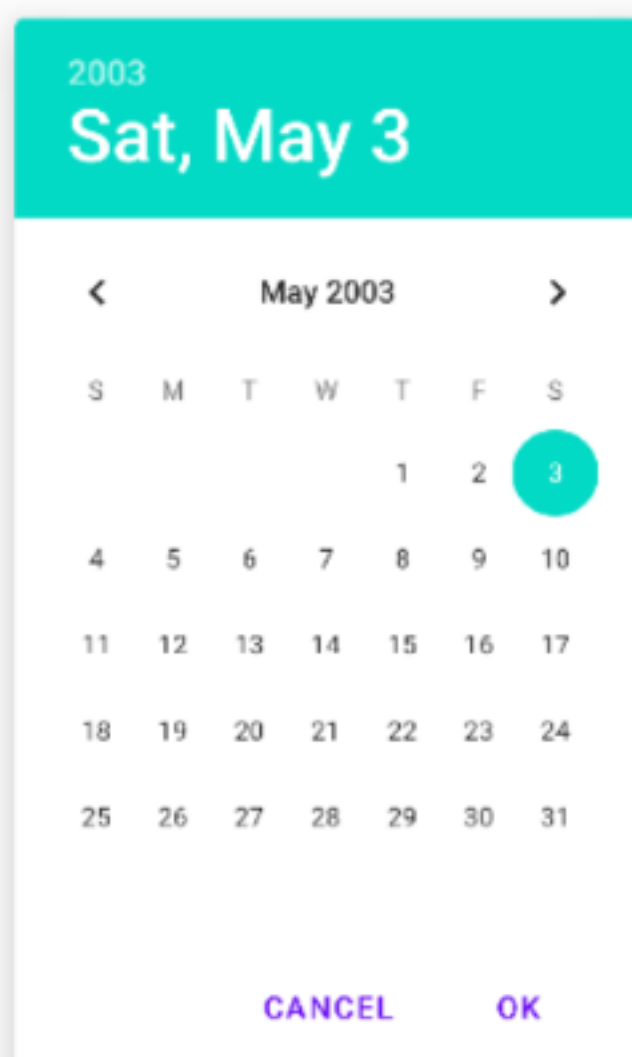

作业三

账号 ftw

密码 *****

注册账号

登录

作业四：

```
protected void onCreate(Bundle savedInstanceState) {  
    super.onCreate(savedInstanceState);  
    setContentView(R.layout.activity_main);  
    //通过布局文件获取子视图  
    View view3 = View.inflate(MainActivity.this,  
R.layout.view_flipper_page3, null);  
    //创建图片视图作为子视图  
    ImageView imageView4 = new ImageView(this);
```

```

imageView4.setAdjustViewBounds(true);
imageView4.setImageResource(R.mipmap.img_9546);
//设置翻转视图
mViewFlipper = findViewById(R.id.view_flipper);
mViewFlipper.addView(imageView4);
mViewFlipper.addView(view3,2);
mViewFlipper.startFlipping();
mViewFlipper.setOnClickListener(v -> Toast.makeText(MainActivity.this, "
当前显示的子视图索引号为"+mViewFlipper.getDisplayedChild(),
Toast.LENGTH_SHORT).show());
//开始按钮
Button startBtn = findViewById(R.id.button_start);
startBtn.setOnClickListener(v -> mViewFlipper.startFlipping());
//停止按钮
Button stopBtn = findViewById(R.id.button_stop);
stopBtn.setOnClickListener(v -> mViewFlipper.stopFlipping());
//上一页按钮
Button previousBtn = findViewById(R.id.button_previous);
previousBtn.setOnClickListener(v -> mViewFlipper.showPrevious());
//下一页按钮
Button nextBtn = findViewById(R.id.button_next);
nextBtn.setOnClickListener(v -> mViewFlipper.showNext());
}

```



作业五：

Initial state of the login/register form. The '用户名:' (Username) field is empty. The '密 码:' (Password) field is empty. There are two buttons: '登录' (Login) and '注册' (Register).

State of the form after some input. The '用户名:' field now contains 'ftw'. The '密 码:' field has a cursor, indicating it is being edited. The buttons remain the same.

主要代码:

```
public class MainActivity extends AppCompatActivity {
    private EditText edtUsername;
    private EditText edtPassword;
    private Button btnLogin;
    private Button btnCancel;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        edtUsername=findViewById(R.id.et_user_name);
        edtPassword=findViewById(R.id.et_psw);
        Button bt2=findViewById(R.id.btn_login);
        Button bt1=findViewById(R.id.tv_register);
        bt1.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {
                Intent intent = new
Intent(MainActivity.this,RegisterActivity.class);
                startActivity(intent);
            }
        });
        bt2.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View v) {
                String strUsername = edtUsername.getText().toString().trim();
                String strPassword = edtPassword.getText().toString().trim();
                if (strUsername.equals("admin") &&
strPassword.equals("admin")) {
                    Toast.makeText(MainActivity.this,
                        " 用 户 名 和 密 码 正 确 !",
Toast.LENGTH_SHORT).show();
                }
            }
        });
    }
}
```

```

        Intent intent = new
Intent(MainActivity.this,MainActivity2.class);
        intent.putExtra("Username",strUsername);
        intent.putExtra("Password",strPassword);
        startActivity(intent);

    } else {
        Toast.makeText(MainActivity.this,
            " 用 户 名 或 密 码 错 误 请 重 试 !",
Toast.LENGTH_SHORT).show();
    }
}
});
}
}
}

```

作业 6:



主要代码:

```

public class MainActivity extends AppCompatActivity {
    EatReceiver eatReceiver;
    @SuppressWarnings("StaticFieldLeak")
    static TextView textView;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        //动态注册广播接收器
        IntentFilter intentFilter = new IntentFilter("android.intent.action.WuHu");
        EatReceiver eatReceiver = new EatReceiver();
        registerReceiver(eatReceiver,intentFilter);
        //文本框
        textView = findViewById(R.id.textView);
    }
}

```



```

        public static class EatReceiver extends BroadcastReceiver {
            @Override
            public void onReceive(Context context, Intent intent) {
                textView.setText("2331123323");
            }
        }
    }
}

```

作业七：

主要代码：

```

public class ContactSQLiteOpenHelper extends SQLiteOpenHelper {
    static String name="user.db";
    static int dbVersion=1;
    public ContactSQLiteOpenHelper(Context context){
        super(context, name, null, dbVersion);
    }
    @Override
    public void onCreate(SQLiteDatabase db) {
        String sql="create table user(id integer primary key
autoincrement,username varchar(20),password varchar(20),time varchar(25))";
        db.execSQL(sql);
    }
}

public class SQLiteLoginActivity extends AppCompatActivity {

```

```

    SQLiteDBHelper dbHelper;

```

```

    EditText etUsername;
    EditText etPassword;

```

```

    @Override

```

```

protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_sqlite_login);

    // 创建 SQLiteDBHelper 对象,利用构造方法进行初始化赋值
    dbHelper = new SQLiteDBHelper(this,"sqlite.db",1);

    // 通过 id 找到 布局管理器中的 相关属性
    etUsername = findViewById(R.id.etUsername);
    etPassword = findViewById(R.id.etPassword);

}

// 当用户点击提交按钮时,就会到这里(单击事件)
public void onClick(View view) {

    // 获取用户的用户名和密码进行验证
    String username = etUsername.getText().toString();
    String password = etPassword.getText().toString();

    SQLiteDatabase db = dbHelper.getReadableDatabase();

    Cursor cursor = db.query("user",new String[]{"name","password"},
"name=?",new String[]{username},null,null,null,"0,1");

    // 游标移动进行校验
    if(cursor.moveToNext()) {
        // 从数据库获取密码进行校验
        String dbPassword =
cursor.getString(cursor.getColumnIndex("password"));
        // 关闭游标
        cursor.close();
        if(password.equals(dbPassword)) {
            // 校验成功则跳转到 SQLiteListActivity
            Intent intent = new Intent(this, SQLiteListActivity.class);
            // 启动
            startActivity(intent);
            return;
        }
    }
}

```

```

    }

    // 跳转失败也要进行关闭
    cursor.close();
    // 跳转失败就提示用户相关的错误信息
    Toast.makeText(this,"输入信息有误! ",Toast.LENGTH_LONG).show();

}

@Override
public void onDestroy() {
    super.onDestroy();
    dbHelper.close();
}
}

public class SQLiteListActivity extends AppCompatActivity {

    ListView listView01;
    SQLiteDBHelper dbHelper;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_sqlite_list);

        // 提示信息
        Toast.makeText(this,"登录成功! ",Toast.LENGTH_LONG).show();

        listView01 = findViewById(R.id.listView01);

        // 创建 SQLiteDBHelper 对象,利用构造方法进行初始化赋值
        dbHelper = new SQLiteDBHelper(this,"sqlite.db",1);

        // 通过 id 找到 布局管理器中的 相关属性
        SQLiteDatabase db = dbHelper.getReadableDatabase();

        Cursor cursor = db.query("user",new
String[]{"_id","name"},null,null,null,null,null);

        // 适配器,利用适配器进行填充信息,相对于数组来说更加灵活,动态化(为这种设计
点赞)
        SimpleCursorAdapter adapter = new SimpleCursorAdapter(
            this,

```





```
        android.R.layout.simple_list_item_1,
        cursor,
        new String[]{"_id","name"},
        new int[]{android.R.id.text1,android.R.id.text1},
        0
    );
    listView01.setAdapter(adapter);
}

/**
 * 关闭 dbHelper.
 */
@Override
protected void onDestroy() {
    super.onDestroy();
    dbHelper.close();
}
}
```

第八章：

关键代码：

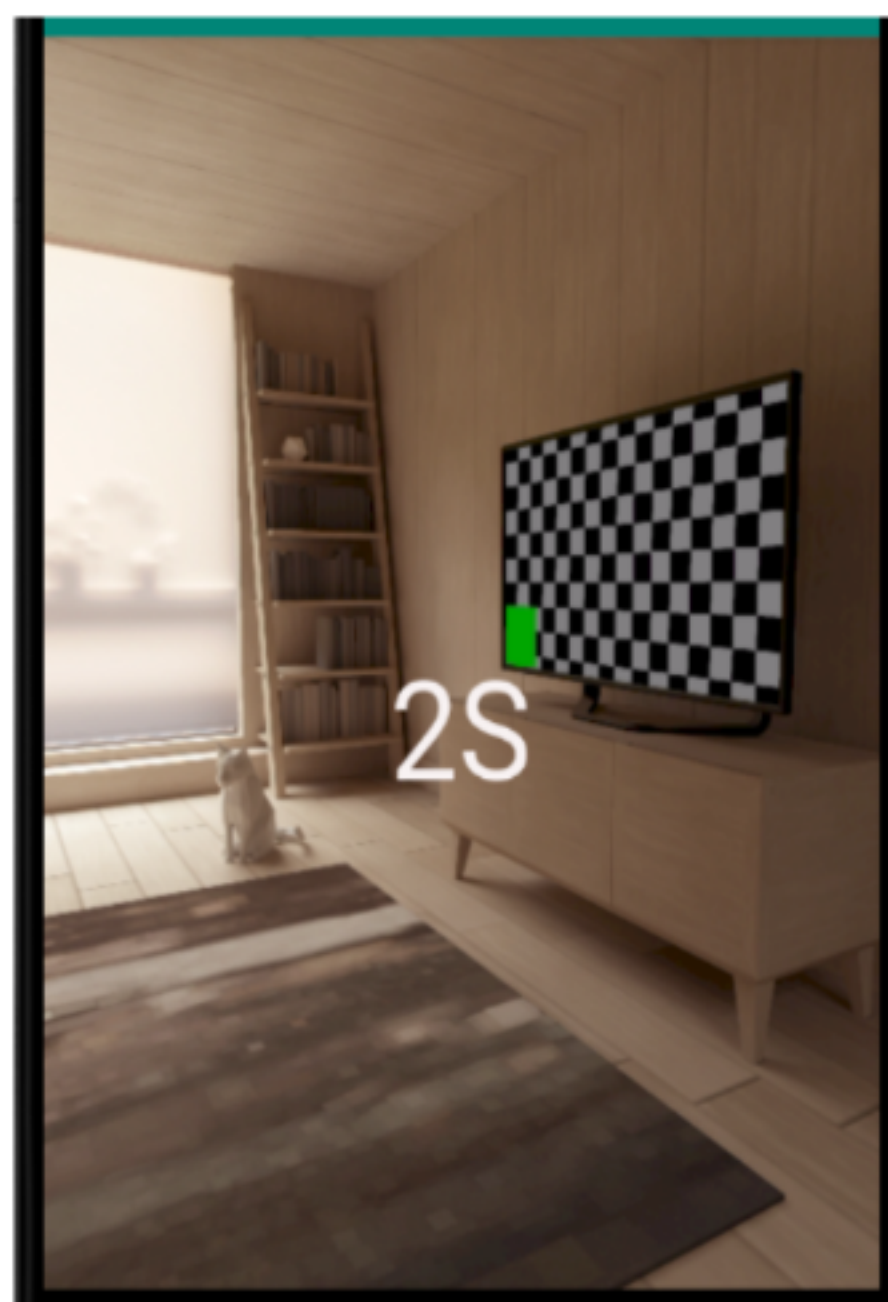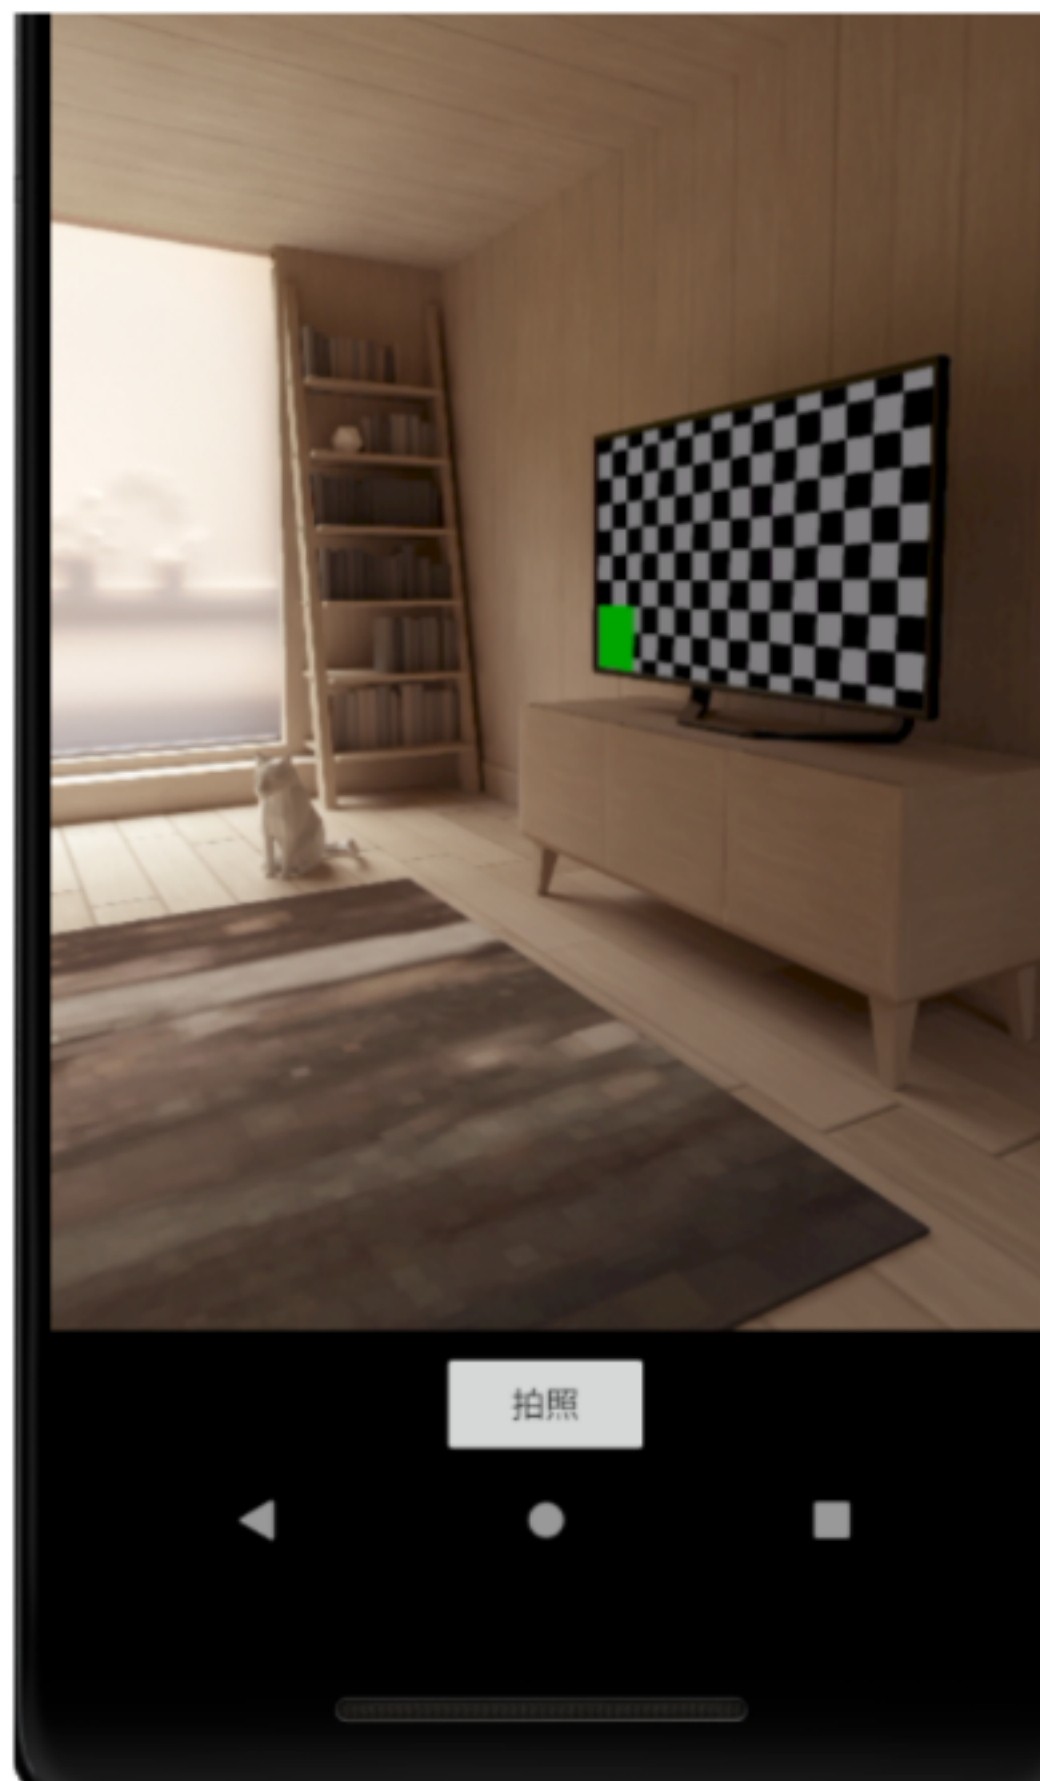

关键代码：


```

private static final int CAMERA_ID = 0;
private static final int CAMERA_ID = 1;
private static final String TAG = MainActivity.class.getSimpleName();
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_main); }
protected void onPause() {
    super.onPause(); stopPreview(); }
private void startPreview(){if (mCamera != null || !mIsSurfaceCreated) {
Log.d(TAG, "startPreview will return"); return; }
mCamera = Camera.open(CAMERA_ID);
Camera.Parameters parameters = mCamera.getParameters();
int width = getResources().getDisplayMetrics().widthPixels;
int height = getResources().getDisplayMetrics().heightPixels;
Camera.Size size = getBestPreviewSize(width, height, parameters);
if (size != null) {parameters.setPreviewSize(size.width, size.height);
parameters.setPictureSize(size.width, size.height); }
parameters.setFocusMode(Camera.Parameters.FOCUS_MODE_AUTO);
parameters.setPreviewFrameRate(20);
mCamera.setDisplayOrientation(90);
mCamera.setParameters(parameters);
try {mCamera.setPreviewDisplay(mHolder); } catch (Exception e) {
Log.d(TAG, e.getMessage()); } mCamera.startPreview(); } } }
private Camera.Size getBestPreviewSize(int width, int height,
Camera.Parameters parameters) { Camera.Size result = null;
for (Camera.Size size : parameters.getSupportedPreviewSizes()) {
if (size.width <= width && size.height <= height) {
if (result == null) { result = size; } else {
int resultArea = result.width * result.height;
int newArea = size.width * size.height;
if (newArea > resultArea) { result = size; } } } } return result; }
public void onClick(View v) { switch (v.getId()) { case R.id.start:
if (!mIsTimerRunning){ mIsTimerRunning = true;
mHandler.post(timerRunnable);} break;}
private Runnable timerRunnable = new Runnable() {
public void run() { if (mCurrentTimer > 0) {
mTvCountDown.setText(mCurrentTimer + ""); mCurrentTimer--;
mHandler.postDelayed(timerRunnable, 1000); } else {
mTvCountDown.setText("");
mCamera.takePicture(null, null, null, MainActivity.this); playSound();
mIsTimerRunning = false; mCurrentTimer = 10; } } };
public void onPictureTaken(byte[] data, Camera camera) {try {

```

```
FileOutputStream fos = new FileOutputStream(new File (Environment.getExternalStorageDirectory() + File.separator + System.currentTimeMillis() + ".png"));  
}
```

```
mCamera.takePicture(null, null, null, MainActivity.this); playSound();
```

```
mIsTimerRunning = false; mCurrentTimer = 10; } } };
```

```
public void onPictureTaken(byte[] data, Camera camera) {try { FileOutputStream fos = new  
FileOutputStream(new File (Environment.getExternalStorageDirectory() + File.separator + System.currentTimeMillis() + ".png")); }
```