


# Yellow RAT Lab

在 GlobalTech Industries 的例行 IT 安全检查中，检测到多台工作站出现异常网络流量。初步调查发现，部分员工的搜索查询被重定向到陌生的网站。这一发现引起了关注，并促使我们展开更深入的调查。您的任务是调查此事件并尽可能收集相关信息。

## 1.了解攻击者有助于防御攻击。导致网络流量异常的恶意软件家族叫什么名字？

社区里翻到

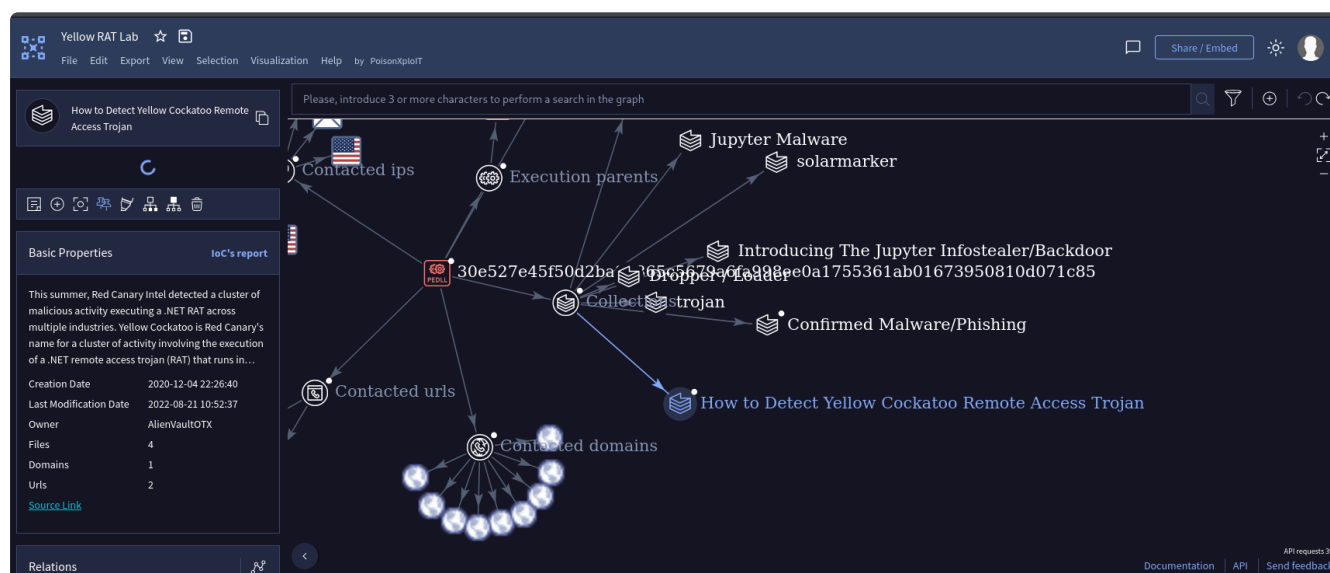

看一下报告


The screenshot shows the Yellow RAT Lab report page. At the top, there is a search bar and a collection of information. The collection is titled 'How to Detect Yellow Cockatoo Remote Access Trojan' and was updated 3 years ago. It includes a 'Description' section with the following text:

This summer, Red Canary intel detected a cluster of malicious activity executing a .NET RAT across multiple industries. Yellow Cockatoo is Red Canary's name for a cluster of activity involving the execution of a .NET remote access trojan (RAT) that runs in memory and drops other payloads. Red Canary has been tracking this threat since June 2020. Yellow Cockatoo has targeted a range of victims across multiple industries and company sizes, and we continue to see it, as recently as this week. This blog focuses on how to detect [Yellow Cockatoo RAT](#) activity.

Below the description, there is an 'Overview' section with the source URL: <https://otx.alienvault.com/pulse/5fcab7a1ac28c015a5717d>.

其实不是找家族，而是确定这起事件名称，Yellow Cockatoo RAT

## 2.作为我们事件响应的一部分，了解恶意软件常用的文件名有助于扫描其他工作站是否存在潜在感染。在我们的工作站上发现的恶意软件，其常见文件名是什么？

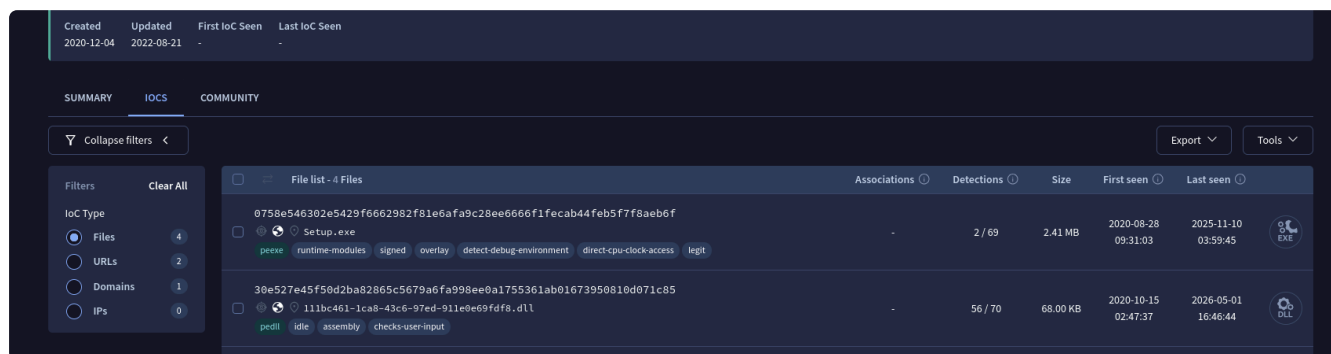

The screenshot shows the VirusTotal IOCs (Indicators of Compromise) interface. It displays a list of files with their MD5 hashes, names, and various attributes. The interface includes a sidebar with filters for IoC Type (Files, URLs, Domains, IPs) and a main table with columns for File list, Associations, Detections, Size, First seen, and Last seen.

| File list - 4 Files                                              | Associations                                                                                | Detections | Size     | First seen          | Last seen           |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------|------------|----------|---------------------|---------------------|
| 0758e546302e5429f6662982f81e6afa9c28ee6666f1fecab44feb5f7f8aeb6f |                                                                                             |            |          |                     |                     |
| Setup.exe                                                        | peexe runtime-modules signed overlay detect-debug-environment direct-cpu-clock-access legit | 2 / 69     | 2.41 MB  | 2020-08-28 09:31:03 | 2025-11-10 03:59:45 |
| 30e527e45f50d2ba82865c5679a6fa998ee0a1755361ab01673950810d071c85 |                                                                                             |            |          |                     |                     |
| 111bc461-lca8-43c6-97ed-911e9e69fdf8.dll                         | pedll idle assembly checks-user-input                                                       | 56 / 70    | 68.00 KB | 2020-10-15 02:47:37 | 2026-05-01 16:46:44 |

在 iocs 里对应我们拿到的 MD5 值找，第二个就是答案，或者回到 virusTotal 的 MD5 匹配结果页，在 MD5 下方也有常见名称

## 3.确定恶意软件的编译时间戳可以揭示其开发和部署时间线的相关信息。感染我们网络的恶意软件的编译时间戳是什么？

|              |                                                                                                           |
|--------------|-----------------------------------------------------------------------------------------------------------|
| SHA-1        | f76e293d627c55eca18ce96e587fb8c6e37d8206                                                                  |
| SHA-256      | 30e527e45f50d2ba82865c5679a6fa998ee0a1755361ab                                                            |
| Vhash        | 36403665151b002c3002b1                                                                                    |
| Authentihash | 67f299064416344fcd2890b69ca06f683fdfb0d733f4e445                                                          |
| Imphash      | dae02f32a21e03ce65412f6e56942daa                                                                          |
| SSDEEP       | 768:RUed7+DWtOW5pkyO0EuAo8rI0BL8gDIJBMZ7wd2                                                               |
| TLSH         | T15963A54D3AF60596CDECBCF20443D5169B34E452D                                                               |
| File type    | Win32 DLL <span>executable</span> <span>windows</span> <span>win32</span> <span>pe</span> <span>pe</span> |
| Magic        | PE32 executable (DLL) (console) Intel 80386 Mono/.Net                                                     |
| TrID         | Win32 Dynamic Link Library (generic) (20%)   Win64 B                                                      |
| DetectItEasy | PE32   Library: .NET (v2.0.50727)   Linker: Microsoft                                                     |
| Magika       | PEBIN                                                                                                     |
| File size    | 68.00 KB (69632 bytes)                                                                                    |
| PEiD packer  | .NET executable                                                                                           |

---

| History ⓘ              |                         |
|------------------------|-------------------------|
| Creation Time          | 2020-09-24 18:26:47 UTC |
| First Seen In The Wild | 2021-01-18 20:15:04 UTC |
| First Submission       | 2020-10-15 02:47:37 UTC |
| Last Submission        | 2026-05-01 16:46:44 UTC |
| Last Analysis          | 2026-06-04 16:09:26 UTC |

---

| Names ⓘ |  |
|---------|--|
|---------|--|

4.了解更广泛的网络安全社区首次识别恶意软件的时间，有助于确定恶意软件在被检测前可能存在的时间。恶意软件最初是什么时候提交给 VirusTotal 的？

| History ⓘ              |                         |
|------------------------|-------------------------|
| Creation Time          | 2020-09-24 18:26:47 UTC |
| First Seen In The Wild | 2021-01-18 20:15:04 UTC |
| First Submission       | 2020-10-15 02:47:37 UTC |
| Last Submission        | 2026-05-01 16:46:44 UTC |
| Last Analysis          | 2026-06-04 16:09:26 UTC |


5.为了彻底根除 Industries 系统中的威胁，我们需要识别恶意软件投放的所有组件。恶意软件在 AppData 文件夹里丢弃的 .dat 文件叫什么名字？

这题直接百度，谷歌搜

solarmarker.dat

在早期的 Yellow Cockatoo 变种中，会在 AppData 文件夹中释放一个名为 solarmarker.dat 的数据文件。该文件通常包含下一阶段的有效载荷或配置信息，会被 PowerShell 脚本读取和解密

## 6.识别恶意软件通信的 C2 服务器至关重要，以阻止其通信并防止进一步数据外泄。恶意软件通信的 C2 服务器是什么？

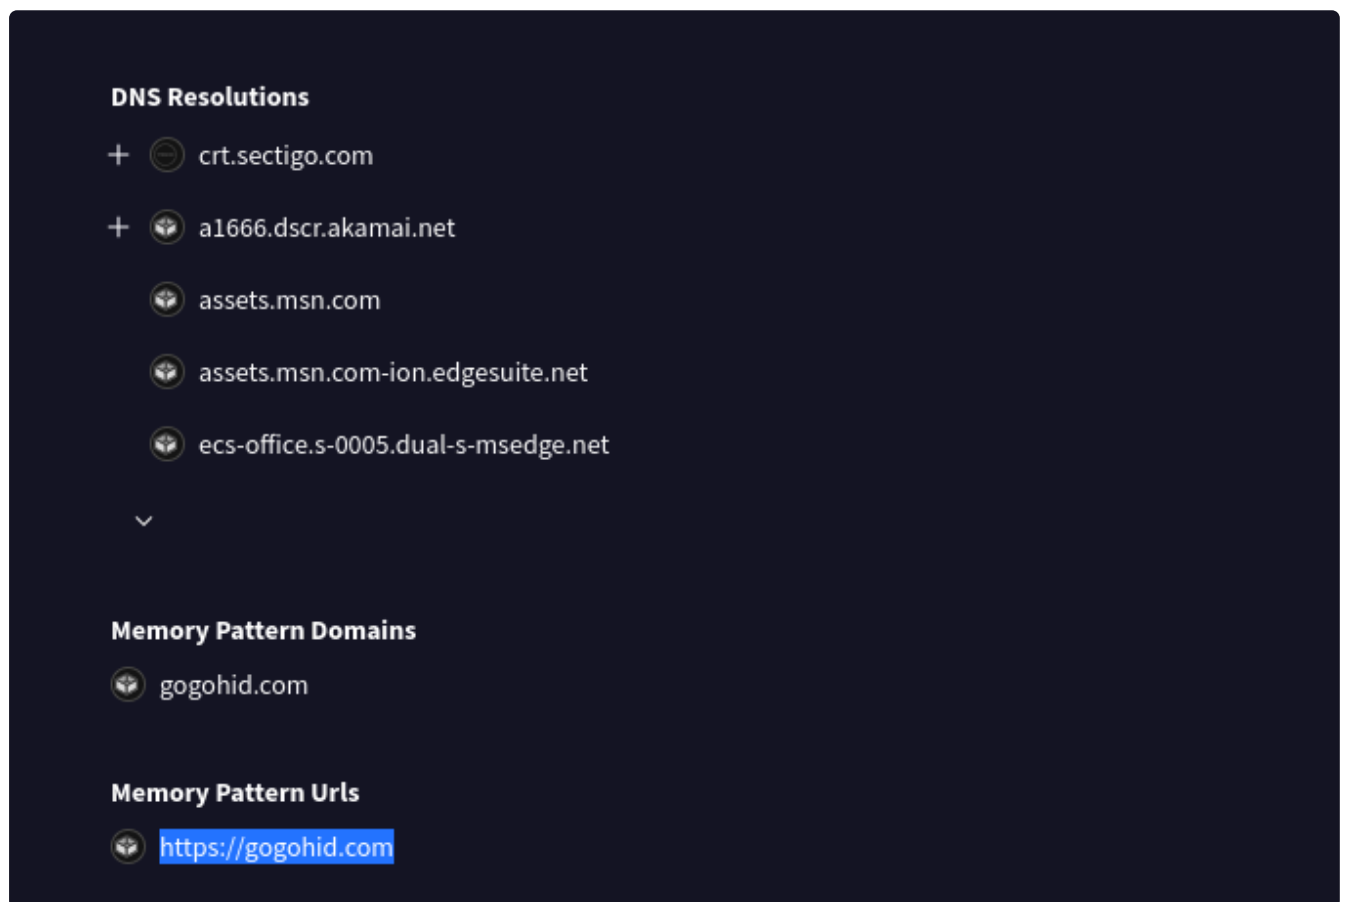

behavior 找