


DanaBot Lab

1. Which IP address was used by the attacker during the initial access?

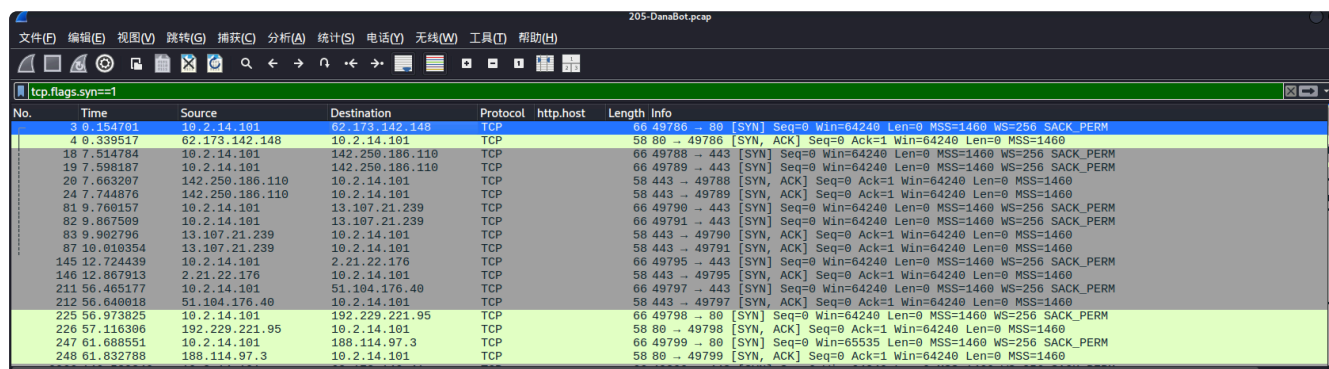

205-DanaBot.pcap

tcp.flags.syn==1


No.	Time	Source	Destination	Protocol	http.host	Length	Info
3	0.154701	10.2.14.101	62.173.142.148	TCP		66	49786 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
4	0.339517	62.173.142.148	10.2.14.101	TCP		58	80 → 49786 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
18	7.514784	10.2.14.101	142.250.186.110	TCP		66	49788 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
19	7.598187	10.2.14.101	142.250.186.110	TCP		66	49789 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
20	7.663207	142.250.186.110	10.2.14.101	TCP		58	443 → 49788 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
24	7.744876	142.250.186.110	10.2.14.101	TCP		58	443 → 49789 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
81	9.760157	10.2.14.101	13.107.21.239	TCP		66	49790 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
82	9.867589	10.2.14.101	13.107.21.239	TCP		66	49791 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
83	9.902796	13.107.21.239	10.2.14.101	TCP		58	443 → 49790 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
87	10.010354	13.107.21.239	10.2.14.101	TCP		58	443 → 49791 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
145	12.724439	10.2.14.101	2.21.22.176	TCP		66	49795 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
146	12.867913	2.21.22.176	10.2.14.101	TCP		58	443 → 49795 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
211	56.465177	10.2.14.101	51.104.176.40	TCP		66	49797 → 443 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
212	56.640018	51.104.176.40	10.2.14.101	TCP		58	443 → 49797 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
225	56.973025	10.2.14.101	192.229.221.95	TCP		66	49798 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
226	57.116396	192.229.221.95	10.2.14.101	TCP		58	80 → 49798 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
247	61.688551	10.2.14.101	188.114.97.3	TCP		66	49799 → 80 [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM
248	61.832788	188.114.97.3	10.2.14.101	TCP		58	80 → 49799 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460

2. What is the name of the malicious file used for initial access?

恶意 IP 过滤：

ip.addr=62.173.142.148

观察 length 字段发现分片传输[TCP PDU...]

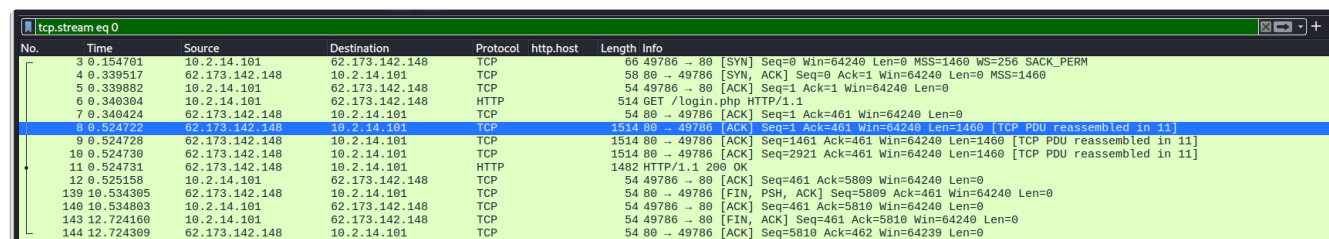

tcp.stream eq 0

No.	Time	Source	Destination	Protocol	http.host	Length	Info
3	0.154701	10.2.14.101	62.173.142.148	TCP		66	49786 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 WS=256 SACK_PERM
4	0.339517	62.173.142.148	10.2.14.101	TCP		58	80 → 49786 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460
5	0.339882	10.2.14.101	62.173.142.148	TCP		54	49786 → 80 [ACK] Seq=1 Ack=1 Win=64240 Len=0
6	0.340394	62.173.142.148	10.2.14.101	HTTP		514	GET /login.php HTTP/1.1
7	0.340424	62.173.142.148	10.2.14.101	TCP		54	80 → 49786 [ACK] Seq=1 Ack=461 Win=64240 Len=0
8	0.524722	62.173.142.148	10.2.14.101	TCP		1514	80 → 49786 [ACK] Seq=1 Ack=461 Win=64240 Len=1460 [TCP PDU reassembled in 11]
9	0.524728	62.173.142.148	10.2.14.101	TCP		1514	80 → 49786 [ACK] Seq=1461 Ack=461 Win=64240 Len=1460 [TCP PDU reassembled in 11]
10	0.524730	62.173.142.148	10.2.14.101	TCP		1514	80 → 49786 [ACK] Seq=2921 Ack=461 Win=64240 Len=1460 [TCP PDU reassembled in 11]
11	0.524731	62.173.142.148	10.2.14.101	HTTP		1482	HTTP/1.1 200 OK
12	0.525158	10.2.14.101	62.173.142.148	TCP		54	49786 → 80 [ACK] Seq=461 Ack=5809 Win=64240 Len=0
139	10.534305	62.173.142.148	10.2.14.101	TCP		54	80 → 49786 [FIN, PSH, ACK] Seq=5809 Ack=461 Win=64240 Len=0
140	10.534803	10.2.14.101	62.173.142.148	TCP		54	49786 → 80 [ACK] Seq=461 Ack=5810 Win=64240 Len=0
143	12.724160	10.2.14.101	62.173.142.148	TCP		54	49786 → 80 [FIN, ACK] Seq=461 Ack=5810 Win=64240 Len=0
144	12.724309	62.173.142.148	10.2.14.101	TCP		54	80 → 49786 [ACK] Seq=5810 Ack=462 Win=64239 Len=0

追踪流即可确定文件名

```
Wireshark - 捕获 TCP 流 (tcp.stream eq 0) - 205-Banabot pcap

GET /login.php HTTP/1.1
Host: portfolio.serveirc.com
Connection: keep-alive
Upgrade-Insecure-Requests: 1
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/121.0.0.0 Safari/537.36 Edg/121.0.0.0
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3;q=0.7
Accept-Encoding: gzip, deflate
Accept-Language: it-IT,it;q=0.9

HTTP/1.1 200 OK
Server: nginx/1.14.0 (Ubuntu)
Date: Wed, 14 Feb 2024 16:25:54 GMT
Content-Type: application/octet-stream
Transfer-Encoding: chunked
Connection: keep-alive
Content-Disposition: attachment;filename=allegato_708.js

15b6
function _0x23c2(){var _0xac67d2=['a8k3odVdVaBcHh/dUmoMWRBdK8kS','w6Xew43cPJwvwQ/cGhykW5FcQ30','w0a1eupd0SkXwR0VjCoMblLdTNq','wQWlk2mA','j8ocW6xcJ0hdNCoJW4RcPsRdVmo6kW','pmk+dmk5W6qEW67d0Mi','EC08WPZdNmojb37dQSoLe8kIja','tmopD8k7W7a1W4VdSLeMuCoNWP1Vw5pcVgehWPzkB3hdKKSpnatdICkRoIxdT10/W6Tzru3dMmoBmCkfW6xcNmkdW6ZdJ8owCSkLWQ/dVG','AcXXvd0E','W5hcUaxcQZFdg8khp13dMezGeG','gSkFWPRdN8kLrCkMdq','kSoWqSkCqmobWRhcGtCsjYm','WPKzWQCXW0hdTmo/','W6uSb8o4z8oHxbVcRfNdICou','W5JcIIm0W57cRC00hJ0','jKJ
```

3.What is the SHA-256 hash of the malicious file used for initial access?

导出对象

Wireshark · 导出 · HTTP 对象列表

文本过滤器: Content Type: All Content-Types

分组	主机名	内容类型	大小	文件名
11	portfolio.serveirc.com	application/octet-stream	5,558 bytes	login.php
230	ocsp.digicert.com	application/ocsp-response	471 bytes	MFewTzBNMEswSTAJBgUrDgM
9952	soundata.top	application/octet-stream	11 MB	resources.dll
10144	www.msftconnecttest.com	text/plain	22 bytes	connecttest.txt

保存 全部保存 Preview 关闭 帮助

计算 sha256


```
(root@kali)-[~/Desktop]
# sha256sum login.php
847b4ad90b1daba2d9117a8e05776f3f902dda593fb1252289538acf476c4268 login.php
```

4.Which process was used to execute the malicious file?

.js 文件，在 windows 系统中，有 cscript.exe、wscript.exe 可执行，前者为命令行，后者为图形化

5.What is the file extension of the second malicious file utilized by the attacker?

导出 HTTP 对象，里面还有个 11MB 的对象，自动命名

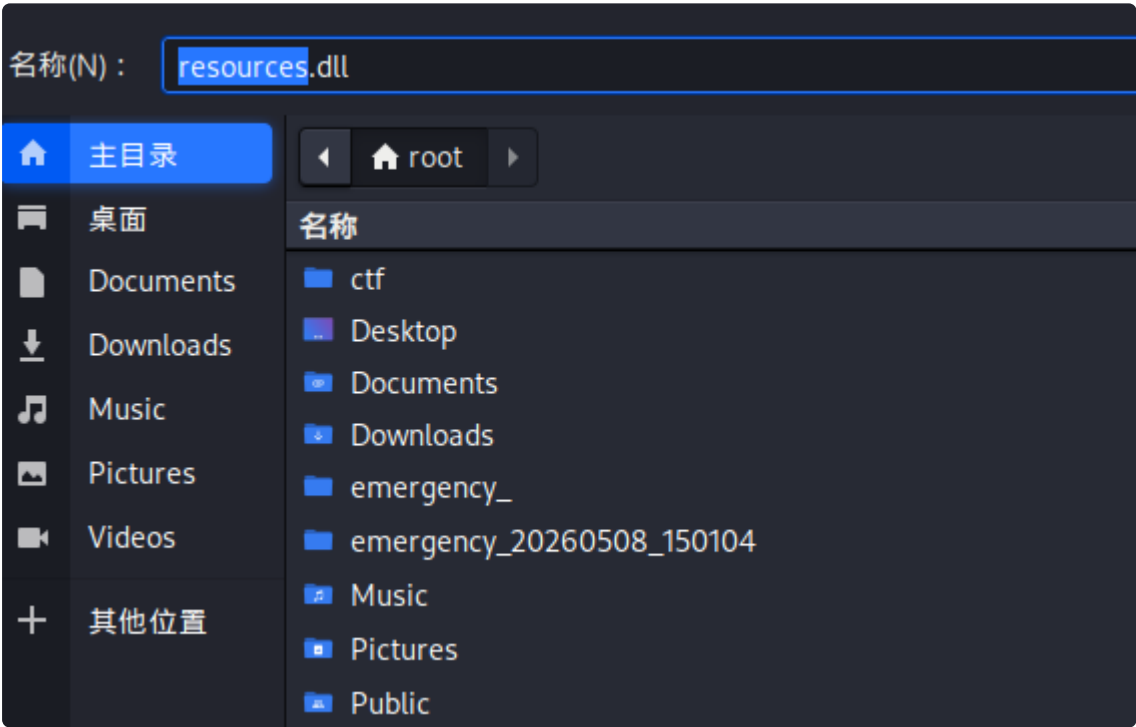

或过滤呆比 IP，找到另一个 get

No.	Time	Source	Destination	Protocol	http.host	Length	Info
244	57.849764	51.184.176.48	10.2.14.101	TCP		54	443 → 49797 [ACK] Seq=7886 Ack=2407 Win=64239 Len=0
245	61.490258	10.2.14.101	10.2.14.1	DNS		72	Standard query 0x0bfd A sounddata.top
246	61.684695	10.2.14.1	10.2.14.101	DNS		293	Standard query response 0x0bfd A sounddata.top A 188.114.97.3 A 188.114.96.3 NS konnor.ns.cloudflare
247	61.688551	10.2.14.101	188.114.97.3	TCP		66	49799 → 80 [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=256 SACK_PERM
248	61.832788	188.114.97.3	10.2.14.101	TCP		58	80 → 49799 [SYN, ACK] Seq=9 Ack=1 Win=64240 Len=0 MSS=1460
249	61.833372	10.2.14.101	188.114.97.3	TCP		54	49799 → 80 [ACK] Seq=1 Ack=1 Win=65535 Len=0
250	61.833925	10.2.14.101	188.114.97.3	HTTP		320	GET /resources.dll HTTP/1.1
251	61.834079	188.114.97.3	10.2.14.101	TCP		54	80 → 49799 [ACK] Seq=1 Ack=267 Win=64240 Len=0
252	62.094440	188.114.97.3	10.2.14.101	TCP		1514	80 → 49799 [ACK] Seq=1 Ack=267 Win=64240 Len=1460 [TCP PDU reassembled in 9952]
253	62.094448	188.114.97.3	10.2.14.101	TCP		1514	80 → 49799 [ACK] Seq=1461 Ack=267 Win=64240 Len=1460 [TCP PDU reassembled in 9952]
254	62.094450	188.114.97.3	10.2.14.101	TCP		1178	80 → 49799 [PSH, ACK] Seq=2921 Ack=267 Win=64240 Len=1124 [TCP PDU reassembled in 9952]
255	62.094896	10.2.14.101	188.114.97.3	TCP		54	49799 → 80 [ACK] Seq=267 Ack=4045 Win=65535 Len=0
256	62.095409	188.114.97.3	10.2.14.101	TCP		1514	80 → 49799 [ACK] Seq=4045 Ack=267 Win=64240 Len=1460 [TCP PDU reassembled in 9952]
257	62.095464	188.114.97.3	10.2.14.101	TCP		1514	80 → 49799 [ACK] Seq=5505 Ack=267 Win=64240 Len=1460 [TCP PDU reassembled in 9952]
258	62.095469	188.114.97.3	10.2.14.101	TCP		1514	80 → 49799 [ACK] Seq=6965 Ack=267 Win=64240 Len=1460 [TCP PDU reassembled in 9952]
259	62.095481	188.114.97.3	10.2.14.101	TCP		1514	80 → 49799 [ACK] Seq=8425 Ack=267 Win=64240 Len=1460 [TCP PDU reassembled in 9952]
260	62.095482	188.114.97.3	10.2.14.101	TCP		954	80 → 49799 [PSH, ACK] Seq=9885 Ack=267 Win=64240 Len=900 [TCP PDU reassembled in 9952]
261	62.095581	188.114.97.3	10.2.14.101	TCP		1514	80 → 49799 [ACK] Seq=10785 Ack=267 Win=64240 Len=1460 [TCP PDU reassembled in 9952]

6.What is the MD5 hash of the second malicious file?

```
(root@kali)-[~/Desktop]  
# md5sum resources.dll  
e758e07113016aca55d9eda2b0ffeebe resources.dll
```