Northwestern University

Machine Learning-Based Prediction of Formula One Race Outcomes

A Data-Driven Study of Top-10 Finish Prediction Using Historical Race Data

Prepared by:

Sara Alsiyat - Qifan Yang - Boqi Niu

MSDS 422: Practical Machine Learning

Dr. Irene Tsapara

Northwestern University

January 2026

Abstract

Formula One race outcomes are influenced by multiple factors, including driver performance, constructor strength, circuit characteristics, and race conditions. Finishing in the top 10 of a race is particularly important because it determines whether a driver earns championship points and reflects competitive performance. Historical race data provides an opportunity to study these factors and understand patterns in race outcomes. This project examines whether machine learning methods can be used to predict whether a driver finishes in the top 10 of a Formula One race using historical data.

The study uses a publicly available Formula One World Championship dataset from Kaggle, covering races from 1950 to recent seasons. The dataset is provided in multiple relational tables and includes race results, qualifying data, driver and constructor information, race status, and circuit details. The unit of analysis is at the driver–race level, where each record represents a driver's result in a specific race. The dataset contains both numerical attributes, such as finishing position, grid position, points, laps completed, and season indicators, and categorical attributes, including driver, constructor, circuit, country, and race status.

The target variable for this project is a binary indicator representing whether a driver finishes within the top 10 positions in a race. The purpose of the study is to evaluate whether historical race information can be used to support structured prediction of race outcomes. The project is intended to provide a data-driven foundation for analyzing Formula One performance and exploring the potential of machine learning techniques in competitive sports analytics.

Problem Statement

Formula One race results depend on many factors, including driver ability, constructor performance, track characteristics, and race conditions. Although race outcomes are often seen as unpredictable, teams and analysts use historical data to better understand what drives performance. Finishing in the top 10 is especially important because it determines whether a driver earns championship points and reflects overall race success.

This project focuses on predicting whether a driver will finish in the top 10 of a Formula One race using historical race data. Machine learning methods are used to combine information about drivers, constructors, circuits, and recent performance. The goal is to understand whether race outcomes can be explained using

measurable factors rather than chance, and whether predictive models can support performance analysis and strategic decision making in Formula One.

Research objective

The main objective of this project is to build and evaluate machine learning models that predict top-10 finishes in Formula One races using historical data. The study examines how factors such as qualifying position, constructor team, driver performance history, track characteristics, and recent race results affect finishing position. The project also explores whether some circuits show more variation in race outcomes, which may suggest more unpredictable races compared to tracks where performance is more consistent. In addition, the research considers related outcomes such as points finishes and Did Not Finish (DNF) events to better understand race reliability and performance risk. Finally, different machine learning models will be compared to assess their accuracy, interpretability, and usefulness for decision-support purposes.

Literature Review

Predicting Formula One race outcomes has attracted growing research interest as machine learning techniques and publicly available historical data have expanded the possibilities for quantitative sports analytics. The existing literature addresses several interconnected themes, including the relative influence of driver skill versus constructor advantage, the role of feature engineering, the comparative performance of machine learning architectures, and the transferability of predictive frameworks across sports domains.

A central question in Formula One research is whether race outcomes are driven primarily by individual driver talent or by the resources and engineering of the constructor. Rockerbie and Easton (2022) use statistical models applied to race-level finishing data and team financial records from 2012 to 2019, finding that both driver ability and constructor performance significantly influence results, with the interaction between the two explaining a substantial share of performance variation. Van Kesteren and Bergkamp (2023) approach the same question through a Bayesian multilevel rank-ordered logit model applied to complete finishing orders from the 2014–2021 hybrid era. Their analysis estimates that approximately 88 percent of the variance in race results is attributable to the constructor, with driver skill accounting for a much smaller share. Both studies confirm that race outcomes are systematic rather than random and that predictive models should incorporate driver-level, constructor-level, and interaction features to capture the structure of Formula One competition.

Feature engineering and exploratory statistical analysis have proven essential for extracting predictive signal from Formula One data. Patil et al. (2023) compile 21 features from 2015–2019 race data, including pit frequency, tyre usage, and starting positions. Using Principal Component Analysis to address multicollinearity, they find that four principal components capture roughly 70 percent of variance, and a subsequent linear regression achieves an R-squared of 99 percent for predicting championship points. Bansal (2025) extends this approach over the full 1950–2024 historical span, building features from qualifying data, lap times, circuit characteristics, and regulatory eras. Gradient boosting models, particularly XGBoost, yield near-perfect predictive accuracy, with feature importance analysis showing that grid position contributes approximately 75.8 percent to model performance. These studies demonstrate that grid position is the single most powerful predictor and that era-aware feature construction captures meaningful structural shifts in the sport.

Several studies directly evaluate machine learning models for Formula One prediction, offering insights into the trade-offs between different architectures. Urdhwareshe (2025) develops a predictive pipeline using TabNet, a deep learning model for tabular data with built-in feature attention mechanisms, trained on 2010–2023 data. The driver-level model predicts finishing positions with an R-squared of 0.75, relying exclusively on pre-race features and chronological splitting to prevent leakage. Jafri (2024) takes a sequential modeling approach, constructing a dataset of over 214,000 laps and evaluating Long Short-Term Memory (LSTM) networks for lap-time prediction. A key finding is that minimizing lap time error alone does not improve race outcome prediction; instead, a composite loss function incorporating positional accuracy and historical performance proves more effective. Later LSTM variants substantially outperform baseline models for predicting podium and top-five finishes in races with fewer unexpected incidents. Together, these studies show that both tabular deep learning and sequence-based architectures can contribute to Formula One prediction, with distinct advantages in interpretability and temporal pattern capture, respectively.

Beyond individual and team features, the modeling of interaction effects between participants offers an important methodological perspective. Gu et al. (2021) introduce NeuralAC, a neural network framework that explicitly models cooperation and competition effects in team-based competitive settings. Their experiments show that capturing interaction patterns yields more accurate predictions than treating participants independently. Although NeuralAC was not developed for motorsport, the framework is conceptually relevant to Formula One, where performance depends on the coordination between driver and constructor, including race strategy, car development, and reliability management.

Insights from predictive modeling in other sports further inform the methodological choices adopted in this project. Zheng (2022) develops a hybrid framework for NBA game prediction that combines internal team performance statistics with external contextual factors such as Elo ratings, home court advantage, and player fatigue. The study finds that integrating both types of features significantly improves prediction accuracy, with ensemble methods achieving the strongest results. This finding validates a general principle applicable to Formula One: combining performance history, contextual conditions, and situational factors produces more reliable predictions than relying on any single feature category. Relatedly, the study on identifying top Elo ratings through a dueling bandits approach demonstrates that adaptive algorithms for competitor evaluation can converge faster and produce more accurate rankings than naive methods, particularly in settings with intransitive competitive relationships—a characteristic shared by Formula One, where driver–constructor–circuit interactions create layered competitive dynamics.

Despite these advances, several gaps remain in the literature. Most existing studies predict continuous outcomes such as finishing position or championship points, rather than the binary classification of top-10 finishes that determines point-scoring eligibility under modern rules. Few studies systematically address data leakage risks inherent in rolling historical features, and the integration of era-specific structural variables remains underexplored. Additionally, most studies lack deployment-oriented components such as model monitoring, drift detection, and interactive dashboards. The present project addresses these gaps by framing race prediction as a binary classification task, implementing strict leakage prevention, incorporating era-aware features, and building a deployment-ready prediction pipeline with monitoring capabilities.

Data Description

The dataset used in this project is the Formula 1 World Championship (1950–2024) dataset published on Kaggle by Vopani (2025). It contains comprehensive historical data about every Formula One race from the first season in 1950 through 2024, organized into 14 relational CSV tables.

Eleven tables were integrated into a single analytical dataset at the driver–race level, resulting in approximately 26,000 observations. Each row represents one driver's participation in one race. The tables merged include: Results, Races, Drivers, Constructors, Circuits, Qualifying, Status, Pit Stops, Lap Times, Driver Standings, and Constructor Standings.

Target Variable

The target variable, top10_finish, is a binary indicator equal to 1 when a driver's finishing position (positionOrder) is 10 or lower, and 0 otherwise. This threshold was chosen because championship points are awarded only to top-10 finishers in the modern F1 points system.

Key Dataset Characteristics

The dataset covers Formula One seasons from 1950 to 2024, spanning 74 years and 1,125 races. After integration and feature engineering, it contains approximately 26,000 driver–race level observations and more than 80 columns. The target variable is moderately balanced overall, with about 42 percent positive cases in the training data. In the validation and test periods, the positive rate is closer to 50 percent, mainly because modern Formula One seasons have smaller and more stable grid sizes, which changes the proportion of drivers who can finish in the top 10.

Exploratory Data Analysis

Exploratory data analysis revealed several important patterns in the Formula One dataset that guided feature engineering and modeling decisions.

Grid Position Dominance

Starting grid position is the strongest single predictor of top-10 finishes. Drivers starting on pole position convert to top-10 finishes at rates exceeding 95%. This conversion rate drops steadily, falling below 30% for grid positions 15 and beyond. This finding is consistent with Bansal (2025), who found that grid position contributes approximately 75.8% to model performance.

Constructor Effect

Van Kesteren and Bergkamp (2023) found that approximately 88% of the variance in Formula One race results is attributable to the constructor rather than the driver. Our EDA confirmed this: top constructors such as Ferrari, McLaren, and Mercedes show consistently higher top-10 rates over decades of competition.

DNF Rate Decline

Did Not Finish (DNF) rates have declined dramatically from approximately 40% in the 1950s to under 10% in recent seasons, reflecting improvements in car reliability, safety regulations, and engineering quality. This structural shift means that modern-era predictions operate in a fundamentally different environment than early Formula One.

Era-Based Structural Shifts

The dataset spans eight distinct regulation eras, from the 1.5-liter era of the 1950s through the current ground-effect era beginning in 2022. Each era introduced different technical regulations that changed competitive dynamics. To capture these structural breaks, we encoded regulation eras as a categorical feature.

Feature Engineering

We engineered over 35 features across 12 categories, all designed to use only pre-race information to prevent data leakage. Every rolling and expanding window calculation uses shift(1) within groupby operations, ensuring that each row's features are computed strictly from that driver's or constructor's prior races.

Feature Categories

Temporal features include driver age, race month, and season stage (early, mid, late, end). Performance history features capture rolling 5-race averages for top-10 rate, DNF rate, and average finishing position, as well as career-level statistics. Constructor features measure team-level rolling performance and season success rate.

Circuit features include historical DNF rates, position volatility, and driver-circuit interaction rates, all computed using expanding means with shift(1) to exclude the current race. Driver–constructor interaction features capture the joint success rate and number of races together for each driver-team pairing.

Qualifying features derived from grid position include front-row start, top-5 start, top-10 start indicators, and grid percentile relative to the field. Momentum features include consecutive top-10 streak length, rolling 3-race points sum, and position trend (improvement in recent versus longer-term average).

Championship context features use previous-round standings data, including championship position, points gap to leader, and a binary contention flag for drivers in the top 5. Era encoding captures the eight

regulation periods from 1950 through 2024. Categorical features include label-encoded driver, constructor, circuit, and country identifiers.

Data Leakage Prevention

Initial models scored a perfect 1.000 ROC AUC, indicating severe data leakage. Investigation revealed that post-race columns—positionOrder, points, milliseconds, and laps—had been included as features. positionOrder directly defines the target variable, and points are only awarded to top-10 finishers. Championship standings also included results from the current race.

We implemented a strict leakage guard: an explicit blocklist of 12+ post-race columns is excluded from the feature matrix. Championship standings were shifted to use the previous round's values. An automated leakage audit cell flags any feature with absolute correlation greater than 0.85 with the target variable.

Methodology

Temporal Train/Validation/Test Split

We use a temporal three-way split to simulate a realistic forecasting scenario. The training set includes all races before 2018, the validation set covers 2018–2021 seasons (1,620 observations), and the test holdout covers 2022–2024 (1,359 observations). This split reflects how the model would be used in practice: trained on past seasons and evaluated on future unseen seasons.

The split is performed after feature engineering because all features use shift(1) guards, making them leakage-safe by construction. Splitting before feature engineering would break rolling window continuity and produce artificial NaN values at split boundaries.

Models Evaluated

Five individual models were trained and compared, along with a grid-only logistic regression baseline. The baseline model uses only grid position as input and serves as a minimum performance threshold. A full Logistic Regression model was then trained using the complete feature set, with L2 regularization and StandardScaler preprocessing, providing a linear baseline with interpretable coefficients. Random Forest was implemented with 300 estimators, balanced subsample class weights, a maximum depth of 15, and a minimum

of 10 samples per leaf, allowing it to capture nonlinear relationships without feature scaling. Gradient Boosting used 200 estimators, a learning rate of 0.1, a maximum depth of 5, and a subsample rate of 0.8, enabling the model to improve performance by sequentially correcting residual errors. Finally, a Multi-Layer Perceptron (MLP) neural network was trained using scaled features, with hyperparameter search over hidden layer sizes, learning rates, and activation functions.

Ensemble Methods

Four ensemble strategies were developed using the top-performing validation models, Random Forest and Gradient Boosting. Soft voting combines the models by averaging their predicted probabilities, while hard voting uses the majority class predicted by the base models. A weighted voting approach was also implemented, where the contribution of each model is optimized using validation performance through scipy.optimize.minimize. In addition, a stacking ensemble was built using a meta-level Logistic Regression model, which learns how to combine the prediction probabilities of the base models based on the validation split.

Evaluation Metrics

Models are evaluated using ROC AUC (discrimination ability), PR AUC (precision-recall trade-off, important for class imbalance), and F1 Score (harmonic mean of precision and recall). All metrics are reported on both the validation set (for model selection and tuning) and the test holdout (for final evaluation only).

Results

Individual Model Comparison

The table below shows performance across all five models and the grid-only baseline on both validation and test sets.

Model	ROC AUC	PR AUC	F1
Baseline (Grid LR)	0.800	0.745	0.748

Logistic Regression	0.821	0.793	0.758
MLP	0.830	0.803	0.770
Gradient Boosting	0.832	0.805	0.764
Random Forest	**0.837**	**0.805**	**0.763**

Table 1: Validation Set Performance (2018–2021)

Model	ROC AUC	PR AUC	F1
Baseline (Grid LR)	0.790	0.724	0.757
Logistic Regression	0.856	0.848	0.786
MLP	0.856	0.835	0.793
Random Forest	0.863	0.832	0.790
Gradient Boosting	**0.864**	**0.852**	**0.789**

Table 2: Test Holdout Performance (2022–2024)

All five models significantly outperform the grid-only baseline, validating the feature engineering pipeline. Gradient Boosting achieves the best PR AUC on both validation (0.805) and test (0.852). Test scores are consistent with validation, confirming no overfitting across the temporal split.

ROC and Precision-Recall Curves

Figure 1 presents the Receiver Operating Characteristic (ROC) curves for all five models on the test set. All models show substantial lift above the diagonal, with Gradient Boosting and Random Forest achieving the highest area under the curve. The clear separation between the baseline and the full-feature models confirms that the engineered features provide meaningful discriminative power beyond grid position alone.

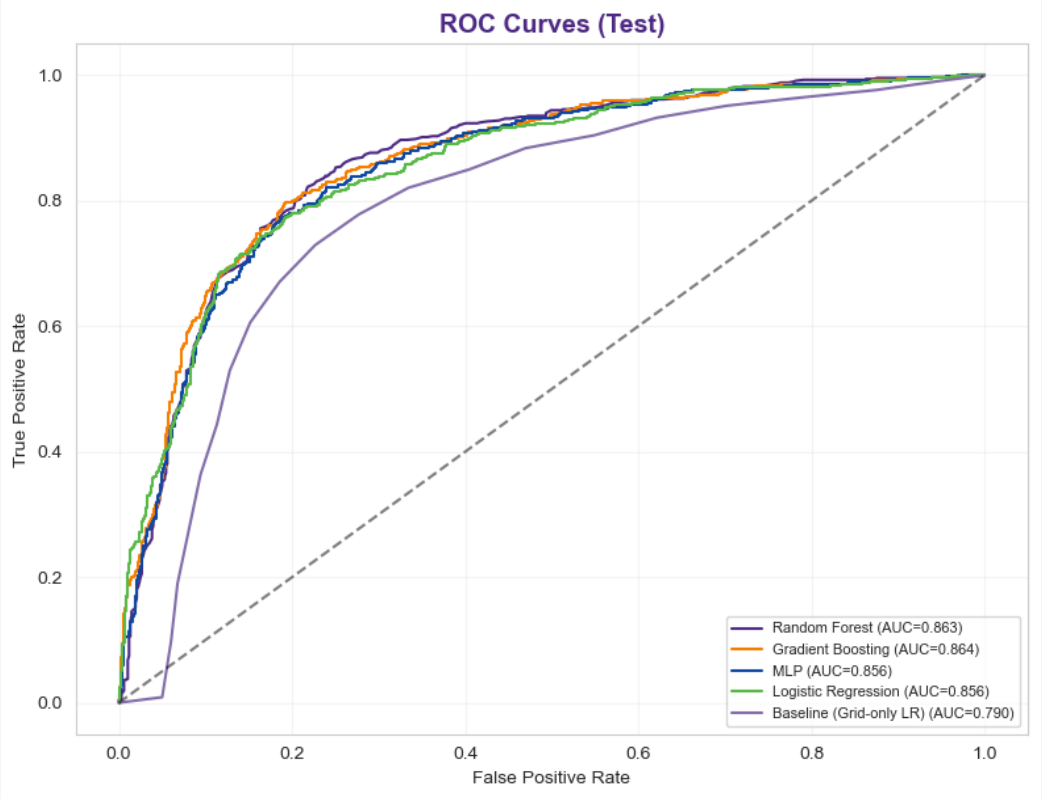

Figure 1. ROC Curves on the Test Set (2022–2024). Gradient Boosting and Random Forest achieve the highest AUC values.

Figure 2 shows the Precision-Recall curves, which are particularly informative given the moderate class balance in the test data. Gradient Boosting maintains the highest average precision (0.852), demonstrating strong performance across all classification thresholds. The baseline model shows noticeably lower precision at high recall levels, reflecting its limited feature set.

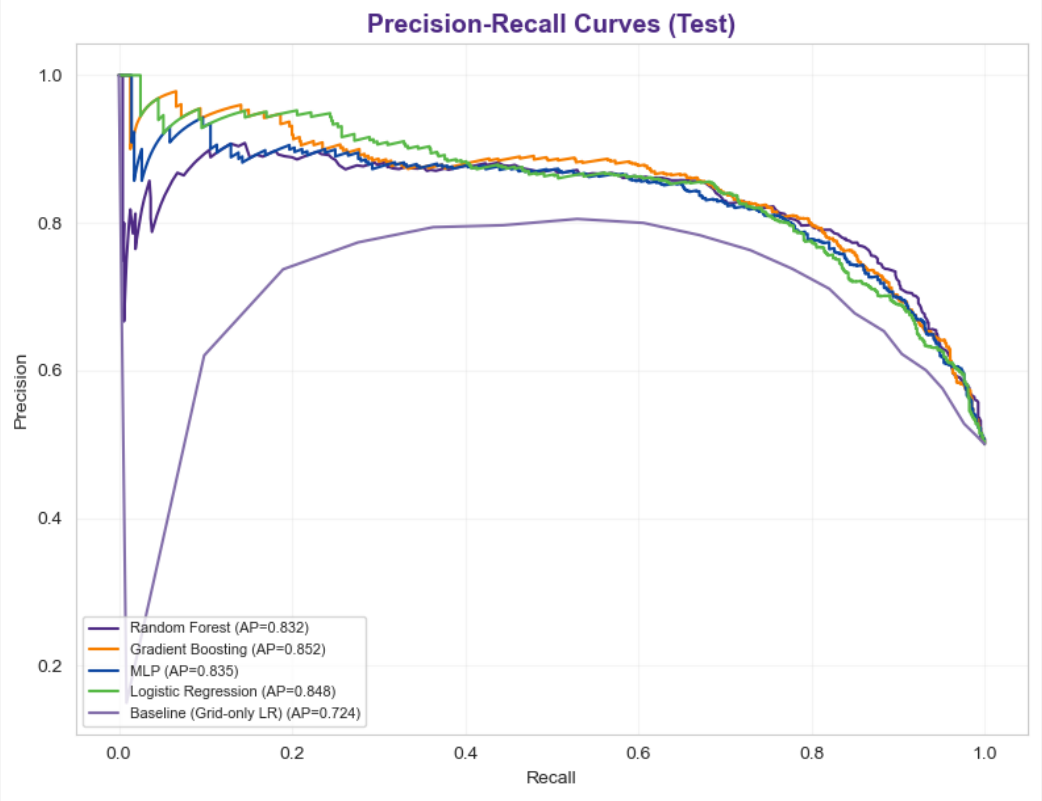

Figure 2. Precision-Recall Curves on the Test Set. Gradient Boosting achieves the highest average precision (AP = 0.852).

Confusion Matrices

Figure 3 displays the confusion matrices for the four full-feature models on the test holdout. Gradient Boosting and Random Forest show the most balanced trade-off between true positives and false positives. All models correctly identify the majority of top-10 finishers (true positive counts above 520), with false negative rates remaining below 160 cases across all models.

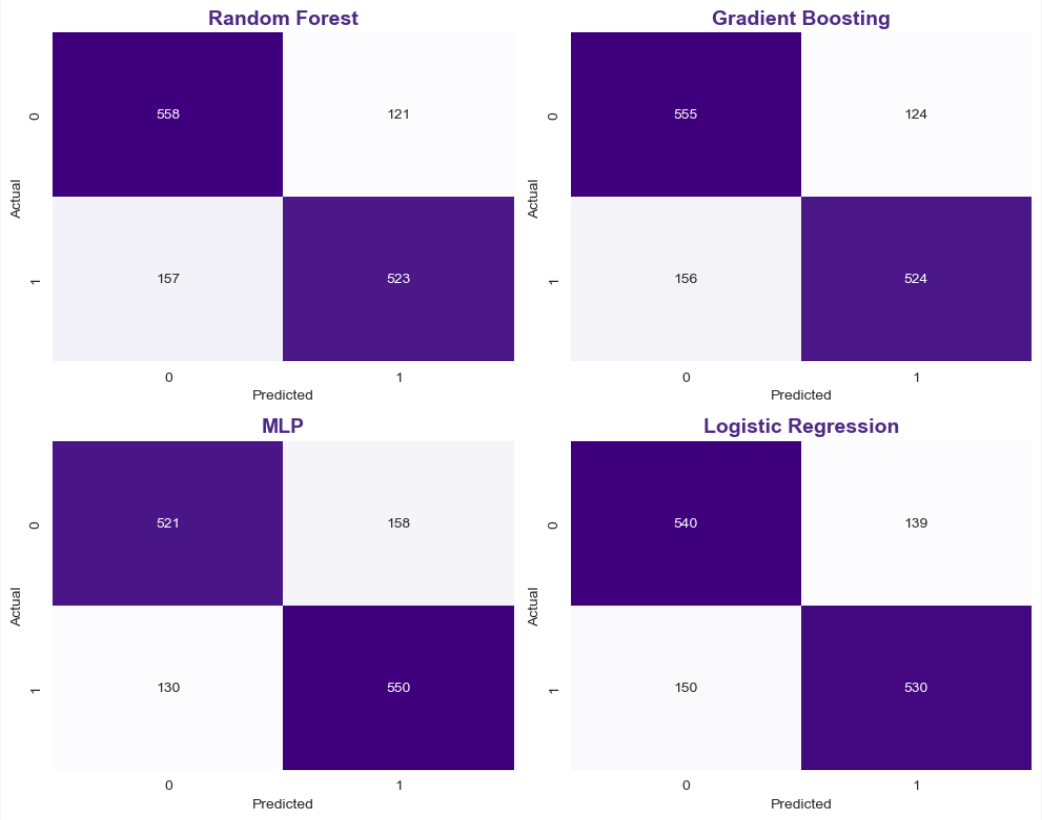

Figure 3. Confusion Matrices on the Test Set for all four full-feature models.

Probability Calibration

Figure 4 shows the calibration plot comparing predicted probabilities against observed frequencies of top-10 finishes. A perfectly calibrated model would follow the diagonal. Gradient Boosting and Random Forest track the diagonal most closely across the full probability range, indicating well-calibrated probability estimates. The MLP and Logistic Regression models show some deviation in the mid-range, while the baseline model exhibits systematic under-confidence at higher predicted probabilities.

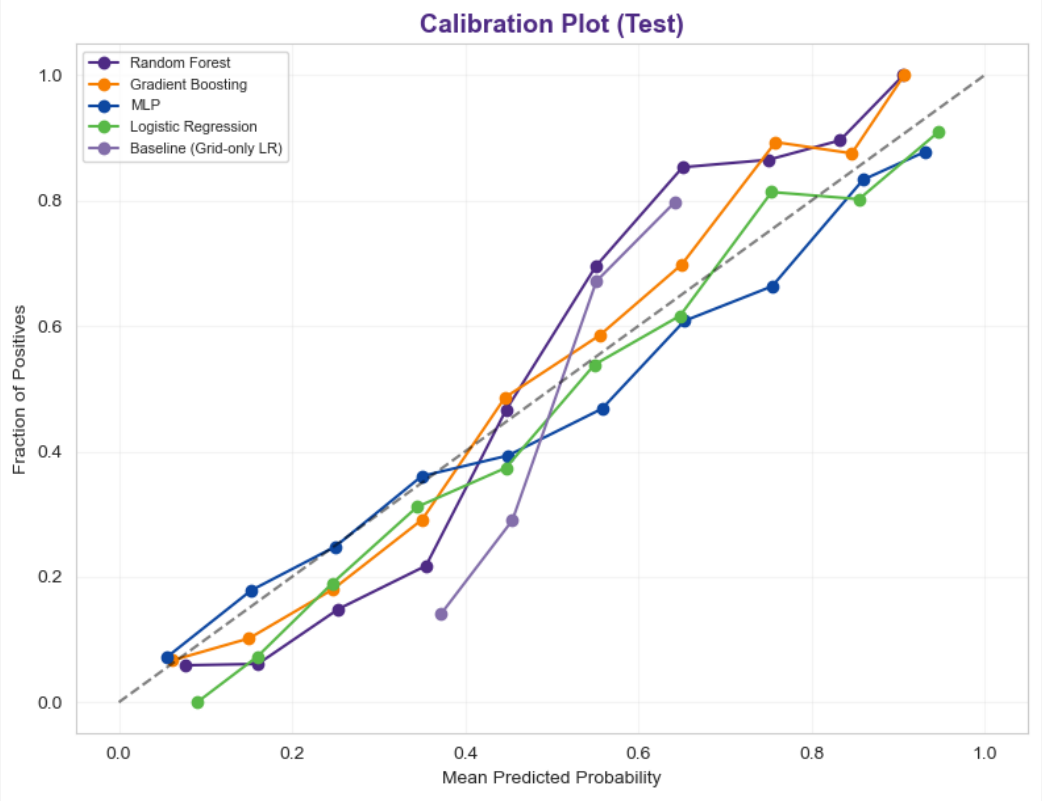

Figure 4. Calibration Plot on the Test Set. Models closer to the diagonal produce more reliable probability estimates.

Ensemble Results

Four ensemble strategies were evaluated using the top two validation models (Random Forest and Gradient Boosting).

Ensemble Method	Val PR AUC	Test PR AUC	Test ROC AUC	Test F1
Soft Voting	0.808	0.845	0.867	0.797
Weighted Voting	0.808	0.845	0.867	0.797
Stacking (Meta-LR)	0.809	0.842	0.868	0.798
Hard Voting	0.723	0.763	0.816	0.794

Ensembles match but do not clearly exceed the best single model. Stacking achieves the highest test ROC AUC at 0.868, marginally above Gradient Boosting at 0.864. However, Gradient Boosting achieves the highest PR AUC at 0.852 compared to 0.842 for Stacking. Given the minimal gains and added complexity, Gradient Boosting is recommended for deployment.

Feature Importance Analysis

Feature importance was assessed using permutation importance on the test set with 8 repeats for stability. Figure 5 shows the top 20 features ranked by their contribution to model performance. Championship position and driver–constructor joint top-10 rate emerge as the two most important features, followed by grid position, points gap to leader, and maximum position gain. These results confirm that both pre-race positioning and team-level contextual features are critical for prediction, consistent with the findings of Bansal (2025) and van Kesteren and Bergkamp (2023).

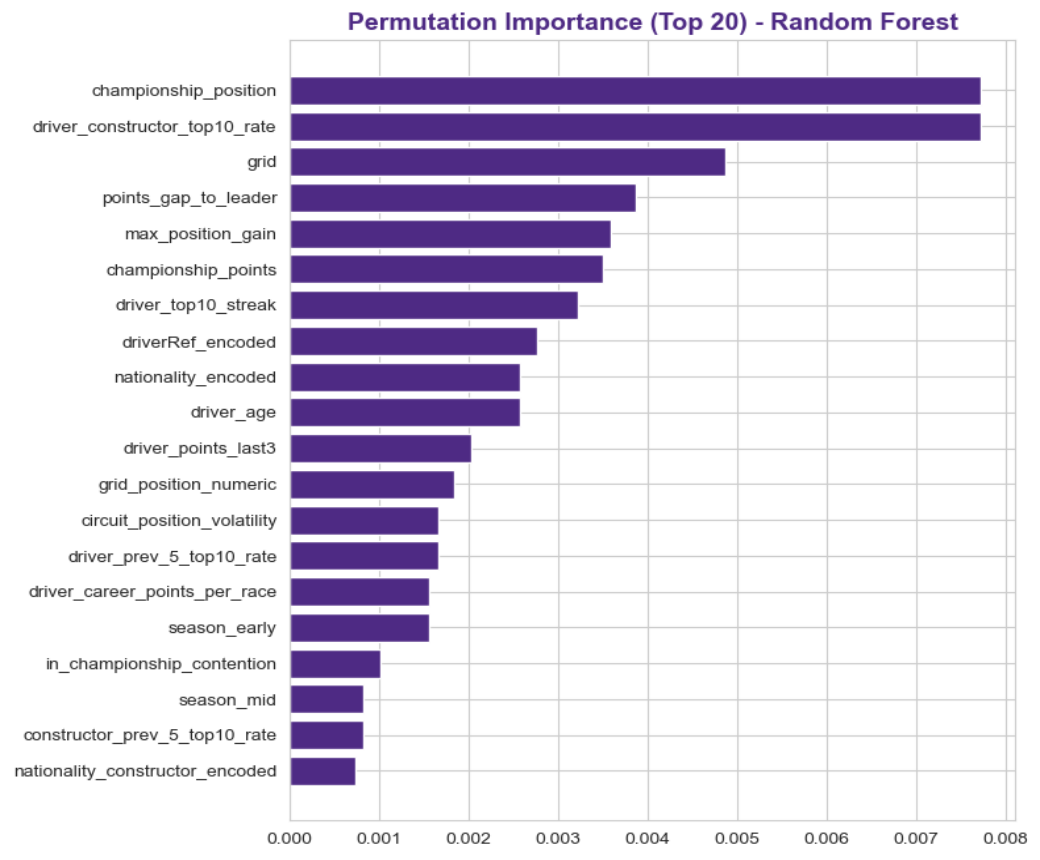

Figure 5. Permutation Importance (Top 20 Features) for the Random Forest model on the test set.

The dominance of championship position and driver–constructor top-10 rate highlights the importance of season-level context and team synergy in predicting individual race outcomes. Grid position ranks third, confirming its status as the strongest single race-day predictor while showing that the broader feature set captures additional predictive information. Driver momentum features such as top-10 streak and recent points contribute meaningfully, reflecting the value of short-term performance trends. Circuit-level features such as position volatility appear in the top 20, indicating that track characteristics influence outcome predictability.

Grid Position Dominance

To further illustrate the importance of starting position, Figure 6 shows the historical top-10 finish rate by grid position. Drivers starting on pole position achieve top-10 finishes at rates exceeding 75 percent, with the rate declining steadily to approximately 20 percent for grid position 20. This monotonic relationship explains why grid position is consistently identified as the single strongest predictor across all models and feature importance methods.

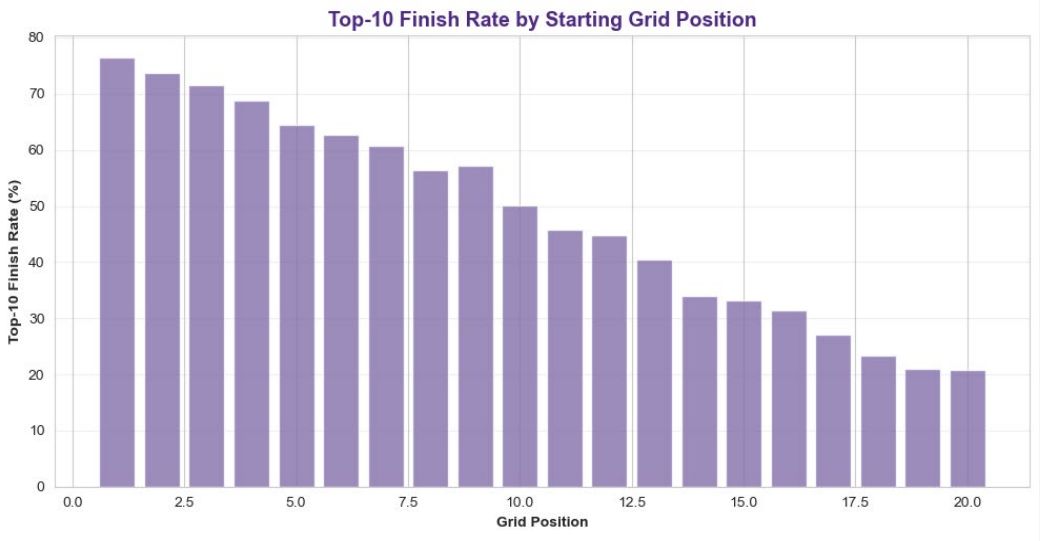

Figure 6. Top-10 Finish Rate by Starting Grid Position (historical data, positions 1–20).

SHAP Analysis

SHAP TreeExplainer was applied to the best tree-based model on a 1,000-sample subset.

Top Predictive Features

The SHAP analysis shows that several features play an important role in predicting whether a driver will finish in the top 10. Grid position, or starting position, is the strongest single predictor and has the highest mean absolute SHAP value. Constructor rolling top-10 rate also provides a strong signal of team strength, as top constructors tend to show consistently positive contributions to the prediction. Driver 5-race rolling top-10

rate captures a driver's recent performance and momentum leading into the race. Grid percentile measures a driver's relative position within the field and adds additional predictive power beyond the raw grid number. Championship standing position contributes season-level competitive context, reflecting the driver's overall performance in the current season. Finally, the driver–constructor joint success rate captures the synergy between the driver and the team, which can significantly influence race outcomes.

Key SHAP Insights

Constructor features show strong positive SHAP values for top teams such as Mercedes and Red Bull. Driver momentum features exhibit asymmetric effects: positive streaks increase predicted probability more than negative streaks decrease it. Circuit-specific features have moderate but consistent directional influence. Era encoding captures structural shifts in competitiveness across regulation periods.

Both permutation importance and SHAP confirm grid position and constructor strength as the dominant predictive signals, consistent with the findings of Bansal (2025) and van Kesteren and Bergkamp (2023).

Model Deployment

The deployment architecture consists of four components designed for reproducibility and monitoring:

Model Registry

The best model (Gradient Boosting) and its associated scaler are saved via joblib for reproducible deployment. The feature list and metadata are stored as JSON artifacts alongside the model file, enabling version tracking across future training runs.

BatchPredictor

An offline scoring utility class that loads the serialized model, feature list, and optional scaler from the artifact directory. It accepts a DataFrame of pre-race features and returns top-10 probability estimates for each driver–race combination.

ModelMonitor

A drift detection module that tracks feature distributions and prediction statistics over time. It computes ROC AUC, PR AUC, and Brier Score on labeled batches and automatically generates human-readable alerts when performance drops below configurable thresholds (default: ROC AUC < 0.75).

Interactive Dashboard

A notebook-based dashboard with year range slider, era dropdown, team filter, and driver filter. The dashboard includes six KPI cards and seven interactive Plotly charts covering seasonal trends, grid position effectiveness, top drivers and constructors, era comparisons, and circuit-level exploration.

Findings and Conclusions

Key Findings

The results show that Gradient Boosting achieves the best performance among the individual models, with a test PR AUC of 0.852 and a ROC AUC of 0.864. Ensemble methods perform similarly but do not clearly exceed the best single model, making Gradient Boosting the recommended choice for deployment due to its strong performance and relative simplicity. Feature importance analysis confirms that grid position and constructor strength are the most influential predictors, a finding supported by both permutation importance and SHAP analysis. The temporal train–validation–test split also demonstrates strong generalization, with no signs of overfitting across the multi-year test period from 2022 to 2024. Finally, all five models significantly outperform the grid-only baseline model, which achieved a test PR AUC of 0.724, confirming that the feature engineering pipeline adds meaningful predictive value.

Business Impact

This project builds a predictive system that estimates a driver's probability of finishing in the top 10 before a race by using historical Formula One data. The model can provide data-driven insights for teams and analysts by helping them evaluate race strategies, including qualifying setup, tire choices, and reliability risks. It can also enhance broadcast storytelling and race analysis by quantifying performance trends and competitive momentum over time. In addition, the system can support fan engagement platforms, such as fantasy sports and prediction markets, by providing transparent probability-based forecasts.

Assumptions and Limitations

Assumptions

Several methodological assumptions guide this project. First, all engineered features are designed to represent information that would be available before race start, which helps prevent data leakage and supports realistic prediction. Rolling statistics are computed using historically shifted windows with shift(1), ensuring that each observation only uses prior race information. Top-10 finish is used as the main target variable because it provides a consistent and meaningful proxy for race success across different Formula One eras. Missing qualifying data is handled by using grid position as a fallback and then applying median imputation when needed. Finally, label encoding is used for categorical identifiers under the assumption that tree-based models can learn useful differences between entities without being misled by the encoded numeric values.

Limitations

This project has several limitations that should be acknowledged. Formula One changes over time, and major rule changes, technological developments, and shifts in competition can affect model stability across eras. The dataset also does not include some important contextual variables, such as weather conditions, safety car events, pit strategy decisions, penalties, and tire compounds, all of which can influence race outcomes. In addition, missing qualifying data in earlier seasons required imputation, which may weaken the quality of that signal. Some engineered features also show multicollinearity, which makes coefficient interpretation more difficult in linear models. Label-encoded categorical variables may not fully capture relationships among drivers and constructors, so more advanced approaches such as entity embeddings could be explored in future work. Finally, the model is intentionally limited to pre-race features, which means that in-race dynamics are excluded by design.

Future Work

Future work can extend this project in several useful ways. One important next step is to integrate additional contextual variables such as weather conditions and safety car events, which Jafri (2024) identified as important for improving predictive accuracy. The modeling pipeline can also be expanded by testing additional algorithms such as LightGBM and TabNet, following the direction suggested by Urdhwareshe

(2025). Another valuable extension would be to build a live prediction interface that produces pre-race top-10 probability estimates for practical use. The project could also be broadened from binary top-10 prediction to multi-class outcome prediction, such as podium finishes or points-zone placement. Further improvements include more extensive hyperparameter tuning and probability calibration to strengthen reliability of the predicted probabilities. It would also be useful to conduct cross-era evaluation in order to identify whether regulatory changes reduce model performance in certain periods. Finally, the best-performing model could be deployed as a production-ready inference pipeline with monitoring and periodic retraining to maintain performance over time.

References

Vopani. “Formula 1 World Championship (1950 - 2024).” Kaggle, January 29, 2025. https://www.kaggle.com/datasets/rohanrao/formula-1-world-championship-1950-2020.

Rockerbie, Duane W., and Stephen T. Easton. “Race to the Podium: Separating and Conjoining the Car and Driver in F1 Racing.” Applied Economics 54, no. 54 (July 5, 2022): 6272–85. https://doi.org/10.1080/00036846.2022.2083068.

Gu, Yin, Qi Liu, Kai Zhang, Zhenya Huang, Runze Wu, and Jianrong Tao. “Neuralac: Learning Cooperation and Competition Effects for Match Outcome Prediction.” Proceedings of the AAAI Conference on Artificial Intelligence35, no. 5 (May 18, 2021): 4072–80. https://doi.org/10.1609/aaai.v35i5.16528.

Patil, Ankur, Nishtha Jain, Rahul Agrahari, Murhaf Hossari, Fabrizio Orlandi, and Soumyabrata Dev. “A Data-Driven Analysis of Formula 1 Car Races Outcome.” Communications in Computer and Information Science, 2023, 134–46. https://doi.org/10.1007/978-3-031-26438-2_11.

Bansal, Aayam. Advanced Machine Learning Approaches for Formula 1 Race Performance Prediction: A Comprehensive Analysis of Championship Point Forecasting, 2025. https://doi.org/10.13140/RG.2.2.20910.01607.

Urdhwareshe, A. 2025 "The Use of Machine Learning in Predicting Formula 1 Race Outcomes" Preprints. https://doi.org/10.20944/preprints202504.1471.v1

Jafri, Ali. *Predicting Formula 1 Race Outcomes: A Machine Learning Approach*. Capstone project, Fall 2024.

https://aliabdullahjafri.com/static/media/Ali_Jafri_CapstoneProject1_Fall2024.c7244022875d46bec5d9.pdf.

Zheng, Xi. “NBA Winner Prediction: A Hybrid Framework Incorporating Internal and External Factors.” *2022 4th International Conference on Big Data Engineering*, May 26, 2022, 71–80. https://doi.org/10.1145/3538950.3538960.

Kesteren, Erik-Jan van, and Tom Bergkamp. “Bayesian Analysis of Formula One Race Results: Disentangling Driver Skill and Constructor Advantage.” Journal of Quantitative Analysis in Sports 19, no. 4 (July 25, 2023): 273–93. https://doi.org/10.1515/jqas-2022-0021.

Appendix A: Annotated Bibliography

Race to the Podium: Separating and Conjoining the Car and Driver in F1 Racing – Alsiyat

This paper studies what really drives race outcomes in Formula One by separating the impact of the driver from the impact of the car and constructor. The authors use historical Formula One race results and financial data from multiple seasons, focusing on races between 2012 and 2019. The dataset includes information on drivers, constructors, race finishing positions, qualifying positions, retirements (DNF), team budgets, and driver salaries. The main goal of the study is to understand how much each factor contributes to a driver's finishing position and whether success in Formula One is driven more by individual skill, team resources, or the interaction between both. The paper applies statistical models to race-level data and focuses on measurable outcomes such as finishing position and podium results.

The results show that both driver skill and constructor performance play an important role in determining race outcomes, but their effects are not equal. While driver ability matters, the interaction between the driver and the team explains a large portion of race performance. High-performing drivers tend to outperform their teammates even in similar cars, while strong constructors provide advantages through better technology, strategy, and reliability. The study also shows that race outcomes are not random and that historical performance can be used to explain and anticipate future results.

This paper is highly relevant to our project because it directly supports our goal of predicting whether a driver will finish in the top 10 of a race. From a decision-support perspective, the clear separation between driver and constructor effects justifies including both driver-level and team-level features in our machine learning models. In my professional experience working with national-level data and KPIs, separating contributing factors is critical for building reliable and explainable models. The paper's findings also support using interaction features, such as driver–constructor combinations, which aligns well with our planned feature engineering using the Kaggle Formula One dataset.

NeuralAC: Learning Cooperation and Competition Effects for Match Outcome Prediction - Alsiyat

This paper introduces NeuralAC, a machine learning framework designed to predict match outcomes by modeling both cooperation and competition effects between participants. The authors evaluate the model

using historical match outcome data from competitive team-based environments, where each observation represents a match involving multiple participants working together against opponents. The dataset includes team compositions, participant identities, and match results, allowing the model to learn how interactions influence outcomes rather than relying only on individual performance metrics. NeuralAC uses neural networks to capture these interaction patterns and compare them against traditional prediction models.

The key contribution of this paper is showing that modeling interaction effects leads to more accurate predictions than treating participants independently. The results demonstrate that cooperation within a team and competition between teams both strongly influence outcomes. The experiments show that NeuralAC performs better in complex competitive settings where outcomes depend on coordination, shared resources, and strategic interactions. This highlights the limitation of models that rely only on individual features.

This paper is important for our project because Formula One race outcomes also depend on interaction effects, especially between the driver and the constructor. While Formula One appears to be an individual sport, performance depends heavily on teamwork, car reliability, race strategy, and coordination. From a decision-support perspective, this paper supports going beyond driver-only features and incorporating interaction features in our models. In applied analytics work, capturing how factors work together often produces more useful insights than analyzing them in isolation. NeuralAC provides strong methodological support for experimenting with models that can capture complex relationships when predicting top-10 finishes using historical Formula One data.

A Data-Driven Analysis of Formula 1 Car Races Outcome - Yang

This article gives us a statistical analysis to help understand the most influential factors that can impact the outcome of Formula 1 races. The outcomes are measured as total championship points scored by a driver over the period of a season. The main motivation is that F1 teams collect vast amounts of data, but yet few studies or analysis systematically analyzes which variables really affect race results. In the study, the researchers compiled race data from 2015 to 2019 by web-scraping and processed the data into a dataset with 21 features such as pit frequency, tyre usage percentages, laps led, penalties, race positions, starting positions, accidents, and driver completion rates. First, correlation analysis was conducted and it turned out that there are strong relationships among position-related variables and between tyre usage and penalties. This suggests that

there are complex dependencies among factors. Due to the high feature interdependence, the authors used Principal Component Analysis (PCA) to reduce the dimensionality. The first four principal components can capture around 70% of the total variance. This indicates that the major patterns can be represented in a lower-dimensional space without significant loss of information.

Next, a linear regression model is used to predict total points scored by drivers (based on the reduced feature set). Key findings include that finishing more races correlates strongly with higher points, while tyre usage of certain compounds such as soft, medium, hard also significantly affects performance. Additionally, a better average starting position or pole position is associated with more points. This illustrates the importance of qualifying. The model achieved an R-square of 99%, which suggests a strong explanatory power on this dataset.

The authors conclude systematic statistical analyses can discover meaningful insights into F1 race performance.

Advanced Machine Learning Approaches for Formula 1 Race Performance Prediction: A Comprehensive Analysis of Championship Point Forecasting - Yang

This study presents a machine learning framework designed to predict Formula 1 race performance and championship points. It used a dataset which spans 74 years of F1 history from 1950 to 2024. This includes 589081 individual lap times from 1125 total races. The authors' goal was to overcome limitations in prior works by using complex feature engineering, algorithm comparisons, and rigorous validation methods which are specially geared towards complex motorsport analysis.

Their approach begins with building meaningful features from qualifying race data, lap time data, circuit characteristics, and temporal dynamics across different eras of racing from 1950 to 2024. These engineered features capture strategic and performance factors such as grid position effects, lap-to-lap variations, and historical performance patterns across different circuits. Various machine learning models are evaluated, including traditional regression, ensemble methods, and gradient boosting techniques. It also comes with hyperparameter tuning and cross-validation to ensure robust generalization.

Among the tested algorithms for example gradient boosting such as XGBoost consistently outperforms others, yielding exceptional predictive accuracy with an R-square score of 0.999, RMSE of 0.197, and MAE of 0.125 on forecasting championship points. Feature importance analysis indicates that race position is the dominant predictor, which contributes around 75.8 % to model performance, with seasonal variations accounting for another 23.8 %. Cross-validation results demonstrate strong generalization (mean R-square roughly equals to 0.993 plus or minus 0.013).

The paper argues that its findings not only advance predictive modeling performance in motorsport but also hold some practical implications for F1 teams, broadcasters, and strategy analysts. It also offers insights into how historical performance and context can influence race outcomes.

The Use of Machine Learning in Predicting Formula 1 Race Outcomes - Niu

This paper examines the application of machine learning techniques to predicting Formula 1 race outcomes, with a particular focus on driver finishing positions and constructor championship points. Using historical Formula 1 data from the 2010 to 2023 seasons, the study develops a structured predictive modeling pipeline based on TabNet, a deep learning architecture specifically designed for tabular data. TabNet is chosen for its strong predictive performance as well as its built-in interpretability through feature attention mechanisms.

Two separate models are constructed: a driver-level model that predicts individual finishing positions and a constructor-level model that forecasts total team points per race. The models rely exclusively on pre-race features such as grid position, number of laps, constructor affiliation, and derived indicators like overtaking potential. Data preprocessing includes cleaning incomplete records, encoding categorical variables, feature normalization, and chronological train–test splitting to prevent data leakage. Hyperparameter tuning is performed using Optuna to optimize model performance.

Empirical results demonstrate that the driver model achieves strong predictive accuracy ($R^2 = 0.75$, RMSE = 2.87), outperforming the constructor model, which exhibits slightly higher variability due to team-level complexity ($R^2 = 0.71$, RMSE = 3.92). Visualization and residual analyses indicate low systematic bias and good alignment between predicted and actual outcomes. The study concludes that interpretable deep learning models like TabNet can effectively predict Formula 1 race outcomes using structured pre-race data.

Limitations include the absence of real-time race variables such as weather, safety cars, and telemetry, which are identified as promising directions for future research.

Predicting Formula 1 Race Outcomes: A Machine Learning Approach - Niu

This paper investigates the use of machine learning techniques to predict Formula 1 lap times and race outcomes using historical race data from 2014 to 2023. The primary objective is to assess how accurately lap times for individual drivers can be forecasted and how these predictions translate into overall race results. The study emphasizes the importance of modeling temporal dependencies in racing data, given that lap performance is influenced by prior laps, race conditions, and driver history.

The author constructs a large-scale dataset comprising over 214,000 laps across 203 races and 55 drivers, incorporating core performance metrics, race conditions (such as pit stops and safety cars), and driver- and team-specific indicators. Several baseline models—including linear regression, decision trees, and random forests—are first evaluated to establish reference performance levels. While random forests outperform simpler models, their prediction errors remain large relative to the typical time gaps between drivers, limiting their usefulness for accurate race outcome prediction.

To better capture sequential patterns, the study focuses on Long Short-Term Memory (LSTM) networks. Multiple LSTM architectures are developed and refined through increased training epochs, dropout regularization, custom feature scaling, and a novel composite loss function that combines lap time error, positional accuracy, and historical driver performance. Experimental results demonstrate that minimizing lap time error alone does not necessarily lead to better race outcome predictions, highlighting the importance of incorporating relative and contextual performance measures.

Evaluation on selected races from the 2023 and 2024 seasons—particularly the Abu Dhabi and Bahrain Grands Prix—shows that later LSTM models substantially outperform baseline approaches in predicting podium finishers, top-five placements, and race winners, especially in races with fewer unexpected incidents. The paper concludes that LSTM-based models, when properly designed and evaluated, offer significant promise for predictive analytics in Formula 1. Future work is proposed to explore transformer-based models and to extend prediction scope to include pit stop strategies and safety car events, aiming for a more comprehensive race forecasting system.

NBA Winner Prediction: A Hybrid Framework Incorporating Internal and External Factors – Alsiyat

This paper studies how machine learning can be used to predict the outcome of NBA games by combining both internal and external factors. The authors use historical NBA regular season data from the 2012–13 season to the 2021–22 season, collected from professional sports databases. The dataset includes game-level information such as team performance statistics, win–loss outcomes, home and away status, Elo ratings, and contextual factors like home court advantage and player tiredness due to back-to-back games. The main objective of the study is to improve prediction accuracy by incorporating contextual and situational features in addition to traditional performance metrics. The authors apply supervised machine learning models and evaluate their performance using cross-validation.

The results show that combining internal team performance indicators with external contextual factors leads to better prediction accuracy compared to models that rely only on basic statistics. Features such as differences in Elo ratings, recent team performance, home court advantage, and tiredness were found to be important predictors of game outcomes. Among the tested models, ensemble-based approaches such as random forest achieved the strongest performance. The study demonstrates that sports outcomes are influenced by both historical performance and situational conditions, and that machine learning models can capture these relationships effectively.

This paper is relevant to our project because it provides a clear example of how combining multiple types of features improves outcome prediction in competitive sports. From a decision-support perspective, the paper supports our approach of integrating driver-level, constructor-level, and contextual race information when predicting top-10 finishes in Formula One. Similar to how NBA outcomes depend on both team strength and external conditions, Formula One race results depend on driver skill, car performance, circuit characteristics, and race context. In applied analytics work, incorporating both internal and external factors leads to more reliable and explainable models. The methodology used in this paper helps justify our feature selection strategy and supports the use of supervised machine learning models for structured performance prediction using historical Formula One data.

Bayesian analysis of Formula One race results: disentangling driver skill and constructor advantage - Yang

A very interesting and valuable question is posed through the article regarding analytics in Formula 1 racing by determining how driver skill and constructor advantage affect performance. This concept is explored through Bayesian analysis within the work of Erik-Jan van Kesteren and Tom Bergkamp. The beauty of sports analytics, in a very simple and instinctive way, is the ability to rank competition participants by their individual ability; however, in high-speed racing and high-stakes competitions (i.e., Formula 1) there are many influences and other types of factors that come into play and affect the outcome of the competition very differently than in many other forms of sport. The probing and inquisitive thinking of the millions of fans and devotees of this sport, regarding questions like "What is the effect of the driver's skill versus the constructor?" remain unanswered.

In order to accomplish this, the authors have created a new Bayesian multilevel (hierarchical) model for rank-ordered logit regression that directly uses data from race finishing positions during the hybrid era of Formula One (2014–2021). The current model improves upon previous efforts by not losing information from point-based systems; it also uses the performance differences of teammates and driver movements between teams to differentiate between driver and constructor effects.

The model computes an entire finish order (rather than aggregate points) allowing for greater details regarding competitive dynamics.

Through this Bayesian framework, the authors are able to measure the skill of each driver and the advantage of each constructor (in log-odds terms) in relation to their competitors (analogous to Elo ratings in chess) with credible intervals to measure uncertainty. The findings show that team performance (constructor) has a large impact on the outcomes of races; approximately 88% of the variance in results is associated with the car, and less than half of the remaining variance can be attributed to driver skill and/or other factors. Also, in terms of driver performance during this time period, the top two drivers were Lewis Hamilton and Max Verstappen, while the top three constructors were Mercedes, Ferrari and Red Bull.

This is a good study that explains exactly how the proposed method can be used to create counterfactual scenarios (such as what if a driver had been in a different type of car) that can be used to rank each individual driver and constructor independently while providing a statistical basis for all of this. The authors conclude that this methodology advances quantitative analytical rigor for measuring the performance of Formula One drivers but that it may extend beyond Formula One to other sporting and competitive settings where the interaction between multiple variables in performance measurement is relevant.

Learning to Identify Top Elo Ratings: A Dueling Bandits Approach - Niu

This paper addresses the problem of efficiently identifying top-performing players under the Elo rating system by reducing the number of matches required to accurately estimate player strength. Traditional Elo-based evaluation relies on repeated random or predefined match-ups, which can be inefficient, especially when the goal is to quickly identify the strongest players among a large pool of competitors. To overcome this limitation, the authors formulate the match scheduling problem as a dueling bandits problem and propose an adaptive, data-driven framework for selecting informative match-ups.

The paper introduces two online algorithms, MaxIn-Elo and MaxIn-mElo, which actively choose which pairs of players should compete at each step. Instead of scheduling matches uniformly at random, the algorithms focus on players whose Elo ratings are uncertain but potentially high-performing. This is achieved by maintaining confidence bounds on Elo estimates and prioritizing match-ups that maximize expected information gain. Elo ratings are updated online using stochastic gradient descent, allowing the system to scale efficiently while using constant memory per iteration.

From a theoretical perspective, the authors show that MaxIn-Elo achieves sublinear cumulative regret, meaning that the algorithm becomes increasingly efficient over time compared to random or naive scheduling strategies. The framework is also extended to multidimensional Elo (mElo), which allows the model to capture intransitive competitive relationships, such as scenarios where no single player consistently dominates all others. This extension is particularly important in competitive environments where performance depends on interaction effects rather than a simple global ranking.

The proposed methods are evaluated through extensive experiments on both synthetic data and real-world competitive games. Results show that MaxIn-Elo and MaxIn-mElo converge significantly faster and produce more accurate rankings than baseline approaches, including random sampling and existing dueling bandit methods. In both transitive and intransitive settings, the algorithms demonstrate superior performance in identifying top players with fewer comparisons.

Overall, the paper demonstrates that combining adaptive match scheduling with online Elo updates provides a more efficient and scalable approach to ranking competitors. While the study focuses primarily on

identifying the best player and assumes stationary skill levels, the framework offers valuable insights for ranking and outcome prediction tasks in complex competitive systems.